Snowfakery Documentation

Snowfakery is a tool for generating fake data that has relations between tables. Every row is fake data, but also unique and random, like a snowflake.

To tell Snowfakery what data to generate, write a recipe file in YAML.

Snowfakery can write its output to `stdout`, or any database accessible to SQLAlchemy. *When it is embedded in CumulusCI*, it can output to a Salesforce org. Adding new output formats is a fairly straightforward process.

Fake Data Tutorial

Overview

Fake data comes in a few different flavours. Let's start with the most common pattern:

```
Unset
# examples/salesforce/simple_account.recipe.yml
- object: Account
  fields:
    Name: ${{fake.Company}}
    Description: ${{fake.CatchPhrase}}
    BillingStreet: ${{fake.StreetAddress}}
    BillingCity: ${{fake.City}}
    BillingState: ${{fake.State}}
    BillingPostalCode: ${{fake.PostalCode}}
    BillingCountry: ${{fake.CurrentCountry}}
    Phone: ${{fake.PhoneNumber}}
```

The description above might generate output like this:

```
Unset
Account(id=1, Name=Nelson-Deleon, Description=Secured bandwidth-monitored
moratorium, BillingStreet=2187 Kerry Way, BillingCity=Rangelland,
BillingState=Colorado, BillingPostalCode=08388, BillingCountry=United States,
Phone=001-738-530-9719)
```

Central Concepts

Snowfakery recipes are specified in the simple, human-readable YAML format. A YAML file is designated by the `.yml` extension.

They typically begin with a version declaration to say which version of the snowfakery language you want to use. The current version is 3 and new recipes should use it.

Let's start with a stupidly simple recipe named `simple_static.yml`. In this example, you can see that YAML uses indentation to define what parts of the file are related to each other.

```
Unset
- snowfakery_version: 3
- object: Person
  fields:
    name: Buster Bluth
    age: 35
```

To create a record with this data, run the snowfakery task command with the recipe name.

```
Unset
$ snowfakery docs/examples/simple_static.yml
...
```

This simple example generates a single record, a `Person` with three fields.

```
Unset
Person(id=1, name=Buster Bluth, age=35)
```

Two of the fields, name and age, include data from the YAML file. The id field is auto-generated by Snowfakery.

Field	id	name	age
Value	1	Buster Bluth	35

Note: Snowfakery only works for models that are amenable to including an id field for every record. Your tools can use the id column, ignore the id column, or exchange the id column for another kind of ID (like CumulusCI does with Salesforce), but Snowfakery always generates an

ID for each record, and refers between tables with IDs. (Future versions are expected to include a command line option to turn this behavior on or off.)

Let's make a new recipe named `persons_of_interest.yml` that requires Snowfakery to do some automation.

```
Unset
- snowfakery_version: 3
- object: Person
  count: 3
  fields:
    name: ${{fake.Name}}
    age: ${{random_number(min=int(12), max=int(95))}}
```

Here's a breakdown for each step of this recipe.

- **object: Person**: Creates a record template for any rows generated in the **Person** table representing real-world **Person** objects.
- **count: 3**: Creates three **Person** records.
- **name: fake.Name**: Generates a fake name for the **name** column instead of requiring you to manually enter one. The list of things you can fake is based on a library called Faker, which is discussed later in this documentation.
- **age: random_number**: Generates a random number between the **min** and the **max** values.

To run this recipe:

```
Unset
$ snowfakery docs/examples/persons_of_interest.yml
...
```

Let's look at what this recipe (randomly) generates.

```
Unset
Person(id=1, name=Allison Garcia, age=94)
Person(id=2, name=Megan Campos, age=67)
Person(id=3, name=Katherine Nelson, age=92)
```

We've created people! Or at least fake personas for people! And every time you run the recipe, you get a different set of "people".

While that's pretty cool, it doesn't use much of Snowfakery's power. Let's go deeper with a recipe named pet_stories.yml.

```
Unset
- snowfakery_version: 3
- object: Person
  count: 3
  fields:
    name: ${{fake.Name}}
    age: ${{random_number(min=int(12), max=int(95))}}
    dog:
      - object: Animal
        fields:
          name: ${{fake.FirstName}}
          species: canine
          food:
            - object: PetFood
              fields:
                name: Pets Choice
                cost: $10

    cat:
      - object: Animal
        fields:
          name: ${{fake.FirstName}}
          species: feline
          food:
            - object: PetFood
              fields:
                name: Pets Choice
                cost: $1
```

If you're lost, don't worry. There are a lot of new concepts in this recipe, so let's tackle them one by one. In this example:

- Three **Person** objects are created with the **count** function.
- Each **Person** has a **name**, an **age**, a **dog**, and a **cat**.
- Each **dog** or **cat** is an **Animal** row.
- If each **Person** has two animals, there are a total of six **Animal** objects.
- If each animal has a favorite food, there are a total of six **PetFood** objects.

To run this recipe:

```
Unset
$ snowfakery docs/examples/pet_stories.yml
...
```

Here's a visual example of the output.

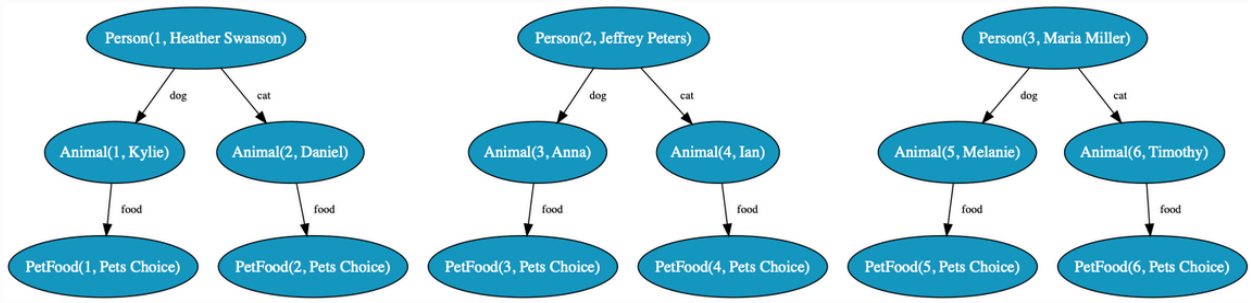

Later, we discuss how to create two **PetFood** objects that are shared, and how to generate a random value for **species** and **food**.

Objects

The core concept of Snowfakery is an *object template*. The object template represents instructions on how to create a *row* (or multiple rows) in a database. Rows, also known as records, in turn represent real-world entities such as people, places, or things, which is why we use the keyword **object**.

Each row has a type, a value that represents the name of the table that the row is added to in a relational database, or which CSV file the row is placed in. You declare the type after the keyword **object**.

As in an Object Relational system, think of objects or rows as synonyms. Rows are how we represent objects in tables or files. Records is another word synonymous with objects and rows in Salesforce.

Each row that is generated by Snowfakery is given a unique ID.

Let's revisit the **person_of_interest.yml** recipe.

```
Unset
- object: Person
  count: 10
  fields:
    name: ${{fake.Name}}
    age: ${{random_number(min=int(12), max=int(95))}}
```

These are the main properties of this Object Template.

- **object** is a type declaration that determines what table or file the row goes in.
- **count** determines how many rows are made. It can be randomized or computed using *Function Blocks* or the *Formula Language*.
- **fields** determine what data values to put in the row.

You can also have more than one Object Template for any row type, such as a relational table, CSV file, Salesforce Object, and so on.

Formulas

To insert data from one field into another, use a formula.

```
Unset
# examples/price_math.recipe.yml
- snowfakery_version: 3
- object: Sale
  fields:
    num_items: ${{random_number(min=int(10), max=int(20))}}
    per_item_price: ${{random_number(min=int(10), max=int(20))}}
    message: Thanks for buying ${{num_items}} items @ $${{per_item_price}}
each!
```

You can also make your data more dynamic with formulas. Formulas even use the same functions described in Function Blocks, but they can also be used inline.

```
Unset
- object: Sale
  count: 2
  fields:
    per_item_price: ${{random_number(min=int(20), max=int(50))}}
    number_of_items: 3
    total: ${{int(per_item_price) * int(number_of_items)}}
    message: Thank you for buying $${{total}} items!
```

Sometimes you might want to combine the fake data with other data in a single field. You can use formula syntax for this.

```
Unset
# examples/faker_in_formula.recipe.yml
- object: Account
  fields:
    Name: ${{fake.State}} State University
```

Some complex faker definitions can also use parameters. The documentation says what parameters are allowed. The docs for `fake.Sentence` define `nb_words` and `variable_nb_words`, for example.

```
Unset
# examples/parameters.recipe.yml
- object: Example
  fields:
    gibberish_words: ${{fake.Sentence(nb_words=10, variable_nb_words=False)}}
```

Formula Language

Some general principles about formulas:

- Use `${{` to start a formula and `}}` to end it.
- Use Python expression syntax in the middle.

- Field values defined earlier on this object are available as names.
- Generate `fake` values in formulas with dots ("."). For example, `Name: ${{fake.FirstName}} Johnson`
- Parent (or ancestor) values are available through the parent's `object` name, such as `Opportunity.amount`.

Formulas are based on a similar language called Jinja2, but we use `${{` and `}}` to be more compatible with YAML.

The relevant section of the Jinja document is called Expressions. It includes information about Literals, Math, Comparisons, Logic, Other Operators, If Expressions and Python Methods.

Core Variables

today

The `today` variable returns a date representing the current date. This date will not change during the execution of a single recipe.

now

The `now` variable returns a datetime representing the current moment. It outputs microsecond precision and is in the UTC timezone.

Using this recipe, you can see three different ways of outputting the timestamp:

```
Unset

# tests/test_now.yml
- snowfakery_version: 3
- object: Times
  fields:
    current_datetime: ${{now}}
    current_datetime_as_number: ${{now.timestamp()}}
    current_datetime_without_microseconds: ${{int(now.timestamp())}}
```

This would generate field values similar to these:

```
Unset
current_datetime=2022-02-23 15:39:49.513086+00:00,
current_datetime_as_number=1645630789.513975,
current_datetime_without_microseconds=1645630789
```

Experimentally, this variable is not guaranteed to return a unique value each time, especially on Windows.

NULL

The `NULL` value represents a missing value.

```
Unset
- object: foo
  count: 10
  fields:
    Name: "${{fake.Name}}"
    future_column: NULL
```

In the above example all the records for future_column will have NULL value.

Let's look at another example in a recipe named nullvalue.yml.

```
Unset
- object: foo
  count: 10
  fields:
    EndDate: "${{ random_choice(
      date_between(start_date='-2d', end_date='today'),
      NULL
    )}}"
    DateSupplied:
      if:
        - choice:
            when: ${{ EndDate!='None' }}
            pick: "Yes - ${{EndDate}}"
        - choice:
            pick: "No - ${{EndDate}}"
```

In this example, `NULL` becomes a `random_choice` option in the `EndDate` field. Then in the `DateSupplied` field, you test if the value is `None` or not.

Note: random_choice function returns `None` when it randomly chooses `NULL` value. Also when NULL is used in ${{ }} i.e., as ${{NULL}} the value is evaluated to None.

Core Functions

The functions below are designed to be used in formulas.

unique_id

The `unique_id` variable returns a unique number that can be used to distinguish any record from others. For example, we can incorporate a unique ID into an email address or an employee ID.

```
Unset
# examples/unique_id/test_unique_id.yml
- snowfakery_version: 3
- object: Contact
  count: 3
  fields:
    FirstName: ${{fake.FirstName}}
    LastName: ${{fake.LastName}}
    EmployeeNum: ${{unique_id}}
    Email: ${{unique_id}}_${{fake.Email}}
```

unique_alpha_code

The `unique_alpha_code` functions generate unique alphanumeric codes similar to those used in some bureaucracies where space is an issue. Snowfakery alphanumeric codes are about 11 characters long in small ID mode and about 17 in Big ID mode. The more you use, the bigger they will grow.

```
Unset

# examples/unique_id/test_unique_alpha_code.yml
- snowfakery_version: 3
```

```
- object: Contact
  count: 3
  fields:
    FirstName: ${{fake.FirstName}}
    LastName: ${{fake.LastName}}
    DepartmentCode: ${{unique_alpha_code}}
```

```
Unset
Contact(id=1, FirstName=Jeremy, LastName=Higgins, DepartmentCode=2AUHHSZN)
Contact(id=2, FirstName=Vicki, LastName=Vazquez, DepartmentCode=GDH9OYLN)
Contact(id=3, FirstName=Gene, LastName=Wall, DepartmentCode=42Q3XX3N)
```

random_choice

The `random_choice` function randomly chooses an option from a list.

```
Unset
- object: Payments
  count: 3
  fields:
    Payment_Method: "${{ random_choice(
          'Cash',
          'Cheque',
          'Credit Card'
        )}}"
```

random_number

The `random_number` function picks a number in a range specified by `min` and `max`.

```
Unset
age: ${{random_number(min=int(12), max=int(95))}}
```

In the following example, we need to perform data type casting. The random_number function expects integer values for its min and max parameters. Therefore, we convert any non-integer values to integers before passing them to the function.

```
Unset
comm: ${{random_number(min=int(34.64), max=int(53.23))}}
```

The `random_number` function can also be used as a function in formulas.

```
Unset

some_number: A number ${{random_number(min=int(5), max=int(10))}}
```

date_between

The `date_between` function picks a random date in some date range.

For example, below recipe picks date between '2024-01-01' and '2024-01-10'

```
Unset
- object: OBJ
    fields:
      date: ${{date_between(start_date='2024-01-01', end_date='2024-01-10')}}
```

Below recipe picks a date between Y2K and the present day.

```
Unset
- object: OBJ
    fields:
      date: ${{date_between(start_date='2000-01-01', end_date='today')}}
```

The options `start_date` and `end_date` can take these forms, too.

- `YYYY-MM-DD`
- `+<number>d`: `number` of days in the future, such as `+10d`
- `-<number>d`: `number` of days in the past, such as `-10d`
- `+<number>M`: `number` of months in the future, such as `+10M`
- `-<number>M`: `number` of months in the past, such as `-10M`
- `+<number>y`: `number` of years in the future, such as `+10y`
- `-<number>y`: `number` of years in the past, such as `-10y`
- `+<number>w`: `number` of weeks in the future, such as `+10w`
- `-<number>w`: `number` of weeks in the past, such as `-10w`
- `today`: The date the template is evaluated

Case is relevant. The "M" for months is uppercase. The rest are lowercase.

Let's pick a date between 30 days ago and 108 days in the future.

```
Unset
Payment_Date: ${{date_between(start_date='-30d', end_date='+108d')}}
```

Pick a date between the last 5 days from today.

```
Unset

Payment_Date: ${{date_between(start_date='-5d', end_date='+0d')}}
```

Pick a date for next 5 days from today.

```
Unset

Payment_Date: ${{date_between(start_date='+0d', end_date='+5d')}}
```

The date_between function can also be used in formulas.

```
Unset
wedding_date: Our big day is ${{date_between(start_date="2022-01-31",
end_date="2022-12-31")}}
```

datetime_between

`datetime_between` is similar to `date_between` but relates to datetimes.
Some example of randomized datetimes:

```
Unset
# tests/test_fake_datetimes.yml
- snowfakery_version: 3
- object: OBJ
  fields:
    past: ${{ datetime_between(start_date='1999-12-31', end_date='today') }}
    future: ${{ datetime_between(start_date='today', end_date='2525-01-01') }}
    some_datetime_01: ${{ datetime_between(start_date='1999-12-31',
end_date='2525-01-01') }}
    some_datetime_02: ${{ datetime_between(start_date='2023-12-31 11:59:00',
end_date='2024-05-01 01:01:00') }}
```

You can use strftime to extract date and (or) time in a particular format as shown below.

```
Unset
# tests/test_fake_datetimes.yml
- snowfakery_version: 3
- object: OBJ
  fields:
    some_datetime: ${{ datetime_between(start_date='1999-12-31',
end_date='2525-01-01').strftime('%Y-%m-%d %H:%M:%S') }}
```

if and **when**

if lets you make field values conditional on other field values.

`when` can be a Python formula. It's even interpreted as a boolean similar to how Python does it: the first `when` clause that matches is selected. The final `choice` clause in the sequence has no `when` clause; it's selected if there's no match to the previous choices.

Let's use `if` and `when` in a recipe named `conditional.yml`.

```
Unset
# examples/conditional.yml
- snowfakery_version: 3
- object: Person
  fields:
    gender: ${{ random_choice("Male", "Female", "Other") }}
    name:
      if:
        - choice:
            when: ${{gender=='Male'}}
            pick: ${{fake.FirstNameMale}}
        - choice:
            when: ${{gender=='Female'}}
            pick: ${{fake.FirstNameFemale}}
        - choice:
            pick: ${{fake.FirstNameNonBinary}}
```

Commonly Used Fakers

Salesforce Fakers

fake.Email

Email address using one of the "example" domains

Recipe:

```
Unset
- object: Contact
  fields:
    FirstName: ${{fake.FirstName}}
    LastName: ${{fake.FirstName}}
    Email: ${{fake.Email}}
```

Outputs:

```
Unset
Contact(id=1, FirstName=Briana, LastName=Rivers,
Email=Briana-Rivers1@example.com)
```

fake.Postalcode

Return whatever counts as a postalcode for a particular locale

Recipe:

```
Unset
- object: Account
  fields:
    Name: ${{fake.Company}}
    BillingPostalCode: ${{fake.Postalcode}}
```

Outputs:

```
Unset
Account(id=1, Name=Curry-Baldwin, BillingPostalCode=59131)
```

fake.State

Return a state, province or other appropriate administrative unit

Recipe:

```
Unset
- object: Account
  fields:
    Name: ${{fake.Company}}
    BillingState: ${{fake.State}}
```

Outputs:

```
Unset
Account(id=1, Name=Escobar-Pineda, BillingState=New York)
```

Address Fakers

fake.City

Example:: 'Sashabury'

Recipe:

```
Unset
- object: Account
  fields:
    Name: ${{fake.Company}}
    BillingCity: ${{fake.City}}
```

Outputs:

```
Unset
Account(id=1, Name=Ritter-Zamora, BillingCity=East Dorothy)
```

fake.Country

Recipe:

```
Unset
- object: Account
  fields:
    Name: ${{fake.Company}}
    BillingCountry: ${{fake.Country}}
```

Outputs:

```
Unset
Account(id=1, Name=Barnett Group, BillingCountry=Timor-Leste)
```

fake.CurrentCountry

Recipe:

```
Unset
- object: Account
  fields:
    Name: ${{fake.Company}}
    BillingCountry: ${{fake.CurrentCountry}}
```

Outputs:

```
Unset
Account(id=1, Name=Murphy-Leon, BillingCountry=United States)
```

fake.StreetAddress

Example:: '791 Crist Parks'

Recipe:

```
Unset
- object: Account
  fields:
    Name: ${{fake.Company}}
    BillingStreet: ${{fake.StreetAddress}}
```

Outputs:

```
Unset
Account(id=1, Name=Chavez, Tran and Shaffer, BillingStreet=1313 Beard Junction)
```

Company Fakers

fake.CatchPhrase

Example:: 'Robust full-range hub'

Recipe:

```
Unset
- object: Account
  fields:
    Name: ${{fake.Company}}
    Description: ${{fake.CatchPhrase}}
```

Outputs:

```
Unset
Account(id=1, Name=Carson, Ray and Vang, Description=Team-oriented neutral open system)
```

fake.Company

Example:: 'Acme Ltd'

Recipe:

```
Unset
- object: Account
  fields:
    Name: ${{fake.Company}}
```

Outputs:

```
Unset
Account(id=1, Name=Casey, Blankenship and Farley)
```

Lorem Fakers

fake.Paragraph

Generate a paragraph.

The `nb_sentences` argument controls how many sentences the paragraph will contain, and setting `variable_nb_sentences` to `False` will generate the exact amount, while setting it to `True` (default) will generate a random amount (+/-40%, minimum of 1) using |randomize_nb_elements|.

Under the hood, |sentences| is used to generate the sentences, so the argument `ext_word_list` works in the same way here as it would in that method.

ext_word_list=['abc', 'def', 'ghi', 'jkl']

Aliases: paragraph

Source: faker : faker.providers.lorem.en_US.Provider.paragraph

Recipe:

```
Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Paragraph(nb_sentences=5)}}
```

Outputs:

```
Unset
SomeObject(id=1, formula_field_example=Attorney quickly candidate change
although bag record. Raise study modern miss dog Democrat quickly. Often late
produce you true soldier. Food break onto friend.)
```

Recipe:

```
Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Paragraph(nb_sentences=5,
variable_nb_sentences=False)}}
```

Outputs:

```
Unset
SomeObject(id=1, formula_field_example=Score from animal exactly drive well
good. Pull opportunity throughout take car. Hold increase practice ability
court. Civil development large report purpose themselves. I reduce industry.)
```

Recipe:

```
Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Paragraph(nb_sentences=5,
ext_word_list=['abc',
      'def', 'ghi', 'jkl'])}}
```

Outputs:

```
Unset
SomeObject(id=1, formula_field_example=Def def abc ghi. Jkl ghi abc abc def jkl
abc. Abc jkl ghi abc ghi jkl.)
```

Recipe:

```
Unset
- var: snowfakery_locale
  value: en_US
```

```
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Paragraph(nb_sentences=5,
variable_nb_sentences=False,
      ext_word_list=['abc', 'def', 'ghi', 'jkl'])}}
```

Outputs:

```
Unset
SomeObject(id=1, formula_field_example=Jkl def abc abc jkl jkl. Ghi abc ghi abc
def ghi abc. Jkl def abc def def jkl jkl. Ghi jkl ghi abc. Def abc abc ghi.)
```

fake.Sentence

Generate a sentence.

The `nb_words` argument controls how many words the sentence will contain, and setting `variable_nb_words` to `False` will generate the exact amount, while setting it to `True` (default) will generate a random amount (+/-40%, minimum of 1) using |randomize_nb_elements|.

Under the hood, |words| is used to generate the words, so the argument `ext_word_list` works in the same way here as it would in that method.

ext_word_list=['abc', 'def', 'ghi', 'jkl']

Recipe:

```
Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
```

```
  fields:
    formula_field_example: ${{fake.Sentence(nb_words=10)}}
```

Outputs:

```
Unset
SomeObject(id=1, formula_field_example=Line beyond its particularly tree whom
local tend employee source.)
```

Recipe:

```
Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Sentence(nb_words=10,
variable_nb_words=False)}}
```

Outputs:

```
Unset
SomeObject(id=1, formula_field_example=Meet usually board necessary religious
natural sport music white owner.)
```

Recipe:

```
Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Sentence(nb_words=10, ext_word_list=['abc',
'def',
      'ghi', 'jkl'])}}
```

Outputs:

```
Unset
SomeObject(id=1, formula_field_example=Def abc jkl def abc abc jkl abc jkl def
abc ghi abc.)
```

Recipe:

```
Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Sentence(nb_words=10,
variable_nb_words=True, ext_word_list=['abc',
      'def', 'ghi', 'jkl'])}}
```

Outputs:

```
Unset
SomeObject(id=1, formula_field_example=Jkl jkl jkl jkl ghi def ghi.)
```

fake.Text

Generate a text string.

The `max_nb_chars` argument controls the approximate number of characters the text string will have, and depending on its value, this method may use either |words|, |sentences|, or |paragraphs| for text generation. The `ext_word_list` argument works in exactly the same way it would in any of those methods.

Aliases: text

Source: faker : faker.providers.lorem.en_US.Provider.text

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Text(max_nb_chars=20)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Much mention.)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Text(max_nb_chars=80)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Partner stock four. Region as true
develop sound central.)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Text(max_nb_chars=160)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Per structure attorney author feeling
job. Mean always beyond write. Employee toward like total now.
Small citizen class morning. Others kind company likely.)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Text(ext_word_list=['abc', 'def', 'ghi',
'jkl'])}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Ghi jkl abc ghi ghi abc. Ghi def jkl ghi
def.
Def ghi abc def def abc ghi. Jkl ghi abc abc def jkl abc. Abc jkl ghi abc ghi
jkl.
Def abc ghi abc jkl ghi. Abc ghi abc def. Abc jkl def abc.)
```

fake.Word

Generate a word.

This method uses |words| under the hood with the `nb` argument set to `1` to generate the result.

Aliases: word

Source: faker : faker.providers.lorem.en_US.Provider.word

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Word}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=son)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Word(ext_word_list=['abc', 'def', 'ghi',
'jkl'])}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=jkl)
```

Person Fakers

fake.FirstName

Aliases: first_name, firstname

Source: faker : faker.providers.person.en_US.Provider.first_name

Recipe:

```
Unset

- object: Contact
  fields:
    FirstName: ${{fake.FirstName}}
    LastName: ${{fake.LastName}}
```

Outputs:

```
Unset

Contact(id=1, FirstName=Danielle, LastName=Hendrix)
```

fake.FirstNameFemale

Aliases: first_name_female, firstnamefemale

Source: faker : faker.providers.person.en_US.Provider.first_name_female

Recipe:

```
Unset
- object: Contact
  fields:
    FirstName: ${{fake.FirstNameFemale}}
    LastName: ${{fake.LastName}}
```

Outputs:

```
Unset

Contact(id=1, FirstName=Dorothy, LastName=Burnett)
```

fake.FirstNameMale

Aliases: first_name_male, firstnamemale

Source: faker : faker.providers.person.en_US.Provider.first_name_male

Recipe:

```
Unset

- object: Contact
  fields:
    FirstName: ${{fake.FirstNameMale}}
    LastName: ${{fake.LastName}}
```

Outputs:

```
Unset
Contact(id=1, FirstName=Glen, LastName=Krause)
```

fake.FirstNameNonbinary

Aliases: first_name_nonbinary, firstnamenonbinary

Source: faker : faker.providers.person.en_US.Provider.first_name_nonbinary

Recipe:

```
Unset
- object: Contact
  fields:
    FirstName: ${{fake.FirstNameNonBinary}}
    LastName: ${{fake.LastName}}
```

Outputs:

```
Unset

Contact(id=1, FirstName=Edgar, LastName=Moon)
```

fake.LastName

Aliases: last_name, lastname

Source: faker : faker.providers.person.en_US.Provider.last_name

Recipe:

```
Unset
- object: Contact
  fields:
    FirstName: ${{fake.FirstName}}
    LastName: ${{fake.FirstName}}
```

Outputs:

```
Unset

Contact(id=1, FirstName=Betty, LastName=Wise)
```

Phone_Number Fakers

fake.PhoneNumber

Aliases: phone_number, phonenumber

Source: faker : faker.providers.phone_number.en_US.Provider.phone_number

Recipe:

```
Unset
- object: Account
  fields:
    Name: ${{fake.Company}}
    Phone: ${{fake.PhoneNumber}}
```

Outputs:

```
Unset
Account(id=1, Name=Copeland-Contreras, Phone=001-818-758-3989x471)
```

Rarely Used

Salesforce Fakers

fake.UserName

Globally unique Salesforce-style username in the form of an email address

Aliases: user_name, username

Source: snowfakery : snowfakery.fakedata.fake_data_generator.FakeNames.user_name

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
```

```
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UserName}}
```

Outputs:

```
Unset

SomeObject(id=1,
formula_field_example=Rose_Huang_a28f5ab0-1fdb-4b32-86d5-99e812f175ff@srv-30.liu.net)
```

fake.Alias

Salesforce-style 8-character alias: really an 8 char-truncated firstname. Not necessarily unique, but likely to be unique if you create small numbers of them.

Aliases: alias

Source: snowfakery : snowfakery.fakedata.fake_data_generator.FakeNames.alias

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Alias}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Nichole)
```

fake.RealisticMaybeRealEmail

Like fake.Email except that the email domain may be real and therefore the email address itself may be real. Use with caution, you might accidentally email strangers!!!

Aliases: realistic_maybe_real_email, realisticmayberealemail

Source: snowfakery : snowfakery.fakedata.fake_data_generator.FakeNames.realistic_maybe_real_email

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.RealisticMaybeRealEmail}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=kellypruitt@example.org)
```

Address Fakers

fake.Address

Example:: '791 Crist Parks, Sashabury, IL 86039-9874'

Aliases: address

Source: faker : faker.providers.address.en_US.Provider.address

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Address}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=PSC 4115, Box 7815
APO AA 41945)
```

fake.AdministrativeUnit

Aliases: administrative_unit, administrativeunit

Source: faker : faker.providers.address.en_US.Provider.administrative_unit

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.AdministrativeUnit}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Nebraska)
```

fake.BuildingNumber

Example:: '791'

Aliases: building_number, buildingnumber

Source: faker : faker.providers.address.en_US.Provider.building_number

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.BuildingNumber}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=382)
```

fake.CityPrefix

Aliases: city_prefix, cityprefix

Source: faker : faker.providers.address.en_US.Provider.city_prefix

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CityPrefix}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Port)
```

fake.CitySuffix

Example:: 'town'

Aliases: city_suffix, citysuffix

Source: faker : faker.providers.address.en_US.Provider.city_suffix

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CitySuffix}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=ton)
```

fake.CountryCode

Aliases: country_code, countrycode

Source: faker : faker.providers.address.en_US.Provider.country_code

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CountryCode}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=NL)
```

fake.CurrentCountryCode

Aliases: current_country_code, currentcountrycode

Source: faker : faker.providers.address.en_US.Provider.current_country_code

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CurrentCountryCode}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=US)
```

fake.MilitaryApo

Example:: 'PSC 5394 Box 3492

Aliases: military_apo, militaryapo

Source: faker : faker.providers.address.en_US.Provider.military_apo

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.MilitaryApo}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=PSC 1948, Box 9241)
```

fake.MilitaryDpo

Example:: 'Unit 3333 Box 9342'

Aliases: military_dpo, militarydpo

Source: faker : faker.providers.address.en_US.Provider.military_dpo

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.MilitaryDpo}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Unit 1948 Box 9241)
```

fake.MilitaryShip

Example:: 'USS'

Aliases: military_ship, militaryship

Source: faker : faker.providers.address.en_US.Provider.military_ship

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.MilitaryShip}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=USS)
```

fake.MilitaryState

Example:: 'APO'

Aliases: military_state, militarystate

Source: faker : faker.providers.address.en_US.Provider.military_state

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.MilitaryState}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=AE)
```

fake.PostalcodeInState

Aliases: postalcode_in_state, postalcodeinstate

Source: faker : faker.providers.address.en_US.Provider.postalcode_in_state

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PostalcodeInState}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=13981)
```

fake.PostalcodePlus4

Aliases: postalcode_plus4, postalcodeplus4

Source: faker : faker.providers.address.en_US.Provider.postalcode_plus4

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PostalcodePlus4}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=67514-7962)
```

fake.Postcode

Aliases: postcode

Source: faker : faker.providers.address.en_US.Provider.postcode

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Postcode}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=55626)
```

fake.PostcodeInState

Return:s: A random postcode within the provided state abbreviation

Param: state_abbr: A state abbreviation

Aliases: postcode_in_state, postcodeinstate

Source: faker : faker.providers.address.en_US.Provider.postcode_in_state

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PostcodeInState}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=13981)
```

fake.SecondaryAddress

Aliases: secondary_address, secondaryaddress

Source: faker : faker.providers.address.en_US.Provider.secondary_address

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.SecondaryAddress}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Suite 938)
```

fake.StateAbbr

Return:s: A random two-letter USPS postal code

By default, the resulting code may abbreviate any of the fifty states, five US territories, or three freely-associating sovereign states.

Param: include_territories: If True, territories will be included. If False, US territories will be excluded.

Param: include_freely_associated_states: If True, freely-associated states will be included. If False, sovereign states in free association with the US will be excluded.

Aliases: state_abbr, stateabbr

Source: faker : faker.providers.address.en_US.Provider.state_abbr

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.StateAbbr}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=WV)
```

fake.StreetName

Example:: 'Crist Parks'

Aliases: street_name, streetname

Source: faker : faker.providers.address.en_US.Provider.street_name

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.StreetName}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Goodwin Tunnel)
```

fake.StreetSuffix

Example:: 'Avenue'

Aliases: street_suffix, streetsuffix

Source: faker : faker.providers.address.en_US.Provider.street_suffix

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.StreetSuffix}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Trace)
```

fake.Zipcode

Aliases: zipcode

Source: faker : faker.providers.address.en_US.Provider.zipcode

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Zipcode}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=55626)
```

fake.ZipcodeInState

Aliases: zipcode_in_state, zipcodeinstate

Source: faker : faker.providers.address.en_US.Provider.zipcode_in_state

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.ZipcodeInState}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=13981)
```

fake.ZipcodePlus4

Aliases: zipcode_plus4, zipcodeplus4

Source: faker : faker.providers.address.en_US.Provider.zipcode_plus4

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.ZipcodePlus4}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=67514-7962)
```

Automotive Fakers

fake.LicensePlate

Generate a license plate.

Aliases: license_plate, licenseplate

Source: faker : faker.providers.automotive.en_US.Provider.license_plate

Recipe:

```Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LicensePlate}}
```

Outputs:

```Unset
SomeObject(id=1, formula_field_example=194-EJEY)
```

fake.Vin

Generate vin number.

Aliases: vin

Source: faker : faker.providers.automotive.en_US.Provider.vin

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Vin}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=16S1YMFL25CEF0V66)
```

Bank Fakers

fake.Aba

Generate an ABA routing transit number.

Aliases: aba

Source: faker : faker.providers.bank.en_GB.Provider.aba

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
```

```
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Aba}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=052194896)
```

fake.BankCountry

Generate the bank provider's ISO 3166-1 alpha-2 country code.

Aliases: bank_country, bankcountry

Source: faker : faker.providers.bank.en_GB.Provider.bank_country

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.BankCountry}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=GB)
```

fake.Bban

Generate a Basic Bank Account Number (BBAN).

Aliases: bban

Source: faker : faker.providers.bank.en_GB.Provider.bban

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Bban}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=RPOQ40801609753513)
```

fake.Iban

Generate an International Bank Account Number (IBAN).

Aliases: iban

Source: faker : faker.providers.bank.en_GB.Provider.iban

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Iban}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=GB51RPOQ40801609753513)
```

fake.Swift

Generate a SWIFT code.

SWIFT codes, reading from left to right, are composed of a 4 alphabet character bank code, a 2 alphabet character country code, a 2 alphanumeric location code, and an optional 3 alphanumeric branch code. This means SWIFT codes can only have 8 or 11 characters, so the value of `length` can only be `None` or the integers `8` or `11`. If the value is `None`, then a value of `8` or `11` will randomly be assigned.

Because all 8-digit SWIFT codes already refer to the primary branch or office, the `primary` argument only has an effect if the value of `length` is `11`. If `primary` is `True` and `length` is `11`, the 11-digit SWIFT codes generated will always end in `'XXX'` to denote that they belong to primary branches/offices.

For extra authenticity, localized providers may opt to include SWIFT bank codes, location codes, and branch codes used in their respective locales. If `use_dataset` is `True`,

this method will generate SWIFT codes based on those locale-specific codes if included. If those codes were not included, then it will behave as if `use_dataset` were `False`, and in that mode, all those codes will just be randomly generated as per the specification.

Aliases: swift

Source: faker : faker.providers.bank.en_GB.Provider.swift

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Swift}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=JDXCGBV4)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Swift(length=8)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=ZRACGBZA)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Swift(length=8, use_dataset=True)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=OCCKGB65)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Swift(length=11)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=SHJFGBMLCQ4)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Swift(length=11, primary=True)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=IQZHGBN0XXX)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Swift(length=11, use_dataset=True)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=LZFKGB1DGJO)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Swift(length=11, primary=True,
use_dataset=True)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=CLDBGBBMXXX)
```

fake.Swift11

Generate an 11-digit SWIFT code.

This method uses |swift| under the hood with the `length` argument set to `11`. If `primary` is set to `True`, the SWIFT code will always end with `'XXX'`. All 11-digit SWIFT codes use this convention to refer to the primary branch/office.

Aliases: swift11

Source: faker : faker.providers.bank.en_GB.Provider.swift11

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Swift11}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=TZIRGBJTGEV)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Swift11(use_dataset=True)}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=TPKHGBUEMOP)
```

fake.Swift8

Generate an 8-digit SWIFT code.

This method uses |swift| under the hood with the `length` argument set to `8` and with the `primary` argument omitted. All 8-digit SWIFT codes already refer to the primary branch/office.

Aliases: swift8

Source: faker : faker.providers.bank.en_GB.Provider.swift8

Recipe:

```Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Swift8}}
```

Outputs:

```Unset
SomeObject(id=1, formula_field_example=SGQEGBSI)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Swift8(use_dataset=True)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=XCVKGB49)
```

Barcode Fakers

fake.Ean

Generate an EAN barcode of the specified `length`.

The value of `length` can only be `8` or `13` (default) which will create an EAN-8 or an EAN-13 barcode respectively.

If a value for `prefixes` is specified, the result will begin with one of the sequences in `prefixes`.

Aliases: ean

Source: faker : faker.providers.barcode.en_US.Provider.ean

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean(length=13)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=1578156593879)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean(length=8)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=13933289)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean(prefixes=('00', ))}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=0015871484187)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean(prefixes=('45', '49'))}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=4598947196598)
```

fake.Ean13

Generate an EAN-13 barcode.

If `leading_zero` is `True`, the leftmost digit of the barcode will be set to `0`. If `False`, the leftmost digit cannot be `0`. If `None` (default), the leftmost digit can be any digit.

If a value for `prefixes` is specified, the result will begin with one of the sequences in `prefixes` and will ignore `leading_zero`.

This method uses the standard barcode provider's |ean13| under the hood with the `prefixes` argument set to the correct value to attain the behavior described above.

.. note:: EAN-13 barcode that starts with a zero can be converted to UPC-A by dropping the leading zero. This may cause problems with readers that treat all of these code as UPC-A codes and drop the first digit when reading it.

You can set the argument `prefixes` (or `leading_zero` for convenience) explicitly to avoid or to force the generated barcode to start with a zero. You can also generate actual UPC-A barcode with |EnUsBarcodeProvider.upc_a|.

Aliases: ean13

Source: faker : faker.providers.barcode.en_US.Provider.ean13

Recipe:

Unset

```
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean13}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=1578156593879)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean13(leading_zero=False)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=5418583989479)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean13(leading_zero=True)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=0694775159171)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean13(prefixes=('00', ))}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=0004135256011)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean13(prefixes=('45', '49'))}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=4998910139919)
```

fake.Ean8

Generate an EAN-8 barcode.

This method uses |ean| under the hood with the `length` argument explicitly set to `8`.

If a value for `prefixes` is specified, the result will begin with one of the sequences in `prefixes`.

Aliases: ean8

Source: faker : faker.providers.barcode.en_US.Provider.ean8

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean8}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=42194897)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean8(prefixes=('00', ))}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=00115780)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ean8(prefixes=('45', '49'))}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=49593877)
```

fake.LocalizedEan

Generate a localized EAN barcode of the specified `length`.

The value of `length` can only be `8` or `13` (default) which will create an EAN-8 or an EAN-13 barcode respectively.

This method uses the standard barcode provider's |ean| under the hood with the `prefixes` argument explicitly set to `local_prefixes` of a localized barcode provider implementation.

Aliases: localized_ean, localizedean

Source: faker : faker.providers.barcode.en_US.Provider.localized_ean

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LocalizedEan}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=1381565938779)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
```

```
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LocalizedEan(length=13)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=0948418583985)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LocalizedEan(length=8)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=10220184)
```

fake.LocalizedEan13

Generate a localized EAN-13 barcode.

This method uses |localized_ean| under the hood with the `length` argument explicitly set to `13`.

Aliases: localized_ean13, localizedean13

Source: faker : faker.providers.barcode.en_US.Provider.localized_ean13

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LocalizedEan13}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=1381565938779)
```

fake.LocalizedEan8

Generate a localized EAN-8 barcode.

This method uses |localized_ean| under the hood with the `length` argument explicitly set to `8`.

Aliases: localized_ean8, localizedean8

Source: faker : faker.providers.barcode.en_US.Provider.localized_ean8

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LocalizedEan8}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=04948926)
```

fake.UpcA

Generate a 12-digit UPC-A barcode.

The value of `upc_ae_mode` controls how barcodes will be generated. If `False` (default), barcodes are not guaranteed to have a UPC-E equivalent. In this mode, the method uses |EnUsBarcodeProvider.ean13| under the hood, and the values of `base` and `number_system_digit` will be ignored.

If `upc_ae_mode` is `True`, the resulting barcodes are guaranteed to have a UPC-E equivalent, and the values of `base` and `number_system_digit` will be used to control what is generated.

Under this mode, `base` is expected to have a 6-digit string value. If any other value is supplied, a random 6-digit string will be used instead. As for `number_system_digit`, the expected value is a `0` or a `1`. If any other value is provided, this method will randomly choose from the two.

.. important:: When `upc_ae_mode` is enabled, you might encounter instances where different values of `base` (e.g. `'120003'` and `'120004'`) produce the same UPC-A barcode. This is normal, and the reason lies within the whole conversion process. To learn more about this and what `base` and `number_system_digit` actually represent, please refer to |EnUsBarcodeProvider.upc_e|.

Aliases: upc_a, upca

Source: faker : faker.providers.barcode.en_US.Provider.upc_a

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcA}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=156593877847)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
```

```
    formula_field_example: ${{fake.UpcA(upc_ae_mode=True,
number_system_digit=0)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=093328000074)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcA(upc_ae_mode=True,
number_system_digit=1)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=183980000090)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
```

```
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcA(upc_ae_mode=True, base='123456',
number_system_digit=0)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=012345000065)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcA(upc_ae_mode=True, base='120003',
number_system_digit=0)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=012000000003)
```

Recipe:

```
Unset
```

```
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcA(upc_ae_mode=True, base='120004',
number_system_digit=0)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=012000000003)
```

fake.UpcE

Generate an 8-digit UPC-E barcode.

UPC-E barcodes can be expressed in 6, 7, or 8-digit formats, but this method uses the 8 digit format, since it is trivial to convert to the other two formats. The first digit (starting from the left) is controlled by `number_system_digit`, and it can only be a `0` or a `1`. The last digit is the check digit that is inherited from the UPC-E barcode's UPC-A equivalent. The middle six digits are collectively referred to as the `base` (for a lack of a better term).

On that note, this method uses `base` and `number_system_digit` to first generate a UPC-A barcode for the check digit, and what happens next depends on the value of `safe_mode`. The argument `safe_mode` exists, because there are some UPC-E values that share the same UPC-A equivalent. For example, any UPC-E barcode of the form `abc0000d`, `abc0003d`, and `abc0004d` share the same UPC-A value `abc00000000d`, but that UPC-A value will only convert to `abc0000d` because of (a) how UPC-E is just a zero-suppressed version of UPC-A and (b) the rules around the conversion.

If `safe_mode` is `True` (default), this method performs another set of conversions to guarantee that the UPC-E barcodes generated can be converted to UPC-A, and that UPC-A barcode can be converted back to the original UPC-E barcode. Using the example above, even if the bases `120003` or `120004` are used, the resulting UPC-E barcode will always use the base `120000`.

If `safe_mode` is `False`, then the `number_system_digit`, `base`, and the computed check digit will just be concatenated together to produce the UPC-E barcode, and attempting to convert the barcode to UPC-A and back again to UPC-E will exhibit the behavior described above.

Aliases: upc_e, upce

Source: faker : faker.providers.barcode.en_US.Provider.upc_e

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcE}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=04219484)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcE(base='123456')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=11234562)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcE(base='123456', number_system_digit=0)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=01234565)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcE(base='123456', number_system_digit=1)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=11234562)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcE(base='120000', number_system_digit=0)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=01200003)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcE(base='120003', number_system_digit=0)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=01200003)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcE(base='120004', number_system_digit=0)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=01200003)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcE(base='120000', number_system_digit=0,
safe_mode=False)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=01200003)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcE(base='120003', number_system_digit=0,
safe_mode=False)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=01200033)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UpcE(base='120004', number_system_digit=0,
safe_mode=False)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=01200043)
```

Color Fakers

fake.Color

Generate a color in a human-friendly way.

Under the hood, this method first creates a color represented in the HSV color model and then converts it to the desired `color_format`. The argument `hue` controls the H value according to the following rules:

- If the value is a number from `0` to `360`, it will serve as the H value of the generated color.
- If the value is a tuple/list of 2 numbers from 0 to 360, the color's H value will be randomly selected from that range.
- If the value is a valid string, the color's H value will be randomly selected from the H range corresponding to the supplied string. Valid values are `'monochrome'`, `'red'`, `'orange'`, `'yellow'`, `'green'`, `'blue'`, `'purple'`, and `'pink'`.

The argument `luminosity` influences both S and V values and is partially affected by `hue` as well. The finer details of this relationship are somewhat involved, so please refer to the source code instead if you wish to dig deeper. To keep the interface simple, this argument either can be omitted or can accept the following string values: `'bright'`, `'dark'`, `'light'`, or `'random'`.

The argument `color_format` controls in which color model the color is represented. Valid values are `'hsv'`, `'hsl'`, `'rgb'`, or `'hex'` (default).

Aliases: color

Source: faker : faker.providers.color.en_US.Provider.color

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Color(hue='red')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=#ef6466)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Color(luminosity='light')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=#f9e38b)
```

Recipe:

```
Unset




- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Color(hue=(100, 200), color_format='rgb')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=rgb(119, 229, 207))
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Color(hue='orange', luminosity='bright')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=#cc7824)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Color(hue=135, luminosity='dark',
color_format='hsv')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=hsv(135, 98, 42))
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Color(hue=(300, 20), luminosity='random',
color_format='hsl')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=hsl(67, 85, 27))
```

fake.ColorHsl

Generate a HSL color tuple in a human-friendly way.

Aliases: color_hsl, colorhsl

Source: faker : faker.providers.color.en_US.Provider.color_hsl

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.ColorHsl}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=(207, 76, 65))
```

fake.ColorHsv

Generate a HSV color tuple in a human-friendly way.

Aliases: color_hsv, colorhsv

Source: faker : faker.providers.color.en_US.Provider.color_hsv

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.ColorHsv}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=(207, 58, 92))
```

fake.ColorName

Generate a color name.

Aliases: color_name, colorname

Source: faker : faker.providers.color.en_US.Provider.color_name

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.ColorName}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=BlueViolet)
```

fake.ColorRgb

Generate a RGB color tuple of integers in a human-friendly way.

Aliases: color_rgb, colorrgb

Source: faker : faker.providers.color.en_US.Provider.color_rgb

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.ColorRgb}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=(98, 173, 234))
```

fake.ColorRgbFloat

Generate a RGB color tuple of floats in a human-friendly way.

Aliases: color_rgb_float, colorrgbfloat

Source: faker : faker.providers.color.en_US.Provider.color_rgb_float

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.ColorRgbFloat}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=(0.3864000000000001, 0.6798800000000002,
0.92))
```

fake.HexColor

Generate a color formatted as a hex triplet.

Aliases: hex_color, hexcolor

Source: faker : faker.providers.color.en_US.Provider.hex_color

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.HexColor}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=#c2094d)
```

fake.RgbColor

Generate a color formatted as a comma-separated RGB value.

Aliases: rgb_color, rgbcolor

Source: faker : faker.providers.color.en_US.Provider.rgb_color

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.RgbColor}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=155,244,183)
```

fake.RgbCssColor

Generate a color formatted as a CSS rgb() function.

Aliases: rgb_css_color, rgbcsscolor

Source: faker : faker.providers.color.en_US.Provider.rgb_css_color

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.RgbCssColor}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=rgb(155,244,183))
```

fake.SafeColorName

Generate a web-safe color name.

Aliases: safe_color_name, safecolorname

Source: faker : faker.providers.color.en_US.Provider.safe_color_name

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.SafeColorName}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=fuchsia)
```

fake.SafeHexColor

Generate a web-safe color formatted as a hex triplet.

Aliases: safe_hex_color, safehexcolor

Source: faker : faker.providers.color.en_US.Provider.safe_hex_color

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.SafeHexColor}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=#99ffbb)
```

Company Fakers

fake.Bs

Example:: 'integrate extensible convergence'

Aliases: bs

Source: faker : faker.providers.company.en_US.Provider.bs

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
```

```
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Bs}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=synthesize wireless content)
```

fake.CompanySuffix

Example:: 'Ltd'

Aliases: company_suffix, companysuffix

Source: faker : faker.providers.company.en_US.Provider.company_suffix

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CompanySuffix}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=Inc)
```

Credit_Card Fakers

fake.CreditCardExpire

Generate a credit card expiry date.

This method uses |date_time_between| under the hood to generate the expiry date, so the `start` and `end` arguments work in the same way here as it would in that method. For the actual formatting of the expiry date, |strftime| is used and `date_format` is simply passed to that method.

Aliases: credit_card_expire, creditcardexpire

Source: faker : faker.providers.credit_card.en_US.Provider.credit_card_expire

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CreditCardExpire}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=07/28)
```

fake.CreditCardFull

Generate a set of credit card details.

Aliases: credit_card_full, creditcardfull

Source: faker : faker.providers.credit_card.en_US.Provider.credit_card_full

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CreditCardFull}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=JCB 16 digit
Courtney Odonnell
3597535139332876 03/25
CVC: 587
)
```

fake.CreditCardNumber

Generate a valid credit card number.

Aliases: credit_card_number, creditcardnumber

Source: faker : faker.providers.credit_card.en_US.Provider.credit_card_number

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CreditCardNumber}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=348778408016097)
```

fake.CreditCardProvider

Generate a credit card provider name.

Aliases: credit_card_provider, creditcardprovider

Source: faker : faker.providers.credit_card.en_US.Provider.credit_card_provider

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CreditCardProvider}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Maestro)
```

fake.CreditCardSecurityCode

Generate a credit card security code.

Aliases: credit_card_security_code, creditcardsecuritycode

Source: faker : faker.providers.credit_card.en_US.Provider.credit_card_security_code

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CreditCardSecurityCode}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=593)
```

Currency Fakers

fake.Cryptocurrency

Aliases: cryptocurrency

Source: faker : faker.providers.currency.en_US.Provider.cryptocurrency

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Cryptocurrency}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=('BC', 'BlackCoin'))
```

fake.CryptocurrencyCode

Aliases: cryptocurrency_code, cryptocurrencycode

Source: faker : faker.providers.currency.en_US.Provider.cryptocurrency_code

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CryptocurrencyCode}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=BC)
```

fake.CryptocurrencyName

Aliases: cryptocurrency_name, cryptocurrencyname

Source: faker : faker.providers.currency.en_US.Provider.cryptocurrency_name

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CryptocurrencyName}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=BlackCoin)
```

fake.Currency

Aliases: currency

Source: faker : faker.providers.currency.en_US.Provider.currency

Recipe:

```Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Currency}}
```

Outputs:

```Unset
SomeObject(id=1, formula_field_example=('BAM', 'Bosnia and Herzegovina convertible mark'))
```

fake.CurrencyCode

Aliases: currency_code, currencycode

Source: faker : faker.providers.currency.en_US.Provider.currency_code

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CurrencyCode}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=BAM)
```

fake.CurrencyName

Aliases: currency_name, currencyname

Source: faker : faker.providers.currency.en_US.Provider.currency_name

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CurrencyName}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=Bosnia and Herzegovina convertible mark)
```

fake.CurrencySymbol

Example:: $

Aliases: currency_symbol, currencysymbol

Source: faker : faker.providers.currency.en_US.Provider.currency_symbol

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CurrencySymbol}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=KM)
```

fake.Pricetag

Aliases: pricetag

Source: faker : faker.providers.currency.en_US.Provider.pricetag

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Pricetag}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=$54.21)
```

Decorators.Py Fakers

fake.AsciiCompanyEmail

Aliases: ascii_company_email, asciicompanyemail

Source: faker : faker.providers.internet.en_US.Provider.ascii_company_email

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.AsciiCompanyEmail}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=kerrivasquez@snyder-frost.com)
```

fake.AsciiEmail

Aliases: ascii_email, asciiemail

Source: faker : faker.providers.internet.en_US.Provider.ascii_email

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.AsciiEmail}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=patricia38@gmail.com)
```

fake.AsciiFreeEmail

Aliases: ascii_free_email, asciifreeemail

Source: faker : faker.providers.internet.en_US.Provider.ascii_free_email

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.AsciiFreeEmail}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=lcortez@gmail.com)
```

fake.AsciiSafeEmail

Aliases: ascii_safe_email, asciisafeemail

Source: faker : faker.providers.internet.en_US.Provider.ascii_safe_email

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.AsciiSafeEmail}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=lcortez@example.org)
```

fake.CompanyEmail

Aliases: company_email, companyemail

Source: faker : faker.providers.internet.en_US.Provider.company_email

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CompanyEmail}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=kerrivasquez@snyder-frost.com)
```

fake.DomainName

Produce an Internet domain name with the specified number of subdomain levels.

> domain_name() nichols-phillips.com domain_name(2) williamson-hopkins.jackson.com

Aliases: domain_name, domainname

Source: faker : faker.providers.internet.en_US.Provider.domain_name

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.DomainName}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=hendrix-mayer.com)
```

fake.DomainWord

Aliases: domain_word, domainword

Source: faker : faker.providers.internet.en_US.Provider.domain_word

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.DomainWord}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=pham)
```

fake.FreeEmail

Aliases: free_email, freeemail

Source: faker : faker.providers.internet.en_US.Provider.free_email

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FreeEmail}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=lcortez@gmail.com)
```

fake.FreeEmailDomain

Aliases: free_email_domain, freeemaildomain

Source: faker : faker.providers.internet.en_US.Provider.free_email_domain

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FreeEmailDomain}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=gmail.com)
```

fake.Hostname

Produce a hostname with specified number of subdomain levels.

> hostname() db-01.nichols-phillips.com hostname(0) laptop-56 hostname(2) web-12.williamson-hopkins.jackson.com

Aliases: hostname

Source: faker : faker.providers.internet.en_US.Provider.hostname

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Hostname}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=lt-24.frost.org)
```

fake.SafeDomainName

Aliases: safe_domain_name, safedomainname

Source: faker : faker.providers.internet.en_US.Provider.safe_domain_name

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.SafeDomainName}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=example.org)
```

fake.SafeEmail

Aliases: safe_email, safeemail

Source: faker : faker.providers.internet.en_US.Provider.safe_email

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.SafeEmail}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=lcortez@example.org)
```

fake.Slug

Django algorithm

Aliases: slug

Source: faker : faker.providers.internet.en_US.Provider.slug

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Slug}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=much-mention)
```

Emoji Fakers

fake.Emoji

Example:: '😉'

Aliases: emoji

Source: faker : faker.providers.emoji.Provider.emoji

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Emoji}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=⏮)
```

File Fakers

fake.FileExtension

Generate a file extension under the specified `category`.

If `category` is `None`, a random category will be used. The list of valid categories include: `'audio'`, `'image'`, `'office'`, `'text'`, and `'video'`.

Aliases: file_extension, fileextension

Source: faker : faker.providers.file.Provider.file_extension

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FileExtension}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=webm)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FileExtension(category='image')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=jpg)
```

fake.FileName

Generate a random file name with extension.

If `extension` is `None`, a random extension will be created under the hood using |file_extension| with the specified `category`. If a value for `extension` is provided, the value will be used instead, and `category` will be ignored. The actual name part itself is generated using |word|. If extension is an empty string then no extension will be added, and file_name will be the same as |word|.

Aliases: file_name, filename

Source: faker : faker.providers.file.Provider.file_name

Recipe:

```
Unset

- var: snowfakery_locale
```

```
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FileName(category='audio')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=much.mp3)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FileName(extension='abcdef')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=why.abcdef)
```

Recipe:

```
Unset

- var: snowfakery_locale
```

```
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FileName(category='audio',
extension='abcdef')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=floor.abcdef)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FileName(extension='')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=past)
```

fake.FilePath

Generate an pathname to a file.

This method uses |file_name| under the hood to generate the file name itself, and `depth` controls the depth of the directory path, and |word| is used under the hood to generate the different directory names.

If `absolute` is `True` (default), the generated path starts with `/` and is absolute. Otherwise, the generated path is relative.

If used, `extension` can be either a string, forcing that extension, a sequence of strings (one will be picked at random), or an empty sequence (the path will have no extension). Default behaviour is the same as |file_name|

if `file_system` is set (default="linux"), the generated path uses specified file system path standard, the list of valid file systems include: `'windows'`, `'linux'`.

Aliases: file_path, filepath

Source: faker : faker.providers.file.Provider.file_path

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FilePath(depth=3)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=/someone/challenge/father/chair.png)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FilePath(depth=5, category='video')}}
```

Outputs:

```
Unset

SomeObject(id=1,
formula_field_example=/four/leader/health/blood/opportunity/marriage.mov)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FilePath(depth=5, category='video',
extension='abcdef')}}
```

Outputs:

```
Unset

SomeObject(id=1,
formula_field_example=/serve/better/address/whole/official/why.abcdef)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FilePath(extension=[])}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=/inside/though)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FilePath(extension='')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=/ability/process)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FilePath(extension=["a", "bc", "def"])}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=/their/minute.def)
```

fake.MimeType

Generate a mime type under the specified `category`.

If `category` is `None`, a random category will be used. The list of valid categories include `'application'`, `'audio'`, `'image'`, `'message'`, `'model'`, `'multipart'`, `'text'`, and `'video'`.

Aliases: mime_type, mimetype

Source: faker : faker.providers.file.Provider.mime_type

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.MimeType}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=video/x-ms-wmv)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.MimeType(category='application')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=application/rss+xml)
```

fake.UnixDevice

Generate a Unix device file name.

If `prefix` is `None`, a random prefix will be used. The list of valid prefixes include: `'sd'`, `'vd'`, and `'xvd'`.

Aliases: unix_device, unixdevice

Source: faker : faker.providers.file.Provider.unix_device

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UnixDevice}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=/dev/vdq)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UnixDevice(prefix='mmcblk')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=/dev/mmcblkz)
```

fake.UnixPartition

Generate a Unix partition name.

This method uses |unix_device| under the hood to create a device file name with the specified `prefix`.

Aliases: unix_partition, unixpartition

Source: faker : faker.providers.file.Provider.unix_partition

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UnixPartition}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=/dev/vdm4)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UnixPartition(prefix='mmcblk')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=/dev/mmcblkq2)
```

Geo Fakers

fake.Coordinate

Optionally center the coord and pick a point within radius.

Aliases: coordinate

Source: faker : faker.providers.geo.en_US.Provider.coordinate

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Coordinate}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=-158.265114)
```

fake.Latitude

Aliases: latitude

Source: faker : faker.providers.geo.en_US.Provider.latitude

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Latitude}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=-79.132557)
```

fake.Latlng

Aliases: latlng

Source: faker : faker.providers.geo.en_US.Provider.latlng

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Latlng}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=(Decimal('47.244262'),
Decimal('80.880444')))
```

fake.LocalLatlng

Returns a location known to exist on land in a country specified by `country_code`. Defaults to 'en_US'. See the `land_coords` list for available locations/countries.

Aliases: local_latlng, locallatlng

Source: faker : faker.providers.geo.en_US.Provider.local_latlng

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LocalLatlng}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=('30.17746', '-81.38758', 'Palm Valley',
'US', 'America/New_York'))
```

fake.LocationOnLand

Returns a random tuple specifying a coordinate set guaranteed to exist on land. Format is `(latitude, longitude, place name, two-letter country code, timezone)` Pass `coords_only` to return coordinates without metadata.

Aliases: location_on_land, locationonland

Source: faker : faker.providers.geo.en_US.Provider.location_on_land

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LocationOnLand}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=('-7.60361', '37.00438', 'Kidodi', 'TZ',
'Africa/Dar_es_Salaam'))
```

fake.Longitude

Aliases: longitude

Source: faker : faker.providers.geo.en_US.Provider.longitude

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Longitude}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=-158.265114)
```

Internet Fakers

fake.Dga

Generates a domain name by given date
https://en.wikipedia.org/wiki/Domain_generation_algorithm

:type year: int :type month: int :type day: int :type tld: str :type length: int :rtype: str

Aliases: dga

Source: faker : faker.providers.internet.en_US.Provider.dga

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Dga}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=iiulfpgbvqcdaehnqkbxmaqgkykorlxnwy.com)
```

fake.HttpMethod

Returns random HTTP method
https://developer.mozilla.org/en-US/docs/Web/HTTP/Methods

:rtype: str

Aliases: http_method, httpmethod

Source: faker : faker.providers.internet.en_US.Provider.http_method

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.HttpMethod}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=GET)
```

fake.HttpStatusCode

Returns random HTTP status code https://www.rfc-editor.org/rfc/rfc9110#name-status-codes

Param: include_unassigned: Whether to include status codes which have not yet been assigned or are unused

Return:: a random three digit status code :rtype: int

Example:: 404

Aliases: http_status_code, httpstatuscode

Source: faker : faker.providers.internet.en_US.Provider.http_status_code

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.HttpStatusCode}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=488)
```

fake.IanaId

Returns IANA Registrar ID
https://www.iana.org/assignments/registrar-ids/registrar-ids.xhtml

:rtype: str

Aliases: iana_id, ianaid

Source: faker : faker.providers.internet.en_US.Provider.iana_id

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.IanaId}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=679216)
```

fake.ImageUrl

Returns URL to placeholder image Example: http://placehold.it/640x480

Param: width: Optional image width

Param: height: Optional image height

Param: placeholder_url: Optional template string of image URLs from custom placeholder service. String must contain `{width}` and `{height}` placeholders, eg: `https:/example.com/{width}/{height}`. :rtype: str

Aliases: image_url, imageurl

Source: faker : faker.providers.internet.en_US.Provider.image_url

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.ImageUrl}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=https://dummyimage.com/621x976)
```

fake.Ipv4

Returns a random IPv4 address or network with a valid CIDR.

Param: network: Network address

Param: address_class: IPv4 address class (a, b, or c)

Param: private: Public or private

Return:s: IPv4

Aliases: ipv4

Source: faker : faker.providers.internet.en_US.Provider.ipv4

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ipv4}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=51.105.121.194)
```

fake.Ipv4NetworkClass

Returns a IPv4 network class 'a', 'b' or 'c'.

Return:s: IPv4 network class

Aliases: ipv4_network_class, ipv4networkclass

Source: faker : faker.providers.internet.en_US.Provider.ipv4_network_class

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ipv4NetworkClass}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=a)
```

fake.Ipv4Private

Returns a private IPv4.

Param: network: Network address

Param: address_class: IPv4 address class (a, b, or c)

Return:s: Private IPv4

Aliases: ipv4_private, ipv4private

Source: faker : faker.providers.internet.en_US.Provider.ipv4_private

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ipv4Private}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=172.25.180.188)
```

fake.Ipv4Public

Returns a public IPv4 excluding private blocks.

Param: network: Network address

Param: address_class: IPv4 address class (a, b, or c)

Return:s: Public IPv4

Aliases: ipv4_public, ipv4public

Source: faker : faker.providers.internet.en_US.Provider.ipv4_public

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
```

```
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ipv4Public}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=168.155.75.206)
```

fake.Ipv6

Produce a random IPv6 address or network with a valid CIDR

Aliases: ipv6

Source: faker : faker.providers.internet.en_US.Provider.ipv6

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Ipv6}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=eb11:67b3:67a9:c378:7c65:c1e6:82e2:e662)
```

fake.MacAddress

Returns a random MAC address.

Param: multicast: Multicast address

Return:s: MAC Address

Aliases: mac_address, macaddress

Source: faker : faker.providers.internet.en_US.Provider.mac_address

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.MacAddress}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=18:47:30:80:4b:9e)
```

fake.NicHandle

Returns NIC Handle ID https://www.apnic.net/manage-ip/using-whois/guide/person/

:rtype: str

Aliases: nic_handle, nichandle

Source: faker : faker.providers.internet.en_US.Provider.nic_handle

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.NicHandle}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=UE59352-FAKE)
```

fake.NicHandles

Returns NIC Handle ID list

:rtype: list[str]

Aliases: nic_handles, nichandles

Source: faker : faker.providers.internet.en_US.Provider.nic_handles

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.NicHandles}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=['UERV52-EJGW'])
```

fake.PortNumber

Returns a network port number https://tools.ietf.org/html/rfc6335

Param: is_system: System or well-known ports

Param: is_user: User or registered ports

Param: is_dynamic: Dynamic / private / ephemeral ports :rtype: int

Aliases: port_number, portnumber

Source: faker : faker.providers.internet.en_US.Provider.port_number

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
```

```
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PortNumber}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=5306)
```

fake.RipeId

Returns RIPE Organization ID https://www.ripe.net/manage-ips-and-asns/db/support/organisation-object-in-the-ripe-database

:rtype: str

Aliases: ripe_id, ripeid

Source: faker : faker.providers.internet.en_US.Provider.ripe_id

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.RipeId}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=ORG-UE59352-RIPE)
```

fake.Tld

Aliases: tld

Source: faker : faker.providers.internet.en_US.Provider.tld

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Tld}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=com)
```

fake.Uri

Param: schemes: a list of strings to use as schemes, one will chosen randomly. If None, it will generate http and https uris. Passing an empty list will result in schemeless uri generation like "://domain.com/index.html".

Param: deep: an integer specifying how many path components the URI should have..

Return:: a random url string.

Aliases: uri

Source: faker : faker.providers.internet.en_US.Provider.uri

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Uri}}
```

Outputs:

```
Unset

SomeObject(id=1,
formula_field_example=http://randall-patterson.com/explorehome.php)
```

fake.UriExtension

Aliases: uri_extension, uriextension

Source: faker : faker.providers.internet.en_US.Provider.uri_extension

Recipe:

```
Unset

- var: snowfakery_locale
```

```
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UriExtension}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=.html)
```

fake.UriPage

Aliases: uri_page, uripage

Source: faker : faker.providers.internet.en_US.Provider.uri_page

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UriPage}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=privacy)
```

fake.UriPath

Aliases: uri_path, uripath

Source: faker : faker.providers.internet.en_US.Provider.uri_path

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UriPath}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=explore/category)
```

fake.Url

Param: schemes: a list of strings to use as schemes, one will chosen randomly. If None, it will generate http and https urls. Passing an empty list will result in schemeless url generation like "://domain.com".

Return:: a random url string.

Aliases: url

Source: faker : faker.providers.internet.en_US.Provider.url

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Url}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=http://frost.org/)
```

Isbn Fakers

fake.Isbn10

Aliases: isbn10

Source: faker : faker.providers.isbn.Provider.isbn10

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Isbn10}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=0-15-781565-X)
```

fake.Isbn13

Aliases: isbn13

Source: faker : faker.providers.isbn.Provider.isbn13

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Isbn13}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=978-0-15-781565-8)
```

Job Fakers

fake.Job

Aliases: job

Source: faker : faker.providers.job.en_US.Provider.job

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Job}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Architect)
```

Lorem Fakers

fake.Paragraphs

Generate a list of paragraphs.

This method uses |paragraph| under the hood to generate paragraphs, and the `nb` argument controls exactly how many sentences the list will contain. The `ext_word_list` argument works in exactly the same way as well.

Aliases: paragraphs

Source: faker : faker.providers.lorem.en_US.Provider.paragraphs

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Paragraphs(nb=5)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=['Security stock ball organization
recognize civil. Pm her then nothing increase.', 'Industry product another
knowledge else citizen month. Traditional page a although for study anyone.
Could yourself plan base rise would.', 'First degree response able state more.
Couple part cup few. Beyond take however ball.', 'Son break either president
stage population boy. Everything affect American race.', 'Water voice travel
among see red. Republican total policy head Mrs debate onto. Catch even
front.'])
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Paragraphs(nb=5, ext_word_list=['abc',
'def', 'ghi',
      'jkl'])}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=['Def ghi abc abc. Def def ghi def def abc abc abc. Ghi def jkl def abc ghi def.', 'Abc abc def abc def ghi. Jkl ghi def jkl. Abc abc ghi abc.', 'Def ghi def def.', 'Def def jkl def jkl. Abc abc jkl jkl abc ghi. Abc def abc abc jkl. Ghi abc def def jkl.', 'Jkl abc def ghi jkl def jkl def. Jkl ghi jkl ghi jkl abc ghi.'])
```

fake.Sentences

Generate a list of sentences.

This method uses |sentence| under the hood to generate sentences, and the `nb` argument controls exactly how many sentences the list will contain. The `ext_word_list` argument works in exactly the same way as well.

Aliases: sentences

Source: faker : faker.providers.lorem.en_US.Provider.sentences

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Sentences}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=['Partner stock four.', 'Region as true
develop sound central.', 'Language ball floor meet usually board necessary.'])
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Sentences(nb=5)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=['Hospital have wonder already.',
'Create wife responsibility.', 'Decision song view age international big
employee.', 'Author feeling job article level.', 'Beyond write current grow
rule stuff truth college.'])
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Sentences(nb=5, ext_word_list=['abc', 'def',
'ghi',
      'jkl'])}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=['Jkl abc ghi jkl def.', 'Abc jkl ghi
abc ghi.', 'Jkl jkl ghi def ghi abc ghi.', 'Ghi def abc def abc jkl def.', 'Ghi
ghi jkl jkl abc.'])
```

fake.Texts

Generate a list of text strings.

The `nb_texts` argument controls how many text strings the list will contain, and this method uses |text| under the hood for text generation, so the two remaining arguments, `max_nb_chars` and `ext_word_list` will work in exactly the same way as well.

ext_word_list=['abc', 'def', 'ghi', 'jkl']

Aliases: texts

Source: faker : faker.providers.lorem.en_US.Provider.texts

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Texts(nb_texts=5)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=['Place full buy radio perform small
camera treatment. True their race special million. Although hot he couple
ground.', 'Between similar safe air. Issue indicate market ten foot education
good. Grow ahead girl act.\nAudience throw debate daughter purpose voice.
Security fall ready usually.', 'Player contain year bill ok choose today.
Source firm drug senior.\nInformation animal car after back available. Federal
indicate unit opportunity fear great.', 'Painting child reflect up control
instead company. Future model green place beat sense far.', 'Three report know
second government the pull. Other along society figure future. Teacher three
seven attention team executive care.'])
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Texts(nb_texts=5, max_nb_chars=50)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=['Partner stand next though house
where.', 'Blue tonight particular smile represent since.', 'Eat expect save
process score middle.', 'Grow push region produce develop story drive.',
'Foreign one agent candidate how wish member.'])
```

Recipe:

```
Unset
```

```
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Texts(nb_texts=5, max_nb_chars=50,
ext_word_list=['abc',
      'def', 'ghi', 'jkl'])}}
```

Outputs:

```Unset
SomeObject(id=1, formula_field_example=['Abc abc abc def ghi. Ghi jkl abc
jkl.', 'Ghi ghi abc abc def abc def. Def abc abc ghi jkl.', 'Def ghi ghi. Def
def abc abc. Abc ghi abc.', 'Def def abc def jkl ghi def.', 'Jkl def def abc
abc jkl ghi. Abc abc jkl abc.'])
```

fake.Words

Generate a tuple of words.

The `nb` argument controls the number of words in the resulting list, and if `ext_word_list` is provided, words from that list will be used instead of those from the locale provider's built-in word list.

If `unique` is `True`, this method will return a list containing unique words. Under the hood, |random_sample| will be used for sampling without replacement. If `unique` is `False`, |random_choices| is used instead, and the list returned may contain duplicates.

`part_of_speech` is a parameter that defines to what part of speech the returned word belongs. If `ext_word_list` is not `None`, then `part_of_speech` is ignored. If the value of `part_of_speech` does not correspond to an existent part of speech according to the set locale, then an exception is raised.

.. warning:: Depending on the length of a locale provider's built-in word list or on the length of `ext_word_list` if provided, a large `nb` can exhaust said lists if `unique` is `True`, raising an exception.

Aliases: words

Source: faker : faker.providers.lorem.en_US.Provider.words

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Words}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=['six', 'field', 'live'])
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Words(nb=5)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=['total', 'financial', 'role',
'together', 'range'])
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Words(nb=5, ext_word_list=['abc', 'def',
'ghi',
      'jkl'])}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=['def', 'abc', 'def', 'ghi', 'jkl'])
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Words(nb=4, ext_word_list=['abc', 'def',
'ghi',
      'jkl'], unique=True)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=['jkl', 'def', 'ghi', 'abc'])
```

Misc Fakers

fake.Binary

Generate a random binary blob of `length` bytes.

If this faker instance has been seeded, performance will be signficiantly reduced, to conform to the seeding.

Aliases: binary

Source: faker : faker.providers.misc.en_US.Provider.binary

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Binary(length=64)}}
```

Outputs:

```
Unset

SomeObject(id=1,
formula_field_example=b'\xdf\\\x1f\xef\x143\xc8f\x85\xb7\xf0Vh\x1dQR\xaf\x80<\x
```

```
e2Y\x06\xf1\xd1\x9f\xb6\xc6\x80N\x06\xea(\xab\x17\x8fEz\xf6\xb4\x93\xb7C\x9e\xc
6\xd4)\x00b\xabQzr\xe5\xc1\xd4\x10\xcd\xd6\x17T\xe4 \x84P')
```

fake.Boolean

Generate a random boolean value based on `chance_of_getting_true`.

Aliases: boolean

Source: faker : faker.providers.misc.en_US.Provider.boolean

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Boolean(chance_of_getting_true=25)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=False)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Boolean(chance_of_getting_true=50)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=False)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Boolean(chance_of_getting_true=75)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=True)
```

fake.Csv

Generate random comma-separated values.

For more information on the different arguments of this method, please refer to :meth:`dsv() <faker.providers.misc.Provider.dsv>` which is used under the hood.

data_columns=('{{name}}', '{{address}}', '{{safe_color_name}}'), num_rows=10, include_row_ids=True

Aliases: csv

Source: faker : faker.providers.misc.en_US.Provider.csv

Recipe:

Unset

```
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Csv(data_columns=('{{name}}',
'{{address}}'), num_rows=10,
      include_row_ids=False)}}
```

Outputs:

Unset

```
SomeObject(id=1, formula_field_example="Krystal Ramirez PhD","Unit 6475 Box
9382
DPO AA 18817"
"Dr. Ruben Escobar","PSC 4115, Box 7815
APO AA 41945"
"Dr. Max Hanna DVM","USS Raymond
FPO AP 02341"
"Dr. Xavier Johnson","Unit 5351 Box 3933
DPO AE 71671"
"Mrs. Bethany Vazquez DVM","418 Meza Plains Apt. 989
Haleyland, PA 50950"
```

```
"Ms. Jade Spencer","PSC 2094, Box 7112
APO AE 05565"
"Dr. Ronald Valdez","PSC 3969, Box 4775
APO AE 43010"
"Dr. Tom Sawyer","USNS Howell
FPO AE 96378"
"Candice Escobar","PSC 5256, Box 0123
APO AE 75718"
"Mr. Corey Walter","PSC 9916, Box 1510
APO AP 03336"
)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Csv(header=('Name', 'Address', 'Favorite
Color'),
      data_columns=('{{name}}', '{{address}}', '{{safe_color_name}}'),
num_rows=10,
      include_row_ids=True)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example="ID","Name","Address","Favorite Color"
"1","Mr. Corey Yates IV","691 Cox Forges
Lake Tylerstad, NE 24135","black"
"2","Mrs. Sabrina Patterson DVM","PSC 4579, Box 2302
APO AE 45368","blue"
"3","Carla Trevino","Unit 2076 Box 9845
DPO AA 86696","olive"
"4","Steve Mccullough Jr.","Unit 1508 Box 4237
```

```
DPO AA 80472","olive"
"5","Ms. Valerie Vega","Unit 6109 Box 3523
DPO AE 84046","lime"
"6","Tracie Donaldson DVM","960 Hannah Circles Suite 278
Irwinside, PA 99523","black"
"7","Randall Dominguez","USCGC Collins
FPO AA 25142","blue"
"8","Mr. Alex Christensen","Unit 5030 Box 0891
DPO AE 16085","silver"
"9","Dr. Hunter Lam III","1047 Ricky Dale Suite 124
North Calvinborough, TX 34536","blue"
"10","Miss Priscilla Krause","765 Luke Lane Suite 022
Andreamouth, WY 48630","yellow"
)
```

fake.Dsv

Generate random delimiter-separated values.

This method's behavior share some similarities with `csv.writer`. The `dialect` and `**fmtparams` arguments are the same arguments expected by `csv.writer` to control its behavior, and instead of expecting a file-like object to where output will be written, the output is controlled by additional keyword arguments and is returned as a string.

The `dialect` argument defaults to `'faker-csv'` which is the name of a `csv.excel` subclass with full quoting enabled.

The `header` argument expects a list or a tuple of strings that will serve as the header row if supplied. The `data_columns` argument expects a list or a tuple of string tokens, and these string tokens will be passed to :meth:`pystr_format()` `<faker.providers.python.Provider.pystr_format>` for data generation. Argument Groups are used to pass arguments to the provider methods. Both `header` and `data_columns` must be of the same length.

Example: fake.set_arguments('top_half', {'min_value': 50, 'max_value': 100})
fake.dsv(data_columns=('{{ name }}', '{{ pyint:top_half }}'))

The `num_rows` argument controls how many rows of data to generate, and the `include_row_ids` argument may be set to `True` to include a sequential row ID column.

Aliases: dsv

Source: faker : faker.providers.misc.en_US.Provider.dsv

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Dsv(dialect='excel',
data_columns=('{{name}}',
      '{{address}}'))}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Krystal Ramirez PhD,"Unit 6475 Box 9382
DPO AA 18817"
Dr. Ruben Escobar,"PSC 4115, Box 7815
APO AA 41945"
Dr. Max Hanna DVM,"USS Raymond
FPO AP 02341"
Dr. Xavier Johnson,"Unit 5351 Box 3933
DPO AE 71671"
Mrs. Bethany Vazquez DVM,"418 Meza Plains Apt. 989
Haleyland, PA 50950"
Ms. Jade Spencer,"PSC 2094, Box 7112
```

```
APO AE 05565"
Dr. Ronald Valdez,"PSC 3969, Box 4775
APO AE 43010"
Dr. Tom Sawyer,"USNS Howell
FPO AE 96378"
Candice Escobar,"PSC 5256, Box 0123
APO AE 75718"
Mr. Corey Walter,"PSC 9916, Box 1510
APO AP 03336"
)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Dsv(dialect='excel-tab',
data_columns=('{{name}}',
      '{{address}}'), include_row_ids=True)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=1    Mr. Corey Yates IV  "691 Cox Forges
Lake Tylerstad, NE 24135"
2   Reginald Moody  "634 Levine Street
Sosashire, GA 91949"
3   Mr. Dave Rubio III  "USNV Ellis
FPO AP 58475"
4   Alejandro Leon DDS  "USNV Figueroa
FPO AP 33391"
5   Steve Mccullough Jr.    "Unit 1508 Box 4237
DPO AA 80472"
6   Tabitha Le  "PSC 4661, Box 0935
```

```
APO AE 31881"
7   Dr. Kevin Odonnell DDS  "960 Hannah Circles Suite 278
Irwinside, PA 99523"
8   Arthur Roman    "USNV Moses
FPO AA 07035"
9   Darlene Conley MD   "PSC 0665, Box 0300
APO AP 69752"
10  Mr. Collin Shields  "PSC 4421, Box 7610
APO AA 59873"
)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Dsv(data_columns=('{{name}}',
'{{address}}'), num_rows=5,
      delimiter='$')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example="Dr. Dakota Wilkerson"$"USS Rasmussen
FPO AE 36992"
"Barry Ramirez"$"PSC 4855, Box 9097
APO AP 84930"
"Dr. Kathryn Rasmussen DDS"$"PSC 6940, Box 2245
APO AA 48630"
"Dr. William Green"$"29456 Tom Crescent Suite 304
Port Lauren, VA 09789"
"Kirsten Blevins"$"USNV Blake
FPO AE 13529"
)
```

fake.FixedWidth

Generate random fixed width values.

Using a list of tuple records that is passed as `data_columns`, that defines the structure that will be generated. Arguments within the record are provider specific, and should be a dictionary that will be passed to the provider method.

Data Column List format [('field width', 'definition', {'arguments'})]

The definition can be 'provider', 'provider:argument_group', tokenized 'string {{ provider:argument_group }}' that is passed to the python provider method pystr_format() for generation, or a fixed '@word'. Using Lists, Tuples, and Dicts as a definition for structure.

Argument Groups can be used to pass arguments to the provider methods, but will override the arguments supplied in the tuple record.

Example: fake.set_arguments('top_half', {'min_value': 50, 'max_value': 100}) fake.fixed_width(data_columns=[(20, 'name'), (3, 'pyint:top_half')])

Param: data_columns: specification for the data structure :type data_columns: list

Param: num_rows: number of rows the generator will yield :type num_rows: int

Param: align: positioning of the value. (left, middle, right) :type align: str

Return:: Serialized Fixed Width data :rtype: str

'max_value': 100})], align='right', num_rows=2

Aliases: fixed_width, fixedwidth

Source: faker : faker.providers.misc.en_US.Provider.fixed_width

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.FixedWidth(data_columns=[(20, 'name'), (3,
'pyint',
      {'min_value':50, 'max_value':100})], align='right', num_rows=2)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example= Krystal Ramirez PhD 82
Dr. Jasmine Bright D 72)
```

fake.Json

Generate random JSON structure values.

Using a dictionary or list of records that is passed as `data_columns`, define the structure that is used to build JSON structures. For complex data structures it is recommended to use the dictionary format.

Data Column Dictionary format: {'key name': 'definition'}

The definition can be 'provider', 'provider:argument_group', tokenized 'string {{ provider:argument_group }}' that is passed to the python provider method pystr_format()

for generation, or a fixed '@word'. Using Lists, Tuples, and Dicts as a definition for structure.

Example: fake.set_arguments('top_half', {'min_value': 50, 'max_value': 100})
fake.json(data_columns={'Name': 'name', 'Score': 'pyint:top_half'})

Data Column List format: [('key name', 'definition', {'arguments'})]

With the list format the definition can be a list of records, to create a list within the structure data. For literal entries within the list, set the 'field_name' to None.

Param: data_columns: specification for the data structure :type data_columns: dict

Param: num_rows: number of rows the returned :type num_rows: int

Param: indent: number of spaces to indent the fields :type indent: int

Param: cls: optional json encoder to use for non-standard objects such as datetimes :type cls: json.JSONEncoder

Return:: Serialized JSON data :rtype: str

'Details': {'Name': 'name', 'Address': 'address'}}, num_rows=2

num_rows=1

{'min_value': 50, 'max_value': 100})], num_rows=1

Aliases: json

Source: faker : faker.providers.misc.en_US.Provider.json

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Json(data_columns={'Spec':'@1.0.1',
'ID':'pyint',
      'Details':{'Name':'name', 'Address':'address'}}, num_rows=2)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=[{"Spec": "1.0.1", "ID": 6311,
"Details": {"Name": "Andrea Little DVM", "Address": "Unit 4759 Box 3824\nDPO AE
99565"}}, {"Spec": "1.0.1", "ID": 1553, "Details": {"Name": "Morgan Escobar",
"Address": "PSC 4115, Box 7815\nAPO AA 41945"}}])
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Json(data_columns={'Candidates':['name',
'name',
      'name']}, num_rows=1)}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example={"Candidates": ["Dr. Max Hanna DVM",
"Ariel Raymond", "Chad Buck"]})
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Json(data_columns=[('Name', 'name'),
('Points',
      'pyint', {'min_value':50, 'max_value':100})], num_rows=1)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example={"Name": "Tracie Tapia MD", "Points":
89})
```

fake.JsonBytes

Generate random JSON structure and return as bytes.

For more information on the different arguments of this method, refer to :meth:`json() <faker.providers.misc.Provider.json>` which is used under the hood.

Aliases: json_bytes, jsonbytes

Source: faker : faker.providers.misc.en_US.Provider.json_bytes

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.JsonBytes}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=b'[{"name": "Dr. Dakota Wilkerson",
"residency": "USS Rasmussen\\nFPO AE 36992"}, {"name": "Barry Ramirez",
"residency": "PSC 4855, Box 9097\\nAPO AP 84930"}, {"name": "Dr. Kathryn
Rasmussen DDS", "residency": "PSC 6940, Box 2245\\nAPO AA 48630"}, {"name":
"Dr. William Green", "residency": "29456 Tom Crescent Suite 304\\nPort Lauren,
VA 09789"}, {"name": "Kirsten Blevins", "residency": "USNV Blake\\nFPO AE
13529"}, {"name": "Dr. Jody Frye PhD", "residency": "76045 Jimmy Road Suite
111\\nLake Max, AR 50939"}, {"name": "Chris Mcgee", "residency": "USCGC
Mcgrath\\nFPO AA 77163"}, {"name": "Dr. Cameron Luna IV", "residency": "USNS
Hammond\\nFPO AE 47492"}, {"name": "Mr. Andres Rowland", "residency": "Unit
3176 Box 4303\\nDPO AP 19683"}, {"name": "Mr. Nathan Navarro", "residency":
"USNS Graham\\nFPO AP 64451"}]')
```

fake.Md5

Generate a random MD5 hash.

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Md5}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=3e92bfaaa510a799067f34c18e175ab3)
```

fake.NullBoolean

Generate `None`, `True`, or `False`, each with equal probability.

Aliases: null_boolean, nullboolean

Source: faker : faker.providers.misc.en_US.Provider.null_boolean

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.NullBoolean}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=False)
```

fake.Password

Generate a random password of the specified `length`.

The arguments `special_chars`, `digits`, `upper_case`, and `lower_case` control what category of characters will appear in the generated password. If set to `True` (default), at least one character from the corresponding category is guaranteed to appear. Special characters are characters from `!@#$%^&*()_+`, digits are characters from `0123456789`, and uppercase and lowercase characters are characters from the ASCII set of letters.

Aliases: password

Source: faker : faker.providers.misc.en_US.Provider.password

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Password(length=12)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=n0geTt4p&S&z)
```

Recipe:

```
Unset

- var: snowfakery_locale
```

```
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Password(length=40, special_chars=False,
upper_case=False)}}
```

Outputs:

```
Unset

SomeObject(id=1,
formula_field_example=3z7cqux6oy2ouc9lf6gtkibc09k0qc1a8ycacymm)
```

fake.Psv

Generate random pipe-separated values.

For more information on the different arguments of this method, please refer to :meth:`dsv() <faker.providers.misc.Provider.dsv>` which is used under the hood.

data_columns=('{{name}}', '{{address}}', '{{safe_color_name}}'), num_rows=10, include_row_ids=True

Aliases: psv

Source: faker : faker.providers.misc.en_US.Provider.psv

Recipe:

```
Unset

- var: snowfakery_locale
```

```
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Psv(data_columns=('{{name}}',
'{{address}}'), num_rows=10,
      include_row_ids=False)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example="Krystal Ramirez PhD"|"Unit 6475 Box
9382
DPO AA 18817"
"Dr. Ruben Escobar"|"PSC 4115, Box 7815
APO AA 41945"
"Dr. Max Hanna DVM"|"USS Raymond
FPO AP 02341"
"Dr. Xavier Johnson"|"Unit 5351 Box 3933
DPO AE 71671"
"Mrs. Bethany Vazquez DVM"|"418 Meza Plains Apt. 989
Haleyland, PA 50950"
"Ms. Jade Spencer"|"PSC 2094, Box 7112
APO AE 05565"
"Dr. Ronald Valdez"|"PSC 3969, Box 4775
APO AE 43010"
"Dr. Tom Sawyer"|"USNS Howell
FPO AE 96378"
"Candice Escobar"|"PSC 5256, Box 0123
APO AE 75718"
"Mr. Corey Walter"|"PSC 9916, Box 1510
APO AP 03336"
)
```

Recipe:

```
Unset
```

```
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Psv(header=('Name', 'Address', 'Favorite
Color'),
      data_columns=('{{name}}', '{{address}}', '{{safe_color_name}}'),
num_rows=10,
      include_row_ids=True)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example="ID"|"Name"|"Address"|"Favorite Color"
"1"|"Mr. Corey Yates IV"|"691 Cox Forges
Lake Tylerstad, NE 24135"|"black"
"2"|"Mrs. Sabrina Patterson DVM"|"PSC 4579, Box 2302
APO AE 45368"|"blue"
"3"|"Carla Trevino"|"Unit 2076 Box 9845
DPO AA 86696"|"olive"
"4"|"Steve Mccullough Jr."|"Unit 1508 Box 4237
DPO AA 80472"|"olive"
"5"|"Ms. Valerie Vega"|"Unit 6109 Box 3523
DPO AE 84046"|"lime"
"6"|"Tracie Donaldson DVM"|"960 Hannah Circles Suite 278
Irwinside, PA 99523"|"black"
"7"|"Randall Dominguez"|"USCGC Collins
FPO AA 25142"|"blue"
"8"|"Mr. Alex Christensen"|"Unit 5030 Box 0891
DPO AE 16085"|"silver"
"9"|"Dr. Hunter Lam III"|"1047 Ricky Dale Suite 124
North Calvinborough, TX 34536"|"blue"
"10"|"Miss Priscilla Krause"|"765 Luke Lane Suite 022
Andreamouth, WY 48630"|"yellow"
)
```

fake.Sha1

Generate a random SHA-1 hash.

If `raw_output` is `False` (default), a hexadecimal string representation of the SHA-1 hash will be returned. If `True`, a `bytes` object representation will be returned instead.

Aliases: sha1

Source: faker : faker.providers.misc.en_US.Provider.sha1

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Sha1(raw_output=False)}}
```

Outputs:

```
Unset

SomeObject(id=1,
formula_field_example=02347357d13590815eb822d13e8366e27cf35e1b)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Sha1(raw_output=True)}}
```

Outputs:

```
Unset

SomeObject(id=1,
formula_field_example=b'\xc6\xb6\x9e\xb0\xfa(\xe2\x08^\xeeG\x9b\xb8\x7f{\xdf\xc
e\xe2\xe3\xb4')
```

fake.Tsv

Generate random tab-separated values.

For more information on the different arguments of this method, please refer to :meth:`dsv() <faker.providers.misc.Provider.dsv>` which is used under the hood.

data_columns=('{{name}}', '{{address}}', '{{safe_color_name}}'), num_rows=10, include_row_ids=True

Aliases: tsv

Source: faker : faker.providers.misc.en_US.Provider.tsv

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Tsv(data_columns=('{{name}}',
'{{address}}'), num_rows=10,
      include_row_ids=False)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example="Krystal Ramirez PhD"    "Unit 6475 Box
9382
DPO AA 18817"
"Dr. Ruben Escobar" "PSC 4115, Box 7815
APO AA 41945"
"Dr. Max Hanna DVM" "USS Raymond
FPO AP 02341"
"Dr. Xavier Johnson"    "Unit 5351 Box 3933
DPO AE 71671"
"Mrs. Bethany Vazquez DVM"  "418 Meza Plains Apt. 989
Haleyland, PA 50950"
"Ms. Jade Spencer"  "PSC 2094, Box 7112
APO AE 05565"
"Dr. Ronald Valdez" "PSC 3969, Box 4775
APO AE 43010"
"Dr. Tom Sawyer"    "USNS Howell
FPO AE 96378"
"Candice Escobar"   "PSC 5256, Box 0123
APO AE 75718"
"Mr. Corey Walter"  "PSC 9916, Box 1510
APO AP 03336"
)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Tsv(header=('Name', 'Address', 'Favorite
Color'),
      data_columns=('{{name}}', '{{address}}', '{{safe_color_name}}'),
num_rows=10,
      include_row_ids=True)}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example="ID" "Name"  "Address"   "Favorite
Color"
"1" "Mr. Corey Yates IV"    "691 Cox Forges
Lake Tylerstad, NE 24135"   "black"
"2" "Mrs. Sabrina Patterson DVM"    "PSC 4579, Box 2302
APO AE 45368"   "blue"
"3" "Carla Trevino" "Unit 2076 Box 9845
DPO AA 86696"   "olive"
"4" "Steve Mccullough Jr."  "Unit 1508 Box 4237
DPO AA 80472"   "olive"
"5" "Ms. Valerie Vega"  "Unit 6109 Box 3523
DPO AE 84046"   "lime"
"6" "Tracie Donaldson DVM"  "960 Hannah Circles Suite 278
Irwinside, PA 99523"    "black"
"7" "Randall Dominguez" "USCGC Collins
FPO AA 25142"   "blue"
"8" "Mr. Alex Christensen"  "Unit 5030 Box 0891
DPO AE 16085"   "silver"
"9" "Dr. Hunter Lam III"    "1047 Ricky Dale Suite 124
North Calvinborough, TX 34536"  "blue"
"10"    "Miss Priscilla Krause" "765 Luke Lane Suite 022
Andreamouth, WY 48630"  "yellow"
)
```

fake.Uuid4

Generate a random UUID4 object and cast it to another type if specified using a callable `cast_to`.

By default, `cast_to` is set to `str`.

May be called with `cast_to=None` to return a full-fledged `UUID`.

Aliases: uuid4

Source: faker : faker.providers.misc.en_US.Provider.uuid4

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Uuid4}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=eb1167b3-67a9-4378-bc65-c1e582e2e662)
```

Passport Fakers

fake.PassportDates

Generates a formatted date of birth, issue, and expiration dates. issue and expiration dates are conditioned to fall within U.S. standards of 5 and 10 year expirations

The `birthday` argument is a datetime.date object representing a date of birth.

Sources:

-https://travel.state.gov/content/travel/en/passports/passport-help/faqs.html

Aliases: passport_dates, passportdates

Source: faker : faker.providers.passport.en_US.Provider.passport_dates

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PassportDates}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=('01 May 2024', '01 May 2024', '01 May
2029'))
```

fake.PassportDob

Generate a datetime date of birth.

Aliases: passport_dob, passportdob

Source: faker : faker.providers.passport.en_US.Provider.passport_dob

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PassportDob}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=1957-02-12)
```

fake.PassportFull

Generates a formatted sting with US Passport information

Aliases: passport_full, passportfull

Source: faker : faker.providers.passport.en_US.Provider.passport_full

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PassportFull}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Vincent
Johns
M
05 Jan 1920
05 Sep 2018
05 Sep 2028
R77840801
)
```

fake.PassportGender

Generates a string representing the gender displayed on a passport

Sources:

- https://williamsinstitute.law.ucla.edu/publications/x-gender-markers-passports/

Aliases: passport_gender, passportgender

Source: faker : faker.providers.passport.en_US.Provider.passport_gender

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PassportGender}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=M)
```

fake.PassportNumber

Generate a passport number by replacing tokens to be alphanumeric

Aliases: passport_number, passportnumber

Source: faker : faker.providers.passport.en_US.Provider.passport_number

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PassportNumber}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=J11578156)
```

fake.PassportOwner

Generate a given_name and surname for a passport owner The `gender` argument is the gender marker of a passport owner, which is a one character string that is either male, female, or non-binary.

Aliases: passport_owner, passportowner

Source: faker : faker.providers.passport.en_US.Provider.passport_owner

Recipe:

```
Unset

- var: snowfakery_locale
```

```
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PassportOwner}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=('Roberto', 'Barajas'))
```

Person Fakers

fake.LanguageName

Generate a random i18n language name (e.g. English).

Aliases: language_name, languagename

Source: faker : faker.providers.person.en_US.Provider.language_name

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LanguageName}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Aymara)
```

fake.LastNameFemale

Aliases: last_name_female, lastnamefemale

Source: faker : faker.providers.person.en_US.Provider.last_name_female

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LastNameFemale}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Mcintosh)
```

fake.LastNameMale

Aliases: last_name_male, lastnamemale

Source: faker : faker.providers.person.en_US.Provider.last_name_male

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LastNameMale}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Mcintosh)
```

fake.LastNameNonbinary

Aliases: last_name_nonbinary, lastnamenonbinary

Source: faker : faker.providers.person.en_US.Provider.last_name_nonbinary

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LastNameNonbinary}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=Mcintosh)
```

fake.Name

Example:: 'John Doe'

Aliases: name

Source: faker : faker.providers.person.en_US.Provider.name

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Name}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Ms. Melody Vasquez)
```

fake.NameFemale

Aliases: name_female, namefemale

Source: faker : faker.providers.person.en_US.Provider.name_female

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.NameFemale}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Miss Catherine Frost)
```

fake.NameMale

Aliases: name_male, namemale

Source: faker : faker.providers.person.en_US.Provider.name_male

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.NameMale}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=Timothy Beltran IV)
```

fake.NameNonbinary

Aliases: name_nonbinary, namenonbinary

Source: faker : faker.providers.person.en_US.Provider.name_nonbinary

Recipe:

```Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.NameNonbinary}}
```

Outputs:

```Unset
SomeObject(id=1, formula_field_example=Patricia Beltran IV)
```

fake.Prefix

Aliases: prefix

Source: faker : faker.providers.person.en_US.Provider.prefix

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Prefix}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Mr.)
```

fake.PrefixFemale

Aliases: prefix_female, prefixfemale

Source: faker : faker.providers.person.en_US.Provider.prefix_female

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PrefixFemale}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=Mrs.)
```

fake.PrefixMale

Aliases: prefix_male, prefixmale

Source: faker : faker.providers.person.en_US.Provider.prefix_male

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PrefixMale}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Mr.)
```

fake.PrefixNonbinary

Aliases: prefix_nonbinary, prefixnonbinary

Source: faker : faker.providers.person.en_US.Provider.prefix_nonbinary

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.PrefixNonbinary}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Mx.)
```

fake.Suffix

Aliases: suffix

Source: faker : faker.providers.person.en_US.Provider.suffix

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Suffix}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=Jr.)
```

fake.SuffixFemale

Aliases: suffix_female, suffixfemale

Source: faker : faker.providers.person.en_US.Provider.suffix_female

Recipe:

```Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.SuffixFemale}}
```

Outputs:

```Unset
SomeObject(id=1, formula_field_example=MD)
```

fake.SuffixMale

Aliases: suffix_male, suffixmale

Source: faker : faker.providers.person.en_US.Provider.suffix_male

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.SuffixMale}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Jr.)
```

fake.SuffixNonbinary

Aliases: suffix_nonbinary, suffixnonbinary

Source: faker : faker.providers.person.en_US.Provider.suffix_nonbinary

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.SuffixNonbinary}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=Jr.)
```

Phone_Number Fakers

fake.BasicPhoneNumber

Aliases: basic_phone_number, basicphonenumber

Source: faker : faker.providers.phone_number.en_US.Provider.basic_phone_number

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.BasicPhoneNumber}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=5159781565)
```

fake.CountryCallingCode

Aliases: country_calling_code, countrycallingcode

Source: faker : faker.providers.phone_number.en_US.Provider.country_calling_code

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.CountryCallingCode}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=+880)
```

fake.Msisdn

https://en.wikipedia.org/wiki/MSISDN

Aliases: msisdn

Source: faker : faker.providers.phone_number.en_US.Provider.msisdn

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Msisdn}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=5659387784080)
```

Profile Fakers

fake.Profile

Generates a complete profile. If "fields" is not empty, only the fields in the list will be returned

Aliases: profile

Source: faker : faker.providers.profile.Provider.profile

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Profile}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example={'job': 'Energy manager', 'company':
'Martin Ltd', 'ssn': '278-15-3613', 'residence': 'USNS Haynes\nFPO AA 08652',
'current_location': (Decimal('-62.9933755'), Decimal('-101.424385')),
'blood_group': 'B-', 'website': ['http://www.walter.org/'], 'username':
'roybenjamin', 'name': 'Mrs. Kathleen Finley MD', 'sex': 'F', 'address': 'PSC
```

```
2173, Box 0086\nAPO AP 13804', 'mail': 'damon31@hotmail.com', 'birthdate':
datetime.date(1943, 4, 3)})
```

fake.SimpleProfile

Generates a basic profile with personal informations

Aliases: simple_profile, simpleprofile

Source: faker : faker.providers.profile.Provider.simple_profile

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.SimpleProfile}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example={'username': 'philip51', 'name': 'Walter
Drake', 'sex': 'M', 'address': 'PSC 9332, Box 8711\nAPO AA 67077', 'mail':
'tramos@hotmail.com', 'birthdate': datetime.date(1942, 2, 5)})
```

Providers Fakers

fake.Bothify

Generate a string with each placeholder in `text` replaced according to the following rules:

- Number signs ('#') are replaced with a random digit (0 to 9).
- Question marks ('?') are replaced with a random character from `letters`.

By default, `letters` contains all ASCII letters, uppercase and lowercase.

Under the hood, this method uses :meth:`numerify() <faker.providers.BaseProvider.numerify>` and and :meth:`lexify() <faker.providers.BaseProvider.lexify>` to generate random values for number signs and question marks respectively.

Aliases: bothify

Source: faker : faker.providers.user_agent.Provider.bothify

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Bothify(letters='ABCDE')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=75 EB)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: '${{fake.Bothify(text=''Product Number:
????-########'')}}'
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Product Number: afUz-38778408)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: '${{fake.Bothify(text=''Product Number:
????-########'',
      letters=''ABCDE'')}}'
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Product Number: DAED-85839894)
```

fake.Hexify

Generate a string with each circumflex ('^') in `text` replaced with a random hexadecimal character.

By default, `upper` is set to False. If set to `True`, output will be formatted using uppercase hexadecimal characters.

Aliases: hexify

Source: faker : faker.providers.user_agent.Provider.hexify

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: '${{fake.Hexify(text=''MAC Address:
^^:^^:^^:^^:^^:^^'')}}'
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=MAC Address: a6:fe:81:02:c0:fa)
```

Recipe:

```
Unset
```

```
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: '${{fake.Hexify(text=''MAC Address:
^^:^^:^^:^^:^^:^^'',
      upper=True)}}'
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=MAC Address: 95:65:18:F2:24:41)
```

fake.LanguageCode

Generate a random i18n language code (e.g. en).

Aliases: language_code, languagecode

Source: faker : faker.providers.user_agent.Provider.language_code

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LanguageCode}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=az)
```

fake.Lexify

Generate a string with each question mark ('?') in `text` replaced with a random character from `letters`.

By default, `letters` contains all ASCII letters, uppercase and lowercase.

Aliases: lexify

Source: faker : faker.providers.user_agent.Provider.lexify

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: '${{fake.Lexify(text=''Random Identifier:
??????????'')}}'
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Random Identifier: NZqITZMjtg)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: '${{fake.Lexify(text=''Random Identifier:
??????????'',
      letters=''ABCDE'')}}'
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Random Identifier: AEDCBCABEB)
```

fake.Locale

Generate a random underscored i18n locale code (e.g. en_US).

Aliases: locale

Source: faker : faker.providers.user_agent.Provider.locale

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Locale}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=ro_RO)
```

fake.Numerify

Generate a string with each placeholder in `text` replaced according to the following rules:

- Number signs ('#') are replaced with a random digit (0 to 9).
- Percent signs ('%') are replaced with a random non-zero digit (1 to 9).
- Dollar signs ('$') are replaced with a random digit above two (2 to 9).
- Exclamation marks ('!') are replaced with a random digit or an empty string.
- At symbols ('@') are replaced with a random non-zero digit or an empty string.

Under the hood, this method uses :meth:`random_digit() <faker.providers.BaseProvider.random_digit>`, :meth:`random_digit_not_null() <faker.providers.BaseProvider.random_digit_not_null>`, :meth:`random_digit_or_empty() <faker.providers.BaseProvider.random_digit_or_empty>`, and :meth:`random_digit_not_null_or_empty() <faker.providers.BaseProvider.random_digit_not_null_or_empty>` to generate the random values.

Aliases: numerify

Source: faker : faker.providers.user_agent.Provider.numerify

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Numerify(text='Intel Core i%-%%##K vs AMD
Ryzen
      % %%##X')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Intel Core i8-9241K vs AMD Ryzen 6
7615X)
```

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Numerify(text='!!! !!@ !@! !@@ @!! @!@ @@!
@@@')}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=12 6  22    4)
```

User_Agent Fakers

fake.AndroidPlatformToken

Generate an Android platform token used in user agent strings.

Aliases: android_platform_token, androidplatformtoken

Source: faker : faker.providers.user_agent.Provider.android_platform_token

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.AndroidPlatformToken}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Android 2.0.1)
```

fake.Chrome

Generate a Chrome web browser user agent string.

Aliases: chrome

Source: faker : faker.providers.user_agent.Provider.chrome

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Chrome}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Mozilla/5.0 (Linux; Android 3.2.5)
AppleWebKit/532.2 (KHTML, like Gecko) Chrome/51.0.870.0 Safari/532.2)
```

fake.Firefox

Generate a Mozilla Firefox web browser user agent string.

Aliases: firefox

Source: faker : faker.providers.user_agent.Provider.firefox

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Firefox}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Mozilla/5.0 (Windows 95; brx-IN;
rv:1.9.2.20) Gecko/4543-03-16 09:03:06.006958 Firefox/3.8)
```

fake.InternetExplorer

Generate an IE web browser user agent string.

Aliases: internet_explorer, internetexplorer

Source: faker : faker.providers.user_agent.Provider.internet_explorer

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.InternetExplorer}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Mozilla/5.0 (compatible; MSIE 7.0;
Windows NT 5.1; Trident/4.0))
```

fake.IosPlatformToken

Generate an iOS platform token used in user agent strings.

Aliases: ios_platform_token, iosplatformtoken

Source: faker : faker.providers.user_agent.Provider.ios_platform_token

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.IosPlatformToken}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=iPad; CPU iPad OS 15_8_2 like Mac OS X)
```

fake.LinuxPlatformToken

Generate a Linux platform token used in user agent strings.

Aliases: linux_platform_token, linuxplatformtoken

Source: faker : faker.providers.user_agent.Provider.linux_platform_token

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
```

```
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LinuxPlatformToken}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=X11; Linux i686)
```

fake.LinuxProcessor

Generate a Linux processor token used in user agent strings.

Aliases: linux_processor, linuxprocessor

Source: faker : faker.providers.user_agent.Provider.linux_processor

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.LinuxProcessor}}
```

Outputs:

```
Unset
```

```
SomeObject(id=1, formula_field_example=i686)
```

fake.MacPlatformToken

Generate a MacOS platform token used in user agent strings.

Aliases: mac_platform_token, macplatformtoken

Source: faker : faker.providers.user_agent.Provider.mac_platform_token

Recipe:

```Unset
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.MacPlatformToken}}
```

Outputs:

```Unset
SomeObject(id=1, formula_field_example=Macintosh; U; Intel Mac OS X 10_12_5)
```

fake.MacProcessor

Generate a MacOS processor token used in user agent strings.

Aliases: mac_processor, macprocessor

Source: faker : faker.providers.user_agent.Provider.mac_processor

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.MacProcessor}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Intel)
```

fake.Opera

Generate an Opera web browser user agent string.

Aliases: opera

Source: faker : faker.providers.user_agent.Provider.opera

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Opera}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Opera/8.49.(Windows NT 10.0; ce-RU)
Presto/2.9.189 Version/12.00)
```

fake.Safari

Generate a Safari web browser user agent string.

Aliases: safari

Source: faker : faker.providers.user_agent.Provider.safari

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.Safari}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Mozilla/5.0 (iPod; U; CPU iPhone OS 3_1
like Mac OS X; the-NP) AppleWebKit/531.6.6 (KHTML, like Gecko) Version/3.0.5
Mobile/8B113 Safari/6531.6.6)
```

fake.UserAgent

Generate a random web browser user agent string.

Aliases: user_agent, useragent

Source: faker : faker.providers.user_agent.Provider.user_agent

Recipe:

```
Unset

- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.UserAgent}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Mozilla/5.0 (iPod; U; CPU iPhone OS 3_2 like Mac OS X; ht-HT) AppleWebKit/532.19.2 (KHTML, like Gecko) Version/4.0.5 Mobile/8B116 Safari/6532.19.2)
```

fake.WindowsPlatformToken

Generate a Windows platform token used in user agent strings.

Aliases: windows_platform_token, windowsplatformtoken

Source: faker : faker.providers.user_agent.Provider.windows_platform_token

Recipe:

```
Unset
```

```
- var: snowfakery_locale
  value: en_US
- object: SomeObject
  fields:
    formula_field_example: ${{fake.WindowsPlatformToken}}
```

Outputs:

```
Unset

SomeObject(id=1, formula_field_example=Windows NT 10.0)
```

Appendices

Snowfakery Glossary

- Object: A type of data, or in this case a row of data, that represents real-world entities like people, places, or things. See also: Rows.
- Object Template: Instructions on how to create a row, or multiple rows, in a database. Each row represents a real-world object.
- Rows: A unit of related information to an object listed in a database, often called records. For example, in Salesforce (which includes a database) a Contact record has a first name, last name, phone number, and so on. In a database each Contact is listed as a separate row. Contact is the object type of each of those rows, and rows represent real-world objects. See also: Objects.

- Recipe: A Snowfakery YAML file that instructs Snowfakery on what to generate.
- Iteration: Snowfakery recipes can be "scaled up" to generate more data when executed over and over again. These executions are called iterations.
- YAML: A relatively simple, human-readable format. Learn more at yaml.org.