Optimizing to make better conservation decisions

Jeffrey Hanson and Richard Schuster

jeffrey.hanson@uqconnect.edu.au

richard.schuster@natureconservancy.ca

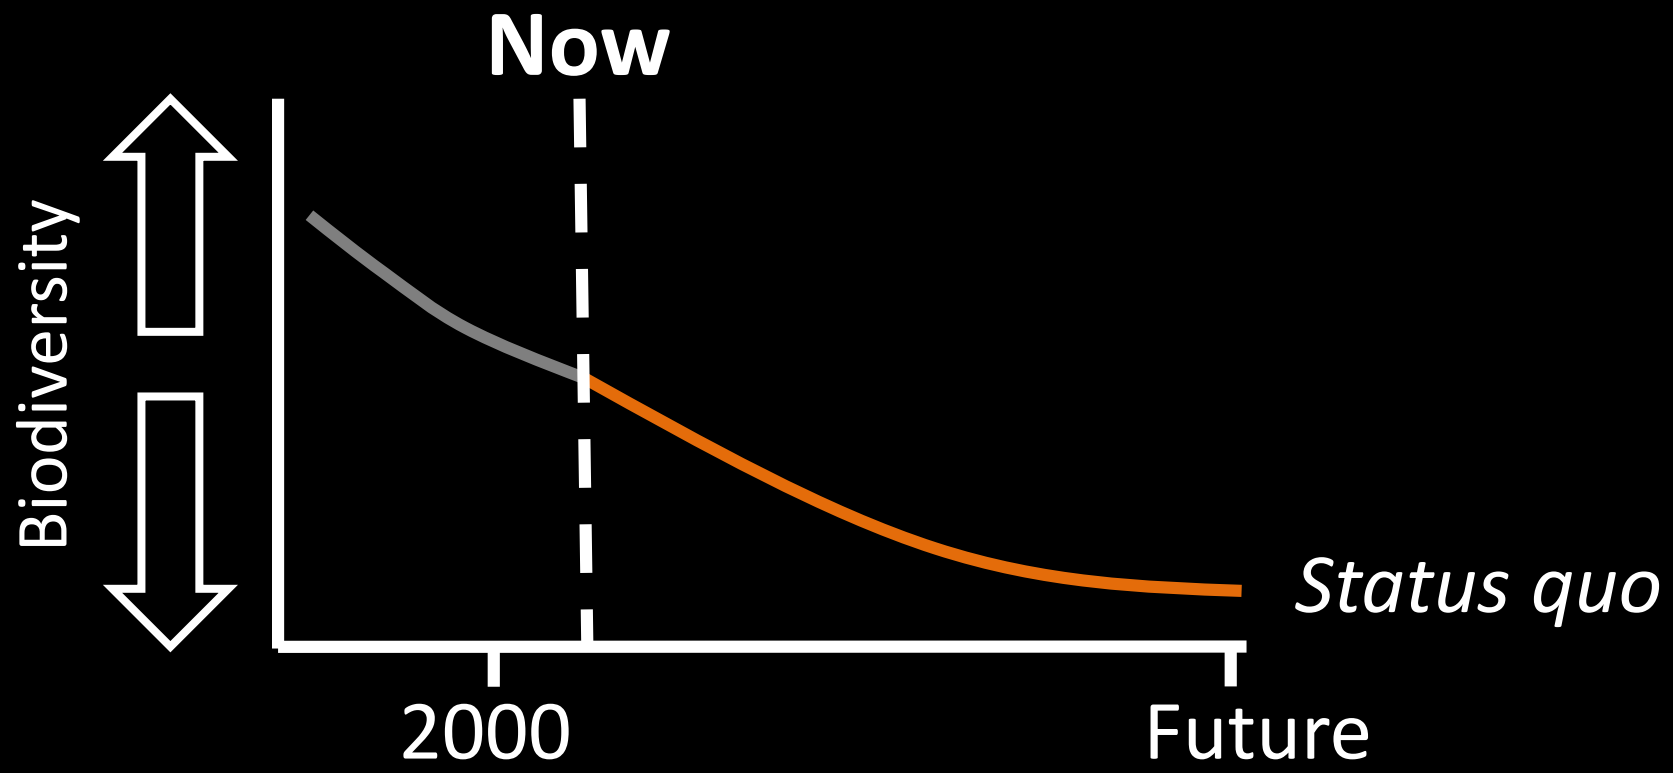
Now
Biodiversity
Status quo
2000
Future

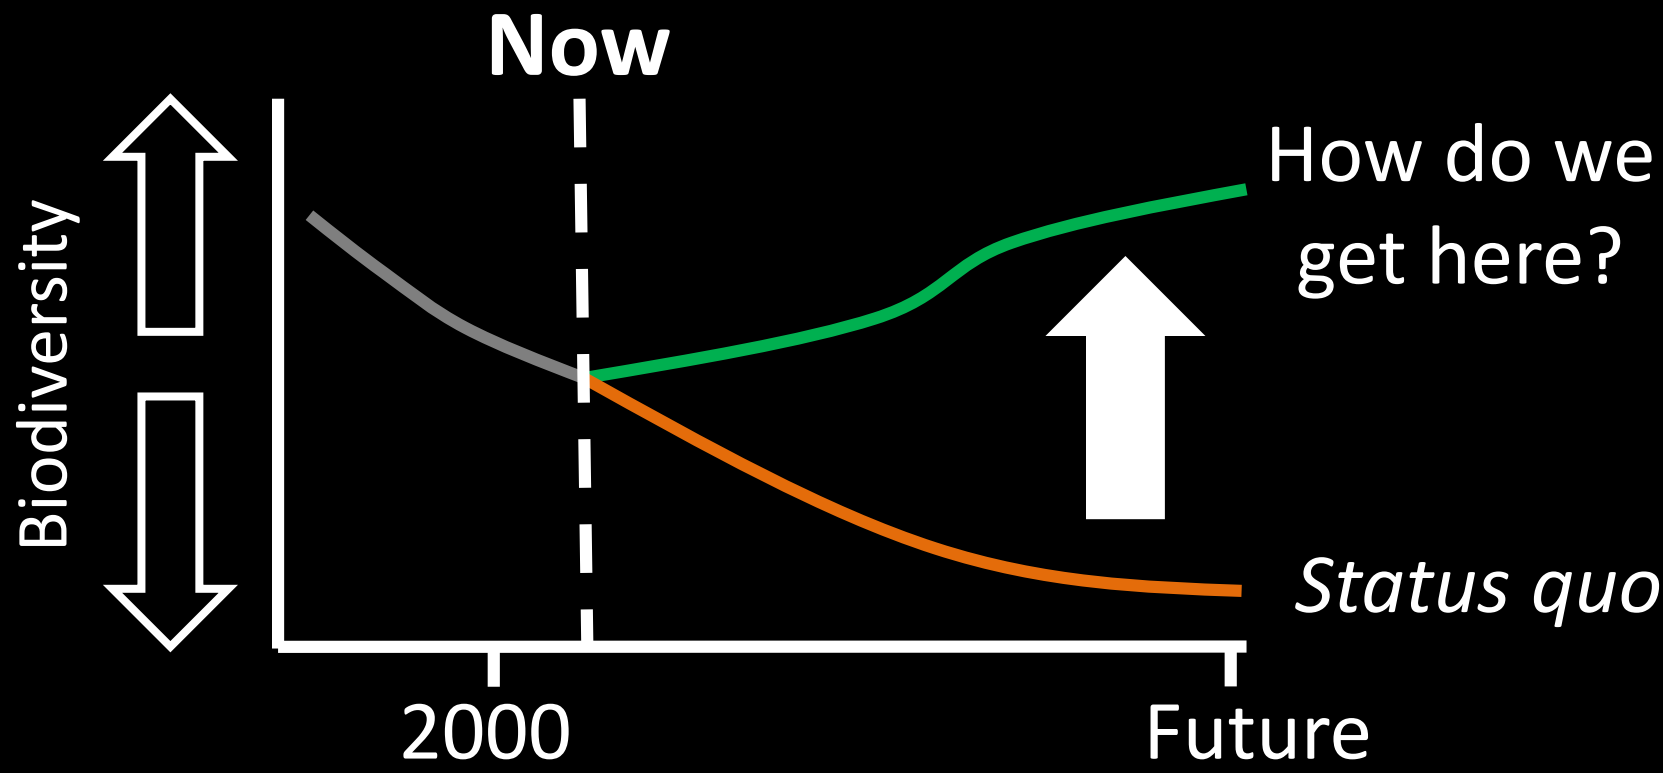
Now
Biodiversity
How do we get here?
Status quo
2000
Future

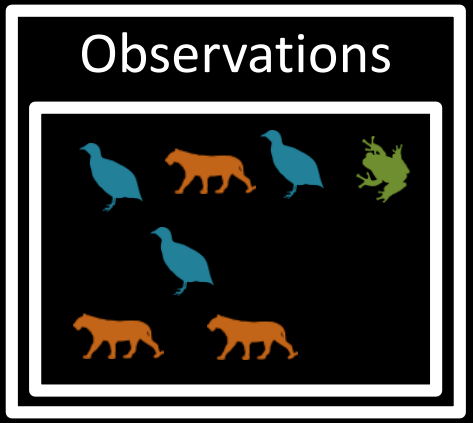

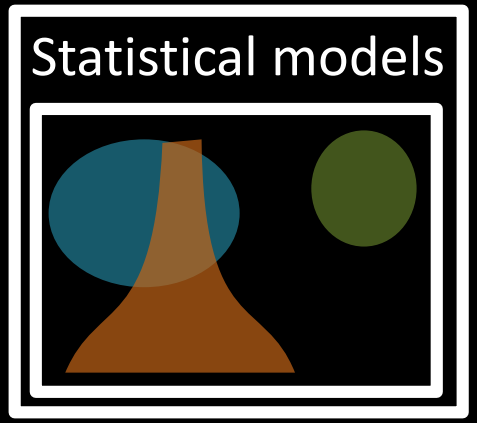

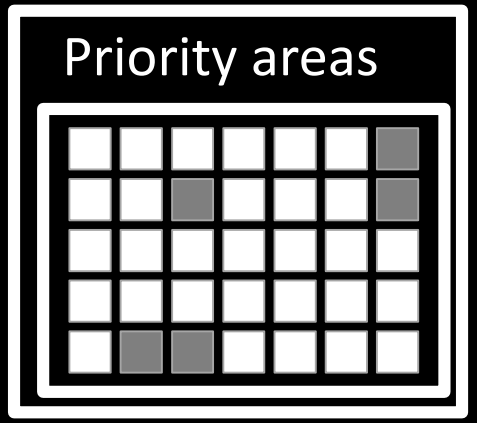

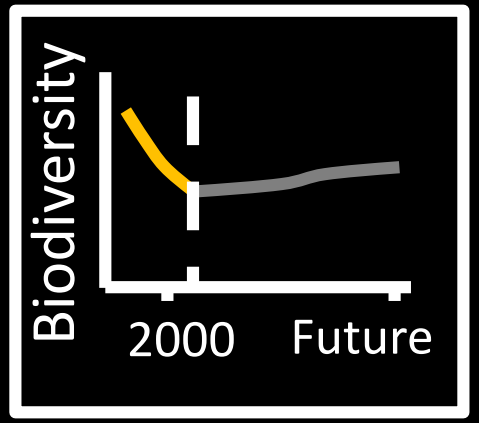

Data → Information → Plan → Outcome

Objectives Constraints

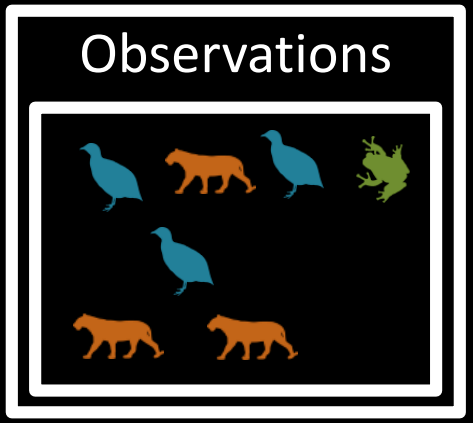

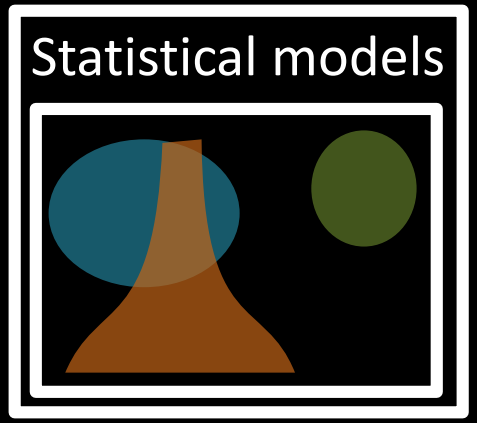

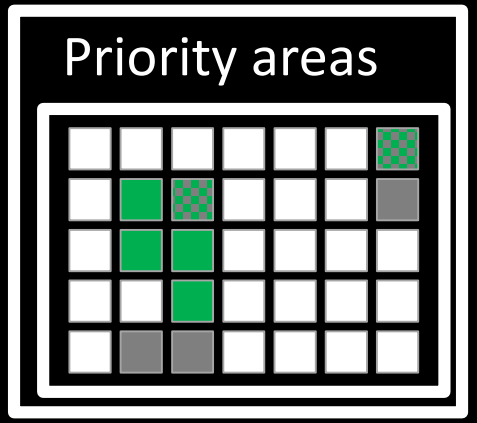

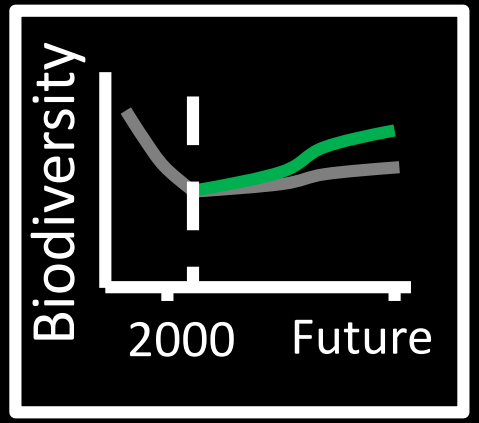

Data → Information → **Plan** → Outcome

Better plan

Better outcome

Objectives Constraints

Reserve selection

Planning units

- Discrete places for conservation management
- Each planning unit is managed separately
- Commonly include land parcels, islands, spatial grid cells

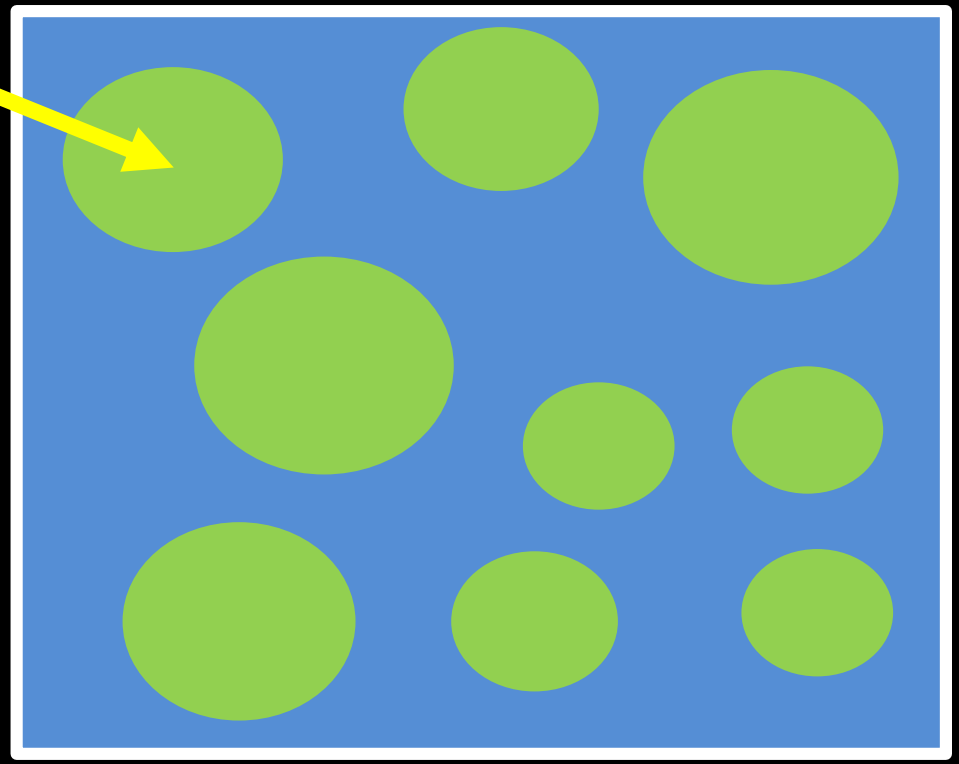

Reserve selection

Features

- Stuff that we care about
- Each feature is relatively independent
- Commonly include species, ecosystem types, ecosystem services (e.g., water provisioning, carbon sequestration)

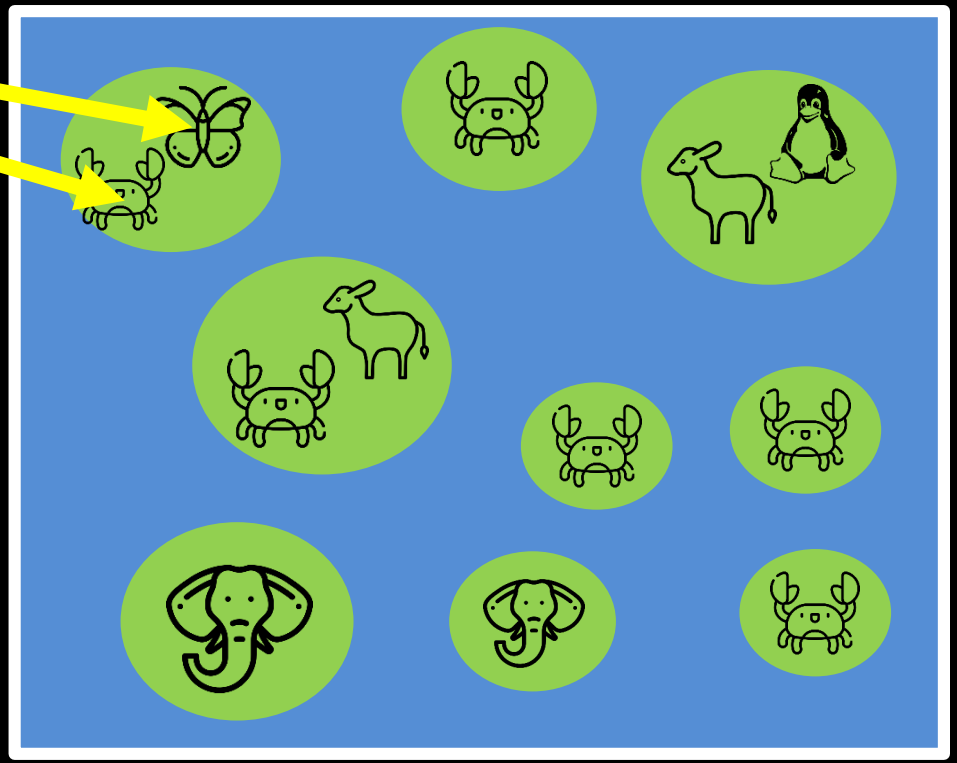

Reserve selection

Which planning units should we manage for conservation?

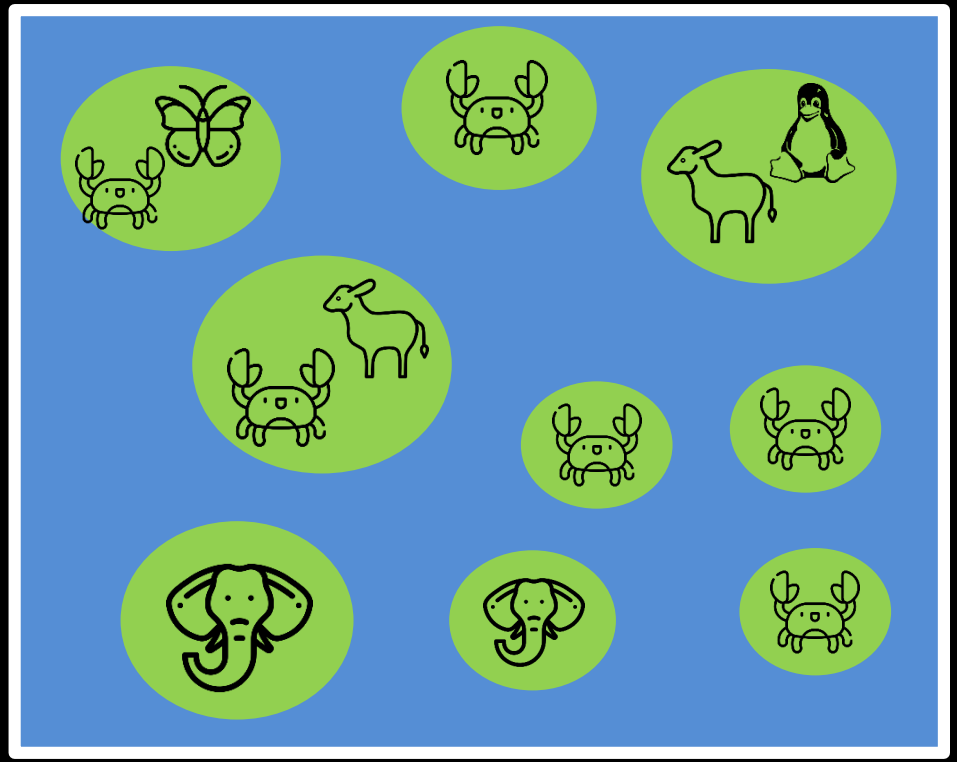

CARE-C Principles

- Comprehensive
- Adequate
- Representative
- Efficient
- Connectivity

Nielsen et al. (2023) Trends Ecol Evol, doi:10.1016/j.tree.2022.09.006

CARE-C Principles

- **Comprehensive**
- Adequate
- Representative
- Efficient
- Connectivity

versus

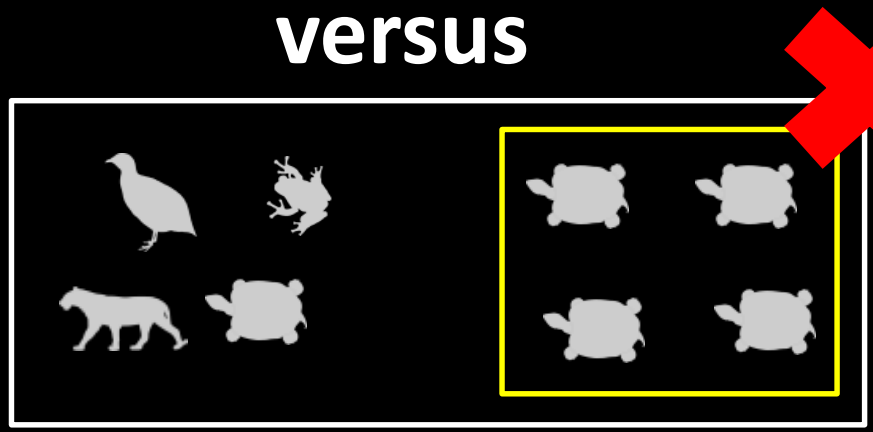

CARE Principles

- Comprehensive
- **Adequate**
- Representative
- Efficient
- Connectivity

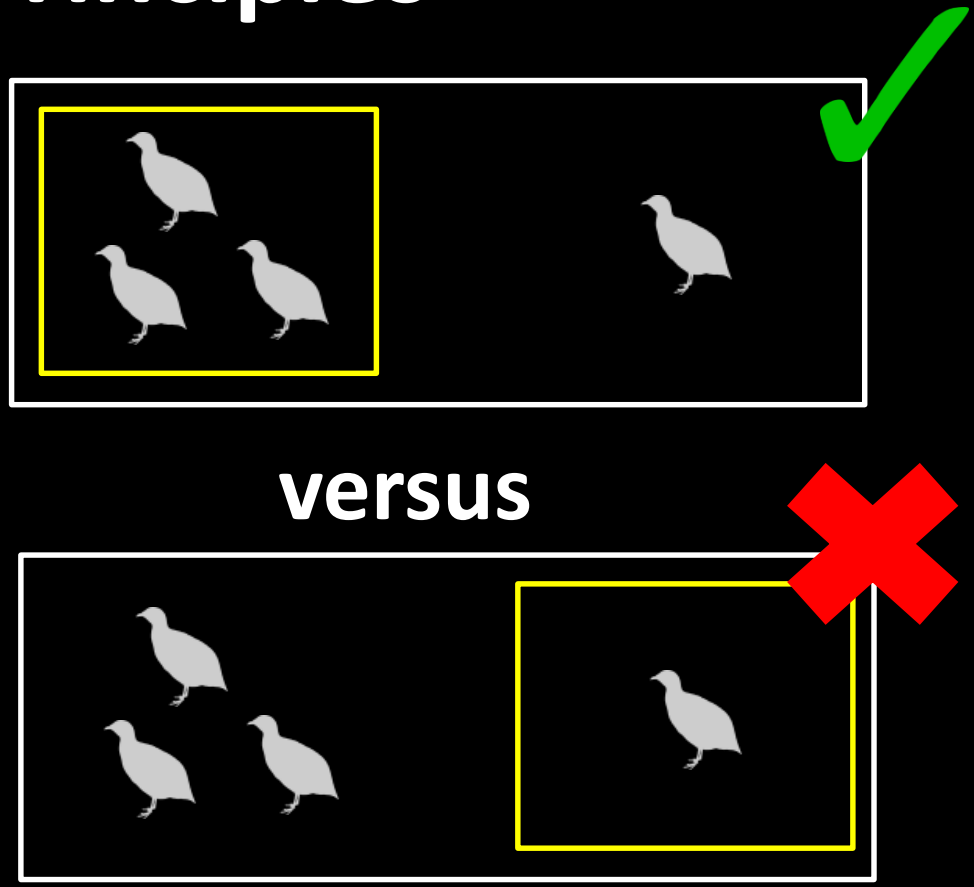

CARE-C Principles

- Comprehensive
- Adequate
- **Representative**
- Efficient
- Connectivity

versus

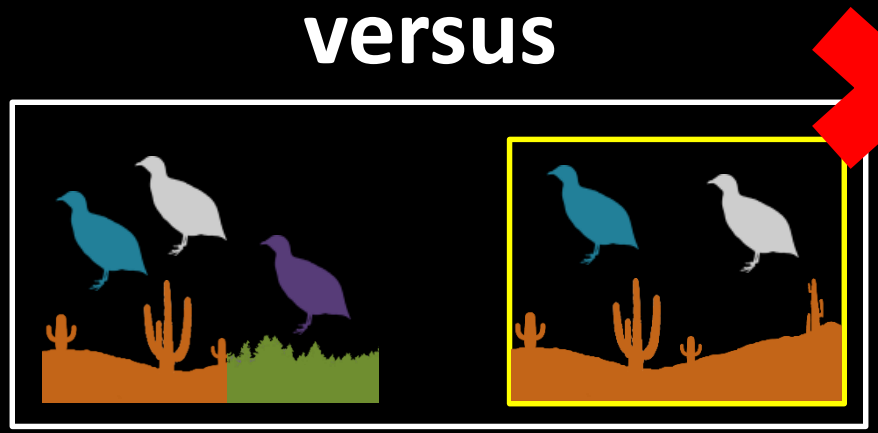

CARE-C Principles

- Comprehensive
- Adequate
- Representative
- **Efficient**
- Connectivity

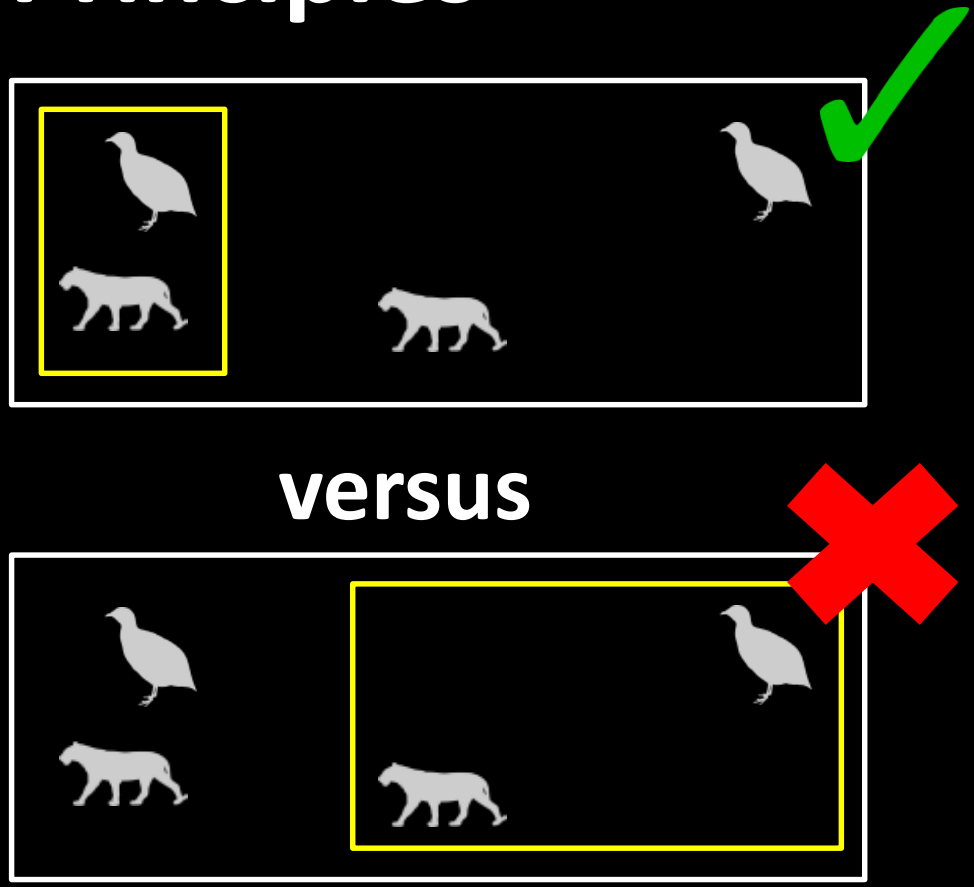

CARE-C Principles

- Comprehensive
- Adequate
- Representative
- Efficient
- **Connectivity**

versus

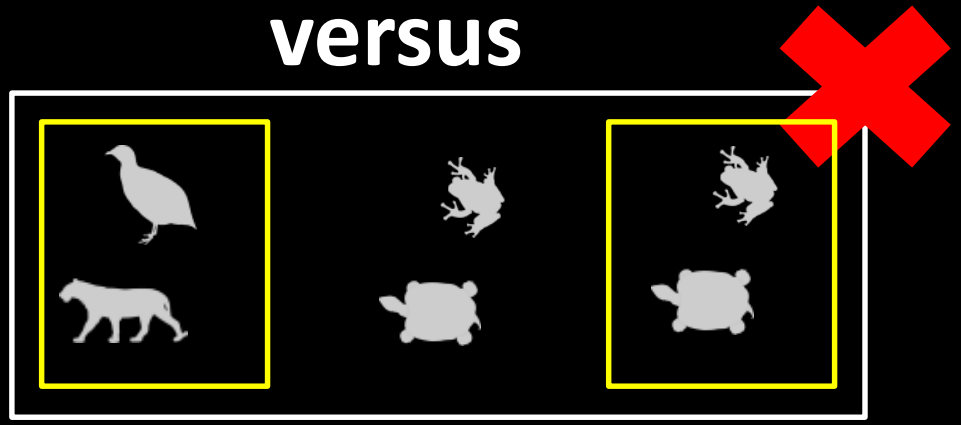

Principle complementarity

Protected areas should “complement” each other to maximize the performance of the overall protected area network (including. existing protected areas)

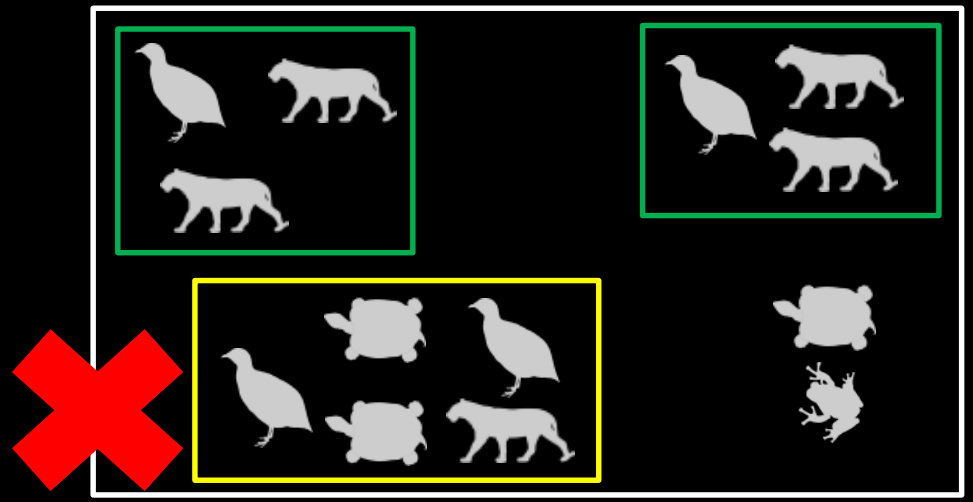

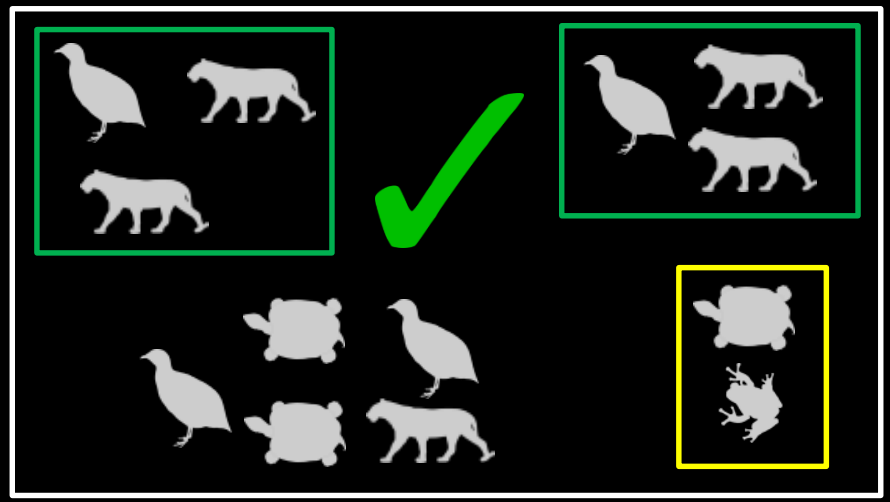

Vane-Wright, et al (1991) Biol Cons, DOI: 10.1016/0006-3207(91)90030-D

Reserve selection as optimization

- Minimum set formulation
- Objective: min. # of islands
- Constraints: sufficient habitat for each species
- Decisions: create a reserve on an island or not?

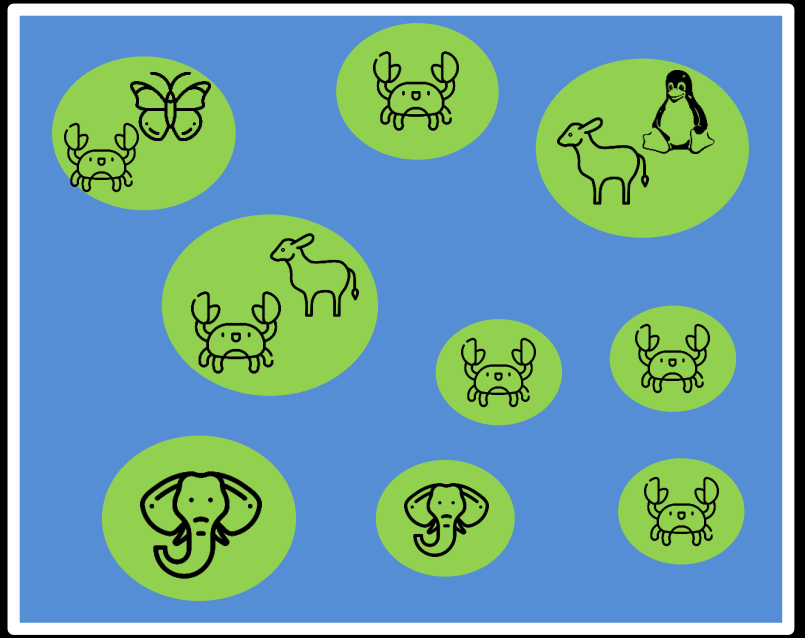

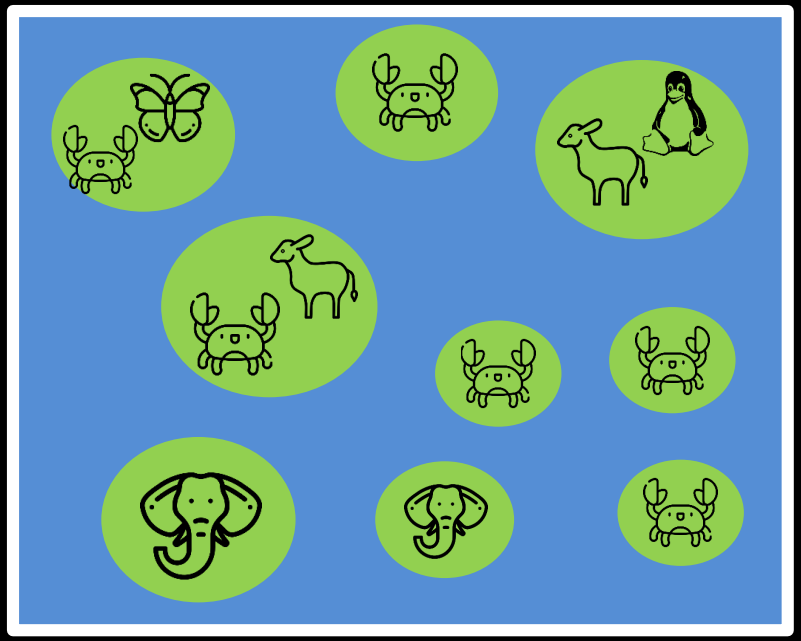

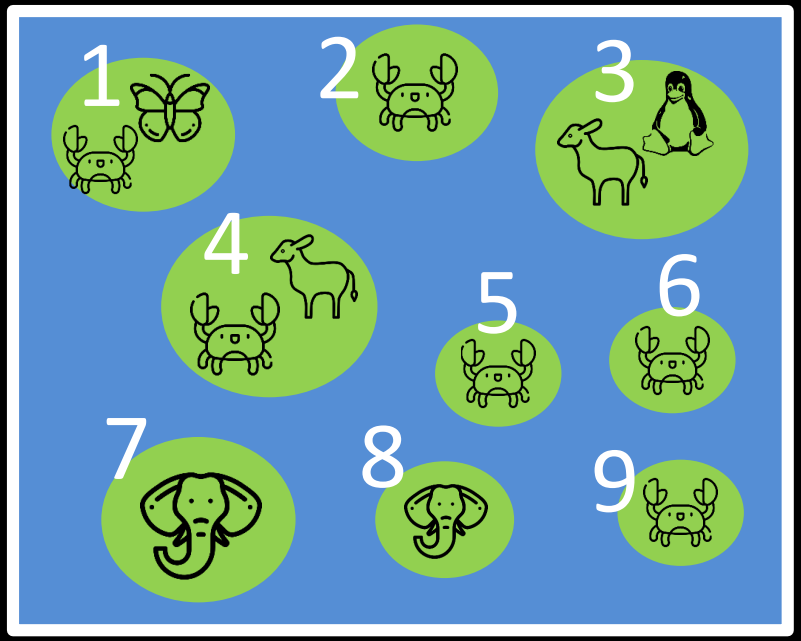
1
2
3
4
5
6
7
8
9

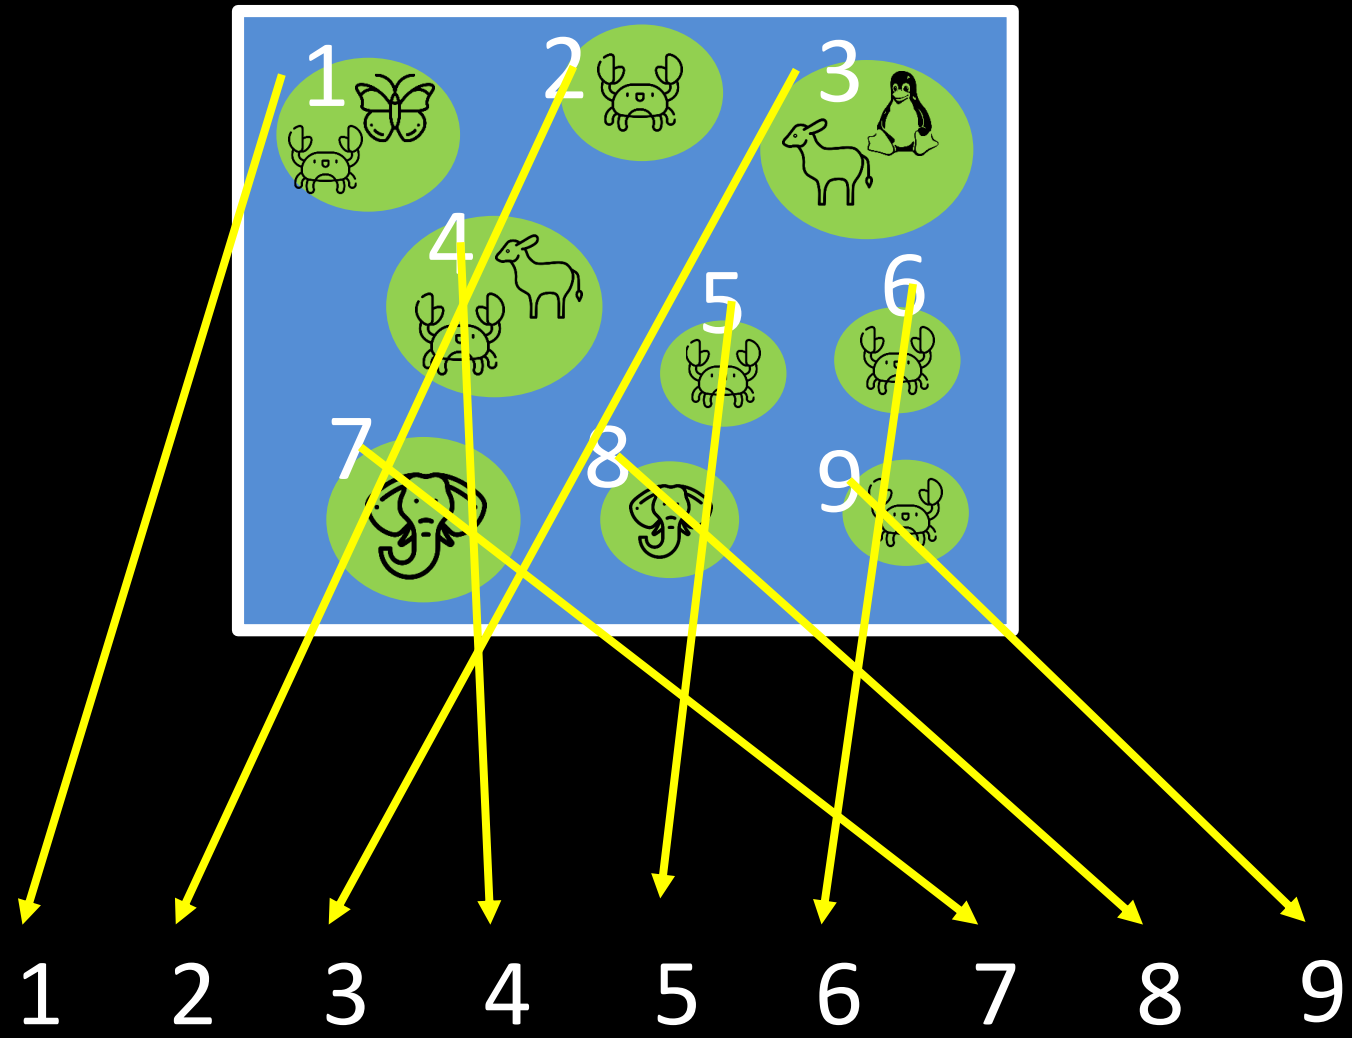
1
2
3
4
5
6
7
8
9
1 2 3 4 5 6 7 8 9

1 2 3 4 5 6 7 8 9

Upper	1	1	1	1	1	1	1	1	1
Lower	0	0	0	0	0	0	0	0	0
V. type	B	B	B	B	B	B	B	B	B
	1	2	3	4	5	6	7	8	9

Min $: +1 +1 +1 +1 +1 +1 +1 +1 +1

Upper	1	1	1	1	1	1	1	1	1
Lower	0	0	0	0	0	0	0	0	0
V. type	B	B	B	B	B	B	B	B	B
	1	2	3	4	5	6	7	8	9

Min $: +1 +1 +1 +1 +1 +1 +1 +1 +1

+1

+1

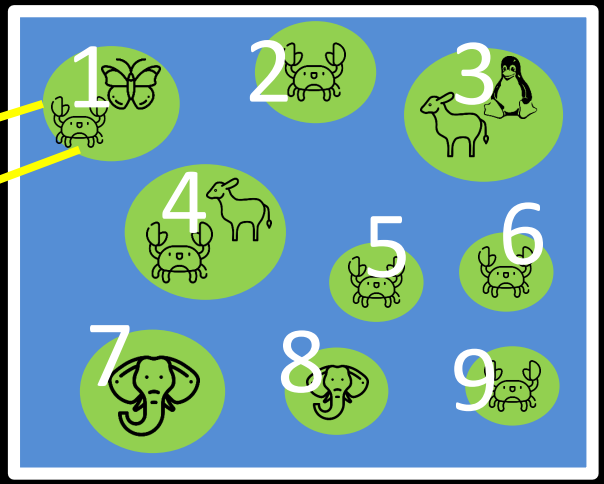

Upper	1	1	1	1	1	1	1	1	1
Lower	0	0	0	0	0	0	0	0	0
V. type	B	B	B	B	B	B	B	B	B
	1	2	3	4	5	6	7	8	9

Min $: +1 +1 +1 +1 +1 +1 +1 +1 +1





+1

+1 +1

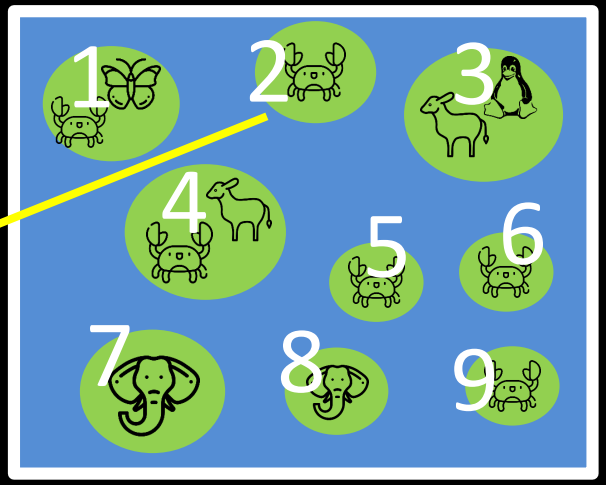

Upper	1	1	1	1	1	1	1	1	1
Lower	0	0	0	0	0	0	0	0	0
V. type	B	B	B	B	B	B	B	B	B
	1	2	3	4	5	6	7	8	9

Min $: +1 +1 +1 +1 +1 +1 +1 +1 +1





+1

+1

+1

+1 +1

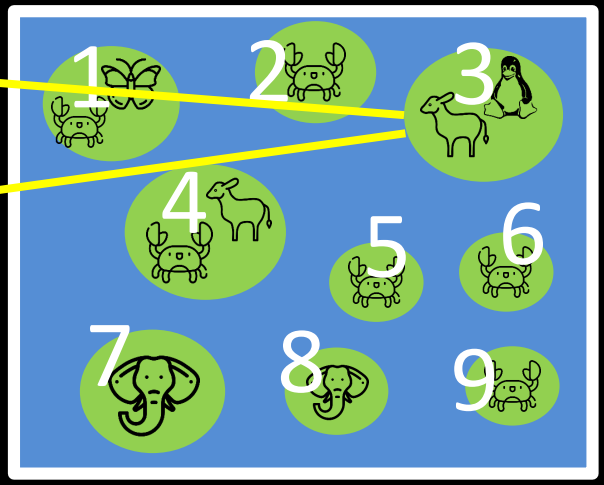

Upper	1	1	1	1	1	1	1	1	1
Lower	0	0	0	0	0	0	0	0	0
V. type	B	B	B	B	B	B	B	B	B
	1	2	3	4	5	6	7	8	9

Min $:	+1	+1	+1	+1	+1	+1	+1	+1	+1
			+1						
							+1	+1	
			+1	+1					
	+1								
	+1	+1		+1	+1	+1			+1
Upper	1	1	1	1	1	1	1	1	1
Lower	0	0	0	0	0	0	0	0	0
V. type	B	B	B	B	B	B	B	B	B
	1	2	3	4	5	6	7	8	9

Min $:	+1	+1	+1	+1	+1	+1	+1	+1	+1	
			+1							≥ 1
							+1	+1		≥ 1
			+1	+1						≥ 1
	+1									≥ 1
	+1	+1		+1	+1	+1			+1	≥ 1
Upper	1	1	1	1	1	1	1	1	1	
Lower	0	0	0	0	0	0	0	0	0	
V. type	B	B	B	B	B	B	B	B	B	
	1	2	3	4	5	6	7	8	9	

Min $: +1 +1 +1 +1 +1 +1 +1 +1 +1





+
+

GUROBI OPTIMIZATION

COIN|OR — COMPUTATIONAL INFRASTRUCTURE FOR OPERATIONS RESEARCH

IBM CPLEX

≥ 1
≥ 1
≥ 1
≥ 1
≥ 1

Upper

Lower

V. type	B	B	B	B	B	B	B	B	B
	1	2	3	4	5	6	7	8	9

Min $:	+1	+1	+1	+1	+1	+1	+1	+1	+1	
			+1							≥ 1
							+1	+1		≥ 1
			+1	+1						≥ 1
	+1									≥ 1
	+1	+1		+1	+1	+1			+1	≥ 1
Upper	1	1	1	1	1	1	1	1	1	
Lower	0	0	0	0	0	0	0	0	0	
V. type	B	B	B	B	B	B	B	B	B	
	1	2	3	4	5	6	7	8	9	

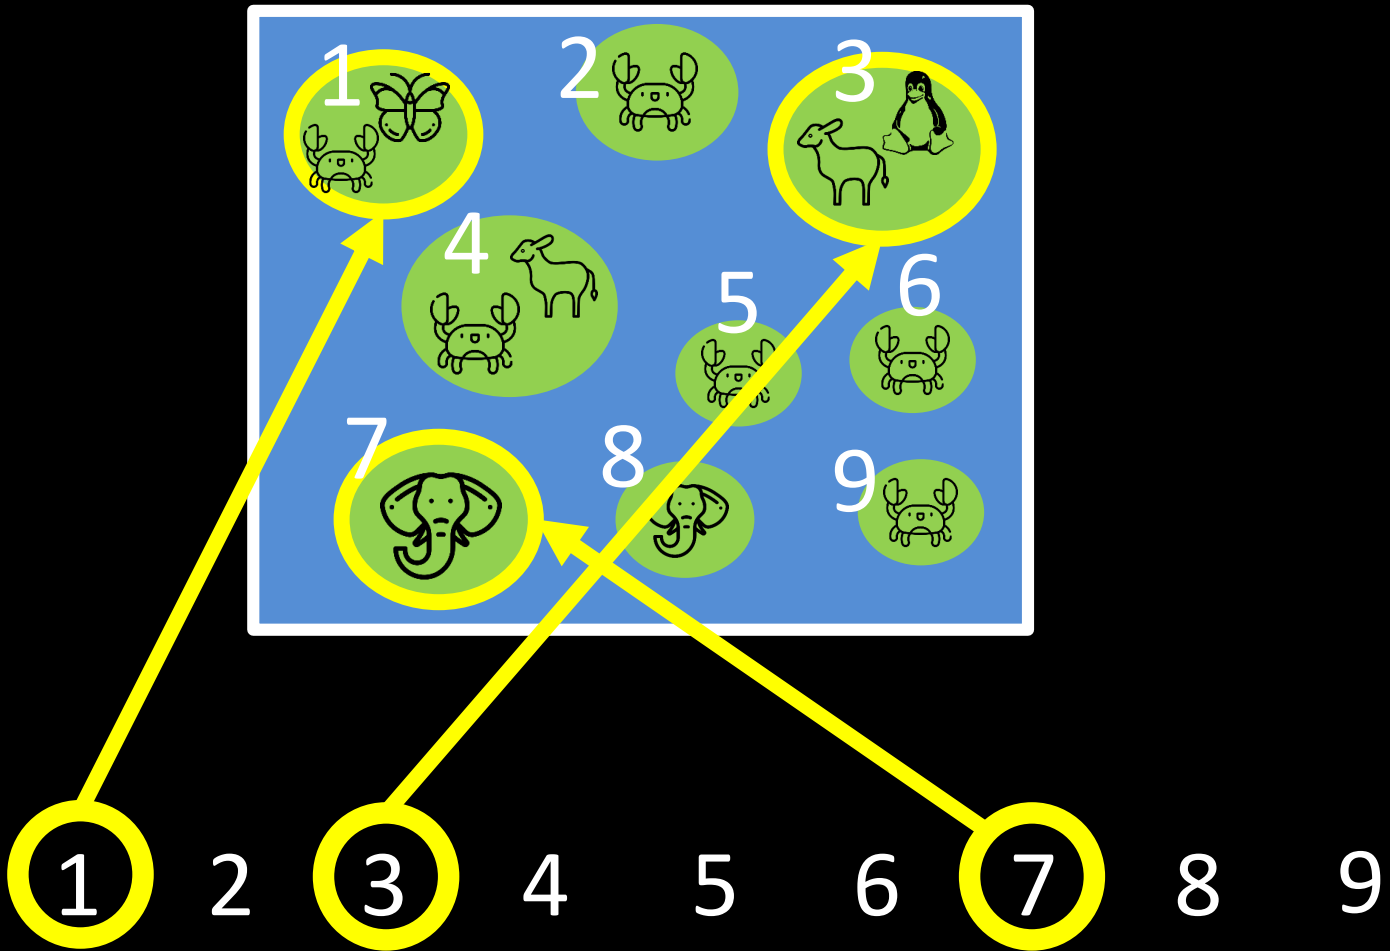
1
2
3
4
5
6
7
8
9
1
2
3
4
5
6
7
8
9

But reality is more complex…

Accounting for existing conservation areas

Min $:	+1	+1	+1	+1	+1	+1	+1	+1	+1	
			+1							≥ 1
							+1	+1		≥ 1
			+1	+1						≥ 1
	+1									≥ 1
	+1	+1		+1	+1	+1			+1	≥ 1
Upper	1	1	1	1	1	1	1	1	1	
Lower	0	1	0	0	0	0	1	0	0	
V. type	B	B	B	B	B	B	B	B	B	
	1	2	3	4	5	6	7	8	9	

Accounting for existing conservation areas

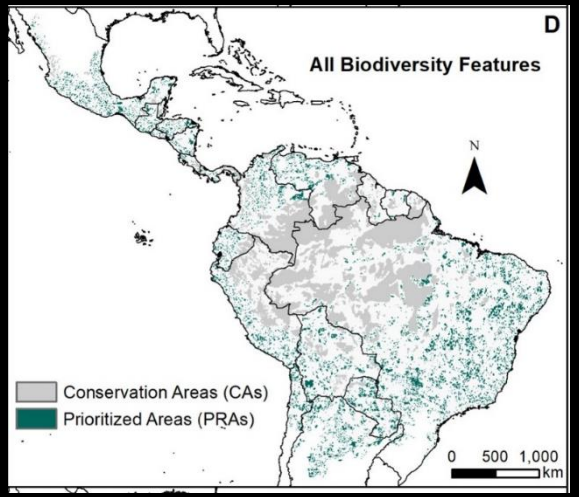

Protected areas + Indigenous Lands

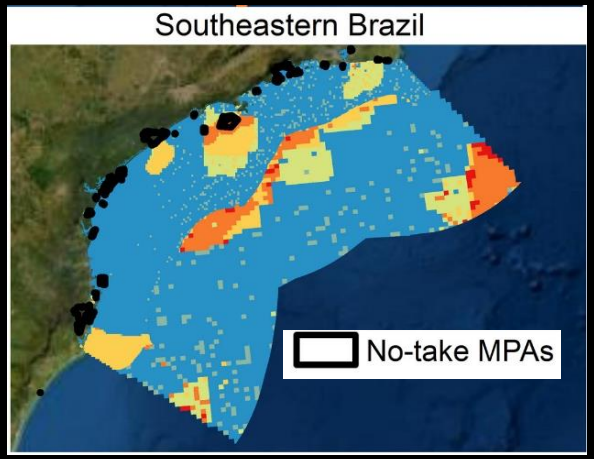

No-take marine reserves

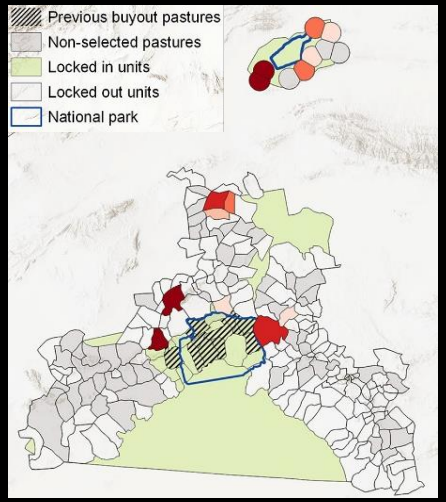

Areas with existing habitat + pastures where grazing rights have already been bought

Burbano-Girón et al. (2022)
DOI:10.1016/j.biocon.2021.109421

Magris et al. (2020)
DOI:10.1111/ddi.13183

Daberger et al. (2022)
10.1111/csp2.12832

Accounting for efficiency

Min $:	+9	+2	+5	+1	+5	+8	+3	+6	+8	
			+1							≥ 1
							+1	+1		≥ 1
			+1	+1						≥ 1
	+1									≥ 1
	+1	+1		+1	+1	+1			+1	≥ 1
Upper	1	1	1	1	1	1	1	1	1	
Lower	0	1	0	0	0	0	1	0	0	
V. type	B	B	B	B	B	B	B	B	B	
	1	2	3	4	5	6	7	8	9	

Accounting for efficiency

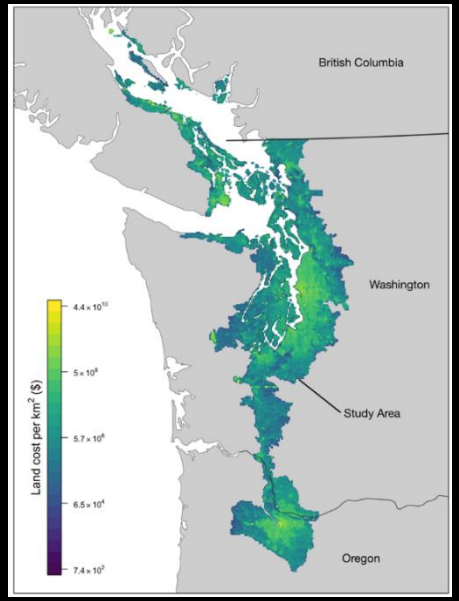

Land value assessments

Rodewald et al. (2019)
DOI:10.1038/s41598-019-52241-2

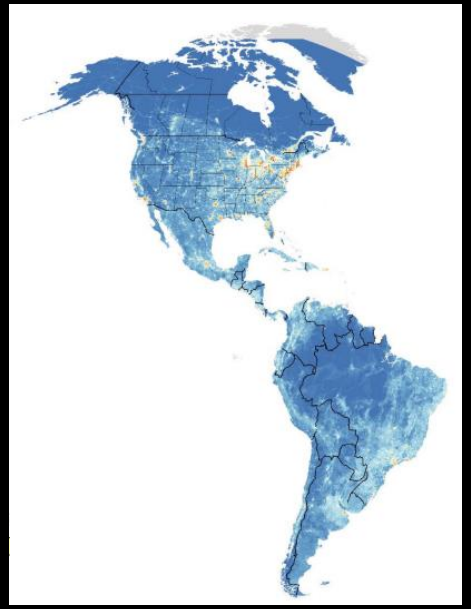

Human pressure

Schuster et al. (2019)
DOI:10.1038/s41467-019-09723-8

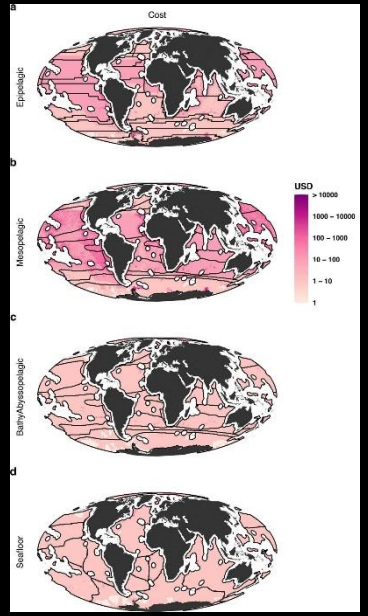

Opportunity cost to commercial fisheries

Brito-Morales et al. (2022)
DOI:10.1038/s41558-022-01323-7

Accounting for adequacy, comprehensiveness, and representativeness

Min $:	+9	+2	+5	+1	+5	+8	+3	+6	+8	
			+10							≥ 10
							+2	+5		≥ 7
			+3	+7						≥ 3
	+1									≥ 1
	+9	+8		+9	+8	+4			+3	≥ 12
Upper	1	1	1	1	1	1	1	1	1	
Lower	0	1	0	0	0	0	1	0	0	
V. type	B	B	B	B	B	B	B	B	B	
	1	2	3	4	5	6	7	8	9	

Accounting for adequacy

Get good data…

High resolution estimates of habitat suitability

Hanson et al. (2022) DOI:10.1038/s41586-020-2138-7

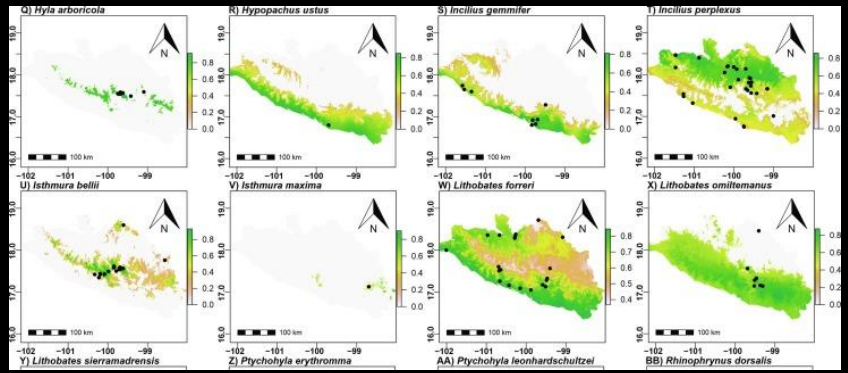

Species distribution models

González-Fernández (2022) DOI:10.1016/j.jnc.2022.126235

and set meaningful targets!

Policy

Southee et al. (2021) DOI: 10.1139/facets-2020-0015

Proctor et al. (2022) DOI: 10.1111/csp2.12771

Expert thresholds

Hanson et al. (2022) DOI: 10.1038/s41586-020-2138-7

Jung et al. 2021 DOI :10.1038/s41559-021-01528-7

Statistical analysis

Taylor et al. (2017) DOI: 10.1371/journal.pone.0169629

Accounting for comprehensiveness

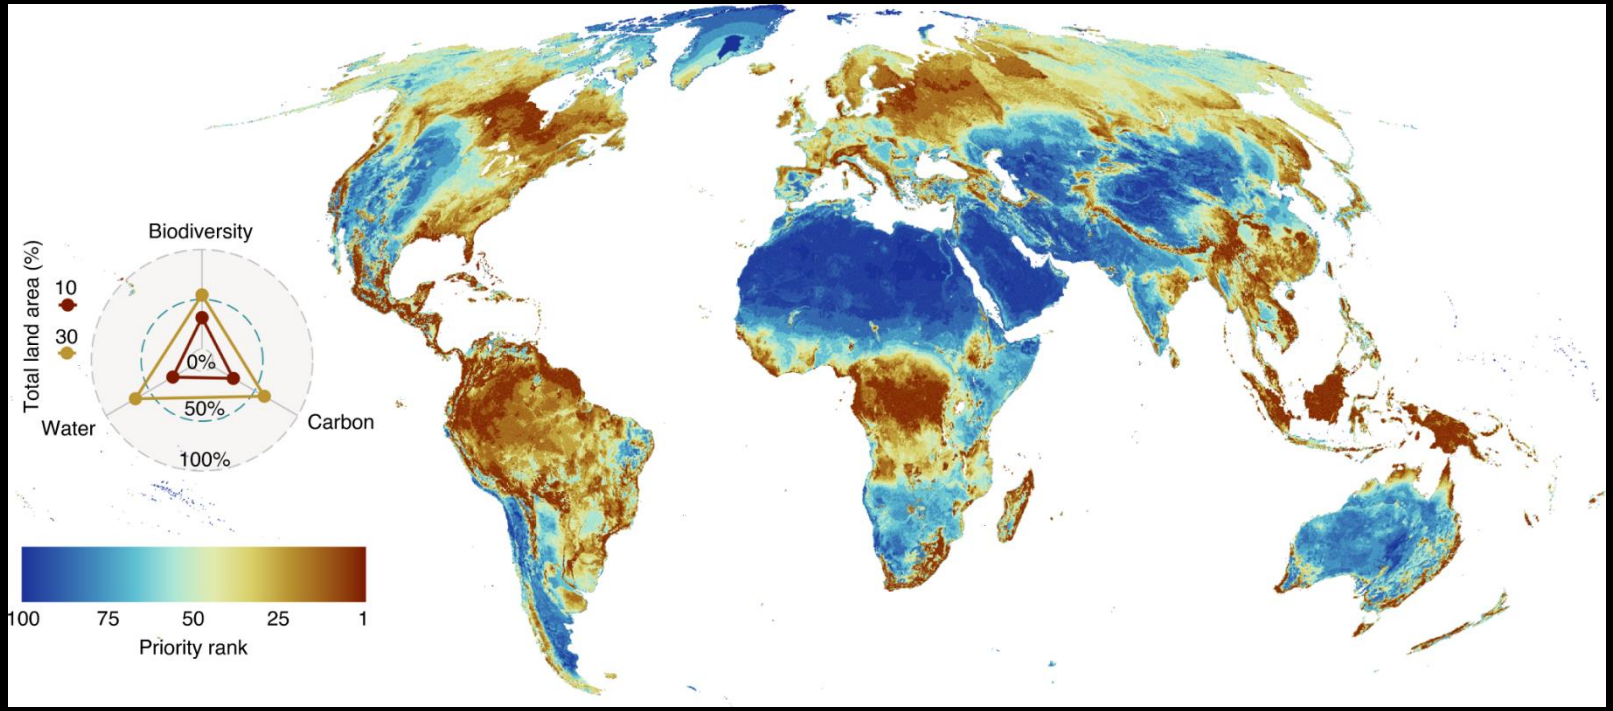

Amphibians, mammals, birds, reptiles, plants, water provisioning, carbon sequestration

Jung et al. 2021 DOI:10.1038/s41559-021-01528-7

Accounting for representativeness

Ecosystems

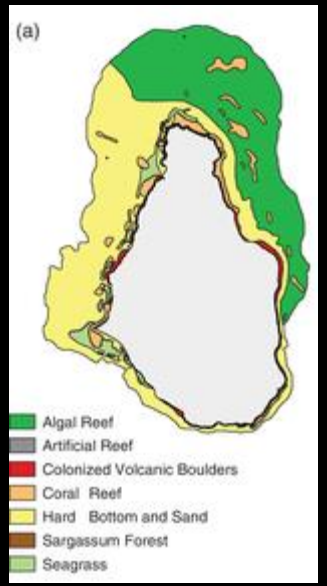

Flower et al. (2010)
DOI: 10.1111/csp2.158

Species

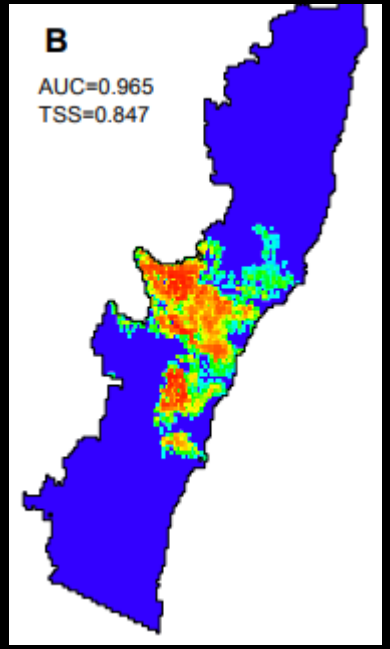

Domisch et al. (2019)
DOI: 10.1111/ddi.12891

Genes

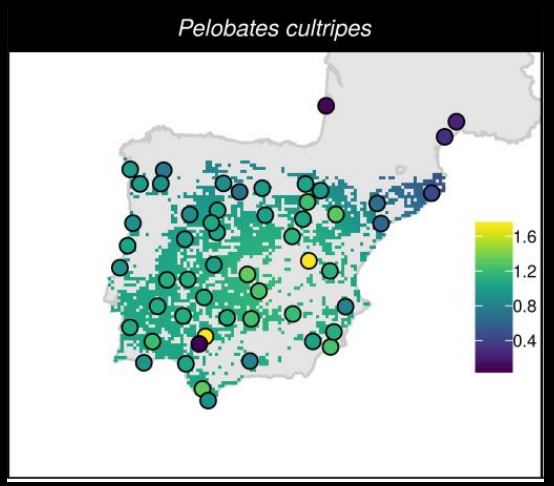

Hanson et al. (2022)
DOI: 10.1111/1365-2664.13718

Accounting for connectivity

Min $:	+9	+2	+5	+1	+5	+8	+3	+6	+8	
			+10							≥ 10
							+2	+5		≥ 7
			+3	+7						≥ 3
	+1									≥ 1
	+9	+8		+9	+8	+4			+3	≥ 12
Upper	1	1	1	0	1	1	1	1	0	
Lower	0	1	0	0	0	0	1	0	0	
V. type	B	B	B	B	B	B	B	B	B	
	1	2	3	4	5	6	7	8	9	

What if connectivity = 1/distance?

Min $:	+9	+2	-3*1/5	
	-1		+1	≤ 0
		+1	-1	≤ 0
	-1	-1	+1	≥ -1
Upper	1	1	1	
Lower	0	1	0	
V. type	B	B	B	
	1	2	1&2	

Let's just consider islands 1 and 2

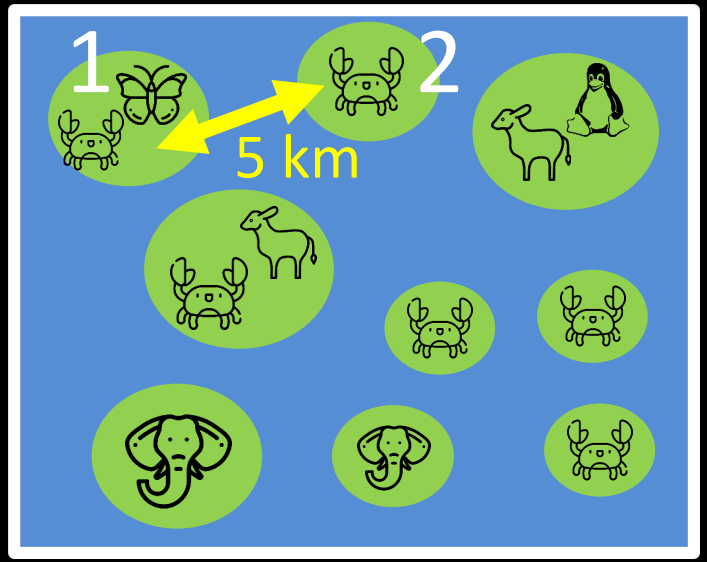

Scaling factor: 3 connectivity units = 1 cost unit

Beyer et al. (2016)
DOI:10.1016/j.ecolmodel.2016.02.005

What if connectivity = 1/distance?

Min $:	+9	+2	-3*1/5	
(1)	-1		+1	≤ 0
(2)		+1	-1	≤ 0
	-1	-1	+1	≥ -1
Upper	1	1	1	
Lower	0	1	0	
V. type	B	B	B	
	1	2	1&2	

So, +1 variable and +2 constraints per pair of planning units.. increases problem size a lot!

Let's just consider islands 1 and 2

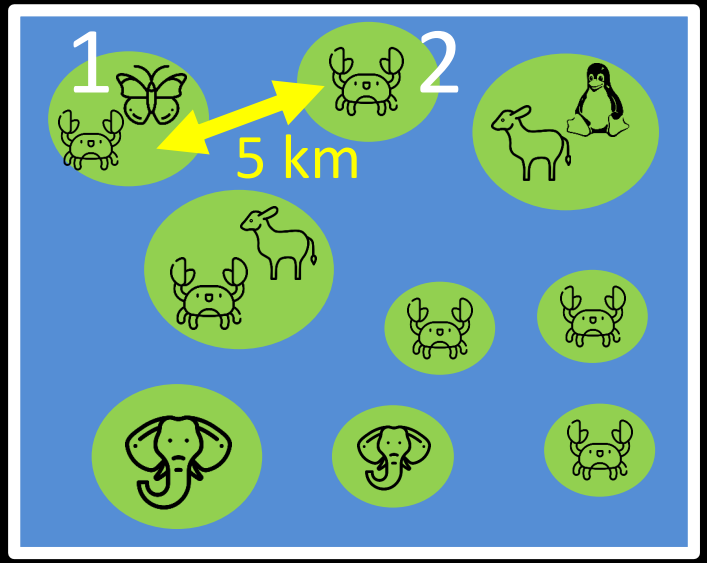

E.g., 1k planning = ~500k extra constraints

Accounting for connectivity

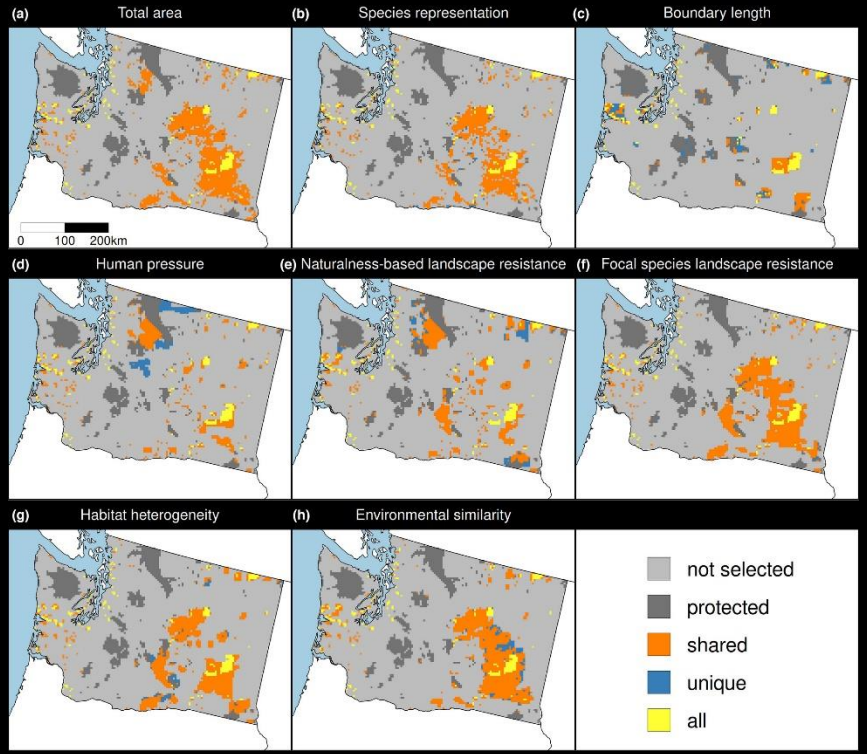

Hanson et al. (2022) DOI:10.1111/1365-2664.14251

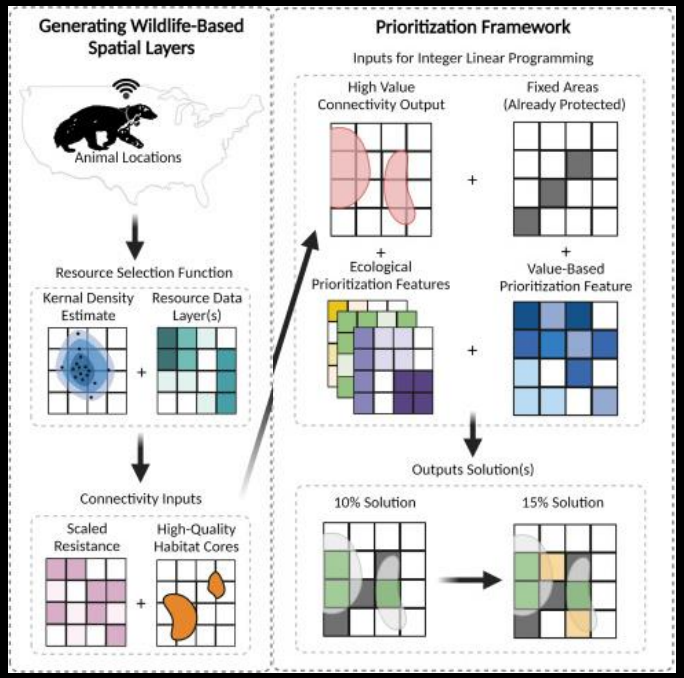

Carroll (2021)
DOI:10.1016/j.xpro.2021.100882

Other stuff too!

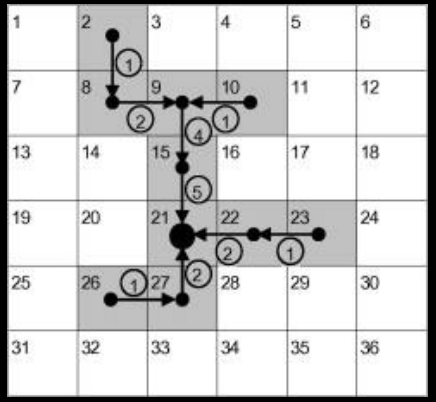

Spatially contiguity

Wang and Önal (2013)
DOI: 10.1016/j.chnaes.2013.07.004

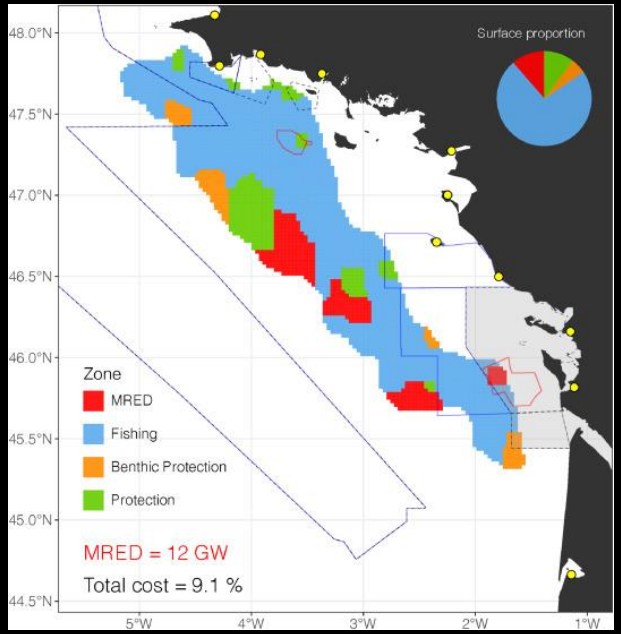

Multiple management zones

Boussarie et al. (2023)
DOI: 10.1016/j.jenvman.2023.117857

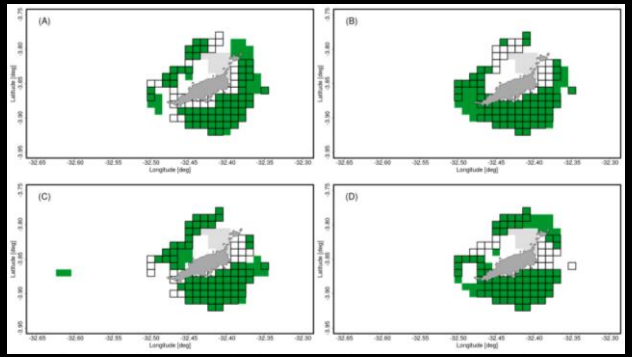

Solution portfolios

Brunel et al. (2022)
DOI: 10.1007/s10666-022-09862-1

prioritizr

- Human readable code
- Design your problem
- Solve it fast!

Package workflow

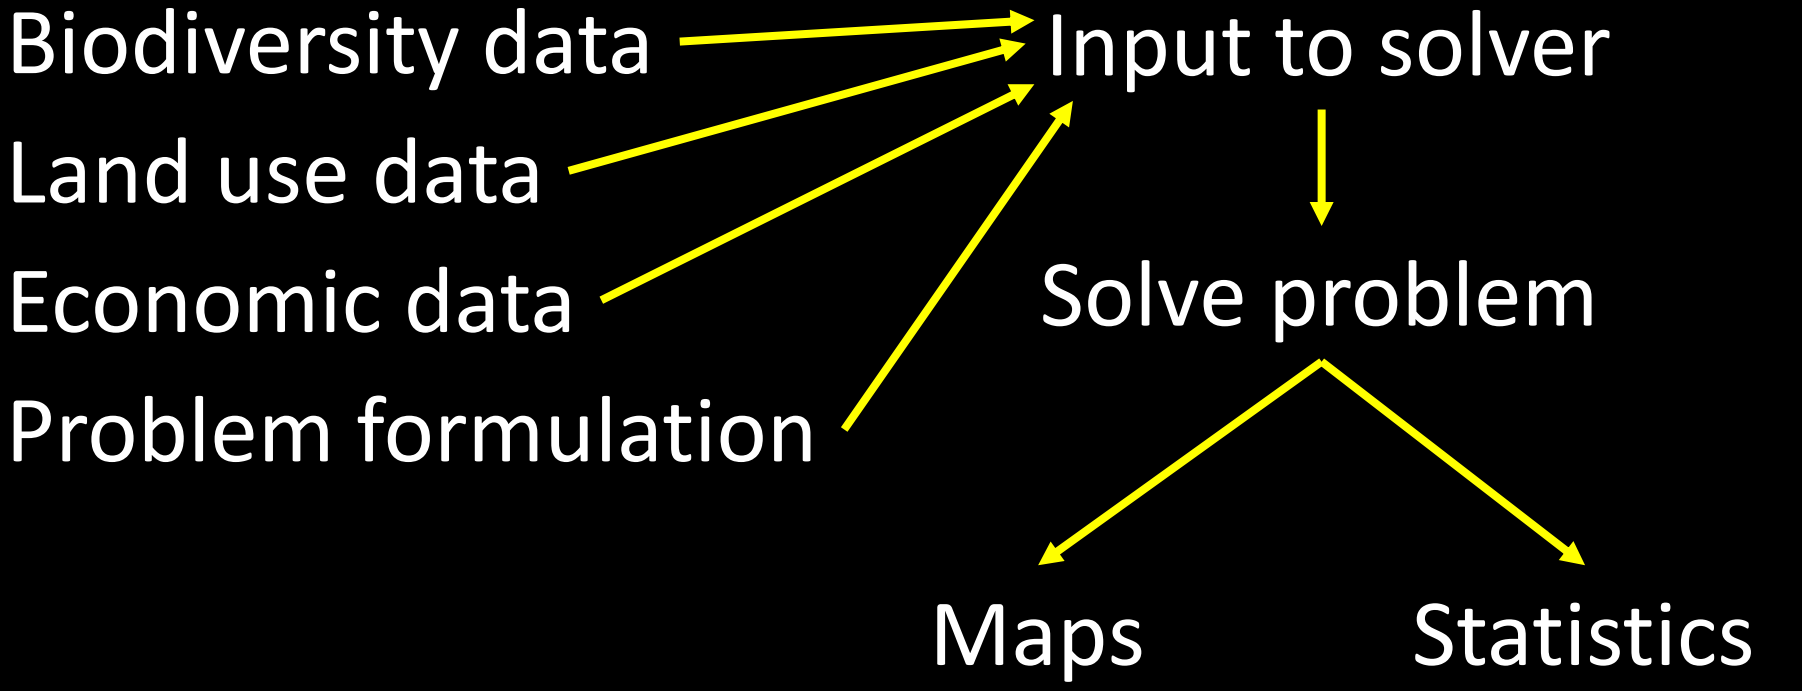

Package workflow

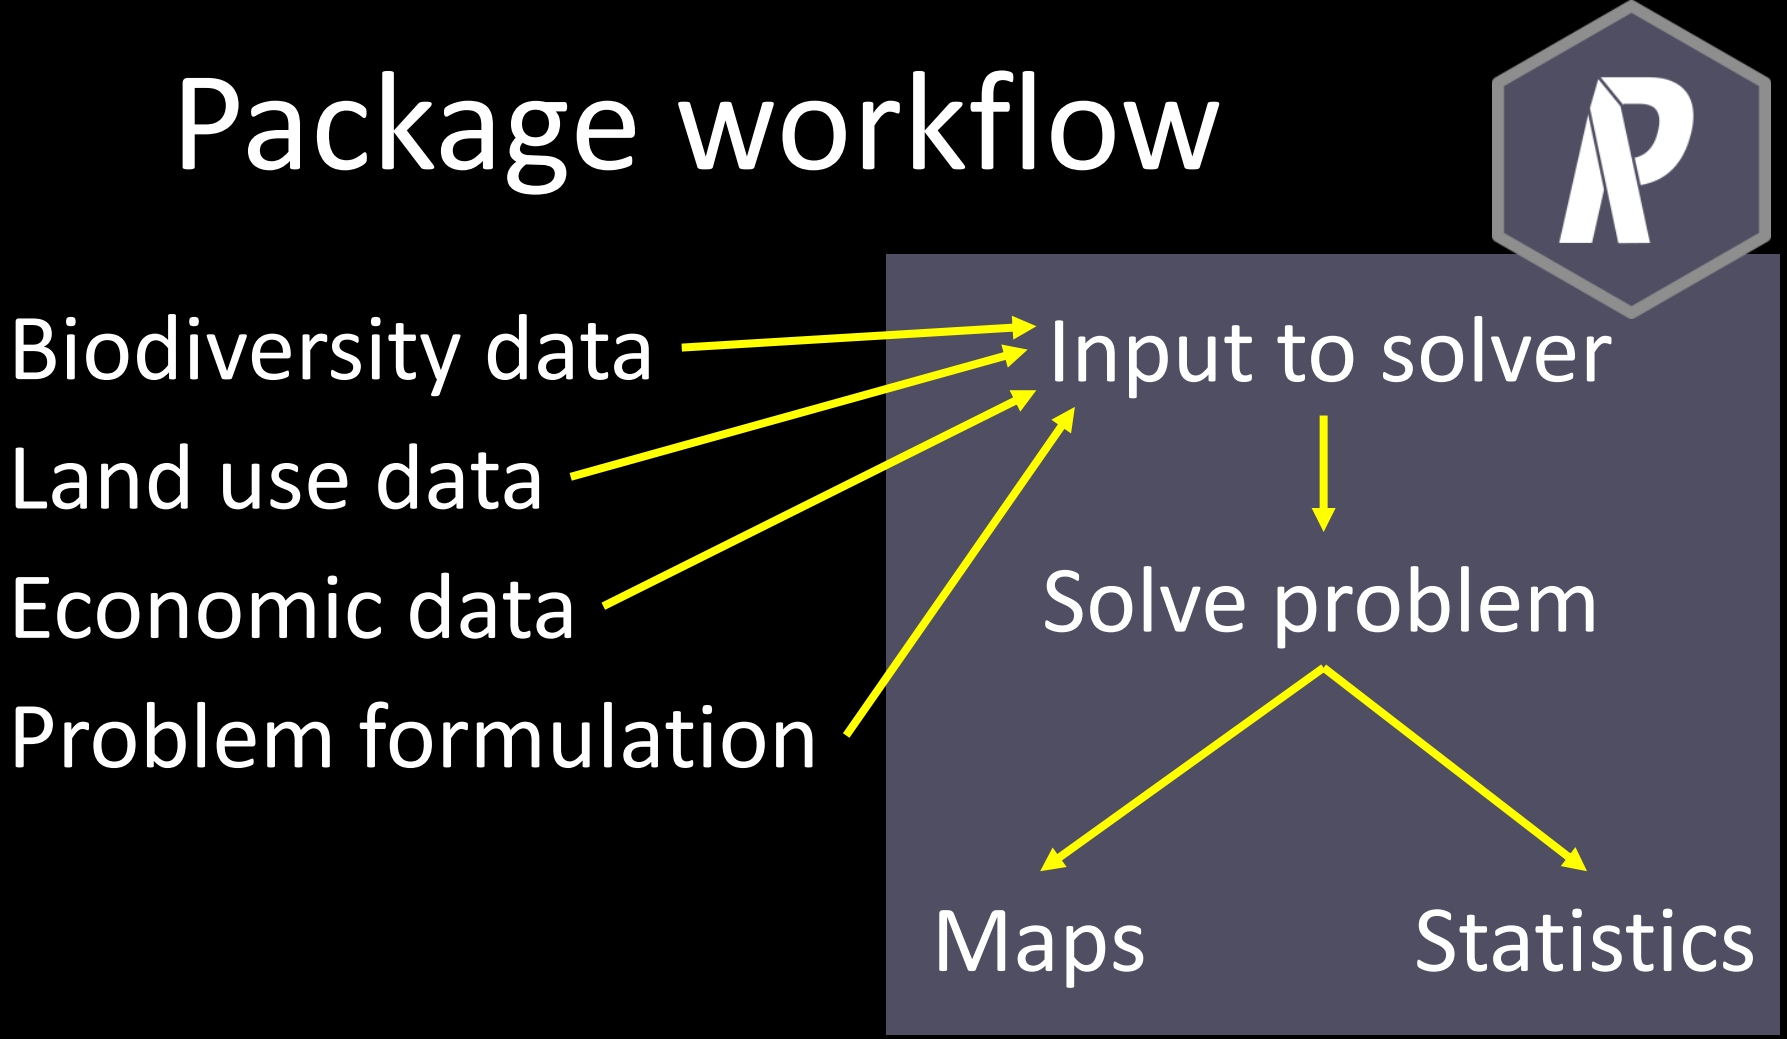

Package workflow

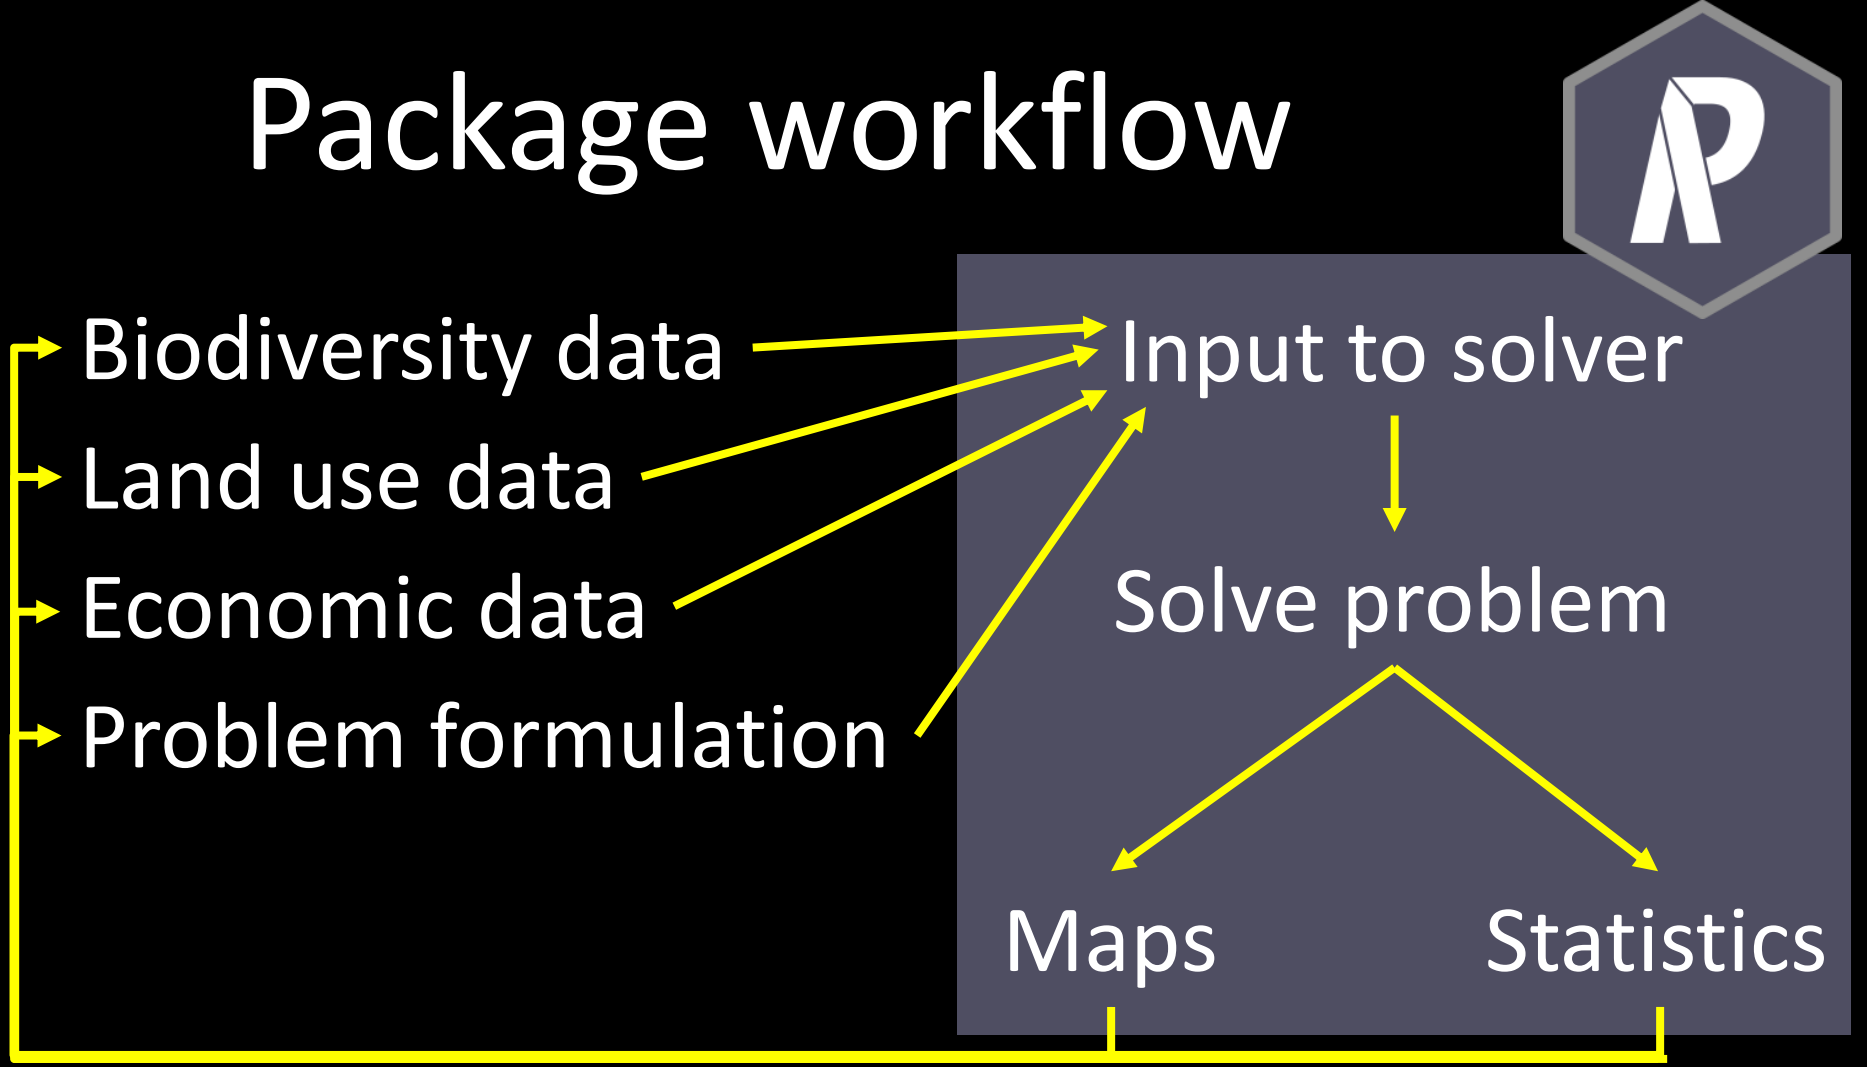

Human-readable code

Mental model

```
problem <-
  data +
  objective +
  constraints +
  penalties +
  decision type +
  solver


solution <- solve(problem)
```

Code

```
p <-
  problem(areas, feats) %>%
  add_min_set_objective() %>%
  add_relative_targets(0.1) %>%
  add_boundary_penalties(5) %>%
  add_binary_decisions() %>%
  add_rsymphony_solver()


solution <- solve(p)
```

Design your problem

```
problem(tas_pu, tas_features,
        "cost") %>%
add_min_set_objective() %>%
add_relative_targets(0.1) %>%
add_locked_in_constraints("in") %>%
add_locked_out_constraints("out") %>%
add_boundary_penalties(0.01, 0.5) %>%
add_binary_decisions() %>%
add_gurobi_solver(gap = 0) %>%
solve()
```

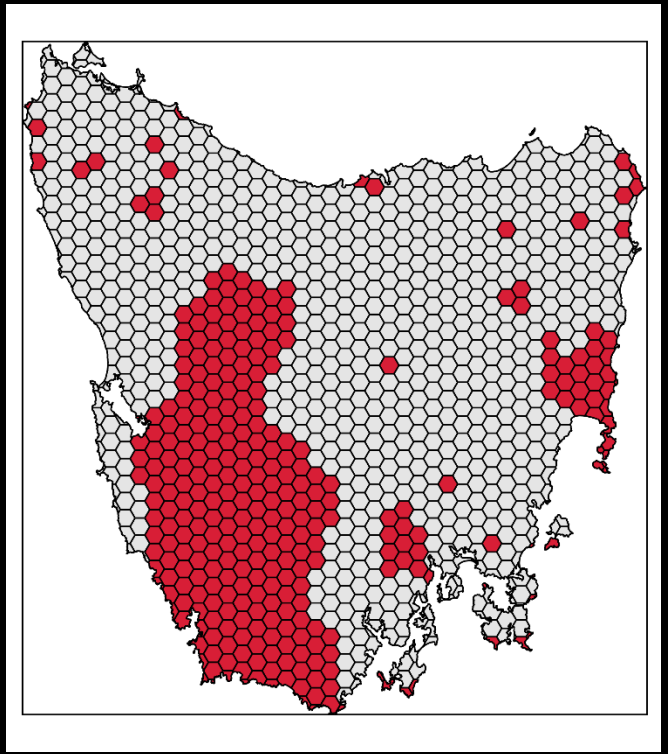

Solve it fast!

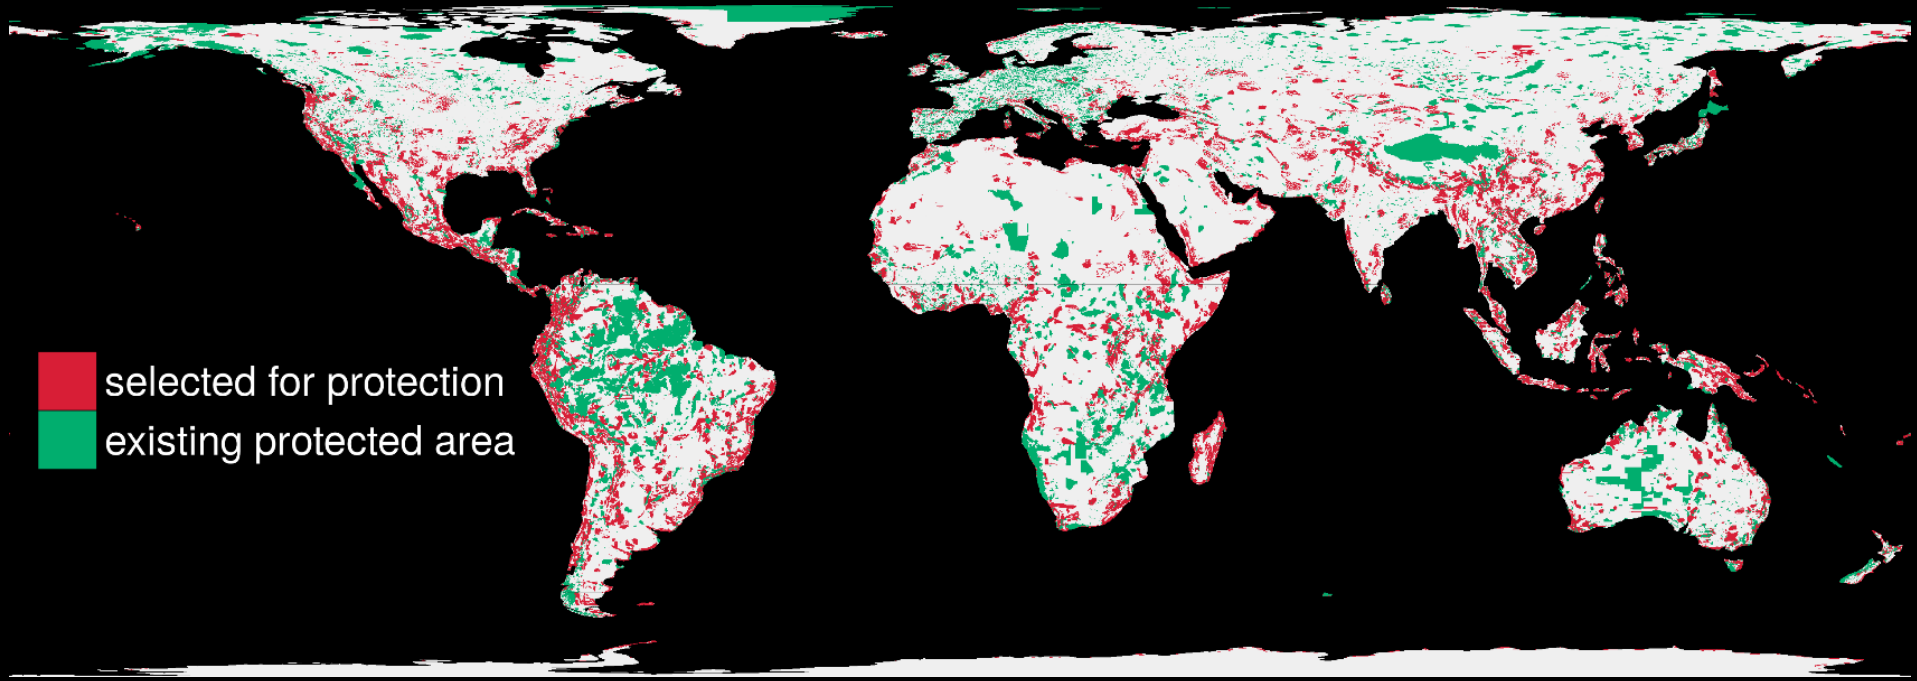

1.5 million planning units & 22,644 species: 76 minutes

Guaranteed quality

Heuristic algorithms

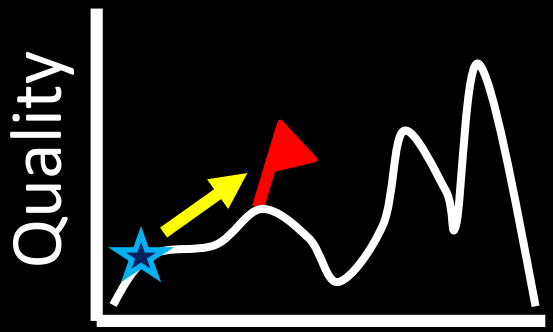

Meta-heuristic algorithms

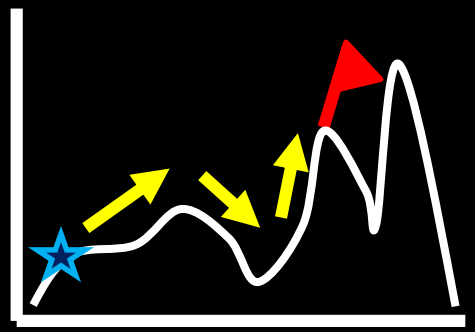

Exact algorithms

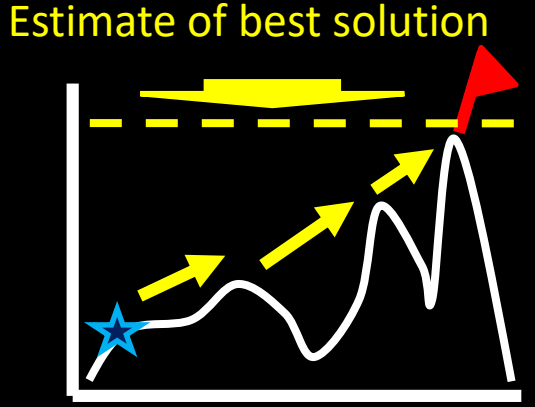

MARXAN
conservation solutions

GUROBI OPTIMIZATION
IBM CPLEX
COIN|OR

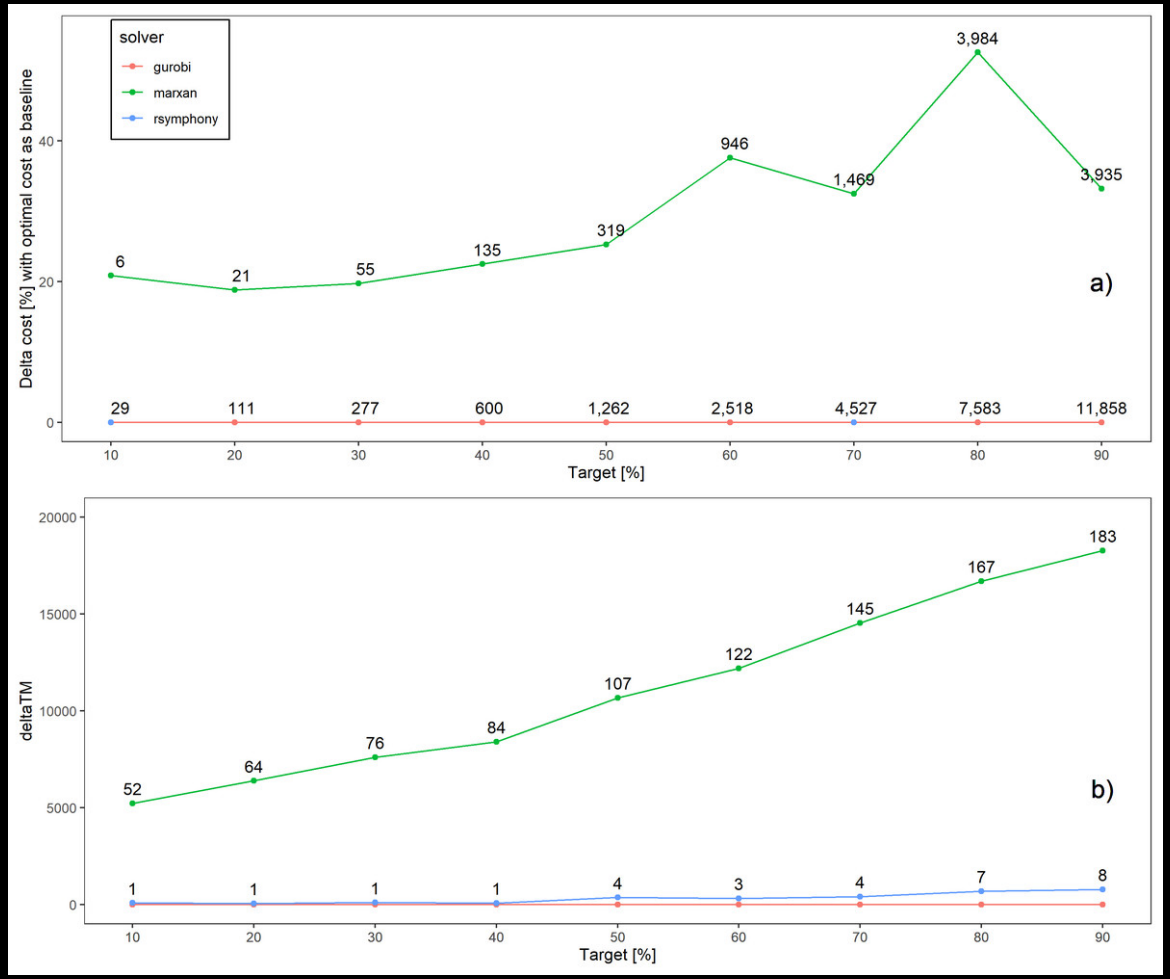

Solve efficiently + fast

Schuster et al. (2020) PeerJ, DOI:10.7717/peerj.9258

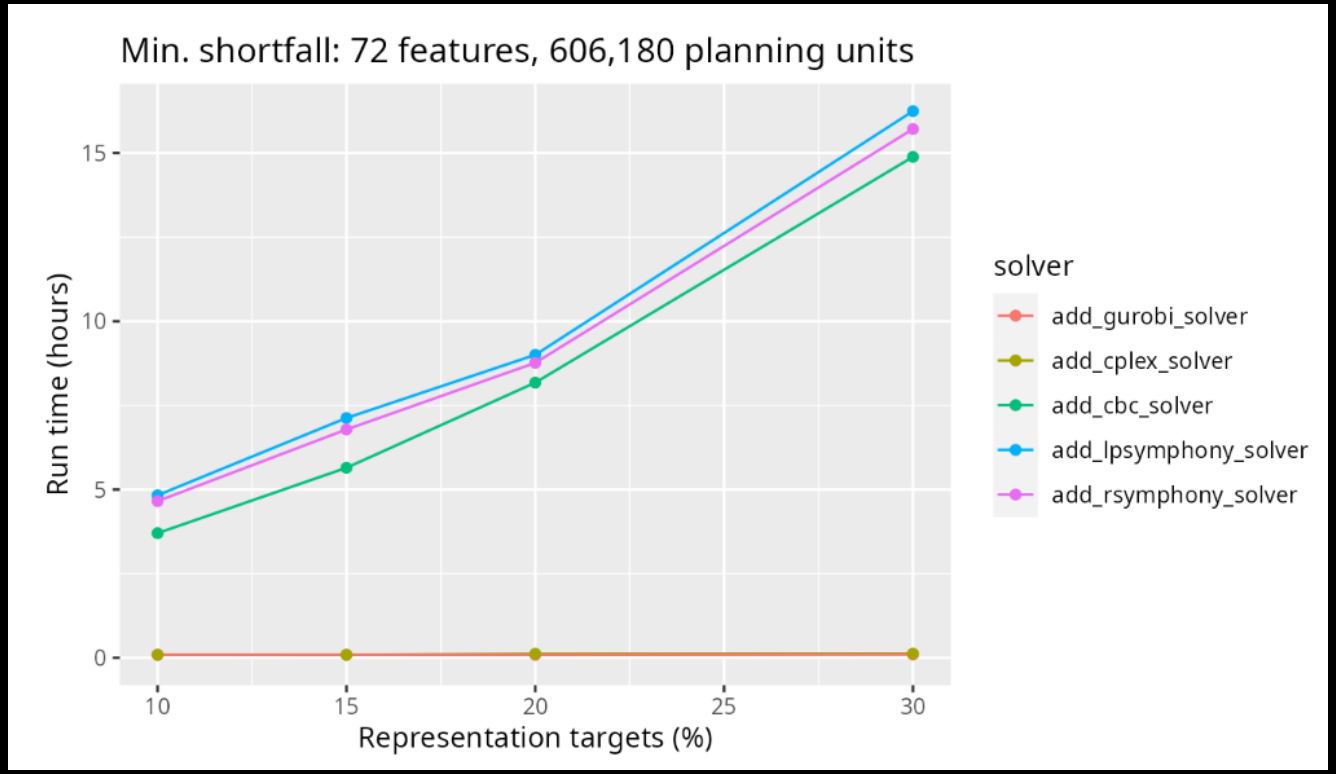

The catch: for complex problems, open-source solvers are a lot slower than Gurobi and IBM CPLEX

(https://prioritizr.net/articles/solver_benchmarks.html)

Example

Article | Open Access | Published: 15 April 2019

Optimizing the conservation of migratory species over their full annual cycle

Richard Schuster, Scott Wilson, Amanda D. Rodewald, Peter Arcese, Daniel Fink, Tom Auer & Joseph. R. Bennett

Nature Communications **10**, Article number: 1754 (2019) | Cite this article

7249 Accesses | **30** Citations | **130** Altmetric | Metrics

Optimizing the conservation of migratory species over their full annual cycle

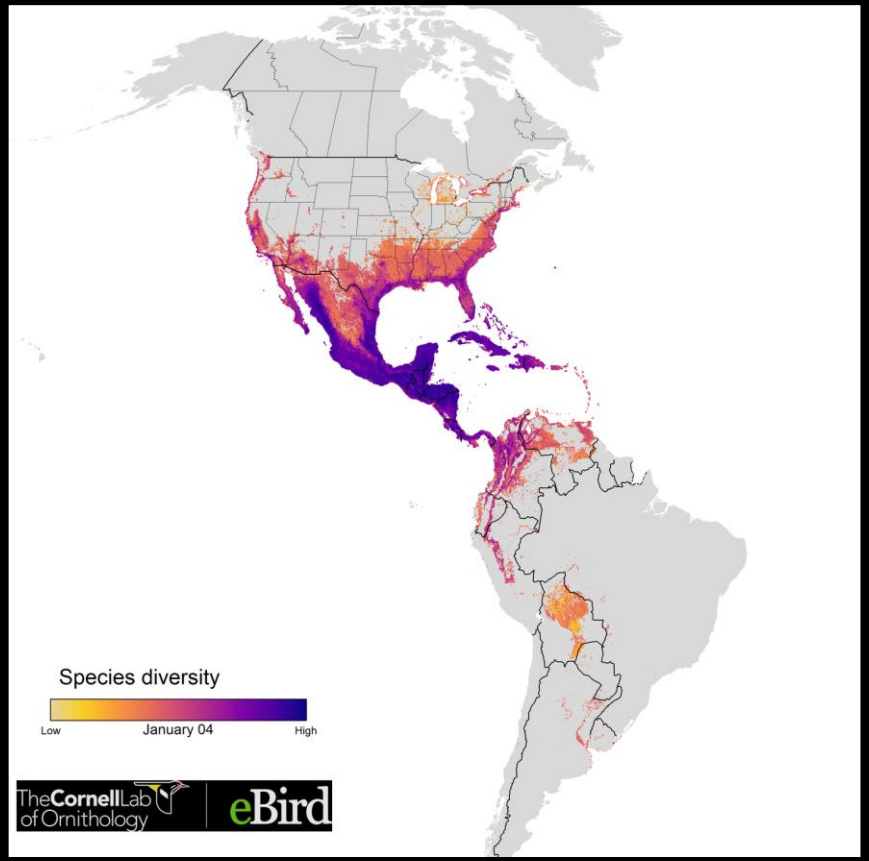

117 species
73 million km^2
1.7 million unique locations
14 million checklists

≤ 30,420 features
1.05 million planning units

Analysis powered by:

Schuster et al. (2019) Nature Communications

Conservation Decision Making Framework


Resilient Landscapes
Biodiversity
People
Connectivity
Climate
Invasives
Land Use


With CARE, we will identify these priority areas.
What does impact look like?
Conservation of the most important habitats for resilience.
C
CONNECTED
Protected areas are connected so that plants, animals and natural systems are able to survive.
A
ADEQUATE
Protected areas include enough quality habitat to allow a diversity of plants, animals and natural systems to survive.
R
REPRESENTATIVE
Protected areas cover the full range of biodiversity within a region.
E
EFFECTIVE
Protected areas are established and managed effectively to ensure conservation objectives are met.

Where to work?

- Resilient landscapes must include:
  - the full range of Biodiveristy,
  - in a sufficiently large area,
  - areas connected to each other
  - protected areas that are effectively managed

- Canada is a big country with a lot of species. Where should we work?

CARE at the Landscape level (Where To Work)

1. Scalable (Property to Country scale)
2. Seamless (1km grid across Canada)
3. Scientific (best available)

Demo

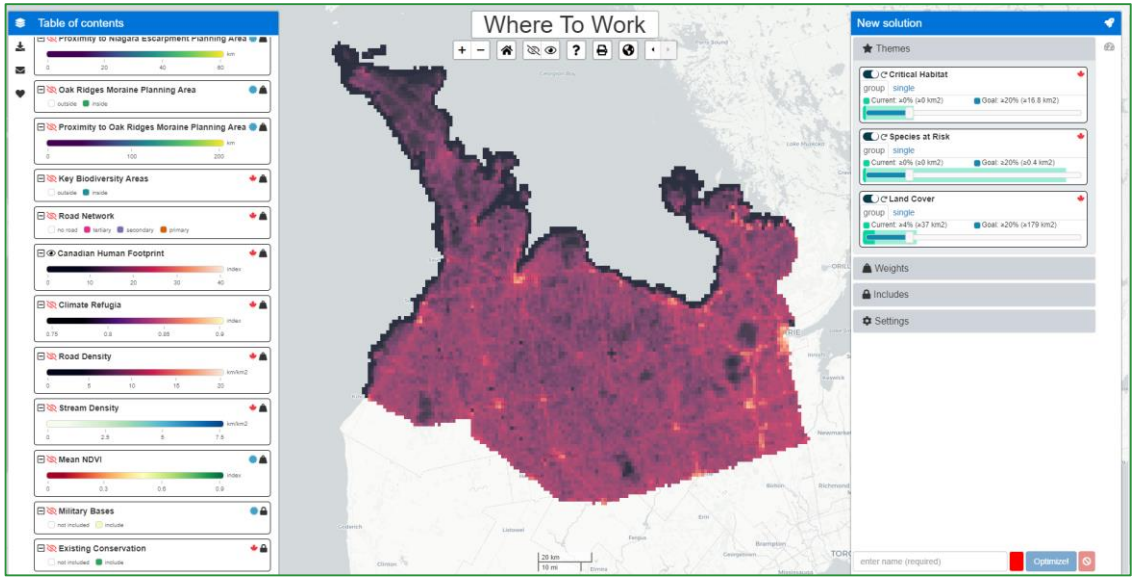

Questions?


jeffrey.hanson@uqconnect.edu.au


richard.schuster@natureconservancy.ca