

JavaScript Cookies



Next >

Cookies let you store user information in web pages.

What are Cookies?

Cookies are data, stored in small text files, on your computer.

When a web server has sent a web page to a browser, the connection is shut down, and the server forgets everything about the user.

Cookies were invented to solve the problem "how to remember information about the user":

- When a user visits a web page, his/her name can be stored in a cookie.
- Next time the user visits the page, the cookie "remembers" his/her name.

Cookies are saved in name-value pairs like:

username = John Doe

When a browser requests a web page from a server, cookies belonging to the page are added to the request. This way the server gets the necessary data to "remember" information about users.



Create a Cookie with JavaScript

JavaScript can create, read, and delete cookies with the document.cookie property.

With JavaScript, a cookie can be created like this:

```
document.cookie = "username=John Doe";
```

You can also add an expiry date (in UTC time). By default, the cookie is deleted when the browser is closed:

```
document.cookie = "username=John Doe; expires=Thu, 18 Dec 2013 12:00:00
UTC";
```

With a path parameter, you can tell the browser what path the cookie belongs to. By default, the cookie belongs to the current page.

```
document.cookie = "username=John Doe; expires=Thu, 18 Dec 2013 12:00:00
UTC; path=/";
```

Read a Cookie with JavaScript

With JavaScript, cookies can be read like this:



document.cookie will return all cookies in one string much like: cookie1=value; cookie2=value; cookie3=value;

Change a Cookie with JavaScript

With JavaScript, you can change a cookie the same way as you create it:

```
document.cookie = "username=John Smith; expires=Thu, 18 Dec 2013
12:00:00 UTC; path=/";
```

The old cookie is overwritten.

Delete a Cookie with JavaScript

Deleting a cookie is very simple.

You don't have to specify a cookie value when you delete a cookie.

Just set the expires parameter to a past date:

```
document.cookie = "username=; expires=Thu, 01 Jan 1970 00:00:00 UTC;
path=/;";
```

You should define the cookie path to ensure that you delete the right cookie.



The Cookie String

The document.cookie property looks like a normal text string. But it is not.

Even if you write a whole cookie string to document.cookie, when you read it out again, you can only see the name-value pair of it.

If you set a new cookie, older cookies are not overwritten. The new cookie is added to document.cookie, so if you read document.cookie again you will get something like:

cookie1 = value; cookie2 = value;



If you want to find the value of one specified cookie, you must write a JavaScript function that searches for the cookie value in the cookie string.

JavaScript Cookie Example

In the example to follow, we will create a cookie that stores the name of a visitor.

The first time a visitor arrives to the web page, he/she will be asked to fill in his/her name. The name is then stored in a cookie.

The next time the visitor arrives at the same page, he/she will get a welcome message.

For the example we will create 3 JavaScript functions:

- 1. A function to set a cookie value
- 2. A function to get a cookie value
- 3. A function to check a cookie value

A Function to Set a Cookie

```
Tutorials ▼
                Exercises ▼
                            Services ▼
                                                            Sign Up
                                                                     Log in
          JAVASCRIPT
                      SQL
                              PYTHON
                                       JAVA
                                                PHP HOW TO
function setCookie(cname, cvalue, exdays) {
  const d = new Date();
  d.setTime(d.getTime() + (exdays*24*60*60*1000));
 let expires = "expires="+ d.toUTCString();
 document.cookie = cname + "=" + cvalue + ";" + expires + ";path=/";
}
```

Example explained:

The parameters of the function above are the name of the cookie (cname), the value of the cookie (cvalue), and the number of days until the cookie should expire (exdays).

The function sets a cookie by adding together the cookiename, the cookie value, and the expires string.

A Function to Get a Cookie

Then, we create a function that returns the value of a specified cookie:

Example

```
function getCookie(cname) {
  let name = cname + "=";
  let decodedCookie = decodeURIComponent(document.cookie);
  let ca = decodedCookie.split(';');
  for(let i = 0; i <ca.length; i++) {
    let c = ca[i];
    while (c.charAt(0) == ' ') {
        c = c.substring(1);
    }
    if (c.indexOf(name) == 0) {
        return c.substring(name.length, c.length);
    }
}</pre>
```



Function explained:

Take the cookiename as parameter (cname).

Create a variable (name) with the text to search for (cname + "=").

Decode the cookie string, to handle cookies with special characters, e.g. '\$'

Split document.cookie on semicolons into an array called ca (ca = decodedCookie.split(';')).

Loop through the ca array (i = 0; i < ca.length; i++), and read out each value c = ca[i]).

If the cookie is found (c.indexOf(name) == 0), return the value of the cookie (c.substring(name.length, c.length).

If the cookie is not found, return "".

A Function to Check a Cookie


Last, we create the function that checks if a cookie is set.

If the cookie is set it will display a greeting.

If the cookie is not set, it will display a prompt box, asking for the name of the user, and stores the username cookie for 365 days, by calling the setCookie function:

Example

```
function checkCookie() {
  let username = getCookie("username");
  if (username != "") {
    alert("Welcome again " + username);
  } else {
    username = prompt("Please enter your name:", "");
```

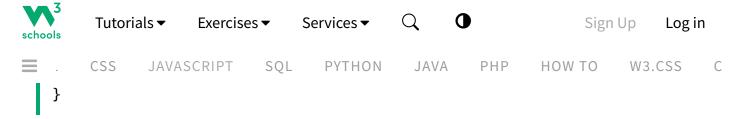

All Together Now

Example

```
function setCookie(cname, cvalue, exdays) {
  const d = new Date();
  d.setTime(d.getTime() + (exdays * 24 * 60 * 60 * 1000));
  let expires = "expires="+d.toUTCString();
 document.cookie = cname + "=" + cvalue + ";" + expires + ";path=/";
}
function getCookie(cname) {
  let name = cname + "=";
  let ca = document.cookie.split(';');
  for(let i = 0; i < ca.length; i++) {</pre>
    let c = ca[i];
    while (c.charAt(0) == ' ') {
      c = c.substring(1);
    }
    if (c.indexOf(name) == 0) {
      return c.substring(name.length, c.length);
    }
  }
  return "";
function checkCookie() {
  let user = getCookie("username");
  if (user != "") {
    alert("Welcome again " + user);
  } else {
    user = prompt("Please enter your name:", "");
```



Try it Yourself »

The example above runs the checkCookie() function when the page loads.



Next >

Track your progress - it's free!

Sign Up Log in



COLOR PICKER





PLUS SPACES schools

GET CERTIFIED FOR TEACHERS

FOR BUSINESS CONTACT US

Top Tutorials


HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
c++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
Angular Reference
jQuery Reference

Top Examples

Get Certified

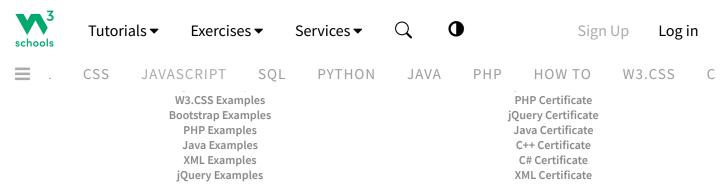



FORUM ABOUT ACADEMY

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.

Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness

of all content. While using W3Schools, you agree to have read and accepted our <u>terms of use</u>, cookie and privacy policy.

Copyright 1999-2025 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.