

# Creative Component

*Taikgun Song*

## Abstract

Write abstract. It is known that the performance of Latent Dirichlet Allocation based topic models over short texts. In this paper, we would like to compare LDA methods with different 'parameter' under experimental setting.

## 1 Introduction

Then the following R packages were utilized to conduct Latent Dirichlet Allocation(Blei, Ng, and Jordan 2003) method: openNLP(Hornik 2016a), NLP (Hornik 2016b), topicmodels (Bettina Grün 2016).

R-Project → Version Control → Git rep. address.



Hadley Naming.

But use underscore.

Clone & or download.

## 2 Data (Need revising)

In order to compare different LDA processes, a collection of short user-generated online reviews from a popular website, the Trip Adviser, was used for evaluation. Among all restaurants in Honolulu, Hawaii registered on the Trip Adviser, the latest 10 reviews were scrapped and read into R (R Core Team 2014) using the `rvest` (Hadley Wickham [aut] 2016) package. This dataset includes the following information of the 7700 Honolulu restaurants: restaurant name, number total reviews, average star rating, individual review title, individual review entry, individual star rating, and the date visited. In this paper, we are particularly interested in individual review entry.

### 2.1 Procedure 1: Obtaining the page numbers for all restaurants

The following URL: “[https://www.tripadvisor.com/Restaurants-g60982-Honolulu\\_Oahu\\_Hawaii.html](https://www.tripadvisor.com/Restaurants-g60982-Honolulu_Oahu_Hawaii.html)” in Figure 1 leads to all 1745 restaurants registered on TripAdvisor (As of October 27th, 2016).

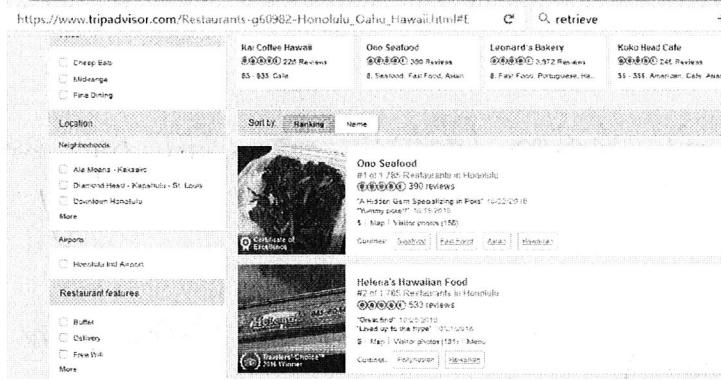


Figure 1: Example image of the initial TripAdvisor webpage for all restaurants in Honolulu, Hawaii



Figure 2: Example pages number image of the restaurants in Honolulu, Hawaii

These restaurants are listed into 59 different pages as it is shown in Figure 2. Therefore, obtaining url of all 59 pages would be the first step to scrap each individual restaurant reviews. Note that there are 30 restaurants in each page except for the last page. The following image of Figure 3 portraits how the html code is written for this web page.

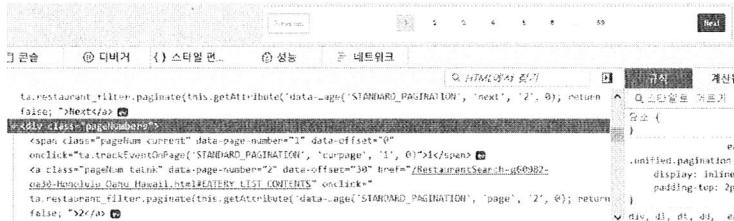


Figure 3: Image of the source code

### 2.1.1 Step 1: Read html using the 'rvest' package

The following steps R code using the rvest (Hadley Wickham [aut 2016]) package will ~~scrape~~ url address for all restaurants in Honolulu, Hawaii.

```
initial.url="https://www.tripadvisor.com/Resta...-g60982-Honolulu_Oahu_Hawaii.html"
doc=read_html(initial.url)
```

### 2.1.2 Step 2: Scrap the last page number of the review pages.

Note that, from Figure 3, the page numbers are under the node `//div[@class="pageNumbers"]`. Use the `html_nodes` function in conjunction with specific node using the `xpath` in the `revst` and XML package respectively to obtain the information under the specific node. Then, apply the `html_text` function to obtain text information. Lastly, since the page numbers are in between `\n` patterns, employ `gsub` function to retrieve the last page number: 59.

```
pg.num.path=c(pg.url = '//div[@class="pageNumbers"]')
check=lapply(pg.num.path, function(x) html_nodes(doc,xpath=x))
f.page=check$pg.url %>% html_text() %>% gsub('.*\n(.*)\n', '\\1', .)
```

### 2.1.3 Step 3: Generate urls for each review page.

The general url for these pages are as the following: "<https://www.tripadvisor.com/Resta...-g60982-oa> SUB-Honolulu\_Oahu\_Hawaii.html#EATERY\_LIST\_CONTENTS". There are 30 restaurants in each page, and the 1<sup>st</sup> restaurant that appears in  $n^{th}$  page is actually the  $(30 * (n - 1) + 1)^{th}$  restaurant. Therefore, changing the SUB in the general url with `gsub` function will allow us to create a list of all page links.

```
complete.initial.url=rbind.data.frame(rest.url=initial.url, data.frame(rest.url=sapply(c(1:(as.numeric(f.page)
row.names(complete.initial.url)=NULL
```

### 2.1.4 Step 4: Combine the all the above functions

The previous R codes were combined into a single function named `get.pg.num`.

```
get.pg.num=function(intial.url){
  doc1=read_html(intial.url)
  pg.num.path=c(pg.url = '//div[@class="pageNumbers"]')
  check=lapply(pg.num.path, function(x) html_nodes(doc1,xpath=x))
  f.page=check$pg.url %>% html_text() %>% gsub('.*\n(.*)\n', '\\1', .)
  complete.initial.url=rbind.data.frame(rest.url=intial.url, data.frame(rest.url=sapply(c(1:(as.numeric(f.page)
row.names(complete.initial.url)=NULL
  return(complete.initial.url[[1]])
```

## 2.2 Procedure 2: Obtaining url for individual restaurants.

Once the url for each pages are retrieved, the next step is to get url for all restaurants within each pages. As shown in Figure 4, the title of the restaurant is embedded in the html node `//div[@id="EATERY_SEARCH_RESULTS"]//h3[@class="title"]` and its corresponding url is embedded in `//div[@id="EATERY_SEARCH_RESULTS"]//h3[@class="title"]//a[@class="property_title"]`.

```
doc=read_html(pg.num.url)
rest.path=c(ea.url = '//div[@id="EATERY_SEARCH_RESULTS"]//h3[@class="title"]//a[@class="property_title"]',
apply_rest.path=lapply(rest.path, function(x) html_nodes(doc,xpath=x))
```

Thus, the title of a restaurant and its url is obtained by running the above R code. Simple cleaning Code below would extract the title and the url of each restaurant.

```
r_url.r_name=cbind.data.frame(rest.url=gsub('.*?href="(.*?)".*', "https://www.tripadvisor.com\\1",apply_rest
```

As a result, the above two codes were made into a function `rest.url`



Figure 4: Example source code image of each restaurant url

```
rest.url=function(pg.num.url){
  doc=read_html(pg.num.url)
  rest.path=c(ea.url = '//div[@id="EATERY_SEARCH_RESULTS"]//h3[@class="title"] //a[@class="property_title"]')
  apply_rest.path=lapply(rest.path, function(x) html_nodes(doc,xpath=x))
  r_url.r_name=cbind.data.frame(rest.url=gsub('.*?href="(.*)\\.".*', "https://www.tripadvisor.com\\1",apply_re
  return(r_url.r_name)
}
```

### 2.3 Procedure 3: Obtaining individual review information for all restaurants.

After the second procedure, url for each restaurants in Honolulu Hawaii that is registered in TripAdvisor was scrapped. These url provide access to a list of individual review entries of that particular given restaurant. For long individual reviews, however, full entry is not directly available from the url generated in Procedure 2. For example, individual review illustrated in Figure 5, ellipsis symbol ... was used to omit reviews after Black Sand. Therefore, further scrapping is required to retrieve full review entry. The following steps were taken.

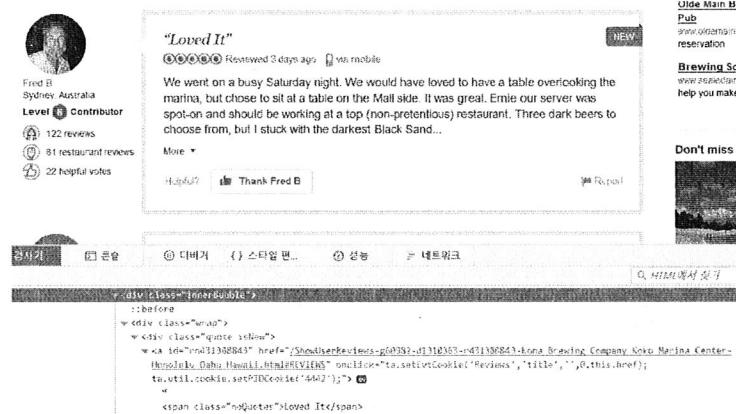


Figure 5: Example source code image of individual review url

#### 2.3.1 Step 1: Reading a given restaurant url.

As the default behavior, the `read_html` function does not properly identify itself to the server that it is retrieving the contents from. Hence, for a long process such as Procedure 3, the `useragent` should be used to the `handle` argument of `read_html` function using `curl` in order for the scraper to identify itself. Otherwise, an error message such as the following will be generated after some iteration: `Error in open.connection(x, "rb")`

```
doc=curl(ea.rest.url, handle = new_handle("useragent" = "Mozilla/5.0")) %>% read_html()
```

#### 2.3.2 Step 2: Scrapping the title of an individual review and its url.

Figure 5 illustrates that the title of the restaurant is embedded in the html node `//div[@id="REVIEWS"]//div[@class="innerBubble"]` and its corresponding url is embedded in `//div[@id="REVIEWS"]//div[@class="noQuotes"]`

```
[\\@class="innerBubble"]. The code below will generate url for individual reviews after further cleaning with gsub function.
u.n.t.path=c(ea.url = '//div [@id="REVIEWS"]//div [@class="innerBubble"]',ea.title= '//div [@id="REVIEWS"]//di
apply_u.n.t.path=lapply(u.n.t.path, function(x) html_nodes(doc,xpath=x))
u.n.t=cbind.data.frame(ea.url=gsub(".*?<a href=\"(.*)\".*", "https://www.tripadvisor.com\\1",apply_u.n.t.path
```

### 2.3.3 Step 3: Scrapping the review entry of an individual review.

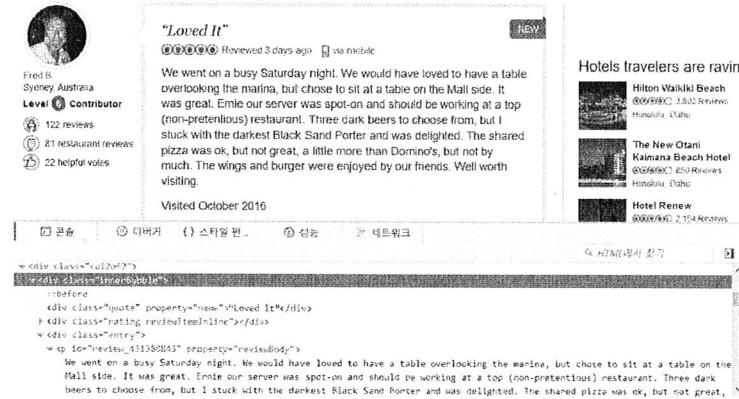


Figure 6: Example source code image of individual review url

The source code and its output is presented in Figure 6. It is clear that the review entry is embedded in the html node (//div [@id="REVIEWS"]//div [@class="innerBubble"]//p)[1]. Thus, the code below was used to capture the full review entry.

```
r.path <- c(ea.review = '(//div [@id="REVIEWS"]//div [@class="innerBubble"]//p)[1]')
apply_r.path=lapply(r.path, function(x) sapply(u.n.t[,1], function(y) html_nodes(y %>% read_html(),xpath=x) %>
u.t.r.out.put=cbind.data.frame(u.n.t, apply_r.path, stringsAsFactors=F)
```

### 2.3.4 Step 4: Dealing with restaurants with no review.

There are multiple restaurants without any review. These restaurants will generate error messages and should be dealt by using a simple if loop. If there is no review entry, then the u.t.r.out.put from the previous code will have zero number of rows. Therefore, re-define u.t.r.out.put with all column entry having No review posted with the number of rows equal to zero as the code provided below.

```
if (nrow(u.t.r.out.put)!=0){
  row.names(u.t.r.out.put)=c(1:nrow(u.n.t))
} else {u.t.r.out.put=cbind.data.frame(ea.url="No review posted", ea.title="No review posted", ea.review ="No
```

### 2.3.5 Step 5: Combine all steps in procedure 3.

The R codes in Procedure 3 were combined into a single function named review.data. The function Sys.sleep(2) allow computer to rest for 2 seconds. Some unstable servers crash when the number of requests exceed the server's capability. Therefore, Sys.sleep was introduced to avoid crashing the server.

```
review.data=function(ea.rest.url){
  doc=curl(ea.rest.url, handle = new_handle("useragent" = "Mozilla/5.0")) %>% read_html()
  u.n.t.path=c(ea.url = '//div [@id="REVIEWS"]//div [@class="innerBubble"]',ea.title= '//div [@id="REVIEWS"]//di
  apply_u.n.t.path=lapply(u.n.t.path, function(x) html_nodes(doc,xpath=x))
  u.n.t=cbind.data.frame(ea.url=gsub(".*?<a href=\"(.*)\".*", "https://www.tripadvisor.com\\1",apply_u.n.t.path)
  r.path <- c(ea.review = '(//div [@id="REVIEWS"]//div [@class="innerBubble"]//p)[1]')
  apply_r.path=lapply(r.path, function(x) sapply(u.n.t[,1], function(y) html_nodes(y %>% read_html(),xpath=x) %>
  u.t.r.out.put=cbind.data.frame(u.n.t, apply_r.path, stringsAsFactors=F)
  if (nrow(u.t.r.out.put)!=0){
    row.names(u.t.r.out.put)=c(1:nrow(u.n.t))
  } else {u.t.r.out.put=cbind.data.frame(ea.url="No review posted", ea.title="No review posted", ea.review ="N
```

```

    return(u.t.r.out.put)
Sys.sleep(2)
}

```

## 2.4 Procedure 4: Combining the previous procedures to construct full dataset.

```

# Procedure 1
initial.url="https://www.tripadvisor.com/Restaurants-g60982-Honolulu_Oahu_Hawaii.html"
source("Code/pg_num_url.r")
all.url=get.pg.num(intial.url)

# Procedure 2
source("Code/ind_rest_url.r")
ea.url=lapply(all.url, function(x) rest.url(x)) %>% do.call("rbind", .)

# Procedure 3
source("Code/ind_url_title_review.r")
fin=nrow(ea.url)

# Final Product
source("Code/review_data_w_pb.r")
final.data=lapply(1:nrow(ea.url), function(x) review.data.w.pb(x) %>% cbind(rep(ea.url[x,2], nrow(.)), .)) %>%
colnames(final.data)[1]="rest.name"
#View(final.data)

```

The above code combines all the previous procedures and generates the complete dataset of all restaurants in Honolulu, Hawaii with following information: Restaurant Name, url, title, and entry of individual reviews. The combined procedure takes time, thus simple progression bar was introduced to monitor the progress. The code for the progression bar is shown below.

```

pb <- winProgressBar(title = "progress bar", min = 0, max = fin, width = 300)
review.data.w.pb=function(x){
  setWinProgressBar(pb, x, title=paste(round(x/fin*100, 0), "% done"))
  return(review.data(ea.url[x,1]))
}

```

	rest.name	ea.url	ea.title	ea.review
1	Ono Seafood	https://www.tripadvisor.com>ShowUserReviews.g6...	A Hidden Gem Specializing in Poke	This tiny, laid back place is a favorite of the locals. In...
2	Ono Seafood	https://www.tripadvisor.com>ShowUserReviews.g6...	Yummy poke!!	Visiting Hawaii for the first time and based on review...
3	Ono Seafood	https://www.tripadvisor.com>ShowUserReviews.g6...	First time to taste that kind of sushi rice!	I love sushi and have been eating many kinds of sus...
4	Ono Seafood	https://www.tripadvisor.com>ShowUserReviews.g6...	Close. Cheap. Delicious	If you've got yourself a rental, it's not far at all from W...
5	Ono Seafood	https://www.tripadvisor.com>ShowUserReviews.g6...	A-MAZ-ING - On par or better with 40-70 dollars dishes	My wife and I walked to Ono Seafood from Honolulu. I...
6	Ono Seafood	https://www.tripadvisor.com>ShowUserReviews.g6...	Good authentic Hawaiian food.	Being away from the islands, I wanted good food I ha...
10068	Bon Bon Cafe	No review posted	No review posted	No review posted
10069	Orange Grove Frozen Yogurt	No review posted	No review posted	No review posted
10070	Tokiwaya	No review posted	No review posted	No review posted
10071	The Kona Bean Cafe	No review posted	No review posted	No review posted
10072	Tokyo Hotdogs	No review posted	No review posted	No review posted
10073	Morning Hill Foods LLC	No review posted	No review posted	No review posted

Figure 7: First 10 and the last 10 entries of the final dataset

The head and the tail of the generated dataset is given in Figure 7.

removing "No review posted" or at least 5 English reviews.  
should be on the data "collection" part.

### 3 Data Cleaning

3.1

The raw data scrapped from the web are noisy and preparation process is necessary to minimize this noise. The initial step for this cleaning process is to remove all non-Latin characters, and change all characters to lower case letters.

**Removing Stop Words** (The second step is to remove meaningless words and words with low frequency by utilizing the tm (Ingo Feinerer 2015) and the RTextTools (Timothy P. Jurka 2014) packages in R. The listed results in Table 1 shows the importance of removing stop words prior to running LDA method.)

	Topic.1	Topic.2	Topic.3	Topic.4
1	the	the	the	the
2	and	and	and	and
3	for	you	was	with
4	you	for	were	was
5	food	this	for	for
6	this	are	had	but
7	are	they	our	this
8	but	was	but	they
9	good	great	that	had
10	with	have	not	you

(a) Table LDA output before removing the stop words

	Topic.1	Topic.2	Topic.3	Topic.4
1	food	food	good	food
2	service	good	place	great
3	good	place	food	good
4	restaurant	like	great	place
5	just	just	also	service
6	one	one	chicken	get
7	ordered	service	just	one
8	back	get	ordered	restaurant
9	like	restaurant	really	can
10	really	will	get	best

(b) Table LDA output after removing the stop words

Table 1: Difference of LDA output between with and without stop words

Stemming... 3.2 . . . .

- LDA, documents are represent as random mixtures over latent topics, where each topic is characterized by a distribution over words. (Need paraphrasing)

LDA assumes that words are generated by topics. That is, word distribution

$$p(w|\theta, \beta)$$

$$p(w|\theta, \beta) = \sum_z p(w|z, \beta)p(z|\theta)$$

Therefore, retrieving information by reducing the inflected words to its original word stem

may increase the probability of the joint distribution of topic mixture leading (thus increasing the probability of a document and a corpus).

	Topic.1	Topic.2	Topic.3	Topic.4
1	food	food	good	food
2	service	good	place	great
3	good	place	food	good
4	restaurant	like	great	place
5	just	just	also	service
6	one	one	chicken	get
7	ordered	service	just	one
8	back	get	ordered	restaurant
9	like	restaurant	really	can
10	really	will	get	best

(a) Table LDA output before stemming

	Topic.1	Topic.2	Topic.3	Topic.4
1	good	food	good	food
2	food	place	food	good
3	place	good	order	great
4	great	restaur	servic	restaur
5	get	great	place	place
6	breakfast	servic	one	delici
7	servic	order	just	tri
8	time	price	great	like
9	price	eat	time	one
10	wait	time	like	love

(b) Table LDA output after stemming

Table 2: Difference of LDA output between with and without stop words

### 4 Sequential bigram

Wallach

## References

- Bettina Grün, Kurt Hornik. 2016. *Topic Models*. <https://cran.r-project.org/web/packages/topicmodels/topicmodels.pdf>.
- Blei, David M, Andrew Y Ng, and Michael I Jordan. 2003. “Latent Dirichlet Allocation.” *Journal of Machine Learning Research* 3 (Jan): 993–1022.
- Hadley Wickham [aut, RStudio [cph], cre]. 2016. *Easily Harvest (Scrape) Web Pages*. <https://cran.r-project.org/web/packages/rvest/rvest.pdf>.
- Hornik, Kurt. 2016a. *Apache OpenNLP Tools Interface*. <https://cran.r-project.org/web/packages/openNLP/openNLP.pdf>.
- . 2016b. *Natural Language Processing Infrastructure*. <https://cran.r-project.org/web/packages/NLP/NLP.pdf>.
- Ingo Feinerer, Artifex Software, Kurt Hornik. 2015. *Text Mining Package*. <https://cran.r-project.org/web/packages/tm/tm.pdf>.
- R Core Team. 2014. *R: A Language and Environment for Statistical Computing*. Vienna, Austria: R Foundation for Statistical Computing. <http://www.R-project.org/>.
- Timothy P. Jurka, Amber E. Boydston, Loren Collingwood. 2014. *Automatic Text Classification via Supervised Learning*. <https://cran.r-project.org/web/packages/RTextTools/RTextTools.pdf>.