



Placement Empowerment Program

Cloud Computing and DevOps Centre

Installing Docker and Running Your First Container on Windows

Name: Sandhana Jefrina J

Department : CSE



Introduction and Overview

Docker is a powerful tool that allows developers to create, deploy, and run applications in isolated environments called containers. These containers ensure that applications run consistently across different systems, eliminating compatibility issues.

In this guide, we will go through the step-by-step process of installing Docker on Windows, setting up a basic Nginx web server inside a container, and accessing it through a browser.

Objective

- To install Docker on Windows and verify its functionality.
- To learn how to pull and run a basic Nginx container.
- To understand how to access a containerized web application using a browser.
- To gain hands-on experience with containerization and Docker commands.

Importance

- Simplifies Deployment Containers eliminate compatibility issues by packaging applications with all their dependencies.
- Improves Efficiency Docker containers are lightweight and use system resources more effectively than virtual machines.
- Enhances Portability Applications run consistently across different environments (local, cloud, or server).
- Boosts Scalability Docker makes it easier to scale applications up or down based on demand.
- Speeds Up Development Developers can quickly create isolated environments for testing and debugging.

Step-by-Step Overview

Step 1: Install Docker Desktop.

- 1. Download **Docker Desktop for Windows** from the official website: https://www.docker.com/products/docker-desktop/
- 2. Run the installer and follow the on-screen instructions.
- 3. Ensure **WSL 2** is enabled (Docker requires this for Windows).
- 4. Restart your PC and launch **Docker Desktop**.



Step 2: Verify Docker Installation


- Open PowerShell and check if Docker is installed by running the version command.
- Verify that Docker is running properly by checking its system information.

• If there are any errors, ensure Docker Desktop is open and running in the background

C:\Users\Jeffrina>docker images IMAGE ID REPOSITORY TAG CREATED SIZE nginx latest 9d6b58feebd2 3 weeks ago 279MB C:\Users\Jeffrina>docker version Client: Version: 27.5.1 API version: 1.47 Go version: go1.22.11 Git commit: 9f9e405 Built: Wed Jan 22 13:41:44 2025 OS/Arch: windows/amd64 Context: desktop-linux Server: Docker Desktop 4.38.0 (181591) Engine: Version: 27.5.1 API version: 1.47 (minimum version 1.24) Go version: go1.22.11 4c9b3b0 Git commit: Wed Jan 22 13:41:17 2025 Built: linux/amd64 OS/Arch: Experimental: false containerd: Version: 1.7.25 GitCommit: bcc810d6b9066471b0b6fa75f557a15a1cbf31bb runc: Version: 1.1.12 GitCommit: v1.1.12-0-g51d5e946 docker-init: Version: 0.19.0 GitCommit: de40ad0

Step 3: Pull the Nginx Docker Image

- Use the Docker pull command to download the latest Nginx image from Docker Hub.
- Once the image is downloaded, verify it by listing all available images in Docker.

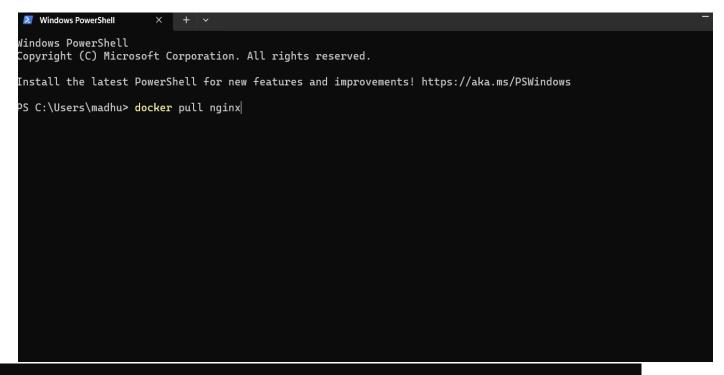

C:\Users\Jeffrina>docker pull nginx

Using default tag: latest

latest: Pulling from library/nginx

Digest: sha256:9d6b58feebd2dbd3c56ab5853333d627cc6e281011cfd6050fa4bcf2072c9496

Status: Image is up to date for nginx:latest

docker io/library/nginx·latest

Step 4: Run the Nginx Container

- Start an Nginx container by running it in detached mode and mapping it to port 8080.
- Verify that the container is running by listing all active containers.

C:\Users\Jeffrina>docker run -d -p 8080:80 --name my-nginx nginx
6b485910ff70680e952c4eb53ede6f339921afa38ad329df76f5f88c98300c99

Step 5: Access the Nginx Web Page


- Open a web browser and go to http://localhost:8080.
- If everything is set up correctly, the default Nginx welcome page should appear.

```
C:\Users\Jeffrina>docker ps
CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
6b485910ff70 nginx "/docker-entrypoint..." About a minute ago Up About a minute 0.0.0.0:8080->80/tcp my-nginx
```

```
PS C:\Users\Jeffrina> docker inspect my-nginx | Select-String '"HostPort": "8080"'

"HostPort": "8080"

"HostPort": "8080"
```

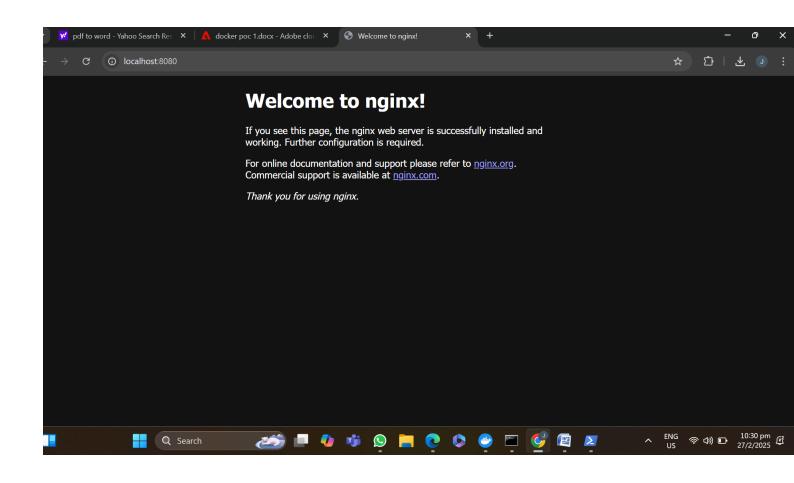

Step 6: Stop and Remove the Container

- If you no longer need the container, stop it using the stop command.
- Remove the stopped container from Docker.
- Optionally, remove the Nginx image if you want to free up space.

```
C:\Users\Jeffrina>docker stop my-nginx
my-nginx
C:\Users\Jeffrina>docker start my-nginx
my-nginx
C:\Users\Jeffrina>docker rmi nginx
Error response from daemon: conflict: unable to delete nginx:latest (must be forced) - container 6b485910ff70 is using its referenced image 9d6b58feebd2
```

Expected Outcome

- Successful installation of **Docker Desktop** on Windows.
- Verification that Docker is running correctly through PowerShell commands.
- Pulling and running an **Nginx container** without errors.
- Accessing the **Nginx default welcome page** in a web browser at http://localhost:8080.
- Understanding basic **Docker commands** like pull, run, stop, and remove.