


Client service:
origin c_1 has
target s_2 when
scalable end-
points are not
available

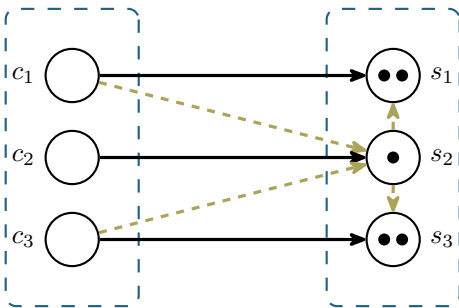

Composed service node:
(e.g., storage, visualiza-
tion, etc) s_1 and s_3 are
targets of s_2 when scal-
able endpoints are not
available