

```
Windows PowerShell
Microsoft Windows [Version 10.0.26200.8875]
(c) Microsoft Corporation. All rights reserved.

C:\Users\jelan>cd "C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\11"

C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\11>npx create-react-app eventexamplesapp
The directory eventexamplesapp contains files that could conflict:

  node_modules/
  package.json

Either try using a new directory name, or remove the files listed above.

C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\11>npx create-react-app eventexamplesapp

Creating a new React app in C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\11\eventexamplesapp.

Installing packages. This might take a couple of minutes.
Installing react, react-dom, and react-scripts with cra-template...

added 1296 packages in 2m

272 packages are looking for funding
  run 'npm fund' for details

Installing template dependencies using npm...

added 17 packages, and removed 1 package in 10s

271 packages are looking for funding
  run 'npm fund' for details
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
```

```
Windows PowerShell

To address all issues (including breaking changes), run:
  npm audit fix --force

Run 'npm audit' for details.
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts core-js@3.49.0 (postinstall: node -e "try{require('./postinstall')}catch(e){}")
npm warn allow-scripts core-js-pure@3.49.0 (postinstall: node -e "try{require('./postinstall')}catch(e){}")
npm warn allow-scripts
npm warn allow-scripts Run 'npm approve-scripts --allow-scripts-pending' to review, or 'npm approve-scripts <pkg>' to allow.

Success! Created eventexamplesapp at C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\11\eventexamplesapp
Inside that directory, you can run several commands:

  npm start
    Starts the development server.

  npm run build
    Bundles the app into static files for production.

  npm test
    Starts the test runner.

  npm run eject
    Removes this tool and copies build dependencies, configuration files
    and scripts into the app directory. If you do this, you can't go back!

We suggest that you begin by typing:

  cd eventexamplesapp
  npm start

Happy hacking!
```

```
Windows PowerShell
C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\11\eventexamplesapp>code .
C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\11\eventexamplesapp>npm start

> eventexamplesapp@0.1.0 start
> react-scripts start

(node:23352) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
(Use 'node --trace-deprecation ...' to show where the warning was created)
(node:23352) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
Compiled successfully!

You can now view eventexamplesapp in the browser.

  Local:            http://localhost:3000
  On Your Network:  http://192.168.0.221:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
Compiling...
Compiled successfully!

You can now view eventexamplesapp in the browser.



  Local:            http://localhost:3000
  On Your Network:  http://192.168.0.221:3000
```

```
VS Code
eventexamplesapp

EXPLORER
EVENTEXAMPLESAPP
  .dist
  node_modules
  public
  src
    # App.css
    JS App.js
    JS App.test.js
    JS CurrencyConvertor.js
    # index.css
    JS index.js
    logo.svg
    JS reportWebVitals.js
    JS setupTests.js
  .gitignore
  package-lock.json
  package.json
  README.md

OUTLINE
TIMELINE

src > # App.css > input
1  .container{
2    |   margin:20px;
3    |   font-family:Arial;
4    | }
5
6  button{
7    |   margin-top:5px;
8    | }
9
10 .heading{
11 |   color:green;
12 |   font-size:50px;
13 |   font-weight:bold;
14 | }
15
16 table{
17 |   margin-top:20px;
18 | }
19
20 td{
21 |   padding:8px;
22 | }
23
24 input{
25 |   width:140px;
26 |   height:20px;
27 | }
```

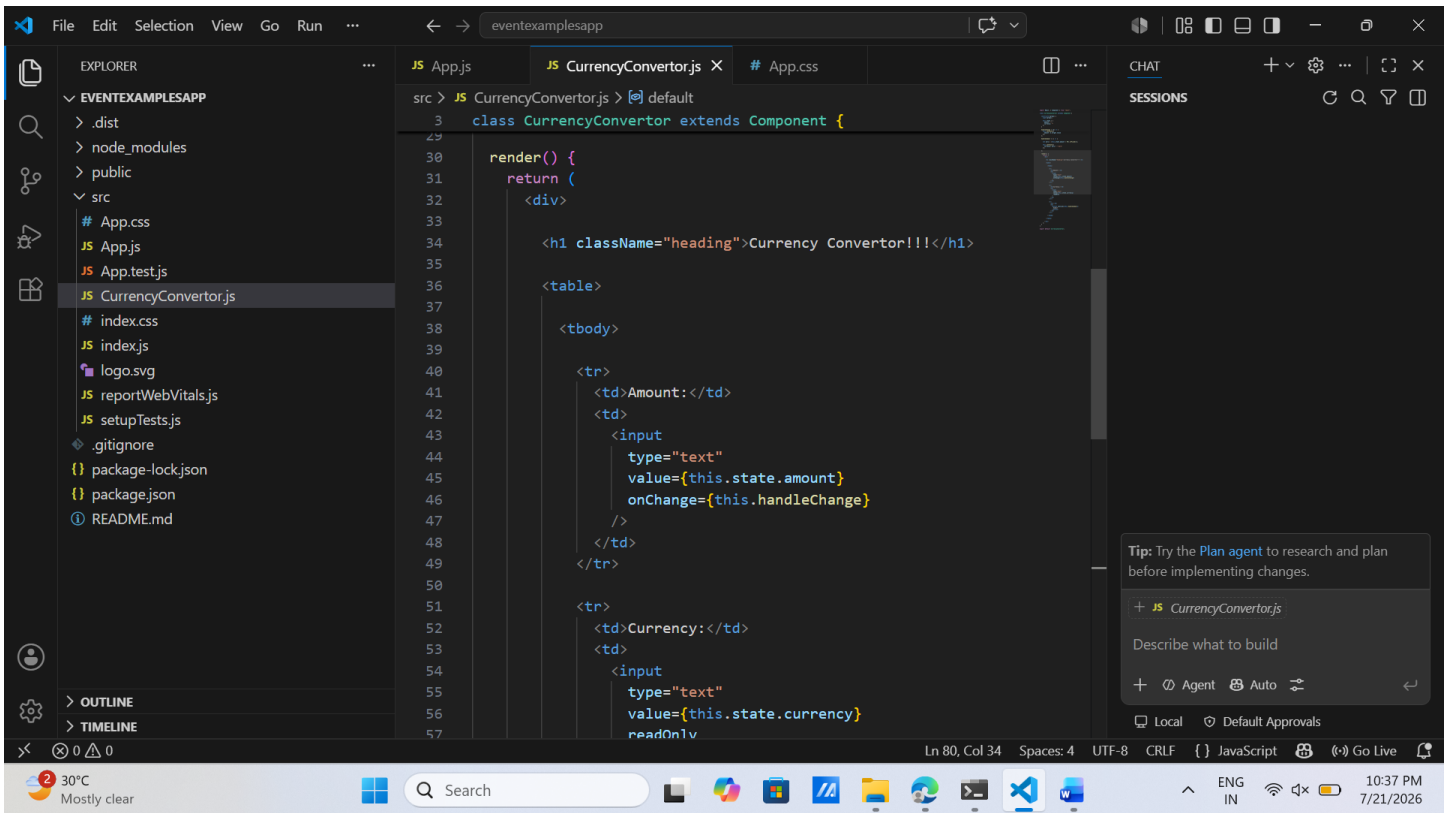
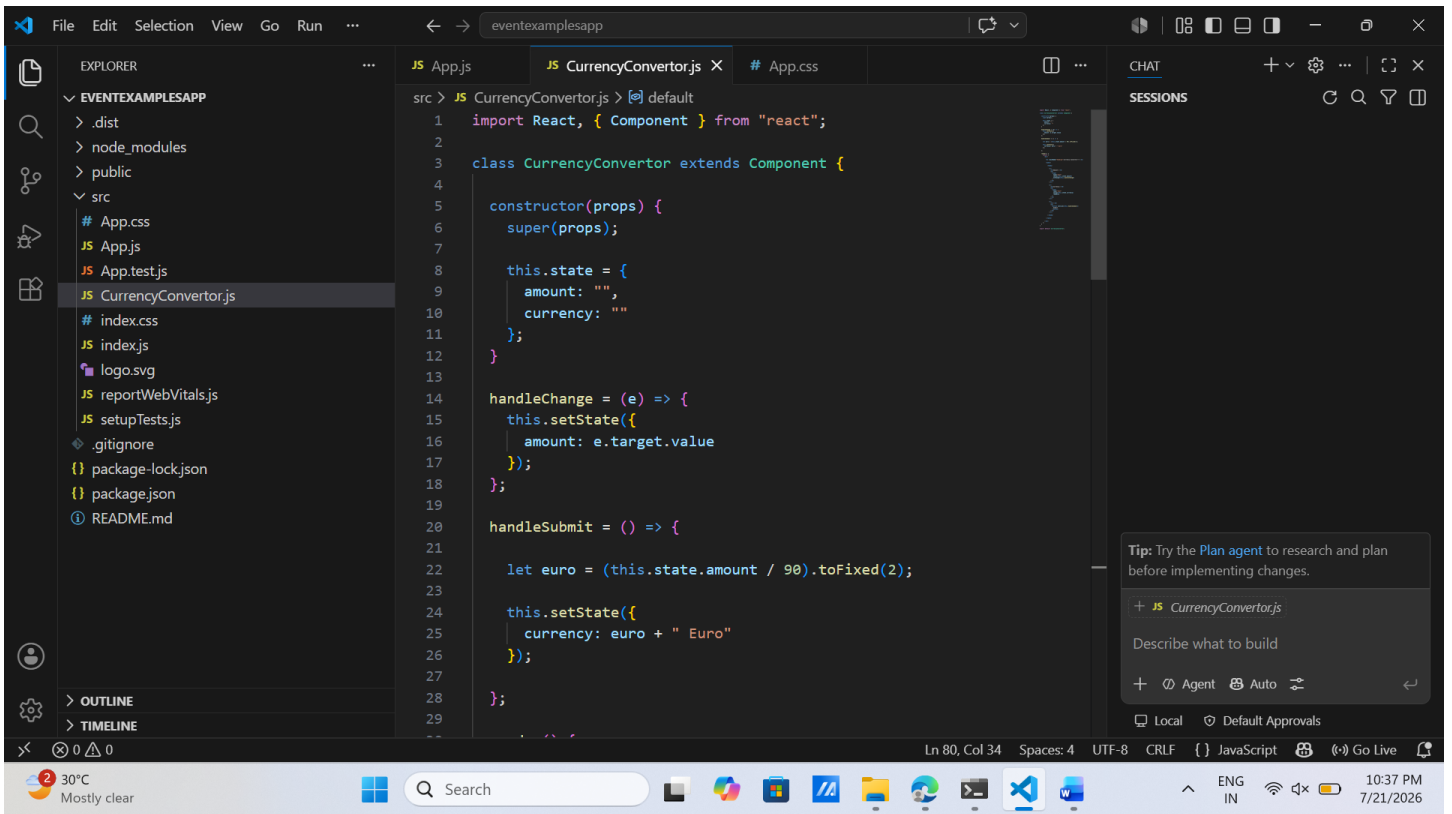


Visual Studio Code interface showing the Explorer, Search, and Run and Debug views. The Explorer view displays the file structure of the project, including `App.js`, `App.test.js`, `CurrencyConverter.js`, `index.css`, `index.js`, `logo.svg`, `reportWebVitals.js`, `setupTests.js`, `.gitignore`, `package-lock.json`, `package.json`, and `README.md`. The Search view shows the results of a search for `default` in `App.js`. The Run and Debug view shows the execution of the `default` function in `App.js`. The `App.js` file is open in the editor, showing the `default` function definition. The `CurrencyConverter.js` file is also open, showing the `render` function. The `App.css` file is open, showing the `body` style. The `index.js` file is open, showing the `ReactDOM.render` call. The `index.css` file is open, showing the `body` style. The `logo.svg` file is open, showing the `svg` element. The `reportWebVitals.js` file is open, showing the `reportWebVitals` function. The `setupTests.js` file is open, showing the `jest` configuration. The `.gitignore` file is open, showing the `node_modules` directory. The `package-lock.json` file is open, showing the `dependencies` section. The `package.json` file is open, showing the `scripts` section. The `README.md` file is open, showing the `README` content. The `App.js` file is open, showing the `default` function definition. The `CurrencyConverter.js` file is open, showing the `render` function. The `App.css` file is open, showing the `body` style. The `index.js` file is open, showing the `ReactDOM.render` call. The `index.css` file is open, showing the `body` style. The `logo.svg` file is open, showing the `svg` element. The `reportWebVitals.js` file is open, showing the `reportWebVitals` function. The `setupTests.js` file is open, showing the `jest` configuration. The `.gitignore` file is open, showing the `node_modules` directory. The `package-lock.json` file is open, showing the `dependencies` section. The `package.json` file is open, showing the `scripts` section. The `README.md` file is open, showing the `README` content.

```
src > JS CurrencyConverter.js > default
3 class CurrencyConverter extends Component {
30   render() {
31     return (
32       <div>
33         <table>
34           <tr>
35             <td>
36               <input
37                 type="text"
38                 value={this.state.currency}
39                 readOnly
40               />
41             </td>
42           </tr>
43           <tr>
44             <td></td>
45             <td>
46               <button onClick={this.handleSubmit}>
47                 Submit
48               </button>
49             </td>
50           </tr>
51         </table>
52       </div>
53     );
54   }
55 }
56 export default CurrencyConverter;
```

Visual Studio Code interface showing the Explorer, Search, and Run and Debug views. The Explorer view displays the file structure of the project, including `App.js`, `App.test.js`, `CurrencyConverter.js`, `index.css`, `index.js`, `logo.svg`, `reportWebVitals.js`, `setupTests.js`, `.gitignore`, `package-lock.json`, `package.json`, and `README.md`. The Search view shows the results of a search for `default` in `App.js`. The Run and Debug view shows the execution of the `default` function in `App.js`. The `App.js` file is open in the editor, showing the `default` function definition. The `CurrencyConverter.js` file is also open, showing the `render` function. The `App.css` file is open, showing the `body` style. The `index.js` file is open, showing the `ReactDOM.render` call. The `index.css` file is open, showing the `body` style. The `logo.svg` file is open, showing the `svg` element. The `reportWebVitals.js` file is open, showing the `reportWebVitals` function. The `setupTests.js` file is open, showing the `jest` configuration. The `.gitignore` file is open, showing the `node_modules` directory. The `package-lock.json` file is open, showing the `dependencies` section. The `package.json` file is open, showing the `scripts` section. The `README.md` file is open, showing the `README` content.

```
src > JS App.js > default
1 import React, { Component } from "react";
2 import "./App.css";
3 import CurrencyConverter from "./CurrencyConverter";
4
5 class App extends Component {
6   constructor(props) {
7     super(props);
8
9     this.state = {
10       count: 0,
11       message: ""
12     };
13   }
14
15   increment = () => {
16     this.setState({ count: this.state.count + 1 });
17   };
18
19   decrement = () => {
20     this.setState({ count: this.state.count - 1 });
21   };
22
23   sayHello = () => {
24     alert("Hello");
25   };
26
27   incrementValue = () => {
28     this.increment();
29     this.sayHello();
30   };
31 }
```

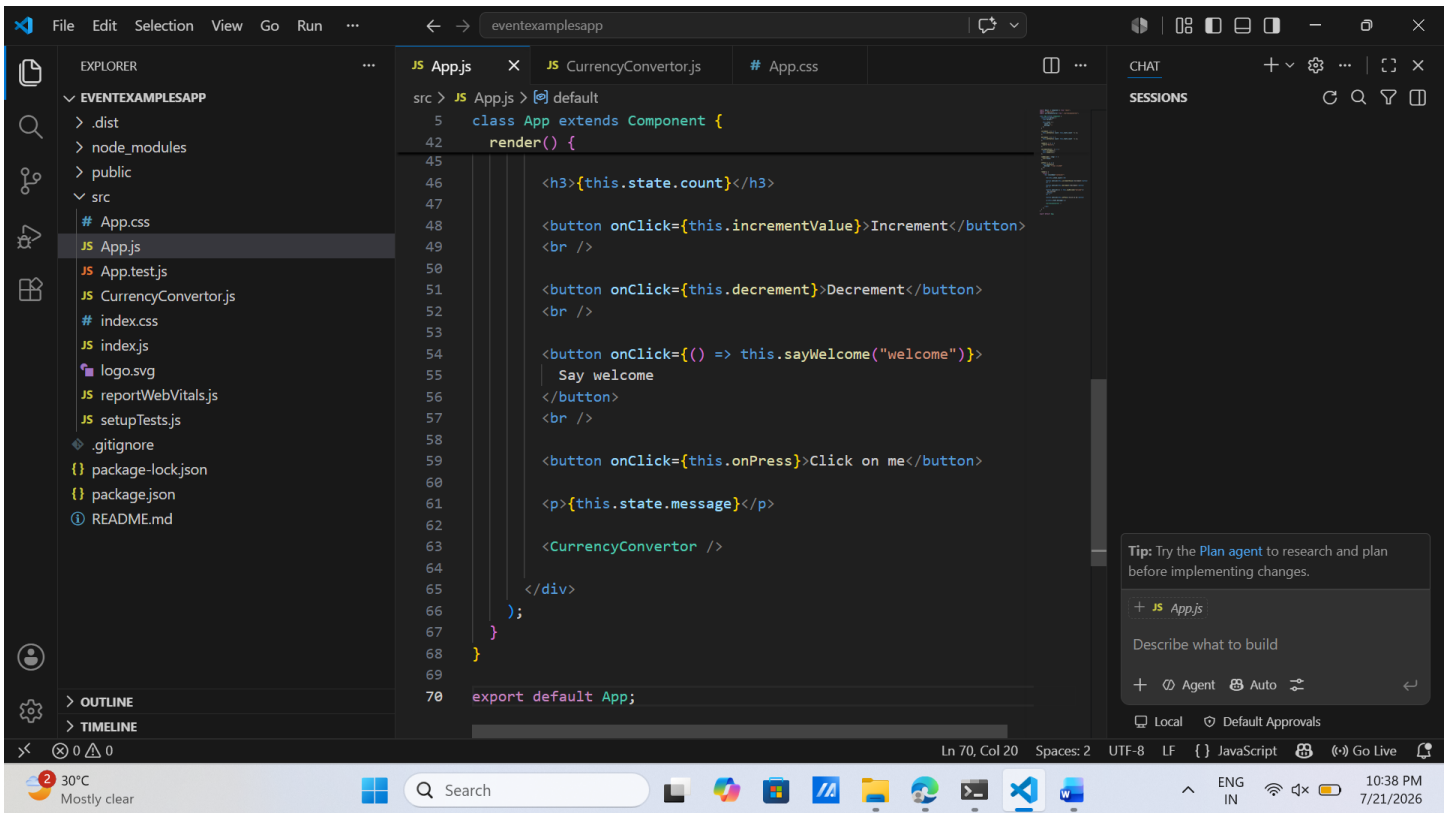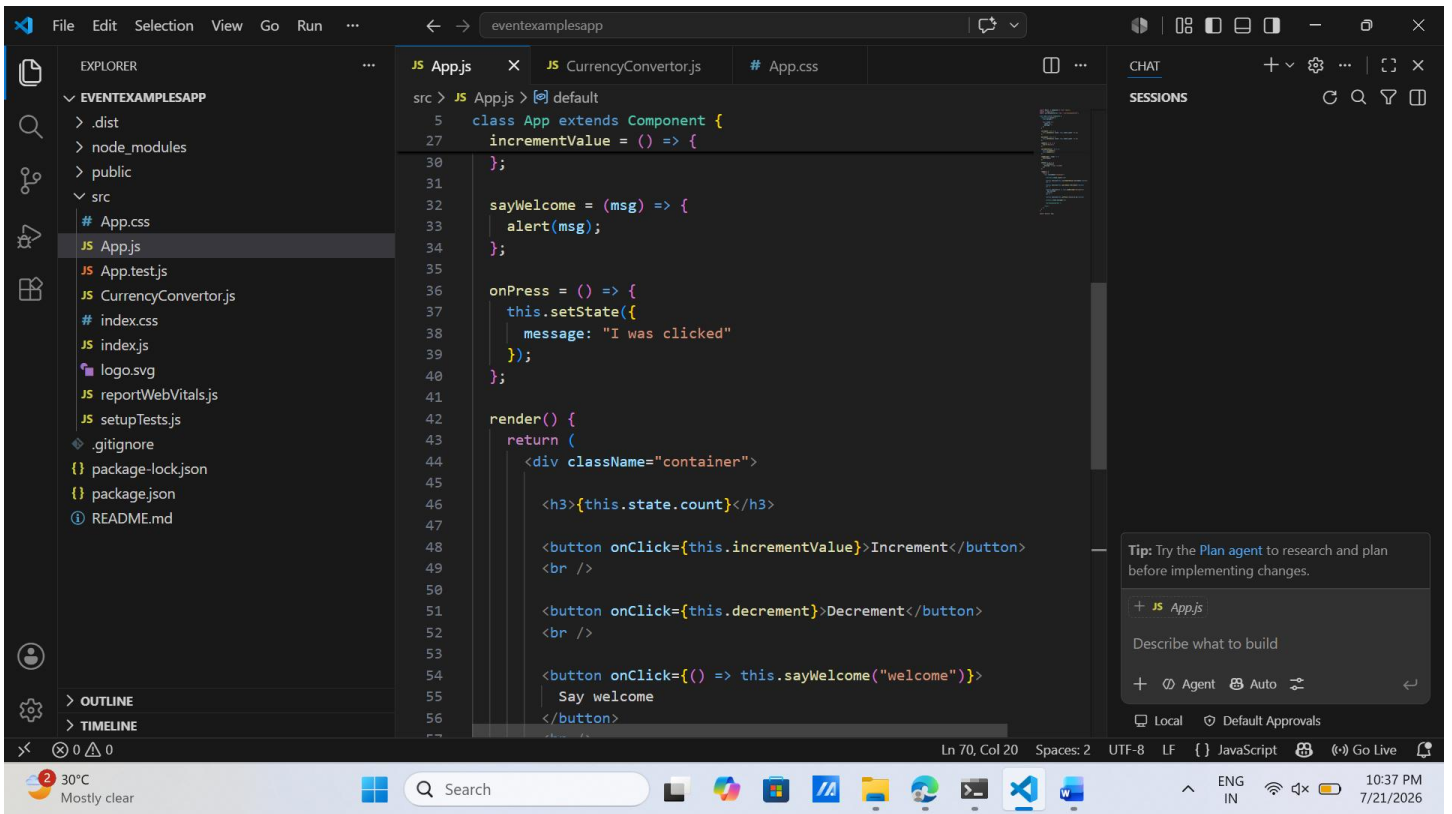

localhost:3000

1

Increment

Decrement

Say welcome

Click on me

localhost:3000 says
Hello

OK

Currency Converter!!!

Amount: 40

Currency: 0.44 Euro

Submit

2 30°C Mostly clear

Search

ENG IN 10:38 PM 7/21/2026

localhost:3000

0

Increment

Decrement

Say welcome

Click on me

Currency Converter!!!

Amount: 40


Currency: 0.44 Euro

Submit

2 30°C Mostly clear

Search

ENG IN 10:38 PM 7/21/2026

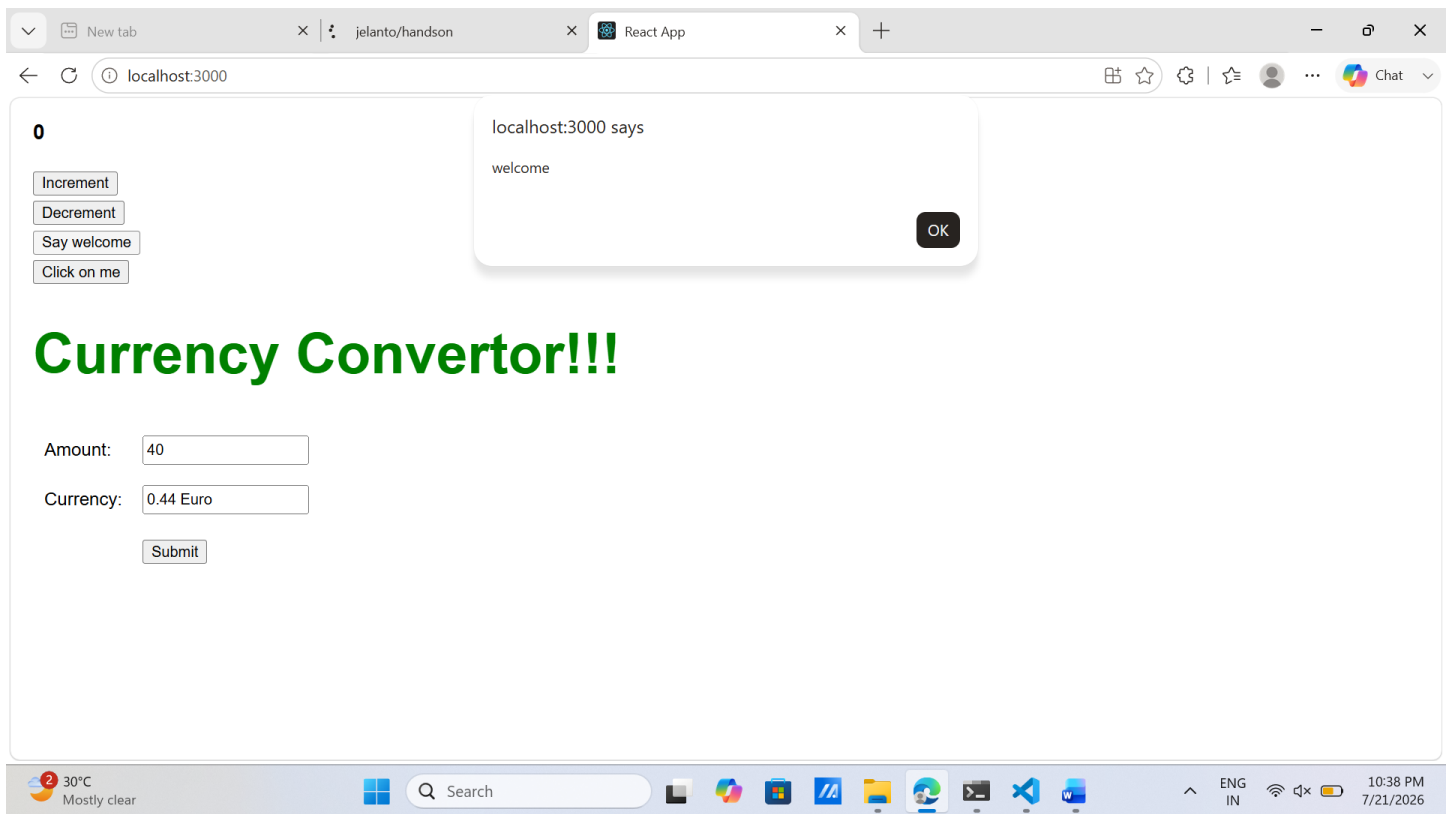

0

Increment

Decrement

Say welcome

Click on me

I was clicked

Currency Converter!!!

Amount:

Currency:

2 30°C Mostly clear

Search

ENG IN 10:39 PM 7/21/2026

0

Increment

Decrement

Say welcome

Click on me

I was clicked

Currency Converter!!!

Amount:

Currency:

2 30°C Mostly clear

Search

ENG IN 10:39 PM 7/21/2026