

```
Windows PowerShell
Microsoft Windows [Version 10.0.26200.8875]
(c) Microsoft Corporation. All rights reserved.

C:\Users\jelan>cd C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\9
C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\9>npx create-react-app cricketapp

Creating a new React app in C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\9\cricketapp.

Installing packages. This might take a couple of minutes.
Installing react, react-dom, and react-scripts with cra-template...

added 1296 packages in 2m

272 packages are looking for funding
  run `npm fund` for details

Installing template dependencies using npm...

added 17 packages, and removed 1 package in 9s

271 packages are looking for funding
  run `npm fund` for details
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts   core-js@3.49.0 (postinstall: node -e "try{require('./postinstall')}catch(e){}")
npm warn allow-scripts   core-js-pure@3.49.0 (postinstall: node -e "try{require('./postinstall')}catch(e){}")
npm warn allow-scripts
npm warn allow-scripts Run `npm approve-scripts --allow-scripts-pending` to review, or `npm approve-scripts <pkg>` to allow.
Removing template package using npm...

removed 1 package, and audited 1312 packages in 10s
```



```
Windows PowerShell
npm audit fix --force

Run 'npm audit' for details.
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts core-js@3.49.0 (postinstall: node -e "try{require('./postinstall')}catch(e){}")
npm warn allow-scripts core-js-pure@3.49.0 (postinstall: node -e "try{require('./postinstall')}catch(e){}")
npm warn allow-scripts
npm warn allow-scripts Run 'npm approve-scripts --allow-scripts-pending' to review, or 'npm approve-scripts <pkg>' to allow.

Success! Created cricketapp at C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\9\cricketapp
Inside that directory, you can run several commands:

  npm start
    Starts the development server.

  npm run build
    Bundles the app into static files for production.

  npm test
    Starts the test runner.

  npm run eject
    Removes this tool and copies build dependencies, configuration files
    and scripts into the app directory. If you do this, you can't go back!

We suggest that you begin by typing:

  cd cricketapp
  npm start

Happy hacking!

C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\9>cd cricketapp
```

```
Windows PowerShell

C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\9\cricketapp>code .

C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\9\cricketapp>npm start

> cricketapp@0.1.0 start
> react-scripts start

(node:12324) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
(Use 'node --trace-deprecation ...' to show where the warning was created)
(node:12324) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
Compiled successfully!

You can now view cricketapp in the browser.

  Local:            http://localhost:3000
  On Your Network:  http://192.168.0.221:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
Compiling...
Compiled successfully!

You can now view cricketapp in the browser.

  Local:            http://localhost:3000
  On Your Network:  http://192.168.0.221:3000
```

VS Code interface showing the file explorer on the left with the project structure for 'CRICKETAPP'. The main editor displays the code for 'ListofPlayers.js' in the 'src > components' directory. The code defines a function 'ListofPlayers()' that imports 'React' from 'react', creates a constant array 'players' with 10 player objects, filters them into 'lowScorePlayers' (score <= 70), and returns a JSX element. The JSX element contains a heading 'List of Players' and a list of players. The right sidebar shows the 'CHAT' panel with a 'SESSIONS' section and a 'Tip' to try the 'Plan agent'.

```
src > components > JS ListofPlayers.js > default
1  import React from "react";
2
3  function ListofPlayers() {
4
5      const players = [
6          { name: "Mr. Jack", score: 50 },
7          { name: "Mr. Michael", score: 70 },
8          { name: "Mr. John", score: 40 },
9          { name: "Mr. Ann", score: 61 },
10         { name: "Mr. Elisabeth", score: 61 },
11         { name: "Mr. Sachin", score: 95 },
12         { name: "Mr. Dhoni", score: 100 },
13         { name: "Mr. Virat", score: 84 },
14         { name: "Mr. Jadeja", score: 64 },
15         { name: "Mr. Raina", score: 75 },
16         { name: "Mr. Rohit", score: 80 }
17     ];
18
19     const lowScorePlayers = players.filter(player => player.score <= 70);
20
21     return (
22         <div>
23
24             <h1>List of Players</h1>
25
26             <ul>
27                 {players.map((player, index) => (
28                     <li key={index}>
29                         {player.name} {player.score}
30                     </li>
31                 ))}
32             </ul>
33         </div>
34     );
35 }
36
37 export default ListofPlayers;
```

Ln 50, Col 30 Spaces: 4 UTF-8 CRLF {} JavaScript Go Live

VS Code interface showing the file explorer on the left with the project structure for 'CRICKETAPP'. The main editor displays the code for 'ListofPlayers.js' in the 'src > components' directory. The code defines a function 'ListofPlayers()' that imports 'React' from 'react', creates a constant array 'players' with 10 player objects, filters them into 'lowScorePlayers' (score <= 70), and returns a JSX element. The JSX element contains a heading 'List of Players' and a list of players. The right sidebar shows the 'CHAT' panel with a 'SESSIONS' section and a 'Tip' to try the 'Plan agent'.

```
src > components > JS ListofPlayers.js > default
3  function ListofPlayers() {
24     <h1>List of Players</h1>
25
26     <ul>
27         {players.map((player, index) => (
28             <li key={index}>
29                 {player.name} {player.score}
30             </li>
31         ))}
32     </ul>
33
34     <hr />
35
36     <h1>List of Players having Scores Less than 70</h1>
37
38     <ul>
39         {lowScorePlayers.map((player, index) => (
40             <li key={index}>
41                 {player.name} {player.score}
42             </li>
43         ))}
44     </ul>
45
46     </div>
47 );
48 }
49
50 export default ListofPlayers;
```

Ln 50, Col 30 Spaces: 4 UTF-8 CRLF {} JavaScript Go Live

Visual Studio Code interface showing the file explorer on the left with the project structure for 'CRICKETAPP'. The main editor displays the code for 'IndianPlayers.js', which defines a function 'IndianPlayers()' that returns an array of player names. The right sidebar shows the 'CHAT' panel with a 'Plan agent' tip and a 'Describe what to build' prompt.


```
src > components > JS IndianPlayers.js > default
1  import React from "react";
2
3  function IndianPlayers() {
4
5      const players = [
6          "Virat",
7          "Rohit",
8          "Gill",
9          "Rahul",
10         "Hardik",
11         "Jadeja"
12     ];
13
14     const [odd1, even1, odd2, even2, odd3, even3] = players;
15
16     const T20players = [
17         "Virat",
18         "Rohit",
19         "Surya"
20     ];
21
22     const RanjiPlayers = [
23         "Pujara",
24         "Rahane",
25         "Iyer"
26     ];
27
28     const mergedPlayers = [...T20players, ...RanjiPlayers];
29
30     return (
31         <div>
32             <h2>Odd Team Players</h2>
33             <ul>
34                 <li>{odd1}</li>
35                 <li>{odd2}</li>
36                 <li>{odd3}</li>
37             </ul>
38             <h2>Even Team Players</h2>
39             <ul>
40                 <li>{even1}</li>
41                 <li>{even2}</li>
42                 <li>{even3}</li>
43             </ul>
44             <h2>Merged Players</h2>
45             <ul>
46                 {mergedPlayers.map((player, index) => (
47                     <li key={index}>{player}</li>
48                 ))}
49             </ul>
50         </div>
51     );
52 }
53
54 export default IndianPlayers;
```


Ln 58, Col 30 Spaces: 4 UTF-8 CRLF {} JavaScript Go Live

Visual Studio Code interface showing the file explorer on the left with the project structure for 'CRICKETAPP'. The main editor displays the code for 'IndianPlayers.js', which defines a function 'IndianPlayers()' that returns an array of player names. The right sidebar shows the 'CHAT' panel with a 'Plan agent' tip and a 'Describe what to build' prompt.

```
src > components > JS IndianPlayers.js > IndianPlayers
3  function IndianPlayers() {
4
5      const mergedPlayers = [...T20players, ...RanjiPlayers];
6
7      return (
8          <div>
9              <h2>Odd Team Players</h2>
10             <ul>
11                 <li>{odd1}</li>
12                 <li>{odd2}</li>
13                 <li>{odd3}</li>
14             </ul>
15             <h2>Even Team Players</h2>
16             <ul>
17                 <li>{even1}</li>
18                 <li>{even2}</li>
19                 <li>{even3}</li>
20             </ul>
21             <h2>Merged Players</h2>
22             <ul>
23                 {mergedPlayers.map((player, index) => (
24                     <li key={index}>{player}</li>
25                 ))}
26             </ul>
27         </div>
28     );
29 }
30
31 export default IndianPlayers;
```

Ln 38, Col 18 Spaces: 4 UTF-8 CRLF {} JavaScript Go Live

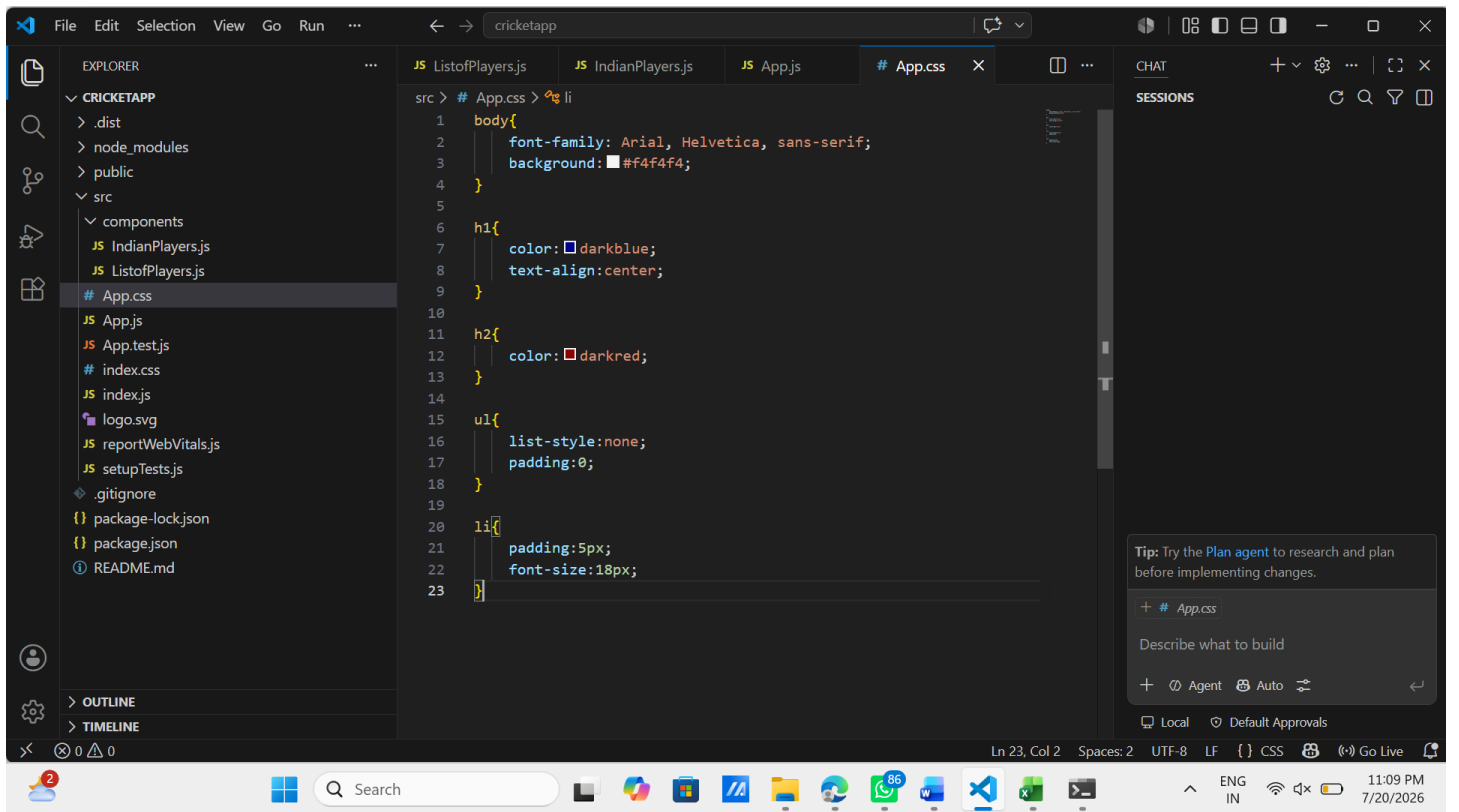

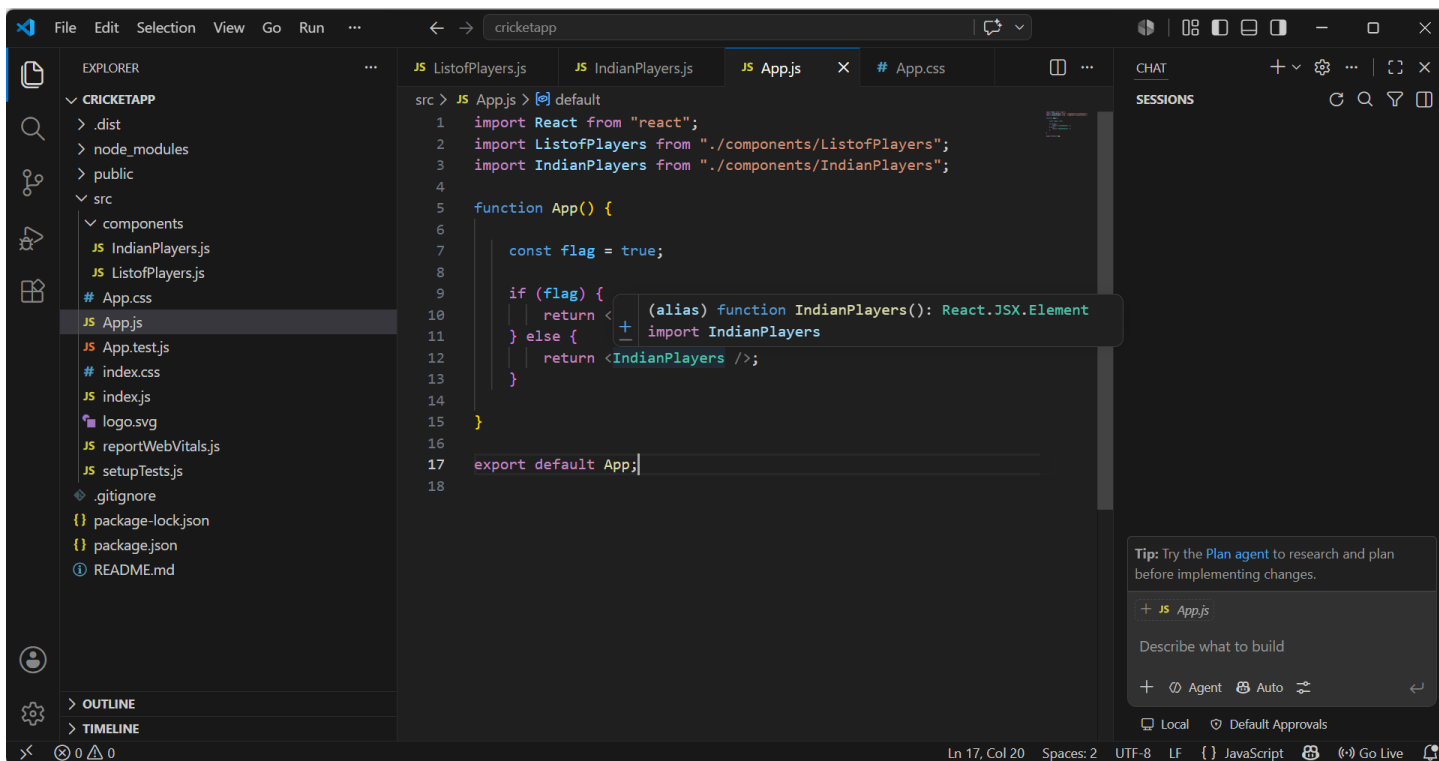

List of Players

- Mr. Jack 50
- Mr. Michael 70
- Mr. John 40
- Mr. Ann 61
- Mr. Elisabeth 61
- Mr. Sachin 95
- Mr. Dhoni 100
- Mr. Virat 84
- Mr. Jadeja 64
- Mr. Raina 75
- Mr. Rohit 80

List of Players having Scores Less than 70

- Mr. Jack 50
- Mr. Michael 70
- Mr. John 40
- Mr. Ann 61
- Mr. Elisabeth 61
- Mr. Jadeja 64



