

```
Command Prompt
Microsoft Windows [Version 10.0.26200.8875]
(c) Microsoft Corporation. All rights reserved.

C:\Users\jelan>npm create-react-app studentapp

Creating a new React app in C:\Users\jelan\studentapp.

Installing packages. This might take a couple of minutes.
Installing react, react-dom, and react-scripts with cra-template...

added 1300 packages in 2m

272 packages are looking for funding
  run 'npm fund' for details

Initialized a git repository.

Installing template dependencies using npm...

added 17 packages, and removed 1 package in 11s

271 packages are looking for funding
  run 'npm fund' for details
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts core-js@3.49.0 (postinstall: node -e "try{require('./postinstall')}catch(e){}")
npm warn allow-scripts core-js-pure@3.49.0 (postinstall: node -e "try{require('./postinstall')}catch(e){}")
npm warn allow-scripts Run 'npm approve-scripts --allow-scripts-pending' to review, or 'npm approve-scripts <pkg>' to allow.
Removing template package using npm...

removed 1 package, and audited 1316 packages in 10s
```

```
Command Prompt

Run 'npm audit' for details.
npm warn allow-scripts 2 packages have install scripts not yet covered by allowScripts:
npm warn allow-scripts core-js@3.49.0 (postinstall: node -e "try{require('./postinstall')}catch(e){}")
npm warn allow-scripts core-js-pure@3.49.0 (postinstall: node -e "try{require('./postinstall')}catch(e){}")
npm warn allow-scripts Run 'npm approve-scripts --allow-scripts-pending' to review, or 'npm approve-scripts <pkg>' to allow.

Created git commit.

Success! Created studentapp at C:\Users\jelan\studentapp
Inside that directory, you can run several commands:

  npm start
    Starts the development server.

  npm run build
    Bundles the app into static files for production.

  npm test
    Starts the test runner.



  npm run eject
    Removes this tool and copies build dependencies, configuration files
    and scripts into the app directory. If you do this, you can't go back!

We suggest that you begin by typing:

  cd studentapp
  npm start

Happy hacking!

C:\Users\jelan>
```

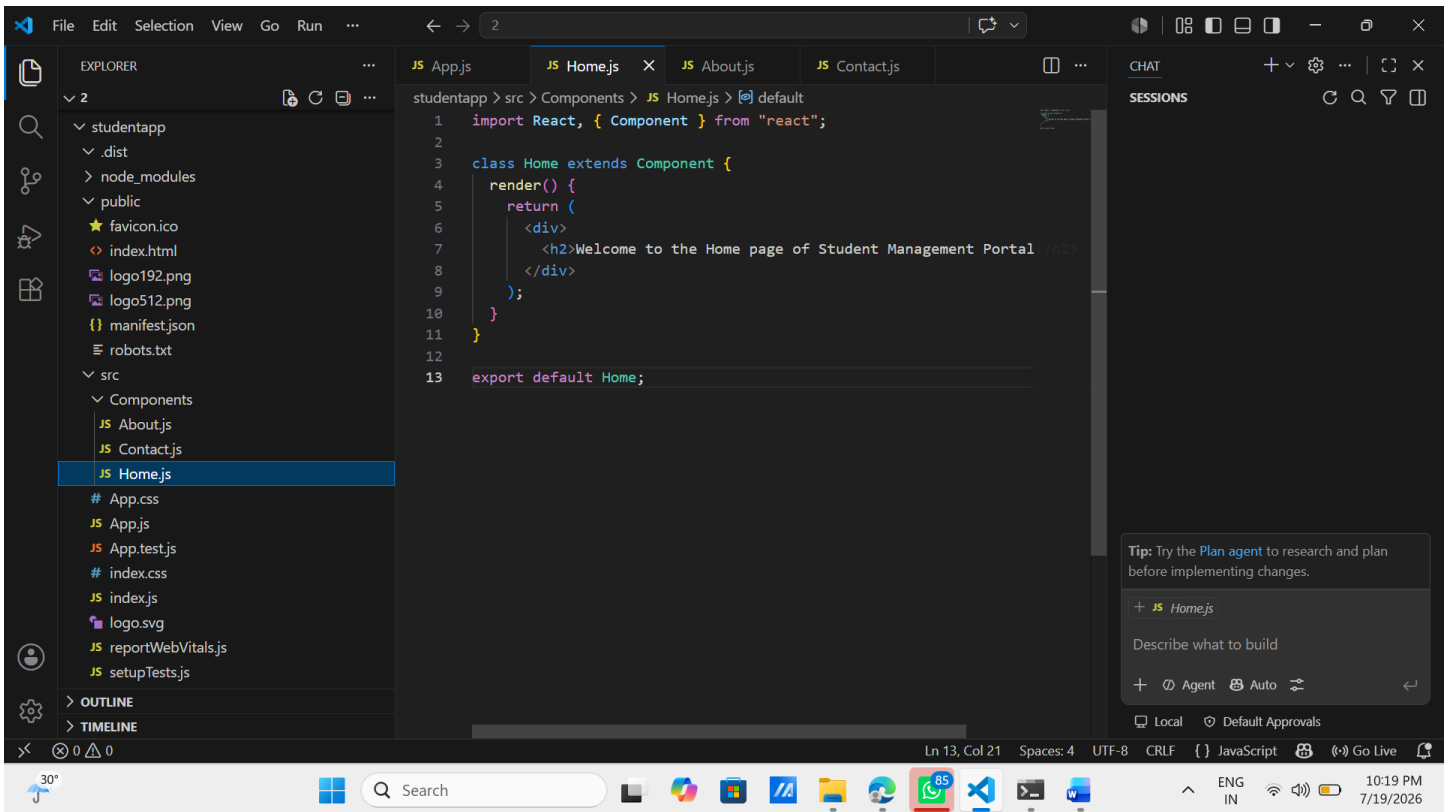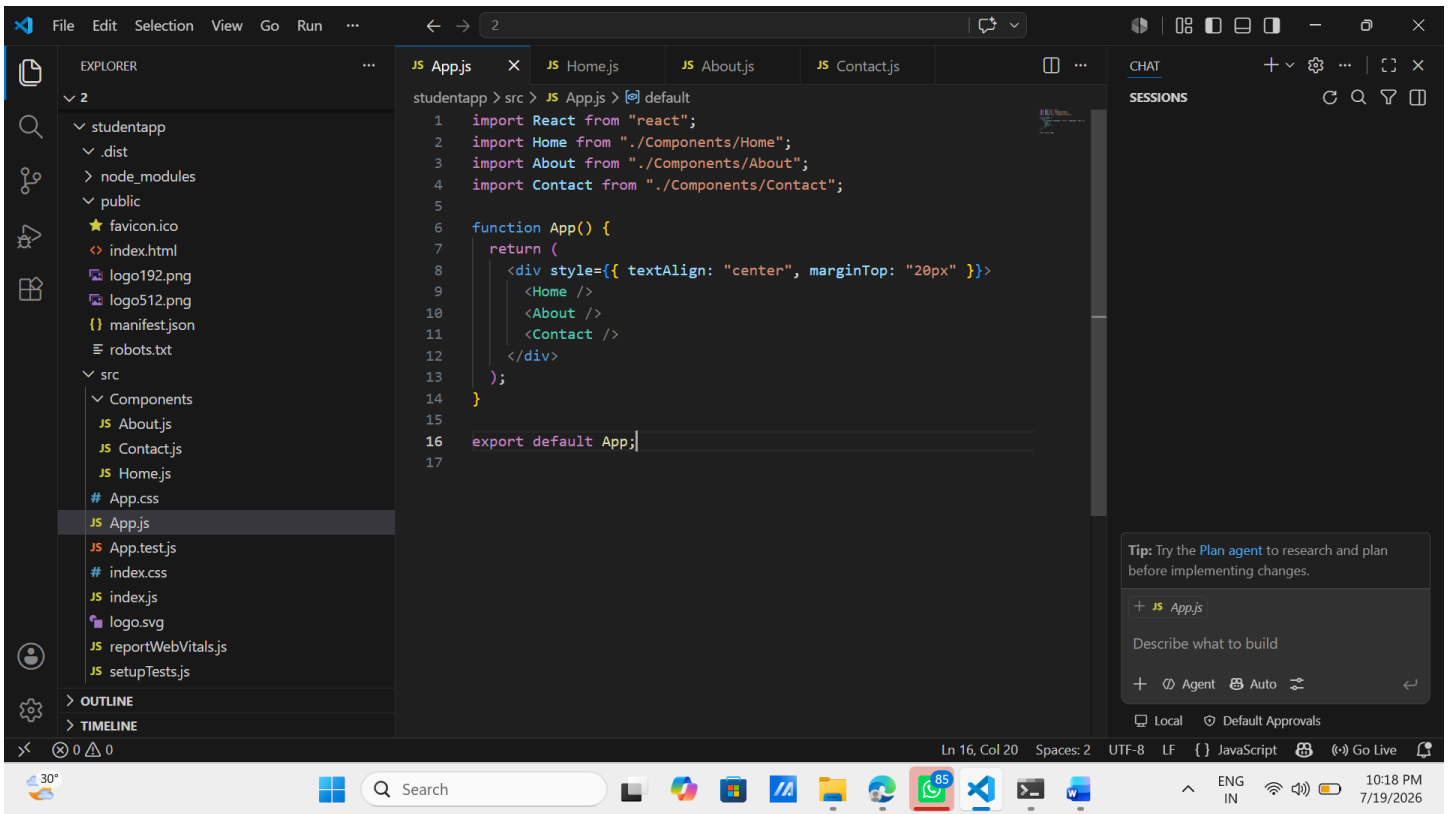

Visual Studio Code interface showing a project named 'studentapp'. The Explorer sidebar on the left displays the file structure, with 'JS Contactjs' selected under the 'Components' folder. The main editor window shows the code for 'Contactjs', which imports React and Component from 'react', defines a 'Contact' class extending 'Component', and renders a welcome message for the Contact page. The status bar at the bottom indicates 'Ln 13, Col 24'.

```
1 import React, { Component } from "react";
2
3
4 class Contact extends Component {
5   render() {
6     return (
7       <div>
8         <h2>Welcome to the Contact page of the Student Management Portal
9       </div>
10    );
11  }
12
13  export default Contact;
```

CHAT

SESSIONS

Tip: Try the [Plan agent](#) to research and plan before implementing changes.

+ JS Contactjs

Describe what to build

+ Agent Auto

Local Default Approvals

30° Search

Ln 13, Col 24 Spaces: 4 UTF-8 CRLF {} JavaScript Go Live

Visual Studio Code interface showing the same project, but with 'JS Aboutjs' selected in the Explorer sidebar. The main editor window shows the code for 'Aboutjs', which imports React and Component from 'react', defines an 'About' class extending 'Component', and renders a welcome message for the About page. The status bar at the bottom indicates 'Ln 1, Col 1'.

```
1 import React, { Component } from "react";
2
3
4 class About extends Component {
5   render() {
6     return (
7       <div>
8         <h2>Welcome to the About page of the Student Management Portal
9       </div>
10    );
11  }
12
13  export default About;
```

CHAT

SESSIONS

Tip: Try the [Plan agent](#) to research and plan before implementing changes.

+ JS Aboutjs

Describe what to build

+ Agent Auto

Local Default Approvals

30° Search

Ln 1, Col 1 Spaces: 4 UTF-8 CRLF {} JavaScript Go Live

```
Windows PowerShell
Microsoft Windows [Version 10.0.26200.8875]
(c) Microsoft Corporation. All rights reserved.

C:\Users\jelan>cd "C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\2\studentapp"

C:\Users\jelan\OneDrive\DN-Java-FSE-Solutions\week 5\2\studentapp>npm start

> studentapp@0.1.0 start
> react-scripts start

(node:20016) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
(Use 'node --trace-deprecation ...' to show where the warning was created)
(node:20016) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
Compiled successfully!

You can now view studentapp in the browser.

  Local:            http://localhost:3000
  On Your Network:  http://192.168.0.221:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
```

