



Instalirati NodeJS <https://nodejs.org/en/download>

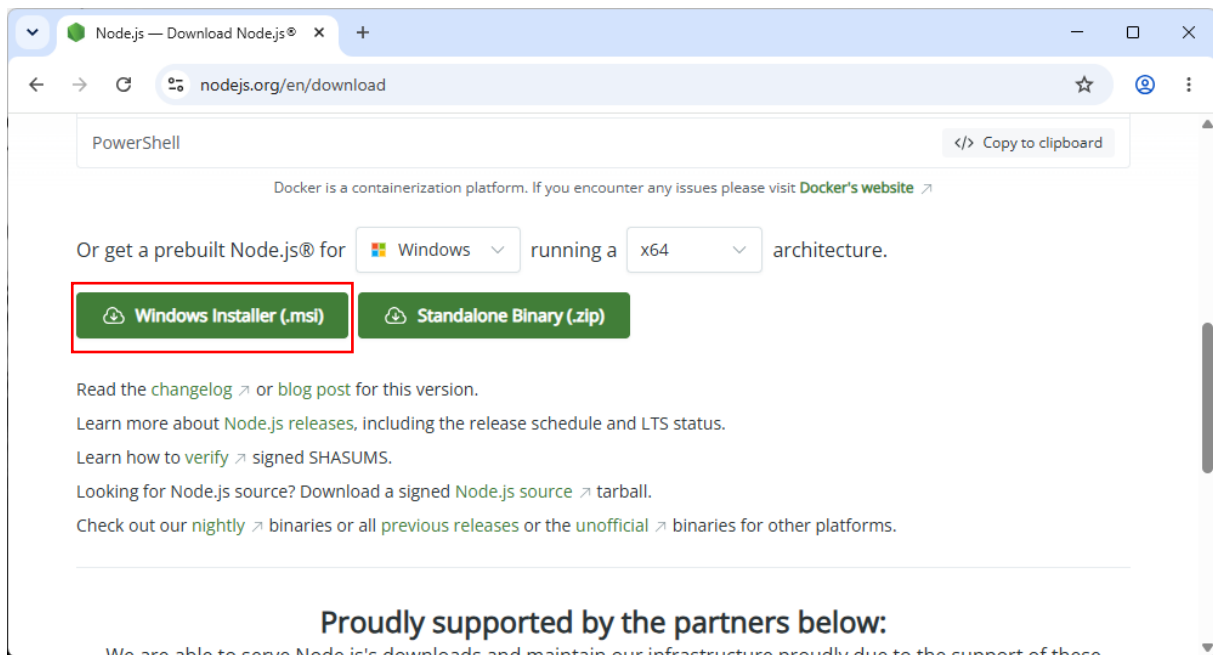

Ostaviti sve opcije kako su postavljene, Next, next, Next 😊

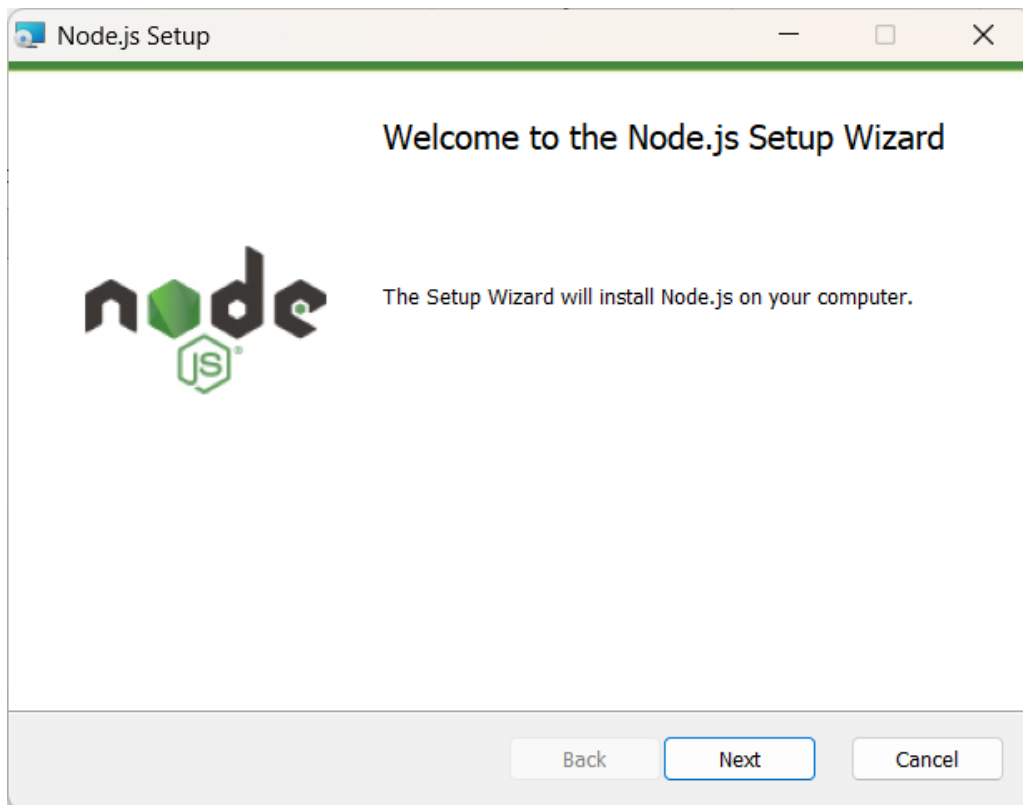

Provjera instalirane verzije

```
Command Prompt
Microsoft Windows [Version 10.0.26200.9278]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Korisnik>node -v
v24.21.0

C:\Users\Korisnik>npm -v
11.19.0

C:\Users\Korisnik>
```

Pozicionirano se na naš **UcenjeFDX/04_React** direktorij na github repozitoriju i kreiramo Vite + ReactJS aplikaciju prema koracima na slici


X označava grupu

```
Command Prompt
C:\Users\Korisnik\Documents\Github\UcenjeFD3\04_REACT>npm create vite@latest
npm notice run npx
npm notice run create-vite
|
| Project name:
| HelloReact
|
| Package name:
| helloreact
|
| Select a framework:
| React
|
| Select a variant:
| JavaScript
|
| Which linter to use?
| ESLint
|
| Install with npm and start now?
| No
|
| Scaffold project in C:\Users\Korisnik\Documents\Github\UcenjeFD3\04_REACT\HelloReact...
|
- Done. Now run:


cd HelloReact
npm install
npm run dev

C:\Users\Korisnik\Documents\Github\UcenjeFD3\04_REACT>
```


Otvorite VSC te u izborniku File idete na open folder

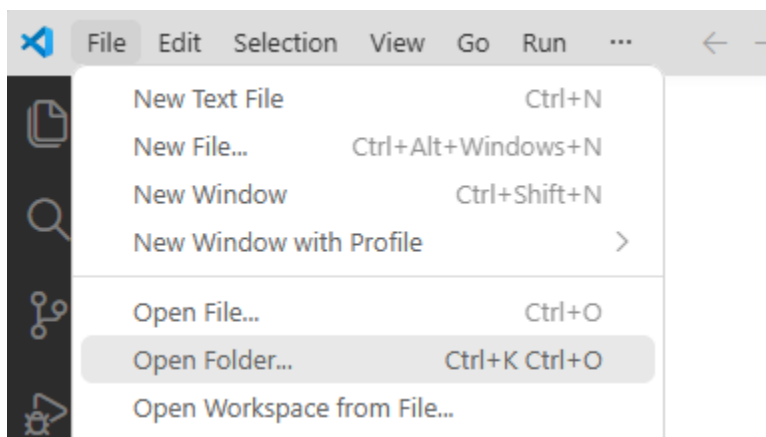


Te otvorimo kreiranu Frontend aplikaciju

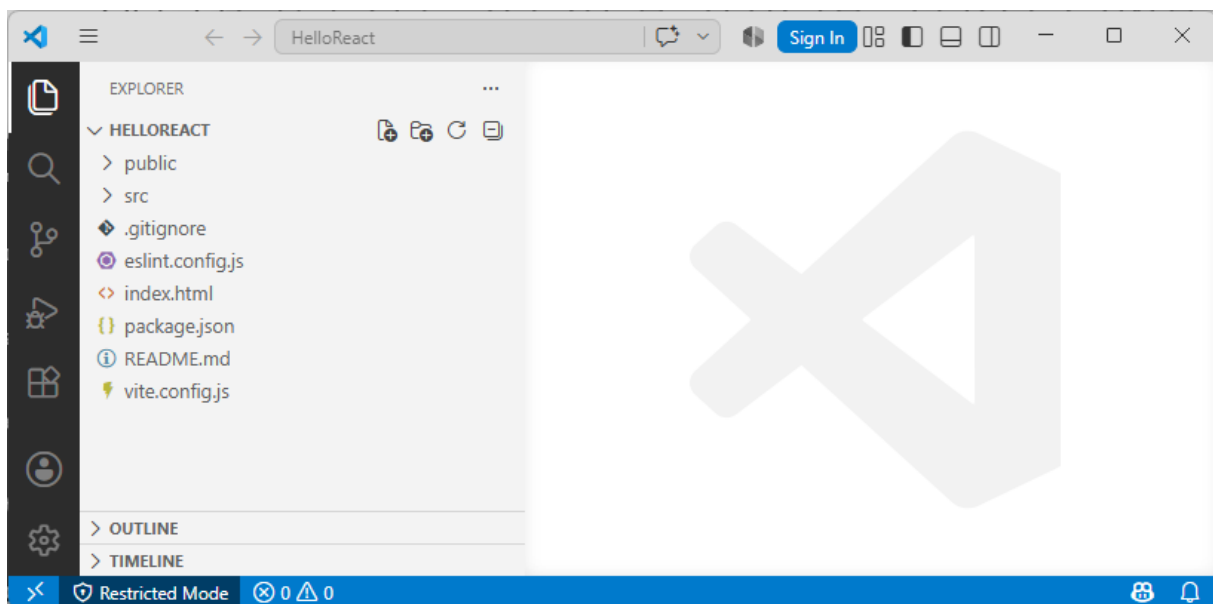


Kako bi instalirali potrebne zavisnosti za našu Frontend aplikaciju u izborniku odaberemo Terminal > New Terminal

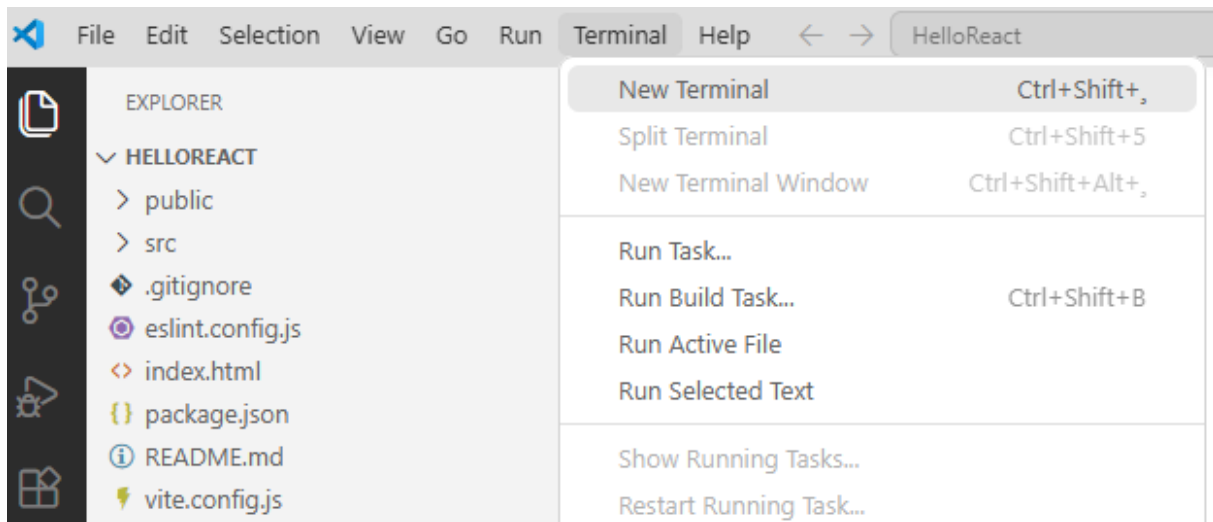


Kažemo da vjerujemo direktoriju (ako pita)

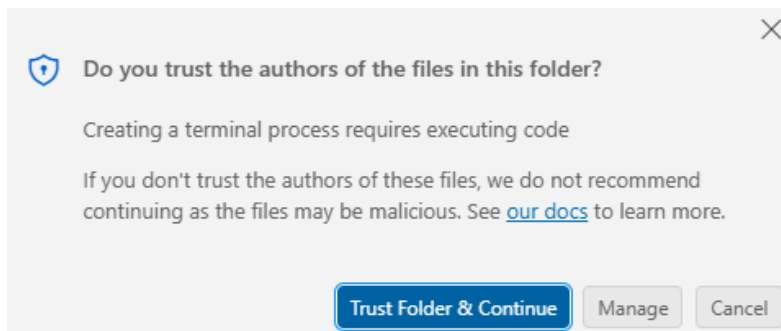


Pripazimo da je terminal Command Prompt (cmd) a ne powershell! Ako nije cmd idemo na strelicu prema dolje kod + znaka i odaberemo cmd

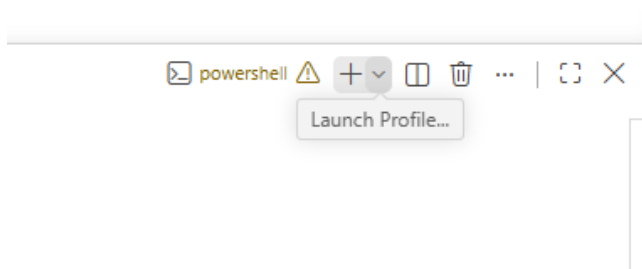

Powershell možemo obrisati

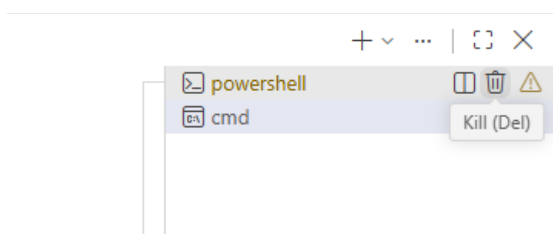

Prvi puta izvedeno **npm i** -> i znači install (može se napisati i install)

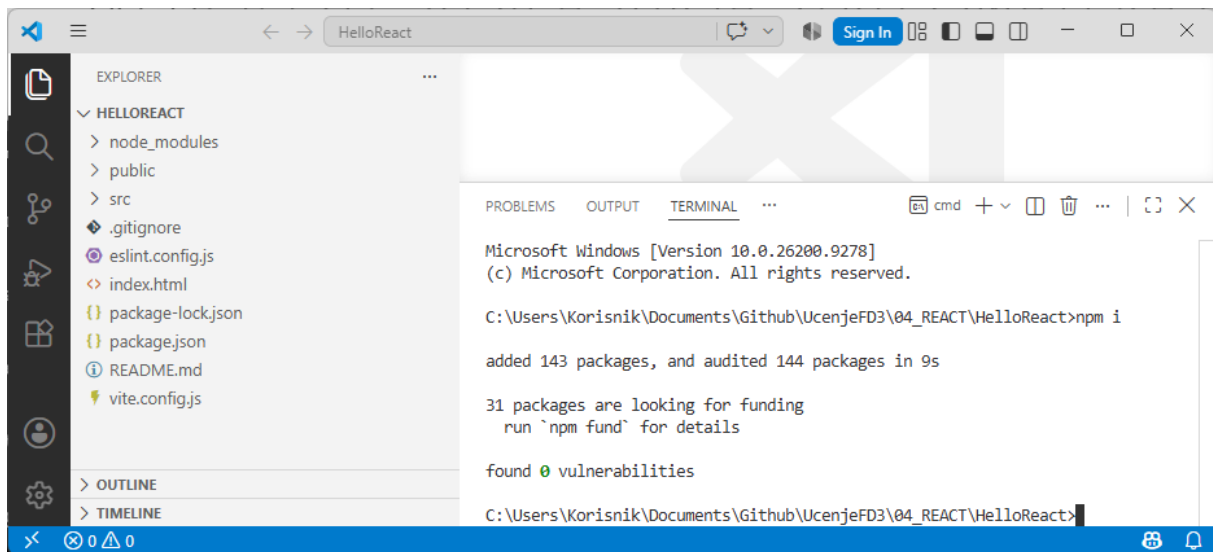

The screenshot shows the Visual Studio Code interface with a project named 'HelloReact'. The Explorer sidebar on the left lists files: node_modules, public, src, .gitignore, eslint.config.js, index.html, package-lock.json, package.json, README.md, and vite.config.js. The Terminal panel at the bottom shows the command prompt output for running 'npm i'.

```
Microsoft Windows [Version 10.0.26200.9278]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Korisnik\Documents\Github\UcenjeFD3\04_REACT\HelloReact>npm i


added 143 packages, and audited 144 packages in 9s

31 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities

C:\Users\Korisnik\Documents\Github\UcenjeFD3\04_REACT\HelloReact>
```

Kako bi pokrenuli aplikaciju u istom terminalu izvedemo **npm run dev**

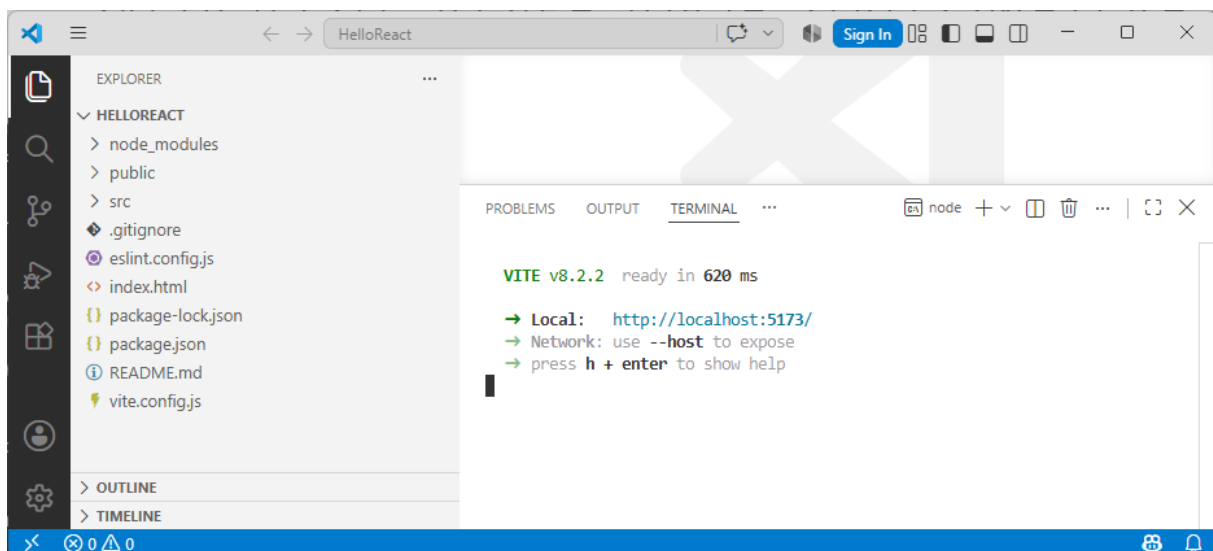

The screenshot shows the same VS Code interface as before, but the terminal now displays the output of 'npm run dev'. The application is running on localhost:5173.


```
VITE v8.2.2 ready in 620 ms

→ Local: http://localhost:5173/
→ Network: use --host to expose
→ press h + enter to show help
```

Kopiramo poveznicu <http://localhost:5173> u preglednik

5173 je broj porta i može biti različiti!

Naša aplikacija je sada dostupna na dobivenoj poveznici

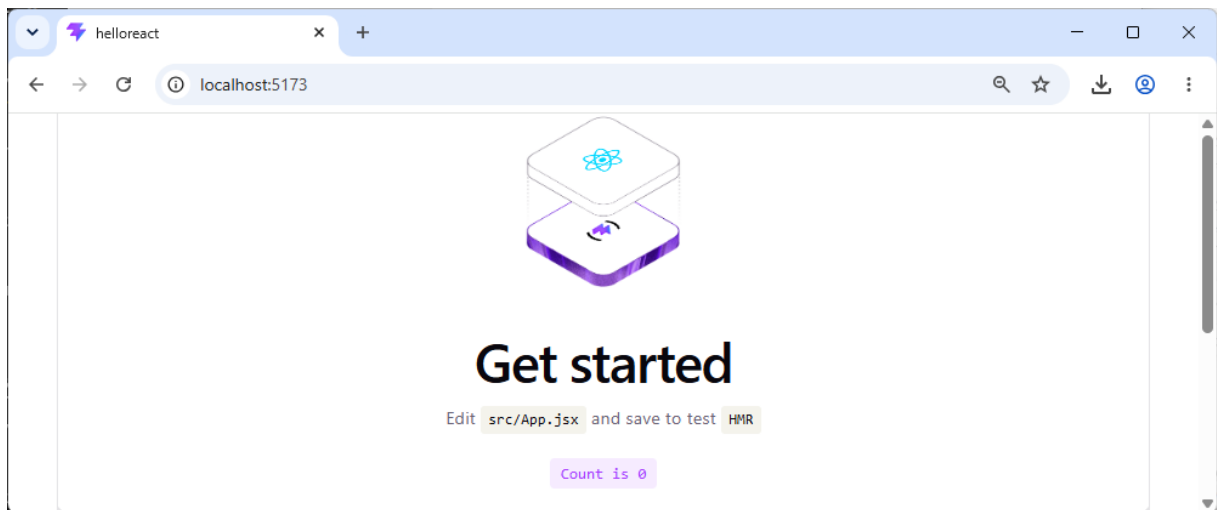

Prekinemo izvođenje aplikacije s CTRL+C u terminalu

