


# Interpretable Machine Learning

## Methods & Discussion of CEs

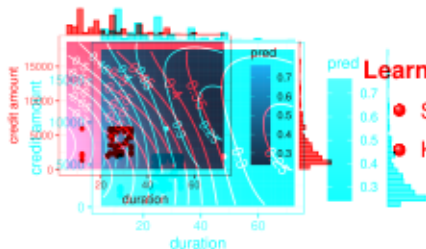

### Learning goals


#### Learning goals

- See two strategies to generate CEs
- See two strategies to generate CEs
- Know problems and limitations of CEs
- Know problems and limitations of CEs

# OVERVIEW OF METHODS

Currently, multiple methods exist to calculate counterfactuals. They mainly differ in:


- **Targets:** Most methods focus on classification models, only few cover regression models
- **Targets:** Most methods focus on classification models, only few cover regression models
- **So far, all methods remain in the supervised learning paradigm**  
~> so far, all methods remain in the supervised learning paradigm



# OVERVIEW OF METHODS

Currently, multiple methods exist to calculate counterfactuals. They mainly differ in:


- **Targets:** Most methods focus on classification models, only few cover regression models
- **Targets:** Most methods focus on classification models, only few cover regression models
  - ~ so far, all methods remain in the supervised learning paradigm
- **Data:** Methods mainly focus on tabular data, few on visual/text data, none on audio data



# OVERVIEW OF METHODS

Currently, multiple methods exist to calculate counterfactuals. They mainly differ in:


- **Targets:** Most methods focus on classification models, only few cover regression models
- **Data:** Methods mainly focus on tabular data, few on visual/text data, none on audio data
- **Feature space:** Some methods can only handle numerical features, few can process mixed (numerical and discrete) feature spaces
- **Feature space:** Some methods can only handle numerical features, few can process mixed (numerical and discrete) feature spaces



# OVERVIEW OF METHODS

Currently, multiple methods exist to calculate counterfactuals. They mainly differ in:


- **Targets:** Most methods focus on classification models, only few cover regression models
- **Data:** Methods mainly focus on tabular data, few on visual/text data, none on audio data
- **Feature space:** Some methods can only handle numerical features, few can process mixed (numerical and discrete) feature spaces
- **Objectives:** Many methods focus on action guidance, plausibility and sparsity, few on other objectives like fairness or individual preferences



# OVERVIEW OF METHODS

Currently, multiple methods exist to calculate counterfactuals. They mainly differ in:


- **Targets:** Most methods focus on classification models, only few cover regression models
- **Data:** Methods mainly focus on tabular data, few on visual/text data, none on audio data
- **Feature space:** Some methods can only handle numerical features, few can process mixed (numerical and discrete) feature spaces
- **Objectives:** Many methods focus on action guidance, plausibility and sparsity, few on other objectives like fairness or individual preferences
- **Model access:** Methods either require access to complete model internals, access to gradients, or only to prediction functions  $\Rightarrow$  Model-agnostic and model-specific methods exist



# OVERVIEW OF METHODS

Currently, multiple methods exist to calculate counterfactuals. They mainly differ in:

- **Targets:** Most methods focus on classification models, only few cover regression models
- **Data:** Methods mainly focus on tabular data, few on visual/text data, none on audio data
- **Feature space:** Some methods can only handle numerical features, few can process mixed (numerical and discrete) feature spaces
- **Objectives:** Many methods focus on action guidance, plausibility and sparsity, few on other objectives like fairness or individual preferences
- **Model access:** Methods either require access to complete model internals, access to gradients, or only to prediction functions  $\Rightarrow$  Model-agnostic and model-specific methods exist
- **Optimization tool:** Gradient-based algorithms (only for differentiable models), mixed-integer programming (only linear), or gradient-free algorithms e.g. Nelder-Mead, genetic algorithm



# OVERVIEW OF METHODS



Currently, multiple methods exist to calculate counterfactuals. They mainly differ in:

- **Targets:** Most methods focus on classification models, only few cover regression models  
→ so far, all methods remain in the supervised learning paradigm
- **Data:** Methods mainly focus on tabular data, few on visual/text data, none on audio data
- **Feature space:** Some methods can only handle numerical features, few can process mixed (numerical and discrete) feature spaces
- **Objectives:** Many methods focus on action guidance, plausibility and sparsity, few on other objectives like fairness or individual preferences
- **Model access:** Methods either require access to complete model internals, access to gradients, or only to prediction functions → Model-agnostic and model-specific methods exist
- **Optimization tool:** Gradient-based algorithms (only for differentiable models), mixed-integer programming (only linear), or gradient-free algorithms e.g. Nelder-Mead, genetic algorithm
- **Rashomon Effect:** Many methods return a single counterfactual per run, some multiple counterfactuals, others prioritize CEs or let the user choose
- **Rashomon Effect:** Many methods return a single counterfactual per run, some multiple counterfactuals, others prioritize CEs or let the user choose





Introduced counterfactual explanations in the context of ML predictions by solving

$$\arg \min_{\mathbf{x}'} \max_{\lambda} \underbrace{\lambda (\hat{f}(\mathbf{x}') - y')^2}_{o_p(\hat{f}(\mathbf{x}'), y')} + \underbrace{\sum_{j=1}^p y_j |x_j'| + x_j|}_{o_f(\mathbf{x}', \mathbf{x})} \underbrace{+ \sum_{j=1}^p |\hat{f}(\mathbf{x}') - y_j|}_{o_r(\mathbf{x}', \mathbf{x})} \underbrace{MAD_j}_{o_r(\mathbf{x}', \mathbf{x})} \quad (1)$$

$MAD_j$  is the median absolute deviation of feature  $j$ . In each iteration, optimizers like Nelder-Mead solve the equation for  $\mathbf{x}'$  and then  $\lambda$  is increased until a sufficiently close solution is found

This optimization problem has several shortcomings:

This optimization problem has several shortcomings:

- We do not know how to choose  $\lambda$  a priori
- Due to the maximization of  $\lambda$ , we focus primarily on the minimization of  $o_p$
- Due to the maximization of  $\lambda$ , we focus primarily on the minimization of  $o_p$ 
  - $\rightsquigarrow$  only if  $\hat{f}(\mathbf{x}') = y'$ , we focus on minimizing  $o_f$
  - $\rightsquigarrow$  only if  $\hat{f}(\mathbf{x}') = y'$ , we focus on minimizing  $o_r$
- Definition of  $o_f$  only covers numerical features
- Definition of  $o_r$  only covers numerical features
- Other objectives such as sparsity and plausibility of counterfactuals are neglected
- Other objectives such as sparsity and plausibility of counterfactuals are neglected

# MULTI-OBJECTIVE COUNTERFACTUAL EXPLANATIONS

► Dandl et al. (2020)


► Dandl et al. (2020)





- **Multi-Objective Counterfactual Explanations (MOC):** Instead of collapsing objectives into a single objective, we could optimize all four objectives simultaneously
- **Multi-Objective Counterfactual Explanations (MOC):** Instead of collapsing objectives into a single objective, we could optimize all four objectives simultaneously
$$\arg \min_{\mathbf{x}'} \left( o_p(\hat{f}(\mathbf{x}'), y'), o_f(\mathbf{x}', \mathbf{x}), o_s(\mathbf{x}', \mathbf{x}), o_d(\mathbf{x}', \mathbf{X}) \right).$$
- Note that weighting parameters like  $\lambda$  are not necessary anymore
- Uses an adjusted multi-objective genetic algorithm (NSGA-II) to produce a set of diverse counterfactuals for mixed discrete and continuous feature spaces
- Note that weighting parameters like  $\lambda$  are not necessary anymore
- Instead of one, MOC returns multiple counterfactuals that represents different trade-offs between the objectives and are constructed to be diverse in feature space
- Instead of one, MOC returns multiple counterfactuals that represents different trade-offs between the objectives and are constructed to be diverse in feature space

## EXAMPLE: CREDIT DATA


- Model: SVM with RBF kernel
- First data point of credit data with  $P(y = \text{good}) = 0.34$  of being a "good" customer
  - Goal: increase the probability to  $[0.5, 1]$
- Goal: Increase the probability to  $[0.5, 1]$
- MOC (with default parameters) found 69 CEs after 200 iterations that met the target
- MOC (with default parameters) found 69 CEs after 200 iterations that met the target
  - All counterfactuals proposed changes to credit duration and many of them to credit amount
- All counterfactuals proposed changes to credit duration and many of them to credit amount




- We can visualize feature changes with a parallel plot and 2-dim surface plot
- Parallel plot reveals that all counterfactuals had values equal to or smaller than the values of  $x$

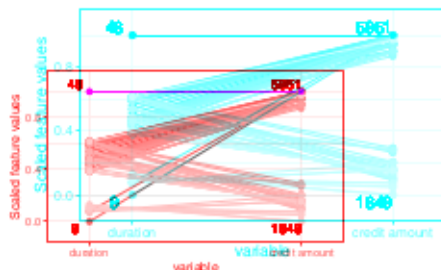

Parallel plot: Grey lines show feature values of CEs  $x'$ , blue line are values of  $x$ . Features without proposed changes are omitted.  $x'$ , blue line are values of  $x$ . Features without proposed changes are omitted. Bold numbers refer to range of numeric features.



- We can visualize feature changes with a parallel plot and 2-dim surface plot
- Parallel plot reveals that all counterfactuals had values equal to or smaller than the values of  $x$
- Surface plot illustrates why these feature changes are recommended
- Surface plot illustrates why these feature changes are recommended
- Counterfactuals in the lower left corner seem to be in a less favorable region far from  $x$ , but
- Counterfactuals in the lower left corner seem to be in a less favorable region far from  $x$ , but they are in high density areas close to training samples (indicated by histograms)

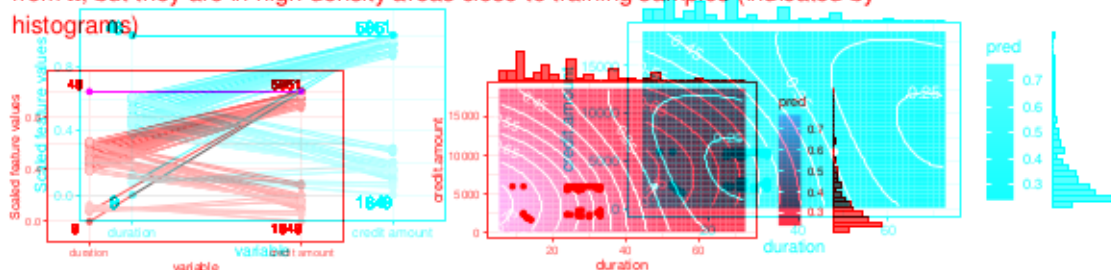


**Parallel plot:** Grey lines show feature values of CEs  $x'$ . Blue line are values of  $x$ . Features without proposed changes are omitted.  $x'$ , blue line are values of  $x$ . Features without proposed changes are omitted. Bold numbers refer to range of numeric features.

**Surface plot:** White dot is  $x$ , black dots are CEs  $x'$ . Histograms show marginal distribution of training data X.


## PROBLEMS, PITFALLS, & LIMITATIONS

- **Illusion of model understanding:** CEs explain ML decisions by pointing to few specific alternatives which reduces complexity, but is limited in explanatory power
- ~ Psychologists have shown that although perceived model understanding of end-users increases, the objective model understanding remains unchanged




# PROBLEMS, PITFALLS, & LIMITATIONS

- **Illusion of model understanding:** CEs explain ML decisions by pointing to few specific alternatives which reduces complexity, but is limited in explanatory power  
Psychologists have shown that although perceived model understanding of end-users increases, the objective model understanding remains unchanged  
~ Psychologists have shown that although perceived model understanding of end-users increases, the objective model understanding remains unchanged
- **Right metric:** Similarity measures are crucial to find good CEs (depends on context/domain)  
~ e.g.,  $L_1$  can be reasonable for tabular data but not for image data  
~ sparsity can be desirable for end-users but not for data scientists searching for model bias




# PROBLEMS, PITFALLS, & LIMITATIONS



- **Illusion of model understanding:** CEs explain ML decisions by pointing to few specific alternatives which reduces complexity, but is limited in explanatory power
  - ~ Psychologists have shown that although perceived model understanding of end-users increases, the objective model understanding remains unchanged
- **Right metric:** Similarity measures are crucial to find good CEs (depends on context/domain)
  - ~ e.g.,  $L_1$  can be reasonable for tabular data but not for image data
- **Confusing Model and Real-World:** Model explanations are not easily transferable to reality
  - ~ sparsity can be desirable for end-users but not for data scientists searching for model bias
  - ~ End-users need to be aware that CE provide insights into a model not the real world
- **Confusing Model and Real-World:** Model explanations are not easily transferable to reality
  - ~ End-users need to be aware that CE provide insights into a model not the real world




# PROBLEMS, PITFALLS, & LIMITATIONS



- **Illusion of model understanding:** CEs explain ML decisions by pointing to few specific alternatives which reduces complexity, but is limited in explanatory power
  - ~ Psychologists have shown that although perceived model understanding of end-users increases, the objective model understanding remains unchanged
- **Right metric:** Similarity measures are crucial to find good CEs (depends on context/domain)
  - ~ e.g.,  $L_1$  can be reasonable for tabular data but not for image data
- **Confusing Model and Real-World:** Model explanations are not easily transferable to reality
  - ~ sparsity can be desirable for end-users but not for data scientists searching for model bias
  - ~ End-users need to be aware that CE provide insights into a model not the real world
- **Disclosing too much information:**
  - **Confusing Model and Real-World:** Model explanations are not easily transferable to reality
    - ~ End-users need to be aware that CE provide insights into a model not the real world
  - **Disclosing too much information:** CEs can reveal too much information about the model and help potential attackers

# PROBLEMS, PITFALLS, & LIMITATIONS

- **Rashomon effect:** One, few, all? Which CE should be shown to the end user?
  - ~ No perfect solution, depends on end users computational resources and knowledge



# PROBLEMS, PITFALLS, & LIMITATIONS

- **Rashomon effect:** One, few, all? Which CEs should be shown to the end user?
  - ~ No perfect solution, depends on end users computational resources and knowledge
- **Actionability vs. fairness:** Some authors suggest to focus only on the actionability of CEs
- **Actionability vs. fairness:** Some authors suggest to focus only on the actionability of CEs
  - ~ Counteract contestability, e.g., if ethnicity is not changed in a CE since it is not actionable, this could hide racial biases in the model



# PROBLEMS, PITFALLS, & LIMITATIONS

- **Rashomon effect:** One, few, all? Which CEs should be shown to the end user?
  - ~ No perfect solution, depends on end users computational resources and knowledge
- **Actionability vs. fairness:** Some authors suggest to focus only on the actionability of CEs
- **Actionability vs. fairness:** Some authors suggest to focus only on the actionability of CEs
  - ~ Counteract contestability, e.g., if ethnicity is not changed in a CE since it is not actionable, this could hide racial biases in the model
- **Assumption of constant model:** To provide guidance for the future, CEs assume that their underlying model does not change in the future
- **Assumption of constant model:** To provide guidance for the future, CEs assume that their underlying model does not change in the future
  - ~ in reality this assumption is often violated and CEs are not reliable anymore



# PROBLEMS, PITFALLS, & LIMITATIONS



- **Rashomon effect:** One, few, all? Which CE should be shown to the end user?
  - ~ No perfect solution, depends on end users computational resources and knowledge
- **Actionability vs. fairness:** Some authors suggest to focus only on the actionability of CEs
- **Actionability vs. fairness:** Some authors suggest to focus only on the fairness of CEs since it is not actionable, actionability of CEs
  - ~ Counteract contestability, e.g., if ethnicity is not changed in a CE since it is not actionable, this could hide racial biases in the model
- **Assumption of constant model:** To provide guidance for the future, CEs assume that their underlying model does not change in the future
- **Assumption of constant model:** To provide guidance for the future, CEs assume that their underlying model does not change in the future
- **Attacking CEs:** Researchers can create models with great performance, which generate arbitrary explanations specified by the ML developer
  - ~ in reality this assumption is often violated and CEs are not reliable anymore
- **Attacking CEs:** Researchers can create models with great performance, which generate arbitrary explanations specified by the ML developer
  - ~ how faithful are CEs to the models underlying mechanism?