Data, what is it?

In God we trust, all others must bring data.
—Edwards Deming, allegedly

https://github.com/jendralhxr/introdatascience


Data, definition

Raw/unprocessed factual observation values.
Forms: numbers, texts, images, sound recordings, sensor readings, timestamp, etc.



https://www.halodoc.com/obat-dan-vitamin/thermometer-digital

Data evolution (US DoD)

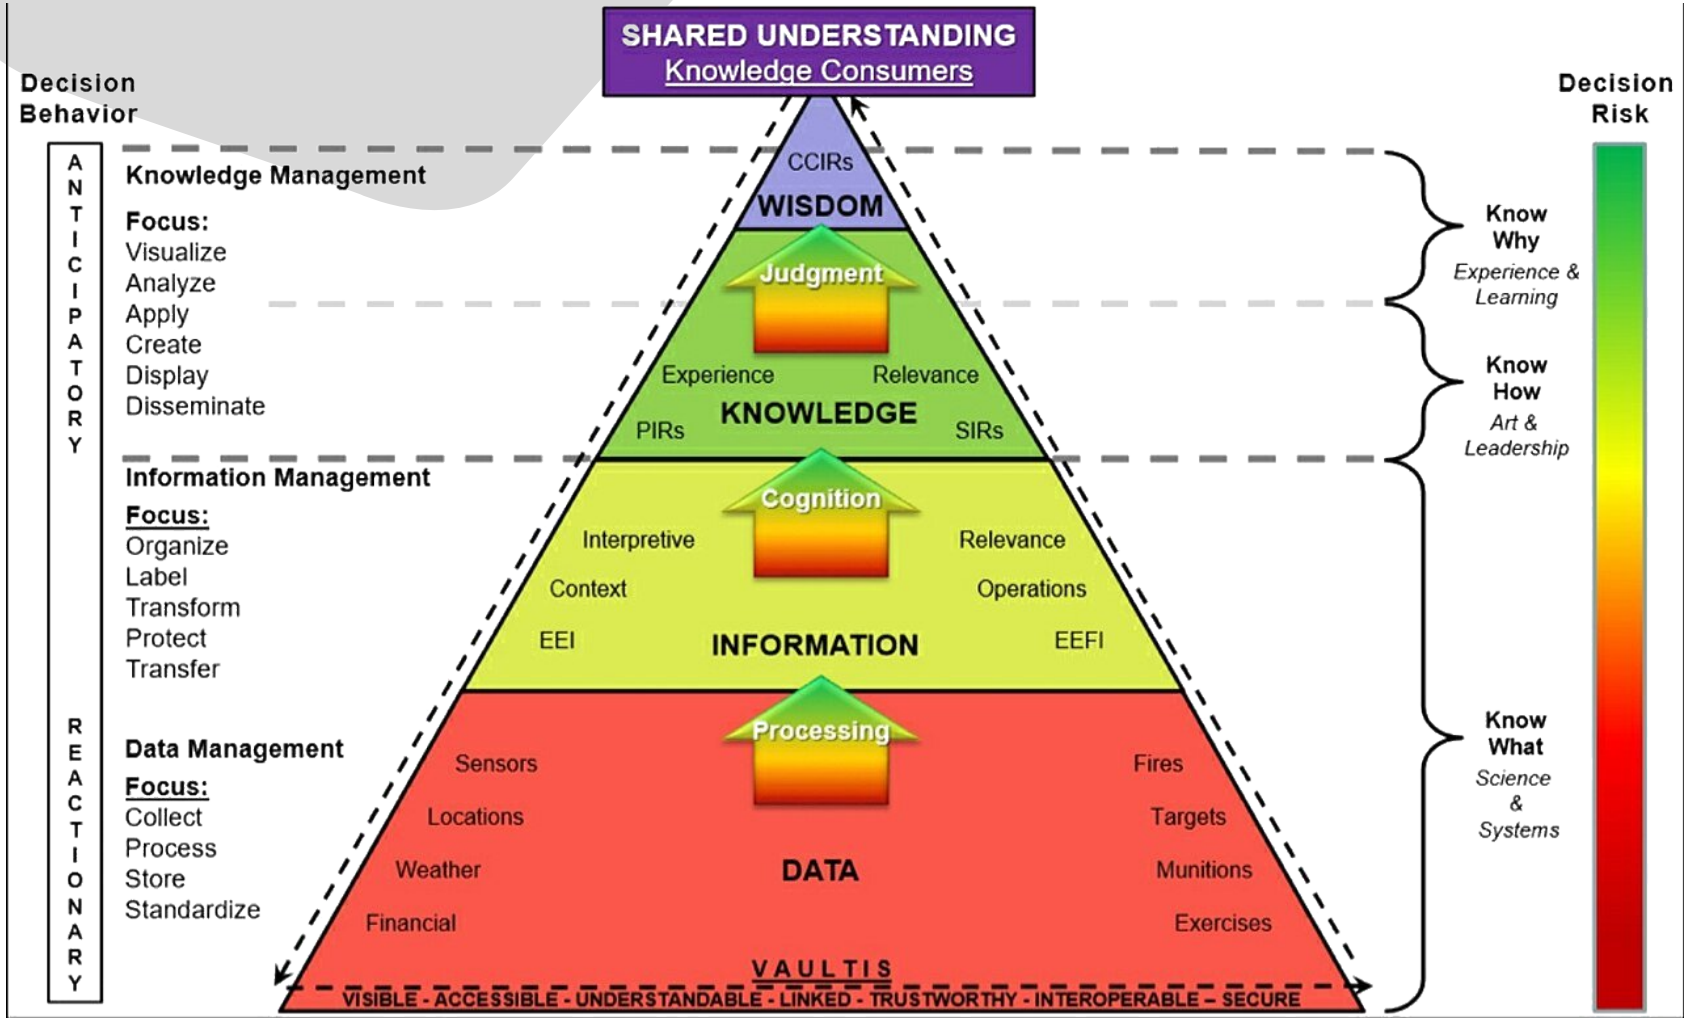


Data: the flow

Data: 40 ^{0}C
Information: Baby armpit temperature is 40 ^{0}C
Knowledge: Baby needs to see doctor





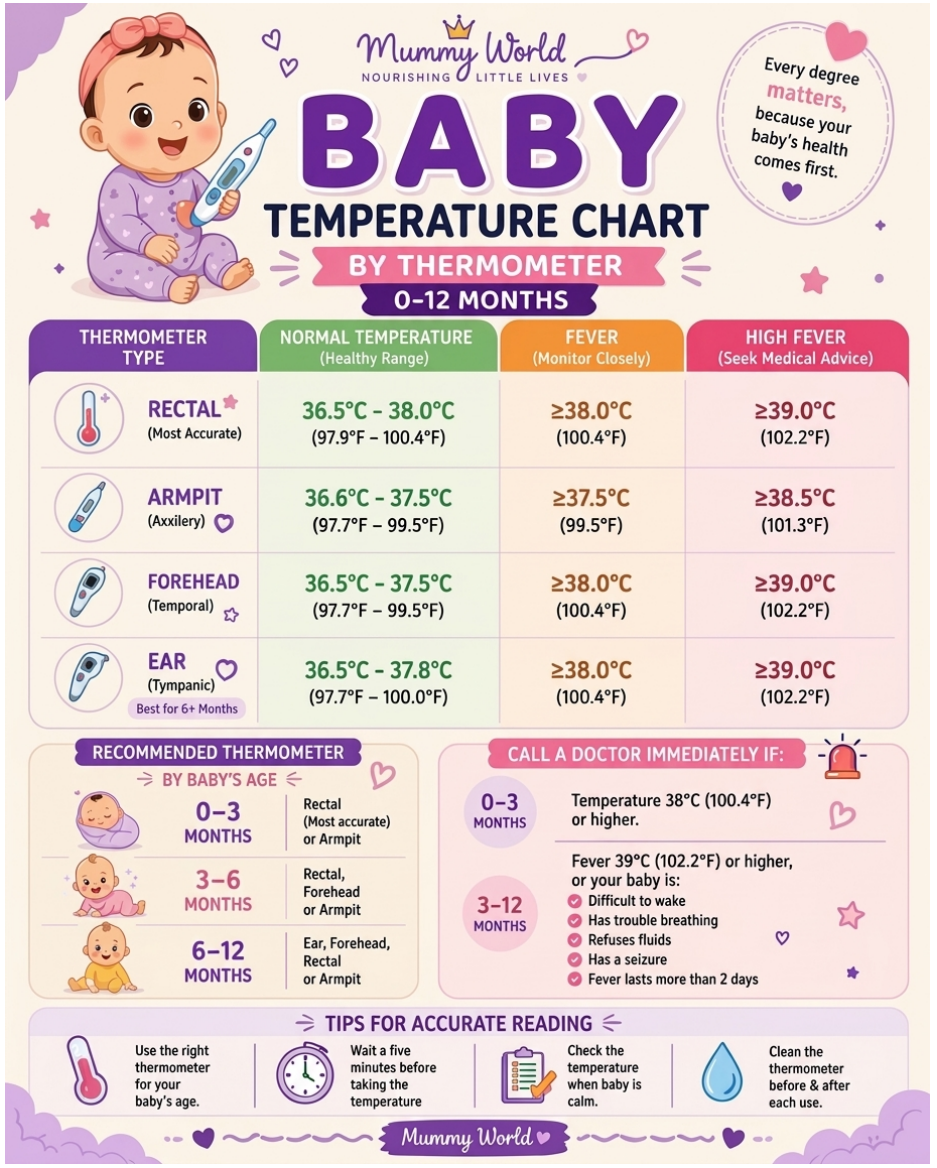

Attendance List



https://forms.gle/q7yN33EmTYT5dpLB6

Data types, by structure

Categorical:

– **Nom**inal (name: country of birth)
– **Ord**inal (order: S/M/L/XL shirt size)

Numerical:

– Discrete (count of something)
– Continuous (physical measurements: height, temperature), continuous data can also be measured in discrete way





- Discrete or continuous?
  - The temperature is continuous by nature
  - The sensor reading is discrete

https://tzone2012.en.made-in-china.com/product/EFBfjSCxMvko/China-Iot-Wireless-Temperature-and-Relative-Humidity-Datalogger-Tzone-WiFi501-Temperature-Sensor.html

Data types, by collection

- Primary: collected directly first-hand for a specific purpose, e.g. research experiment data
- Secondary: collected by third parties that being reused for analysis
- Dark: collected just in case, analyzed later if actually required

Temperature effects on the virulence of entomopathogenic fungi to manage the bronze bug *Thaumastocoris peregrinus* (Hemiptera: Thaumastocoridae)

Primary

Efeitos da temperatura sobre a virulência de fungos entomopatogênicos para o manejo do percevejo-bronzeado *Thaumastocoris peregrinus* (Hemiptera: Thaumastocoridae)

S. G. M. Velozo[a], V. R. Carvalho[a*], D. L. Teixeira[a], J. R. S. Passos[b], M. A. Soares[c], J. C. Zanuncio[d] and C. F. Wilcken[a]

[a]Universidade Estadual Paulista – UNESP, Faculdade de Ciências Agronômicas, Botucatu, SP, Brasil
[b]Universidade Estadual Paulista – UNESP, Instituto de Biociências, Botucatu, SP, Brasil
[c]Universidade Federal dos Vales do Jequitinhonha e Mucuri – UFVJM, Departamento de Agronomia, Diamantina, MG, Brasil
[d]Universidade Federal de Viçosa – UFV, Instituto de Biotecnologia Aplicada à Agropecuária Brasil – BIOAGRO, Departamento de Entomologia, Viçosa, MG, Brasil

2. Materials and Methods

2.1. Location

The experiments were conducted at the Laboratory of Biological Control of Forest Pests (LCBPF) and at the Application Technology Laboratory of the Department of Plant Protection (DPV) of the Faculty of Agronomic Sciences (FCA) at São Paulo State University (UNESP) in Botucatu, São Paulo state, Brazil.

2.2. Insect rearing

The colony of *T. peregrinus* was established using eggs from the stock culture at the entomology laboratory of Embrapa Florestas in Colombo, Paraná state, Brazil. Insects were maintained in a climate-controlled room at 24 ± 2°C, a relative humidity of 60 ± 10%, and a 12-hour photoperiod (Barbosa et al., 2017). Nymphs hatched from these eggs were kept on branches of *Eucalyptus urophylla* var. platyphylla, clone 433 (Myrtaceae), in 500 mL Erlenmeyer flasks with water and placed in rectangular plastic trays (40 cm long × 35 cm wide × 8 cm high). Adults and nymphs from the laboratory rearing system were used in the pathogenic bioassays.

Table 1. Isolate codes (Code), species, source and host orders (Ord.) of the entomopathogenic fungi *Beauveria bassiana*, *Metarhizium anisopliae*, *Cordyceps* sp., *Cordyceps farinosa*, *Cordyceps fumosorosea*, and *Sporothrix insectorum* used.

Codes	Specfies	Hosts	Ordens
IBCB227	*Beauveria bassiana*	*Spodoptera frugiperda*	Lepidoptera
IBCB226	*Beauveria bassiana*	*Bactris gasipae* (Plant)	-
IBCB66	*Beau*		
IBCB617	*Beau*		
IBCB532	*Beau*		
IBCB425	*Metarh*		
IBCB348	*Metarh*		
IBCB375	*Co*		
IBCB220	*Cord*		
IBCB638	*Cordyc*		
IBCB79	*Sporot*		

Table 4. Cumulative mortality of nymphs and adults of *Thaumastocoris peregrinus* (Hemiptera: Thaumastocoridae) with different conidia/mL concentrations (Conc.) of *Beauveria bassiana* (IBCB227) and *Metarhizium anisopliae* (IBCB425) six days after their application.

Conc.	IBCB227		IBCB425	
	Nymph[a]	Adult[a]	Nymph[a]	Adult[a]
10^4	42 ± 9.2Ba α	50 ± 7.1B a α	42 ± 15.0B b α	82 ± 9.7B a α
10^5	80 ± 7.1 A a α	44 ± 10.8B b β	54 ± 11.6B b β	84 ± 4.0A a α
10^6	68 ± 13.9A b α	88 ± 9.7A a α	78 ± 12.0B b α	87 ± 1.2A a α
10^7	84 ± 16.9A a α	96 ± 4.0A a α	92 ± 3.74A a α	96 ± 2.4A a α
10^8	100 ± 0.0A a α	96 ± 4.0A a α	100 ± 0.0A a α	100 ± 0.0A a α

Means followed by the same uppercase letter, per column, lowercase letter per row, or Greek letter per row, do not differ according to the Tukey–Kramer test (Westfall et al., 1999) at a significance level of 5%. Uppercase letters compare concentrations per insect stage and isolate; lowercase letters compare insect stages per concentration and isolate; and Greek letters compare isolates per insect stage and concentration.
[a]Developmental stage of *Thaumastocoris peregrinus*.

Secondary

RIN Dataverse > Organisasi Riset Elektronika dan Informatika Dataverse > Pusat Riset Kecerdasan Artifisial dan Keamanan Siber Dataverse > Computer Vision Dataverse >

Graph-based Optical Character Recognition for Syair Perang Johor

Version 1.0

Aliansyah, Zulhaj; Andriana, Dian, 2025, "Graph-based Optical Character Recognition for Syair Perang Johor", https://hdl.handle.net/20.500.12690/RIN/1JFQSA, RIN Dataverse, V1, UNF:6:IQFaGCanXpQzGaQjUqCfXA== [fileUNF]

Cite Dataset ▾ Learn about Data Citation Standards.

Access Dataset ▾

Contact Owner | Share

Make Data Count (MDC) Metrics

since

0 Views

0 Downloads

Description

Graph and Freeman chaincode traversal log from optical character recognition on historic manuscript (Syair Perang Johor) Generated using series of Python scripts: - https://github.com/jendralhxr/cursive-scribe/blob/main/view2page.py (conversion from a single scan into respective pages) - https://github.com/jendralhxr/cursive-scribe/blob/main/page2line.py (from a single pages to multiple lines based on horizontal projection histogram) - https://github.com/jendralhxr/cursive-scribe/blob/main/feature2rasm.py (SLIC feature extraction for graph construction) - https://github.com/jendralhxr/cursive-scribe/blob/main/rasm2hurf.py (graph traversal into detected Arab/Jawi rasm in Unicode) (2025-01-13)

Subject

Arts and Humanities; Computer and Information Science


Keyword

manuscript, ocr, graph, perang johor, jawi

License/Data Use Agreement

PUBLIC DOMAIN CC0 1.0

Dark: public

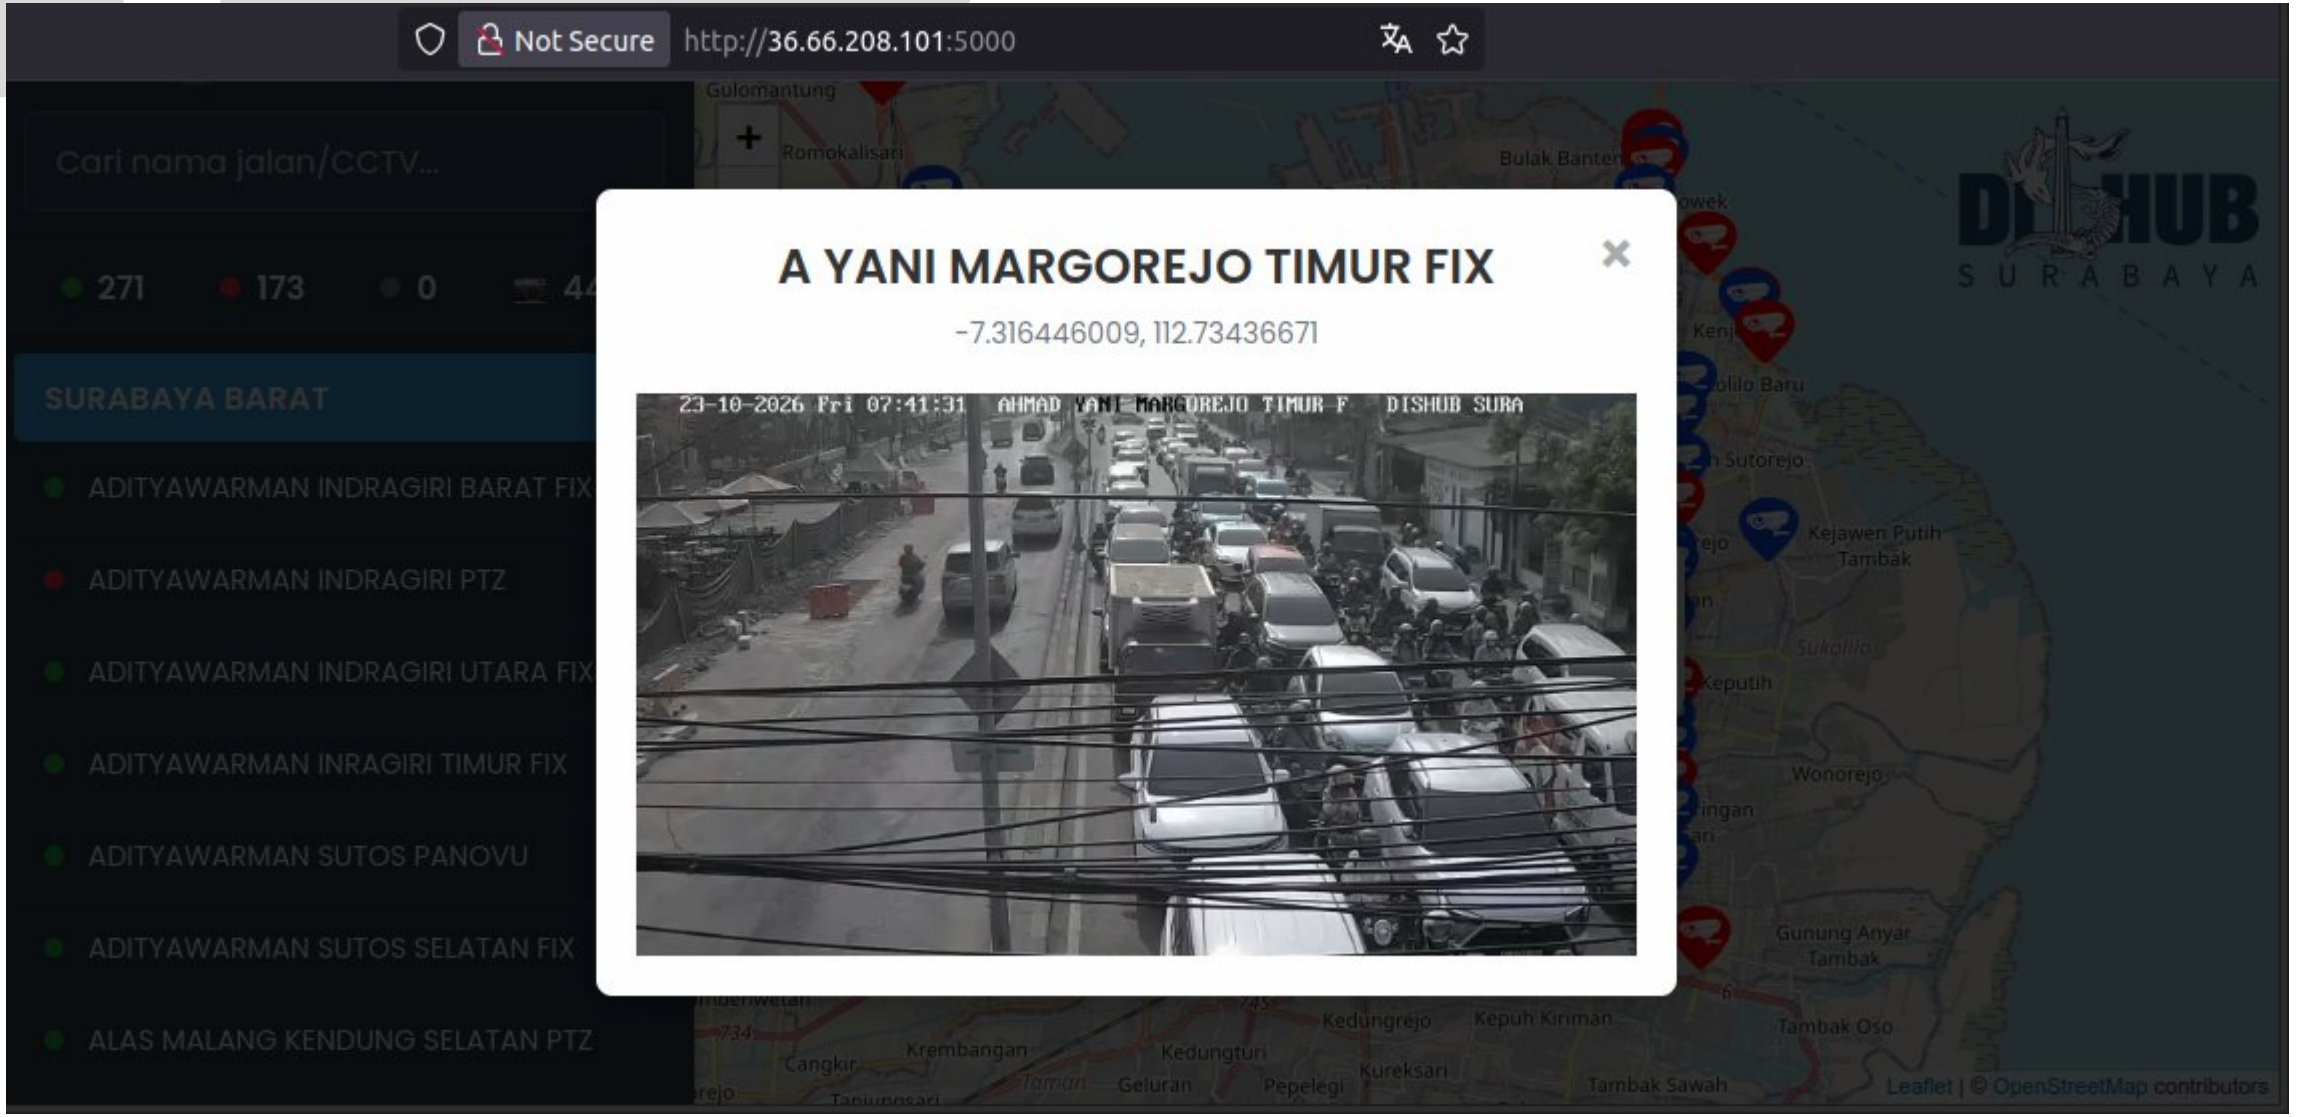
Not Secure
http://36.66.208.101:5000
Cari nama jalan/CCTV...
271
173
0
SURABAYA BARAT
ADITYAWARMAN INDRAGIRI BARAT FIX
ADITYAWARMAN INDRAGIRI PTZ
ADITYAWARMAN INDRAGIRI UTARA FIX
ADITYAWARMAN INRAGIRI TIMUR FIX
ADITYAWARMAN SUTOS PANOVU
ADITYAWARMAN SUTOS SELATAN FIX
ALAS MALANG KENDUNG SELATAN PTZ
A YANI MARGOREJO TIMUR FIX
-7.316446009, 112.73436671
23-10-2026 Fri 07:41:31 AHMAD YANI MARGOREJO TIMUR F DISHUB SURA
DISHUB SURABAYA
Gulomantung
Romokalisari
Bulak Banteng
Kejawen Putih Tambak
Keputih
Wonorejo
Gunung Anyar Tambak
Tambak Oso
Kedungrejo
Kepuh Kiriman
Kedungturi
Krembangan
Cangkir
Geluran
Pepelegi
Kureksari
Tambak Sawah
Leaflet | © OpenStreetMap contributors

Dark: private, kept *just-in-case*





https://www.nst.com.my/news/regional/2026/03/1406329/thief-caught-camera-stealing-parcel-early-morning-heist

Data types, by orderliness

- Structured: organized and conforms to a [pre-]defined model or schema/table
- Semi-structured: not strictly organized, but have referencing information (tags, key, indices, markers)
- Unstructured: *features* are to be derived from within


Structured

Terence Tan · Updated 8 years ago

31 | Code | Download

Malaysia GE14 Election Results

Parliamentary, State and Total Votes

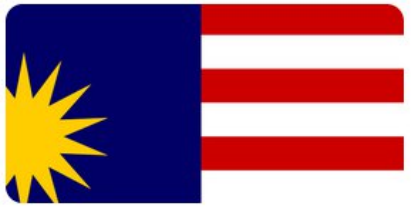

Data Card | Code (7) | Discussion (0) | Suggestions (0)

About Dataset

Context

Election Results for Malaysian GE14 Election

Content

This is the parliamentary & State election results for GE 14 organized by candidate. Some notes on the data:

Gender L = Male(Lelaki), P=Female(Perempuan)
Status KLH = Lose(Kalah), MNG = Win(Menang)
Perkerjaan = Job (Ahli Perniaga = Business Owner, Tiada=None, Usahawan=Entrepreneur etc.

Acknowledgements

Data was collected by Sinar Project

Election-Results-2018 - Parlimen_Results_By_Candidate.c...


Detail | Compact | Column | 10 of 12 columns

Seat ID	Seat Name	Candidate Name	Candidate Party
222 unique values	222 unique values	687 unique values	BN 32% PKR 28% Other (274) 40%
P.005	JERLUN	OTHMAN BIN AZIZ	BN
P.005	JERLUN	MUKHRIZ MAHATHIR	PKR
P.006	KUBANG PASU	DATO' SRI MOHD JOHARI BIN BAHARUM	BN
P.006	KUBANG PASU	DATO' AMIRUDDIN HAMZAH	PKR
P.006	KUBANG PASU	NORHAFIZA BINTI FADZIL	PAS

https://www.kaggle.com/datasets/terenctb/malaysia-ge14-election-results-parliament


Semi-structured


https://api.data.gov.my/data-catalogue/?id=fuelprice

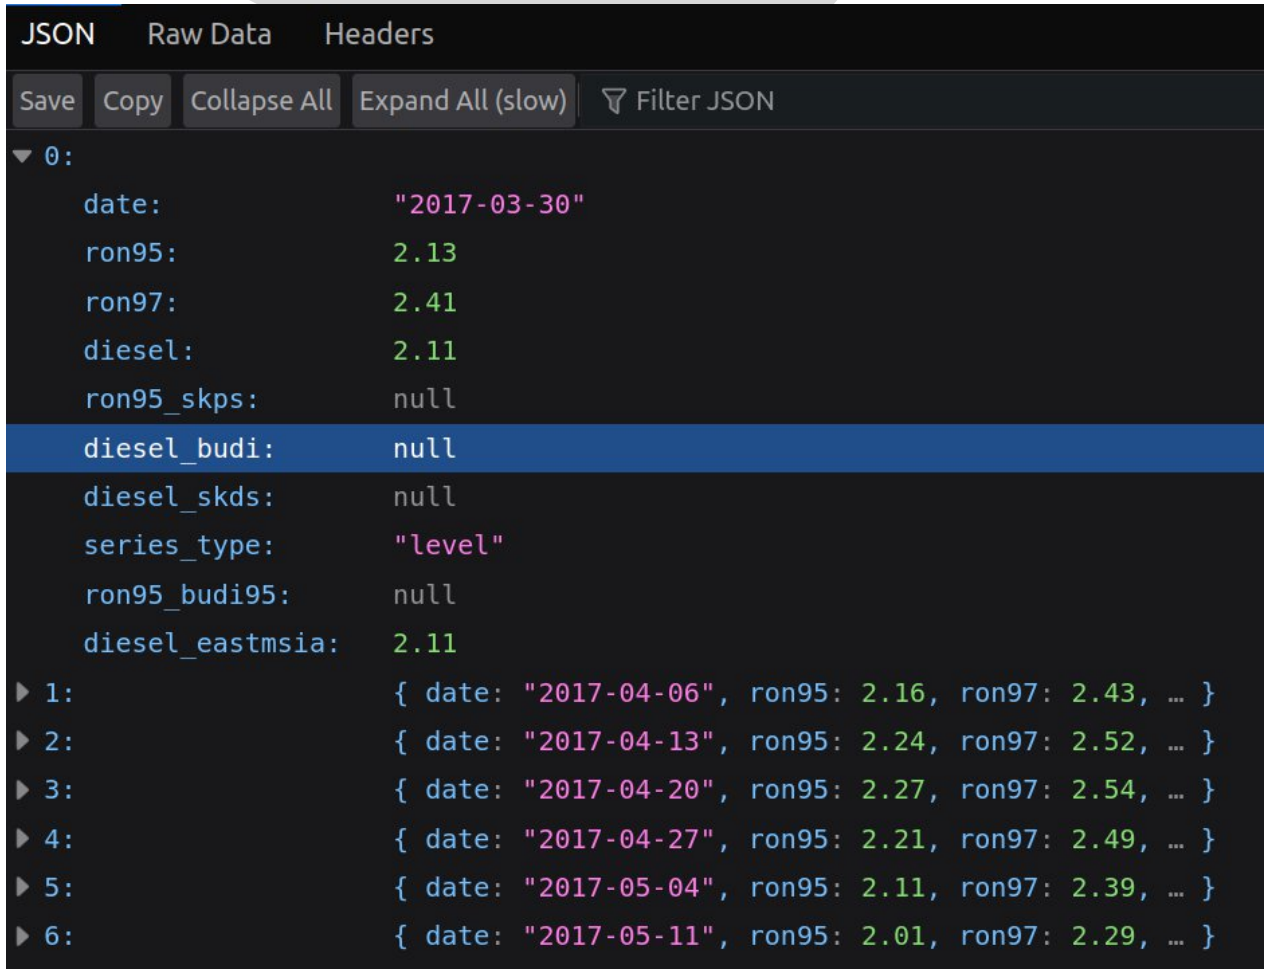


Actually structured, but users need to actually understand the structures beforehand

Unstructured

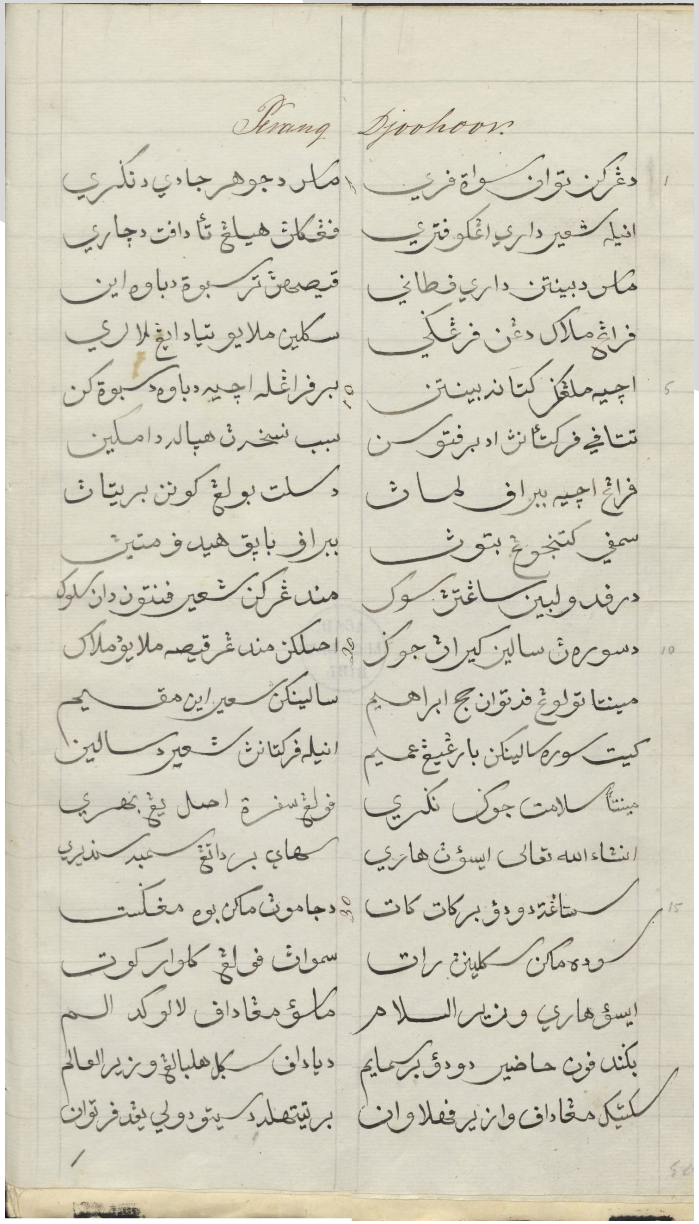

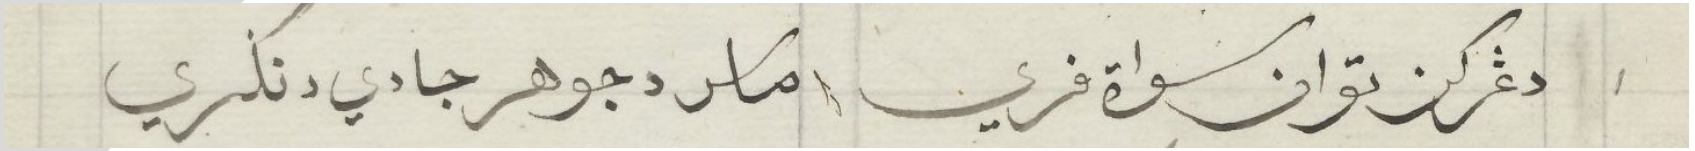



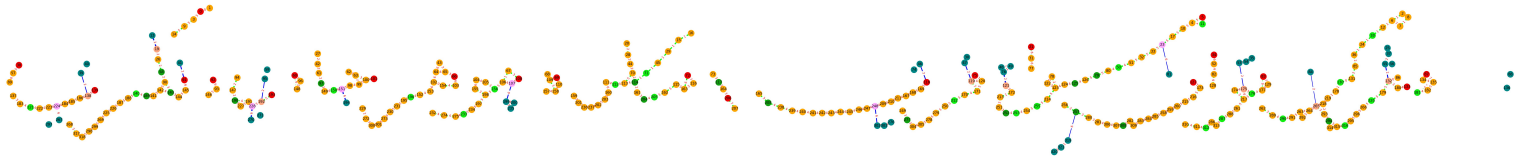

دغركن توان سواة فري ماس د جوهر جادي د ن ک ري

Dengar Tuan suatu peri, masa di Johor jadi di Negeri

Wrap up

- Data: record
- Collection method: primary, secondary, dark
- Orderliness and immediate information availability: structured, semi-structured, unstructured