LEBANESE INTERNATIONAL UNIVERSITY

الجامعة اللبنانية الدولية

School Of Arts and Sciences
Department of Computer Science/Information Technology

CSCI390

Web Programming

Week 05 : Lecture 02

CSS Text

Text Alignment

The `text-align` property is used to set the horizontal alignment of a text.

```
h1 {
  text-align: center;
}

h2 {
  text-align: left;
}

h3 {
  text-align: right;
}
```

```
div {
  text-align: justify;
}
```

CSS Text

Text Vertical Alignment

```
img.top {
  vertical-align: top;
}

img.middle {
  vertical-align: middle;
}

img.bottom {
  vertical-align: bottom;
}
```

```
<p>An <img src="logo.gif" alt="My Logo" width="270" height="50"> image with
a default alignment.</p><br>

<p>An <img class="top" src="logo.gif" alt="My Logo" width="270" height="50">
image with a top alignment.</p><br>
```

CSS Text

Text Decoration

```
h1 {
  text-decoration: overline;
}

h2 {
  text-decoration: line-through;
}

h3 {
  text-decoration: underline;
}
```

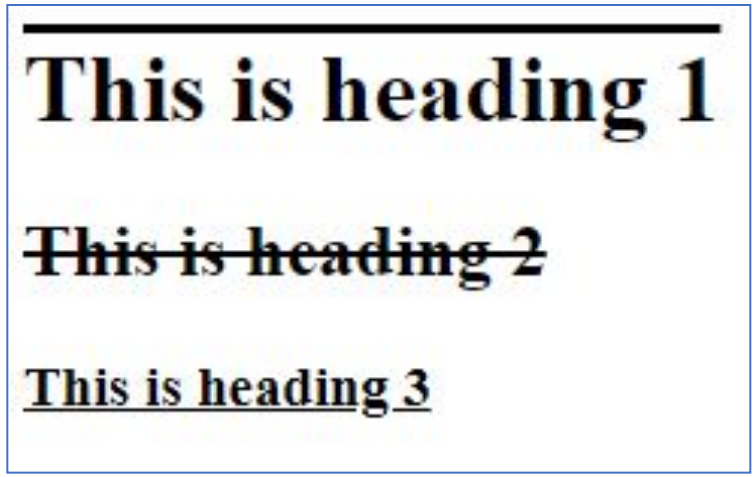

CSS Text

Text Transformation

```
p.uppercase {
  text-transform: uppercase;
}

p.lowercase {
  text-transform: lowercase;
}

p.capitalize {
  text-transform: capitalize;
}
```

CSS Text

Text Spacing

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
  text-indent: 50px;
}
</style>
</head>
<body>

<p>In my younger and more vulnerable years my father gave me some advice that
I've been turning over in my mind ever since. 'Whenever you feel like
criticizing anyone,' he told me, 'just remember that all the people in this
world haven't had the advantages that you've had.'</p>

</body>
</html>
```

CSS Text

Text Shadow

```
<!DOCTYPE html>
<html>
<head>
<style>
h1 {
  text-shadow: 2px 2px 5px red;
}
</style>
</head>
<body>

<h1>Text-shadow effect!</h1>

</body>
</html>
```

Text-shadow effect!

CSS Text

Text Shadow

```
<!DOCTYPE html>
<html>
<head>
<style>
h1 {
  text-shadow: 2px 2px 5px red;
}
</style>
</head>
<body>

<h1>Text-shadow effect!</h1>

</body>
</html>
```

Text-shadow effect!

CSS Text

Text Color & Background Color

```html
<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-color: lightgrey;
  color: blue;
}

h1 {
  background-color: black;
  color: white;
}
</style>
</head>
<body>

<h1>This Heading is Black with White Text</h1>
<p>This page has a grey background color and a blue text.</p>
<p>Another paragraph.</p>

</body>
</html>
```

CSS Backgrounds

- CSS background-color

```
body {
  background-color: lightblue;
}
```

- a valid color name - like "red"
- a HEX value - like "#ff0000"
- an RGB value - like "rgb(255,0,0)"

- Opacity / Transparency

```
div {
  background-color: green;
  opacity: 0.3;
}
```

CSS Backgrounds

- Transparency using RGBA

```
div {
  background: rgba(0, 128, 0, 0.3) /* Green background with 30% opacity */
}
```

- CSS Background Image

```
body {
  background-image: url("paper.gif");
}


p {
  background-image: url("paper.gif");
}
```

CSS Backgrounds

- CSS Background Image

```
body {
  background-image: url("gradient_bg.png");
  background-repeat: repeat-x;
}
```

```
body {
  background-image: url("img_tree.png");
  background-repeat: no-repeat;
}
```

CSS Backgrounds

- CSS Background Image

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-image: url("img_tree.png");
  background-repeat: no-repeat;
  background-position: right top;
  margin-right: 200px;
}
</style>
</head>
<body>

<h1>Hello World!</h1>
<p>W3Schools background no-repeat, set position example.</p>
<p>Now the background image is only shown once, and positioned away from the
text.</p>
<p>In this example we have also added a margin on the right side, so the
background image will never disturb the text.</p>

</body>
</html>
```

CSS Backgrounds

- CSS Background Attachment

```
body {
  background-image: url("img_tree.png");
  background-repeat: no-repeat;
  background-position: right top;
  background-attachment: fixed;
}
```

The `background-attachment` property specifies whether the background image should scroll or be fixed (will not scroll with the rest of the page):

```
body {
  background-image: url("img_tree.png");
  background-repeat: no-repeat;
  background-position: right top;
  background-attachment: scroll;
}
```

CSS Backgrounds

- **CSS Background ShortHand**

Use the shorthand property to set the background properties in one declaration:

```
body {
  background: #ffffff url("img_tree.png") no-repeat right top;
}
```

CSS Borders

```
p.dotted {border-style: dotted;}
p.dashed {border-style: dashed;}
p.solid {border-style: solid;}
p.double {border-style: double;}
p.groove {border-style: groove;}
p.ridge {border-style: ridge;}
p.inset {border-style: inset;}
p.outset {border-style: outset;}
p.none {border-style: none;}
p.hidden {border-style: hidden;}
p.mix {border-style: dotted dashed solid double;}
```

CSS Borders

```
p {
  border: 2px solid red;
  border-radius: 5px;
}
```

The `border-radius` property is used to add rounded borders to an element

```
p {
  border-left: 6px solid red;
  background-color: lightgrey;
}
```

```
p {
  border-bottom: 6px solid red;
  background-color: lightgrey;
}
```

Different List Item Markers

```
ul.a {
  list-style-type: circle;
}

ul.b {
  list-style-type: square;
}

ol.c {
  list-style-type: upper-roman;
}

ol.d {
  list-style-type: lower-alpha;
}
```

Lists

Example of unordered lists:

- Coffee
- Tea
- Coca Cola

- Coffee
- Tea
- Coca Cola

Example of ordered lists:

I. Coffee
II. Tea
III. Coca Cola

a. Coffee
b. Tea
c. Coca Cola

Styling List With Colors

```
ol {
  background: #ff9999;
  padding: 20px;
}

ul {
  background: #3399ff;
  padding: 20px;
}

ol li {
  background: #ffe5e5;
  padding: 5px;
  margin-left: 35px;
}

ul li {
  background: #cce5ff;
  margin: 5px;
}
```

1. Coffee
2. Tea
3. Coca Cola

- Coffee
- Tea
- Coca Cola

(backBorder.css)

```
body {
    background-image: url(aa.jpg);
    background-repeat: no-repeat;
    background-size: 200px;
    background-position: right;
}
h2 {
    border-style: dashed;
    width: 50%;
    border-width: 5px;
    border-color: blueviolet;
    height: 50px;
    text-align: center;
}
```

(backBorder.css)

```
h3 {
    border-style: double;
    width: 60%;
    border-width: 7px;
    border-color: green;
    border-radius: 15px;
    text-align: center;
    padding: 20px;
    color: red;
    outline-style: dotted;
    outline-color: blue;
    outline-width: 6px;
}
```

(backBorder.css)

```
img {
   height: 200px;
   width: 300px;
   opacity: 0.8;
}
h4 {
   border: 10px solid red;
}
ul {
   list-style-type: circle;
}
ol {
   list-style-type: lower-greek;
}
```

```html
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta http-equiv="X-UA-Compatible" content="IE=edge">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>Background Border & Outline</title>
   <link rel="stylesheet"
   href="backBorder.css">
</head>
<body>
   <h1>Background Border & Outline</h1>
   <p><img src="aa.jpg" alt=""></p>
   <h2>LIU</h2><br>
   <h3>BIU</h3><br>
   <h4>AUB</h4>
```

```
<ul>Majors:
    <li>CSCI</li>
    <li>CSIT</li>
    <li>MATH</li>
    <li>BMIS</li>
  </ul><br>
  <ol>Majors:
    <li>CSCI</li>
    <li>CSIT</li>
    <li>MATH</li>
    <li>BMIS</li>
  </ol>
</body>
</html>
```

CSS Links

Background Color

The `background-color` property can be used to specify a background color for links:

```
a:link {
  background-color: yellow;
}

a:visited {
  background-color: cyan;
}

a:hover {
  background-color: lightgreen;
}

a:active {
  background-color: hotpink;
}
```

CSS Links

Link Buttons

```
a:link, a:visited {
  background-color: #f44336;
  color: white;
  padding: 14px 25px;
  text-align: center;
  text-decoration: none;
  display: inline-block;
}

a:hover, a:active {
  background-color: red;
}
```

```
<body>

<h2>Link Button</h2>
<p>A link styled as a button:</p>
<a href="index.html" target="_blank">This is a link</a>

</body>
```

Link Button

A link styled as a button:

This is a link

CSS Links

Link Buttons

```
a:link, a:visited {
  background-color: white;
  color: black;
  border: 2px solid green;
  padding: 10px 20px;
  text-align: center;
  text-decoration: none;
  display: inline-block;
}

a:hover, a:active {
  background-color: green;
  color: white;
}
```

```
<body>

<a href="default.asp" target="_blank">This is a link</a>

</body>
```

This is a link

CSS Links

CSS Navigation Bar Navigation Bar = List of Links

```
<ul>
  <li><a href="default.asp">Home</a></li>
  <li><a href="news.asp">News</a></li>
  <li><a href="contact.asp">Contact</a></li>
  <li><a href="about.asp">About</a></li>
</ul>
```

- Home
- News
- Contact
- About

Removing the bullets :

```
ul {
  list-style-type: none;
  margin: 0;
  padding: 0;
}
```

Home
News
Contact
About

CSS Links

CSS Vertical Navigation Bar

```css
ul {
  list-style-type: none;
  margin: 0;
  padding: 0;
  width: 200px;
  background-color: #f1f1f1;
}

li a {
  display: block;
  color: #000;
  padding: 8px 16px;
  text-decoration: none;
}

/* Change the link color on hover */
li a:hover {
  background-color: #555;
  color: white;
}
```

```html
<body>

<h2>Vertical Navigation Bar</h2>

<ul>
 <li><a href="#home">Home</a></li>
 <li><a href="#news">News</a></li>
 <li><a href="#contact">Contact</a></li>
 <li><a href="#about">About</a></li>
</ul>

</body>
```

CSS Links

CSS Vertical Navigation Bar

```css
ul {
  list-style-type: none;
  margin: 0;
  padding: 0;
  width: 200px;
  background-color: #f1f1f1;
}

li a {
  display: block;
  color: #000;
  padding: 8px 16px;
  text-decoration: none;
}

/* Change the link color on hover */
li a:hover {
  background-color: #555;
  color: white;
}
```

```html
<body>

<h2>Vertical Navigation Bar</h2>

<ul>
 <li><a href="#home">Home</a></li>
 <li><a href="#news">News</a></li>
 <li><a href="#contact">Contact</a></li>
 <li><a href="#about">About</a></li>
</ul>

</body>
```