



CREATE
READ
UPDATE
DELETE

with
Express

w3d2

- RESOURCES
- CRUD
- ROUTES
- REQUESTS
- EXPRESS

RESOURCES



Cookie



Pie



Cupcake

ARTICLE



The Bob Loblaw Law Blog



Title

Date

Content

Lobbing Law Bombs

1 minute ago

Let Bob Loblaw show you how you too can lob law bombs. The Bob Loblaw Law Bomb Lobbing School of Law.

Every
resource
has a unique
identifier.

CREATE

READ

UPDATE

DESTROY

CREATE

READ

UPDATE

DESTROY

CREATE

READ

UPDATE

DESTROY

CREATE

READ

UPDATE

DESTROY

CREATE

READ

UPDATE

DESTROY

ROUTE = METHOD
+ PATH
+ BEHAVIOUR

```
app.get("/articles", (request, response) => {})
```

choosing a method



Safe.

Body.

Idempotent.

SAFE

BODY

IDEMPOTENT

GET



POST






PUT



DELETE



	SAFE	BODY	IDEMPOTENT
POST			

Create

SAFE

BODY

IDEMPOTENT


POST



A



B

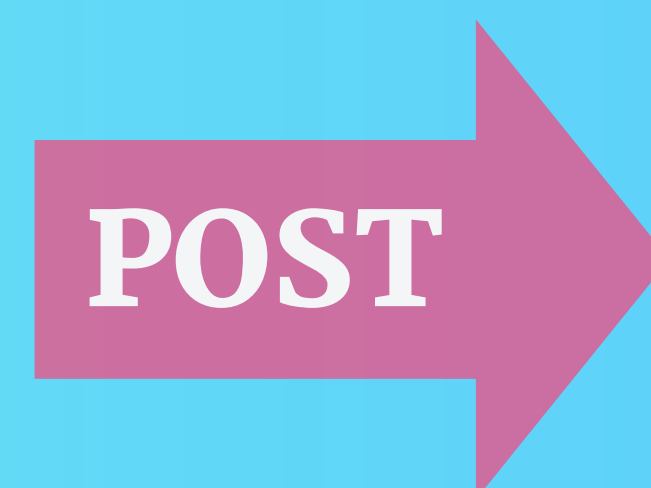

C

Create

SAFE

BODY

IDEMPOTENT

GET



Read

SAFE

BODY

IDEMPOTENT

GET



A



A



A

Read

SAFE

BODY

IDEMPOTENT

PUT



Update

SAFE


BODY

IDEMPOTENT


PUT



A

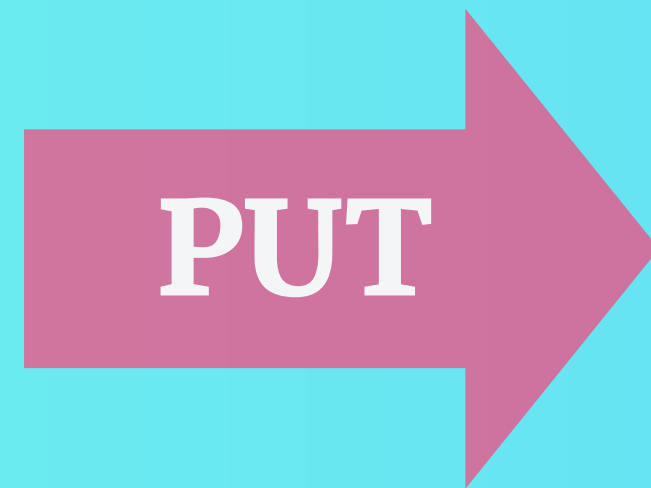

B

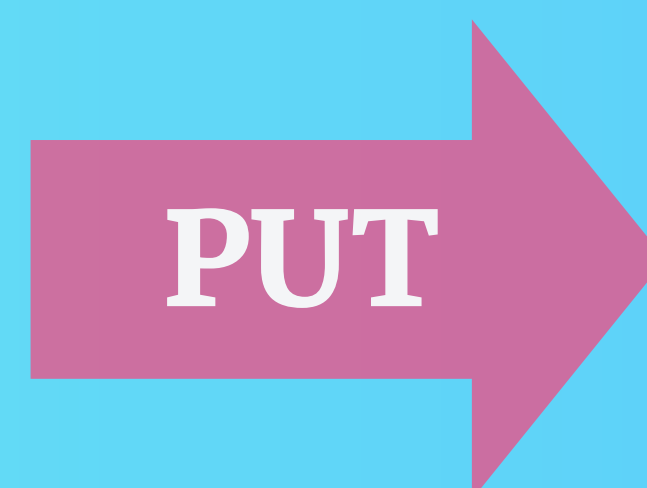

B

Update

SAFE

BODY

IDEMPOTENT

DELETE



Destroy

SAFE

BODY

IDEMPOTENT

DELETE



A



B



B

Destroy

Browser Requests

GET: Location Bar
GET: Refresh
GET: Click Link
GET: Submit Form
POST: Submit Form
GET: Load File

Browser Requests

w4d3

GET: XHR
POST: XHR
PUT: XHR
DELETE: XHR

Browser Requests

w4d3

GET: AJAX
POST: AJAX
PUT: AJAX
DELETE: AJAX

Questions?