

Case Study

Abdel Shehata

2022-10-26

Introduction and Data

Introduction

Data Introduction


Exploratory Data Analysis

```
library(readr)
data_train <- read_csv("data-train.csv")


## Rows: 89 Columns: 7
## -- Column specification -----
## Delimiter: ","
## dbl (7): St, Re, Fr, R_moment_1, R_moment_2, R_moment_3, R_moment_4
##
## i Use 'spec()' to retrieve the full column specification for this data.
## i Specify the column types or set 'show_col_types = FALSE' to quiet this message.

attach(data_train)
data_train <- data_train%>% mutate(TFr = case_when(Fr>1~ .99999, Fr<1~Fr))
data_train<-data_train%>%mutate(TFr=logit(TFr))

ggplot(data_train) +
  geom_histogram(aes(x = St), bins = 15)
```

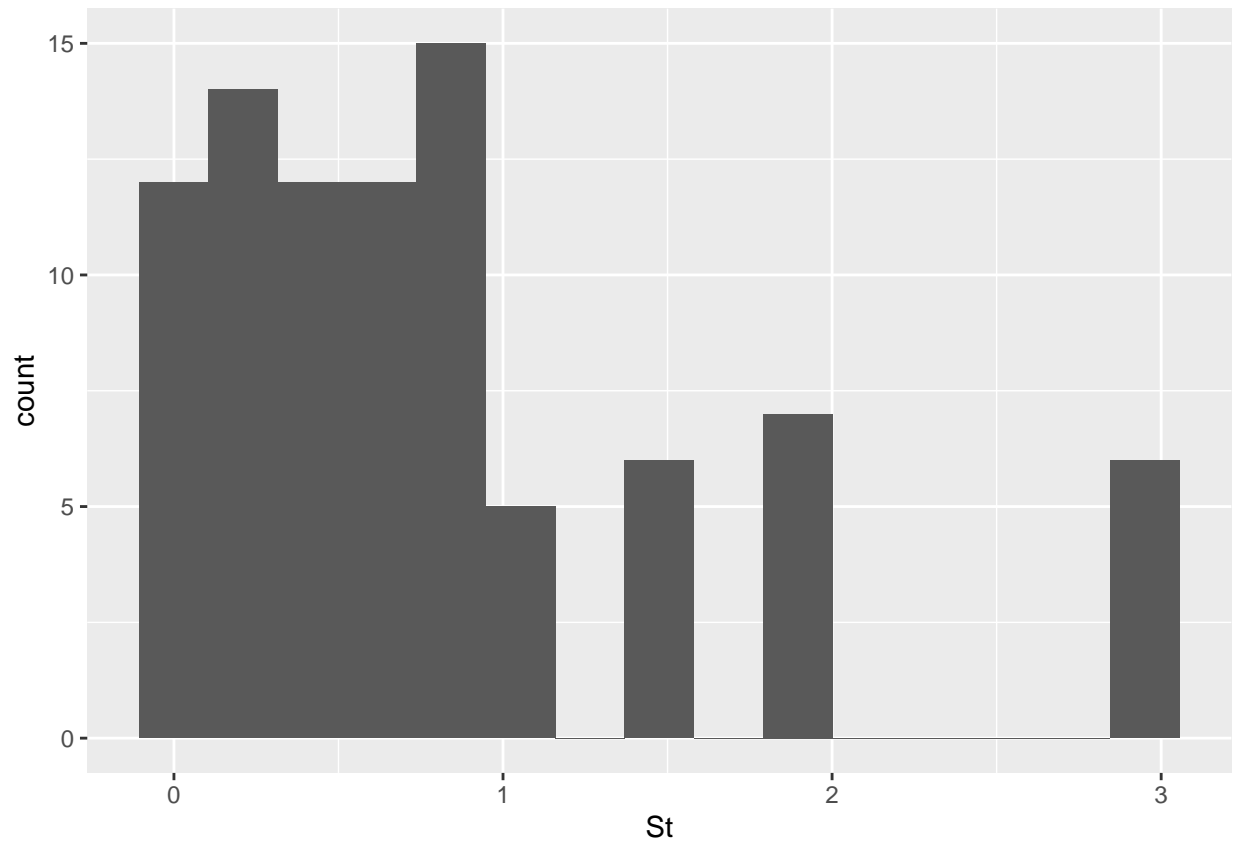


```
ggplot(data_train) +  
  geom_histogram(aes(x = Re), bins = 15)
```

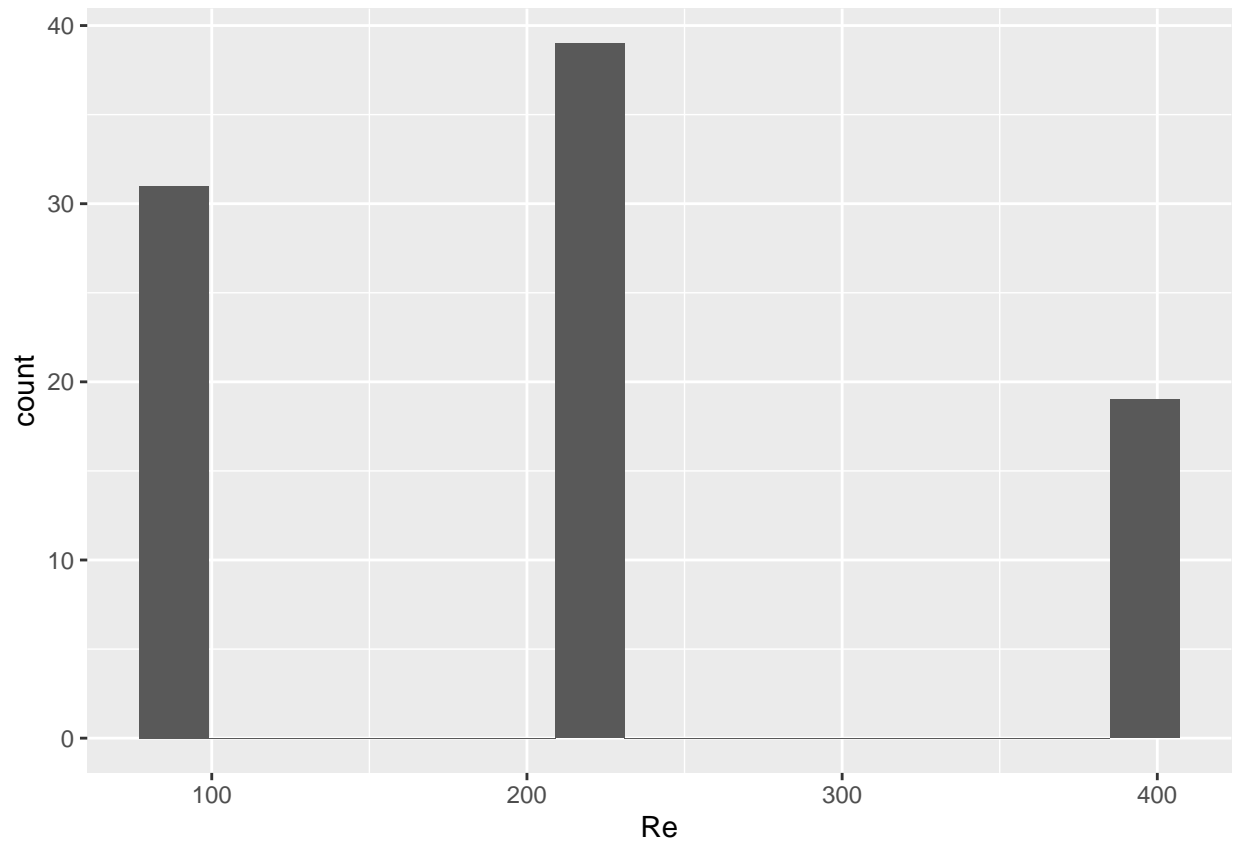


```
ggplot(data_train) +  
  geom_histogram(aes(x = Fr), bins = 15)
```


```
## Warning: Removed 30 rows containing non-finite values (stat_bin).
```

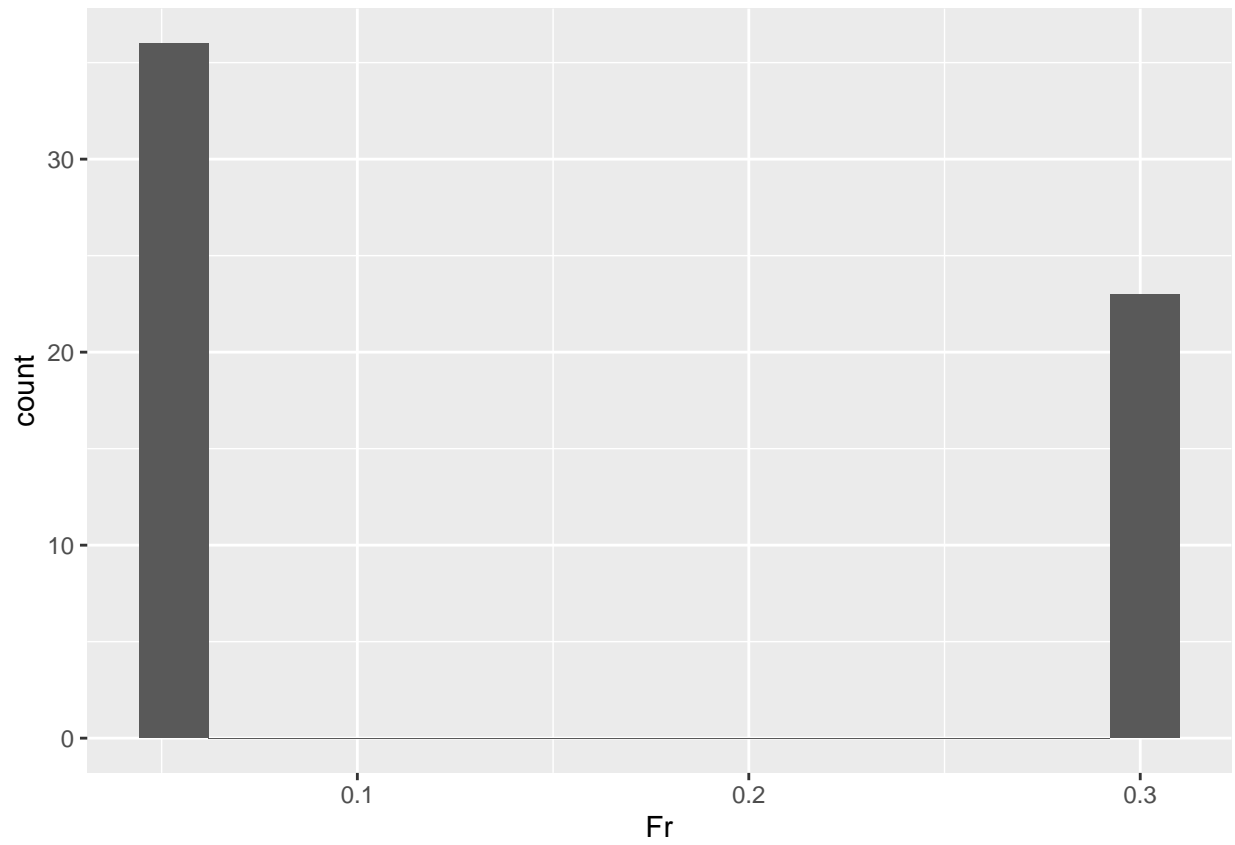


```
ggplot(data_train) +  
  geom_histogram(aes(x = R_moment_1), bins = 15)
```

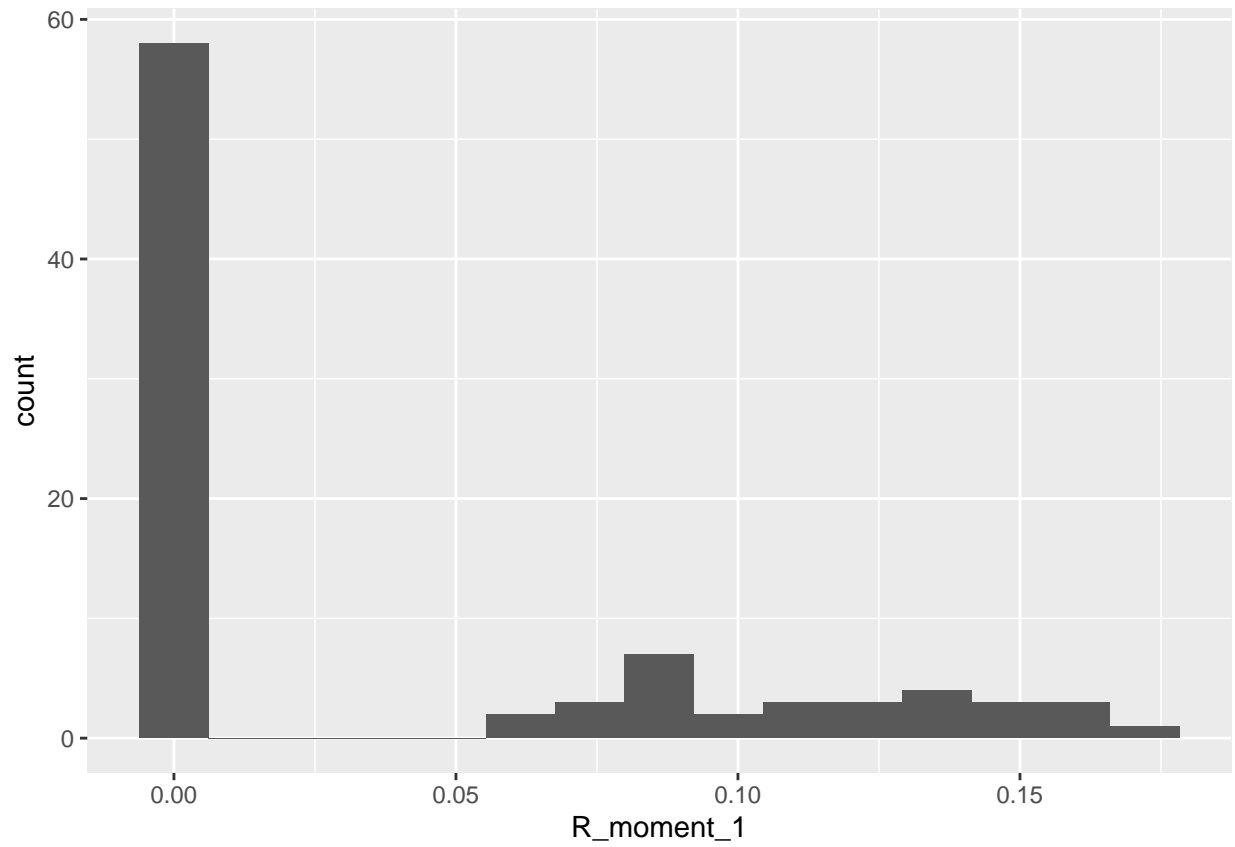


```
ggplot(data_train) +  
  geom_histogram(aes(x = R_moment_2), bins = 15)
```

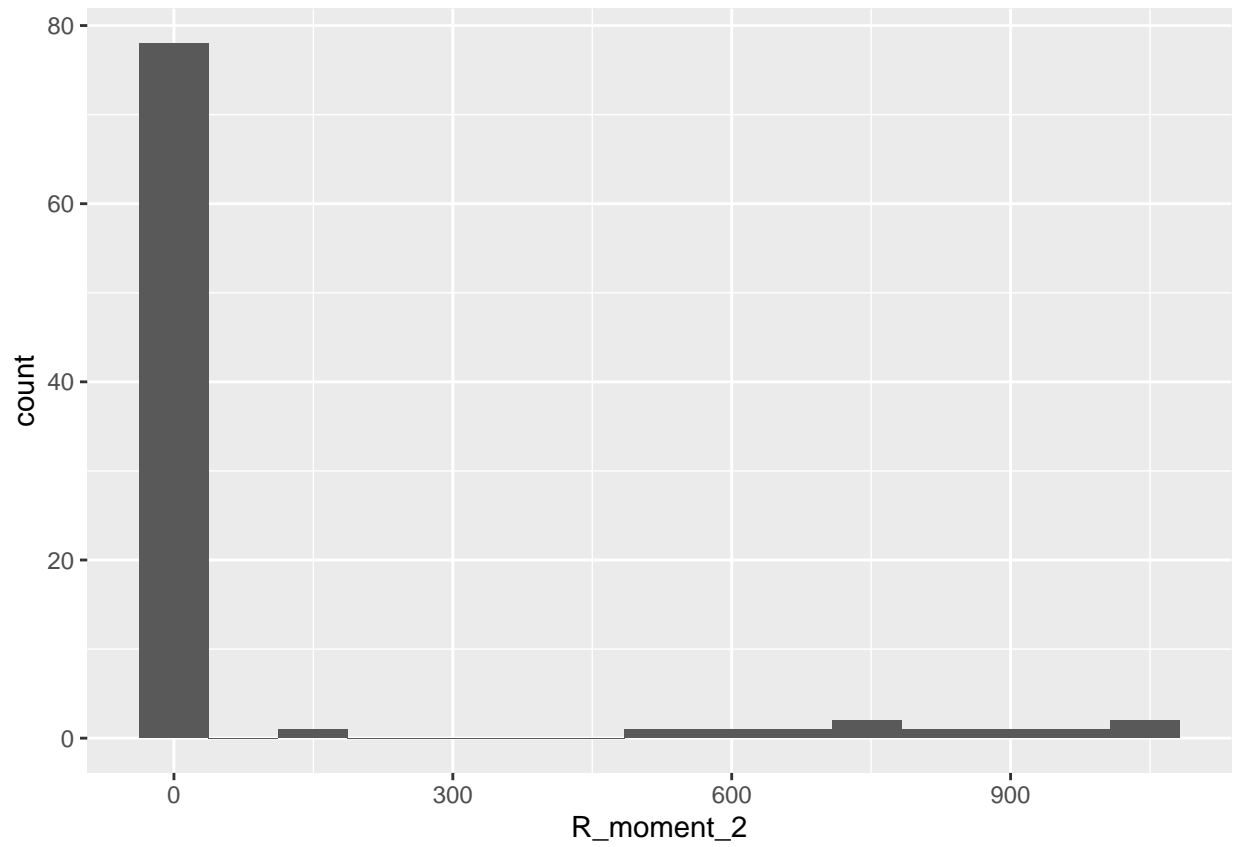

```
ggplot(data_train) +  
  geom_histogram(aes(x = R_moment_3), bins = 15)
```

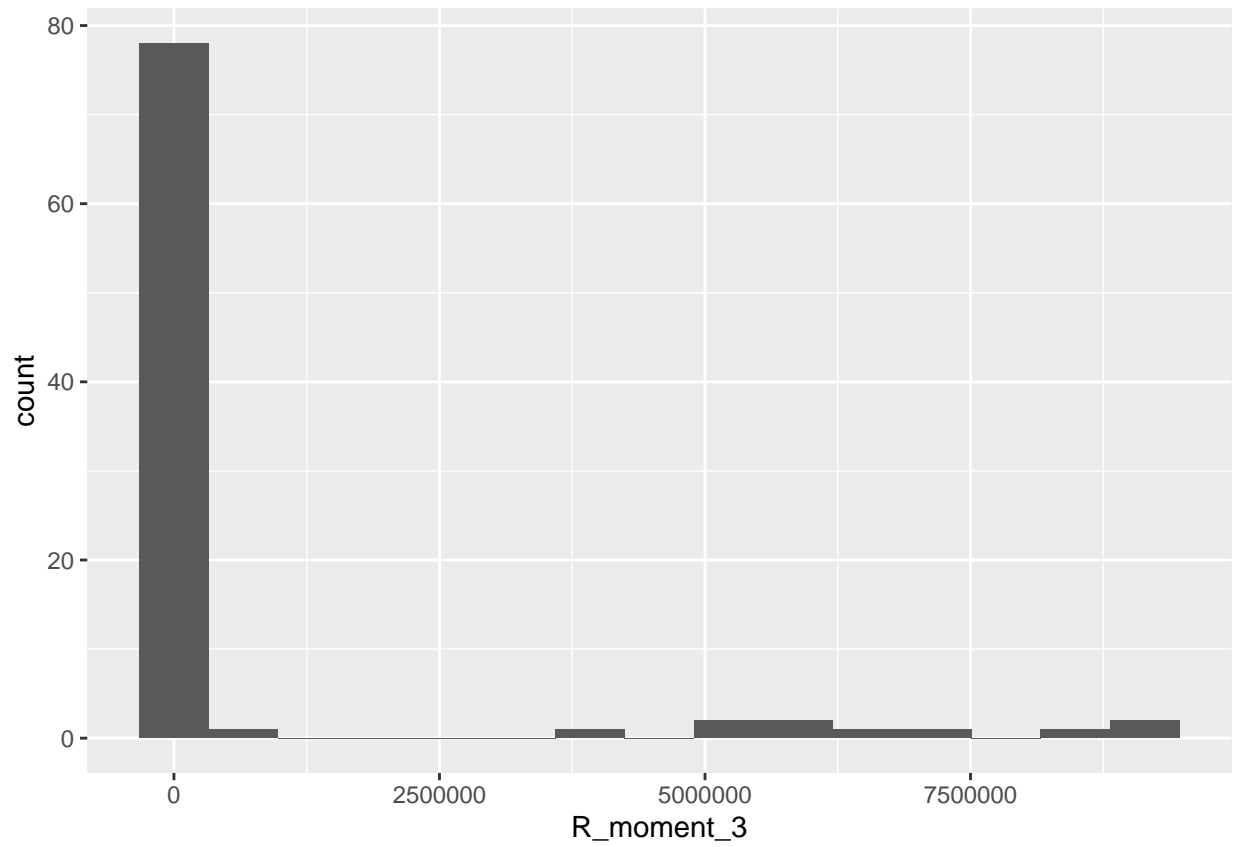

```
ggplot(data_train) +  
  geom_histogram(aes(x = R_moment_4), bins = 15)
```

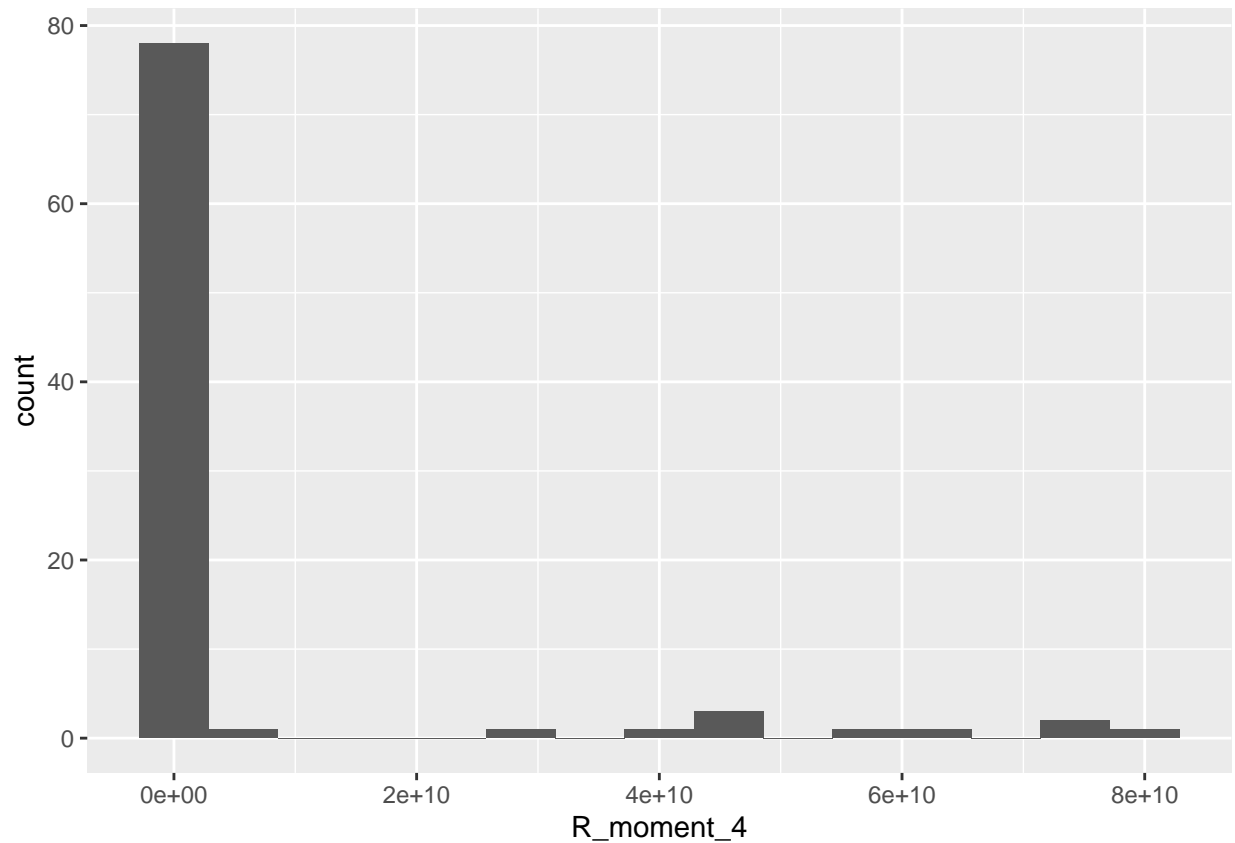

```
ggpairs(data_train)
```

```
## Warning: Removed 1 rows containing missing values (geom_text).
```

```
## Warning: Removed 1 rows containing missing values (geom_text).
```

```
## Warning: Removed 30 rows containing non-finite values (stat_density).
```


```
## Warning: Removed 1 rows containing missing values (geom_text).
```

```
## Removed 1 rows containing missing values (geom_text).
```

```
## Removed 1 rows containing missing values (geom_text).
```

```
## Removed 1 rows containing missing values (geom_text).
```

```
## Removed 1 rows containing missing values (geom_text).
```

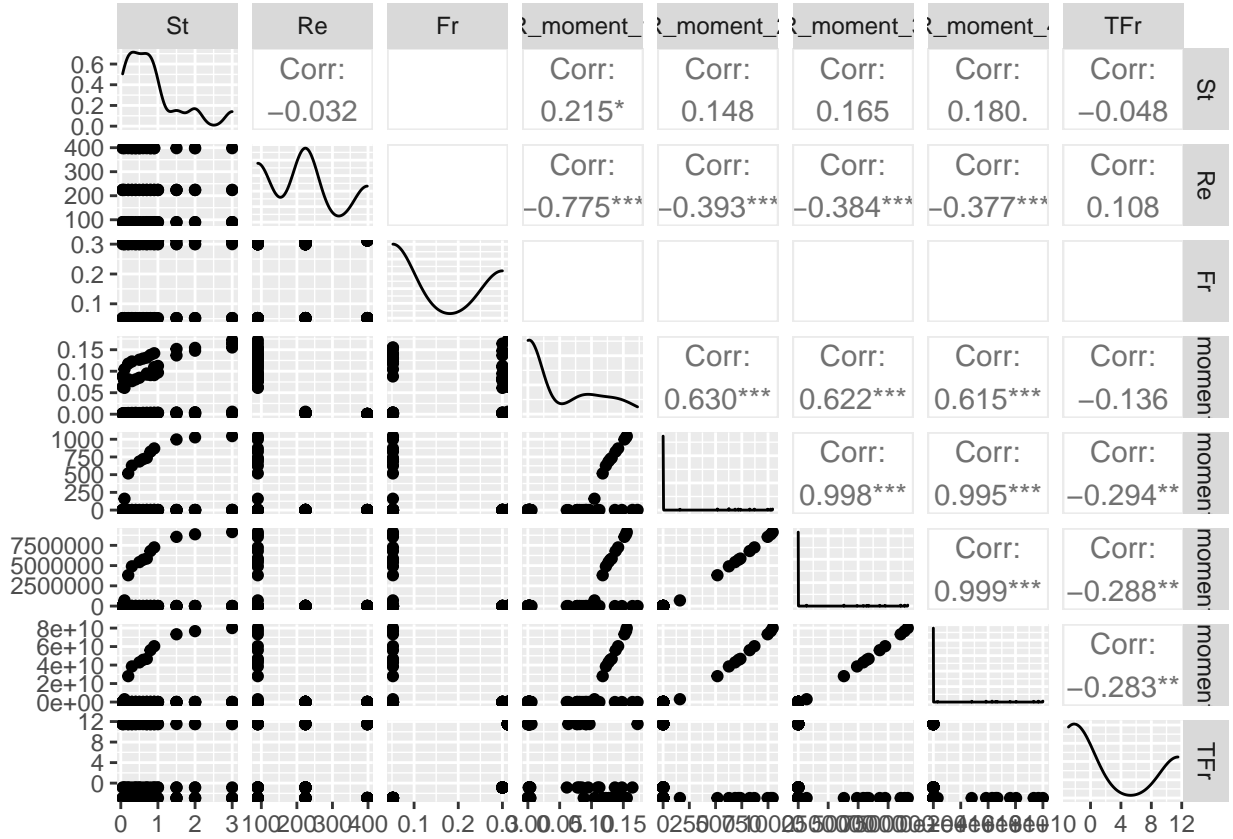Some brief notes:

Observations on predictors: St (size) seems to be mostly small particles with some trials with larger particles. Re (turbulence) seems to be in three groups: low (90), medium (224), and high (398). Perhaps it could be considered a categorical variable? Fr (gravitational acceleration) seems to also be in three groups: low (.052), medium (.3), and high (infinite). Could this also become a categorical variable? We have decided to do a logistic transformation on Fr in order to approximate the effects of infinity.

Also, I believe we should centralize the second through fourth moments. The first raw moment is actually helpful because it tells us about the average amount of turbulence. However, when it comes to the shape of the distribution (variance, skewness, and kurtosis) we need to centralize the moments in order to interpret them.

The code for transforming the variables is below:

```
data_train <- data_train %>% mutate(R_moment_1_central = 0)
data_train <- data_train %>% mutate(R_moment_2_central = R_moment_2 - (R_moment_1)^2)
data_train <- data_train %>% mutate(R_moment_3_central = R_moment_3 - 3*R_moment_1*R_moment_2 + 2*(R_moment_1)^3)
data_train <- data_train %>% mutate(R_moment_4_central = R_moment_4 - 4*R_moment_1*R_moment_3 + 6*(R_moment_1)^2*R_moment_2 - 3*(R_moment_1)^4)
```

Correlations: Reynolds number is negatively correlated with all moments, which is surprising but I believe it is due to the fact that almost all of the observations of all the moments are mostly around 0 with only some exceptions. The 2nd, 3rd, and 4th moments are pretty correlated but this makes sense because they are all various measures of the width and shape of the tails.

Plots: St and the first moment seem to have a linear or quadratic relationship. I would not be surprised if it is true that bigger particles cluster more on average. St and the second, third, and fourth moments seem to have a linear or quadratic relationship. Perhaps bigger particles behave more unpredictably.

Methodology


Linear


```
full_linear_E1 <- glm(R_moment_1 ~ St + TFr + Re, data = data_train)
step_full_linear_E1 <- stepAIC(full_linear_E1, direction = "both", trace = FALSE)
summary(step_full_linear_E1)
```


Linear Fitting


```
##
## Call:
## glm(formula = R_moment_1 ~ St + Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -0.061936 -0.030347 -0.000174  0.034491  0.055714
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  1.102e-01  8.837e-03  12.475  < 2e-16 ***
## St           1.353e-02  4.621e-03   2.927  0.00438 **
## Re          -3.798e-04  3.215e-05 -11.816  < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 0.001160225)
##
##      Null deviance: 0.274427  on 88  degrees of freedom
## Residual deviance: 0.099779  on 86  degrees of freedom
## AIC: -344.04
##
## Number of Fisher Scoring iterations: 2

plot(step_full_linear_E1)
```

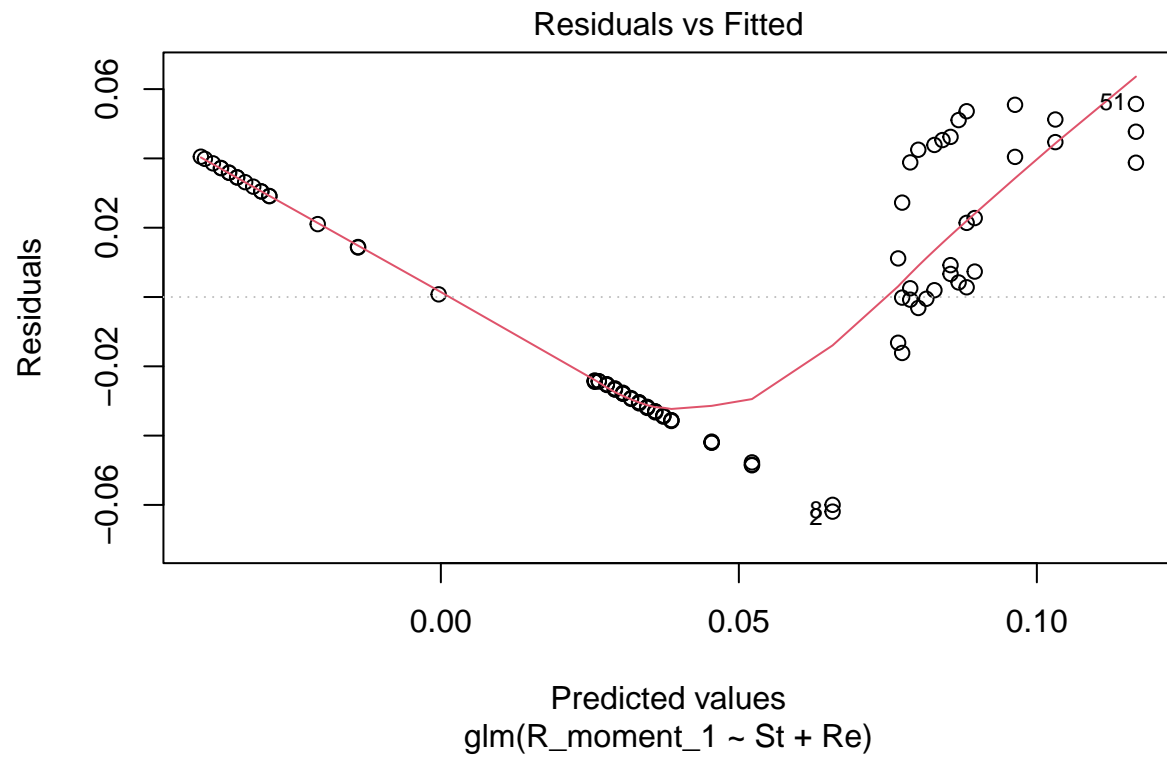

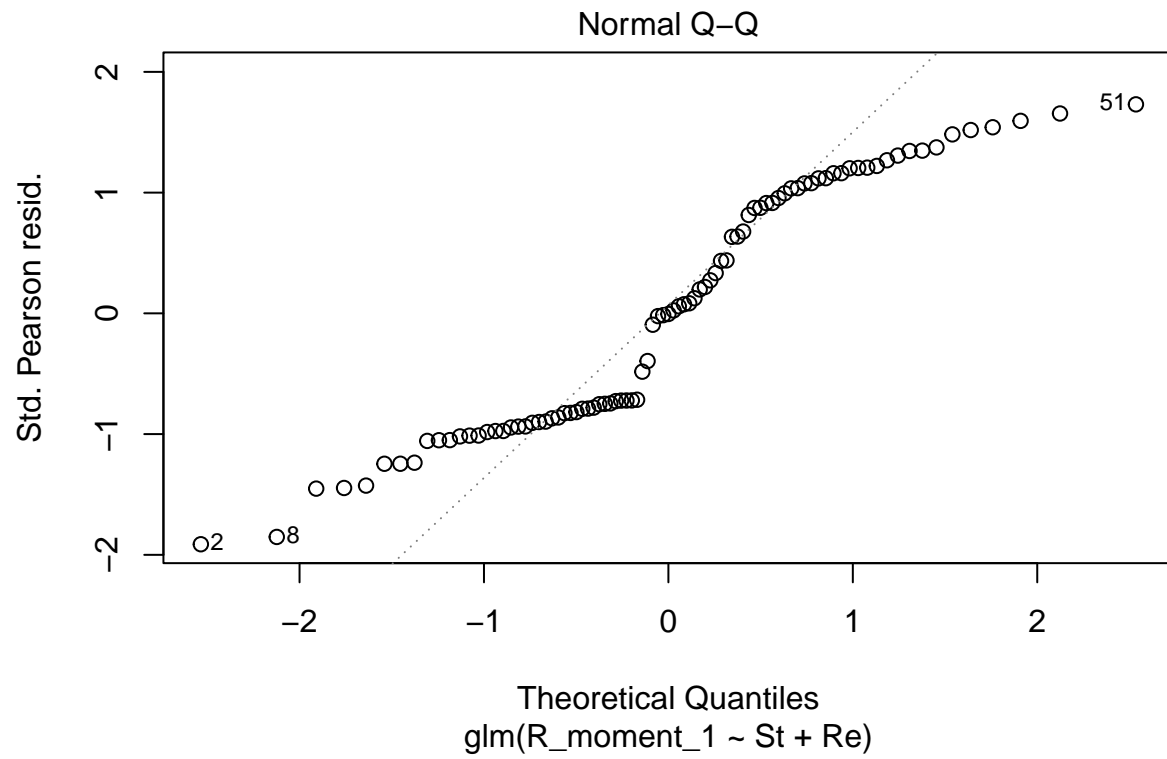

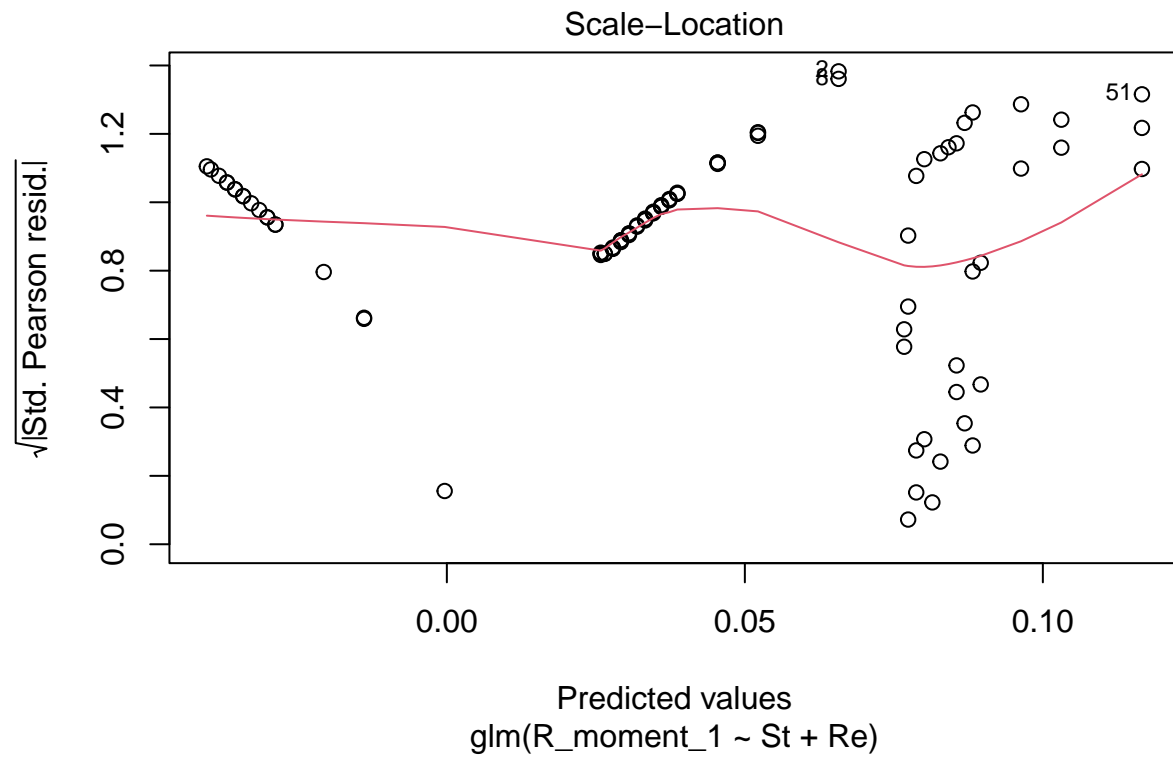

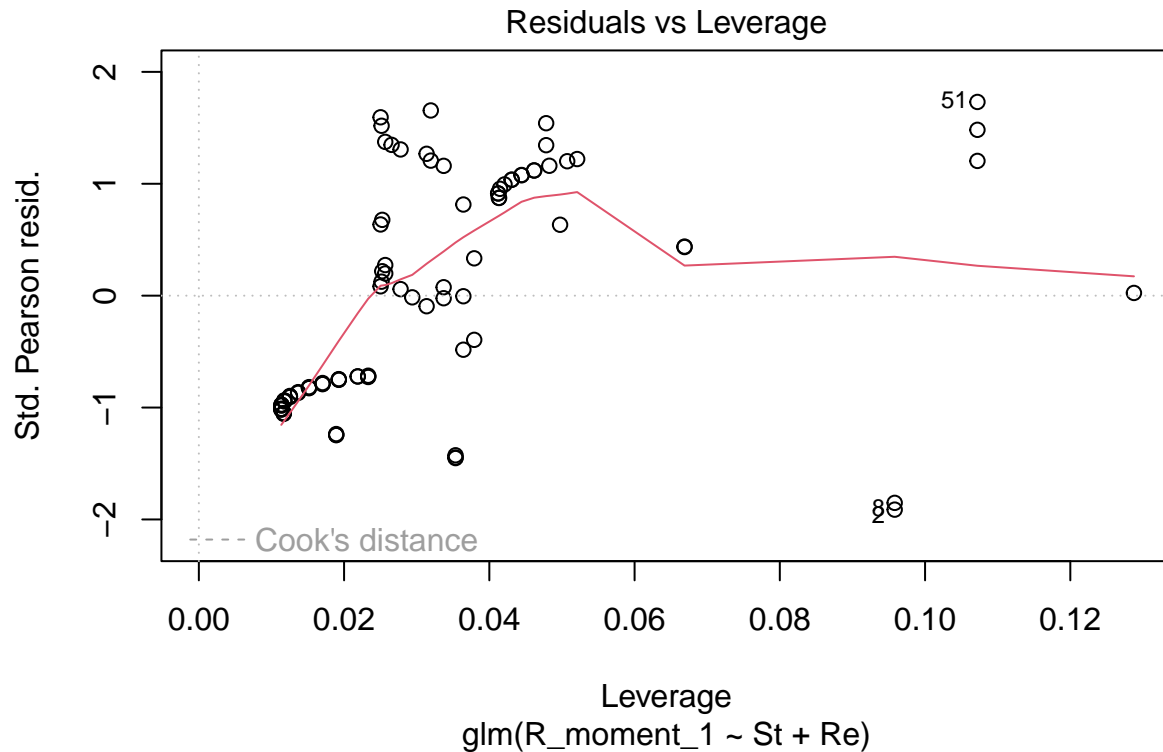



```
full_linear_E2 <- glm(R_moment_2 ~ St + TFr + Re, data = data_train)
step_full_linear_E2 <- stepAIC(full_linear_E2, direction = "both", trace = FALSE)
summary(step_full_linear_E2)
```


```
##
## Call:
## glm(formula = R_moment_2 ~ TFr + Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -252.57  -139.17  -104.99    7.97   791.19
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  299.6593    53.6457   5.586 2.67e-07 ***
## TFr          -10.2317     3.8471  -2.660 0.009332 **
## Re            -0.8473     0.2221  -3.815 0.000256 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 54790.94)
##
##      Null deviance: 6032373  on 88  degrees of freedom
## Residual deviance: 4712021  on 86  degrees of freedom
## AIC: 1228.6
```


```
##  
## Number of Fisher Scoring iterations: 2
```

```
plot(step_full_linear_E2)
```

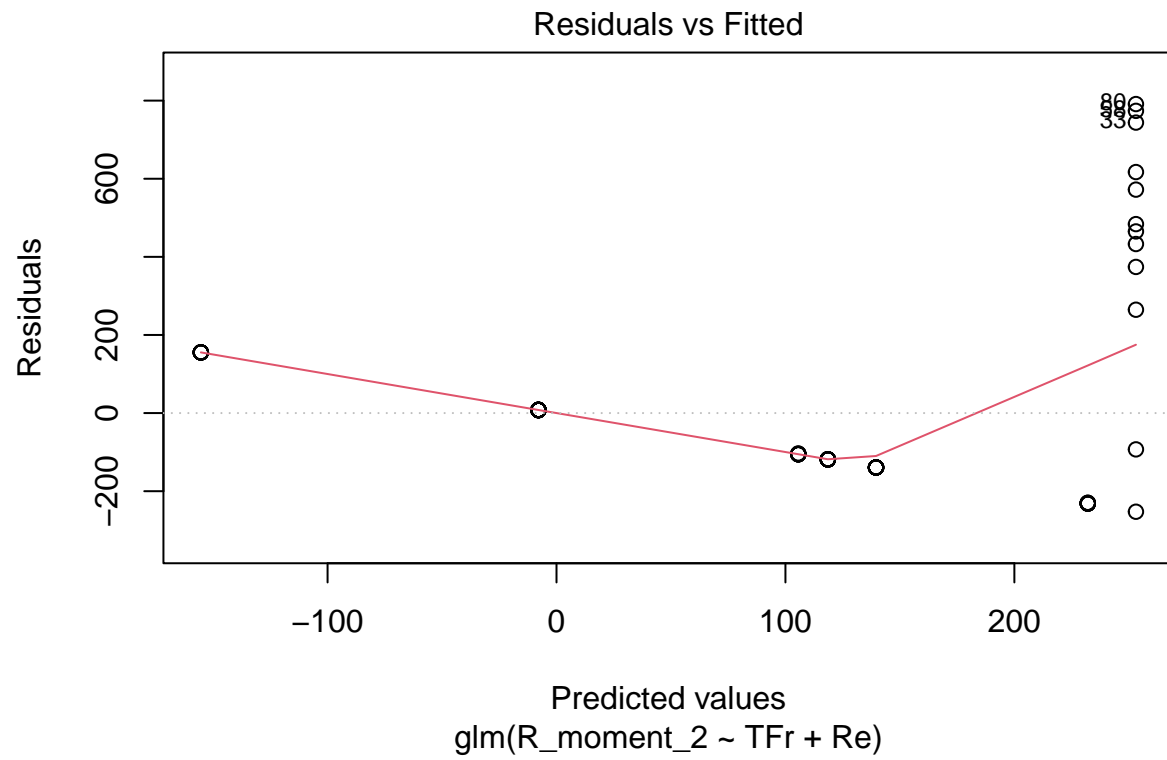

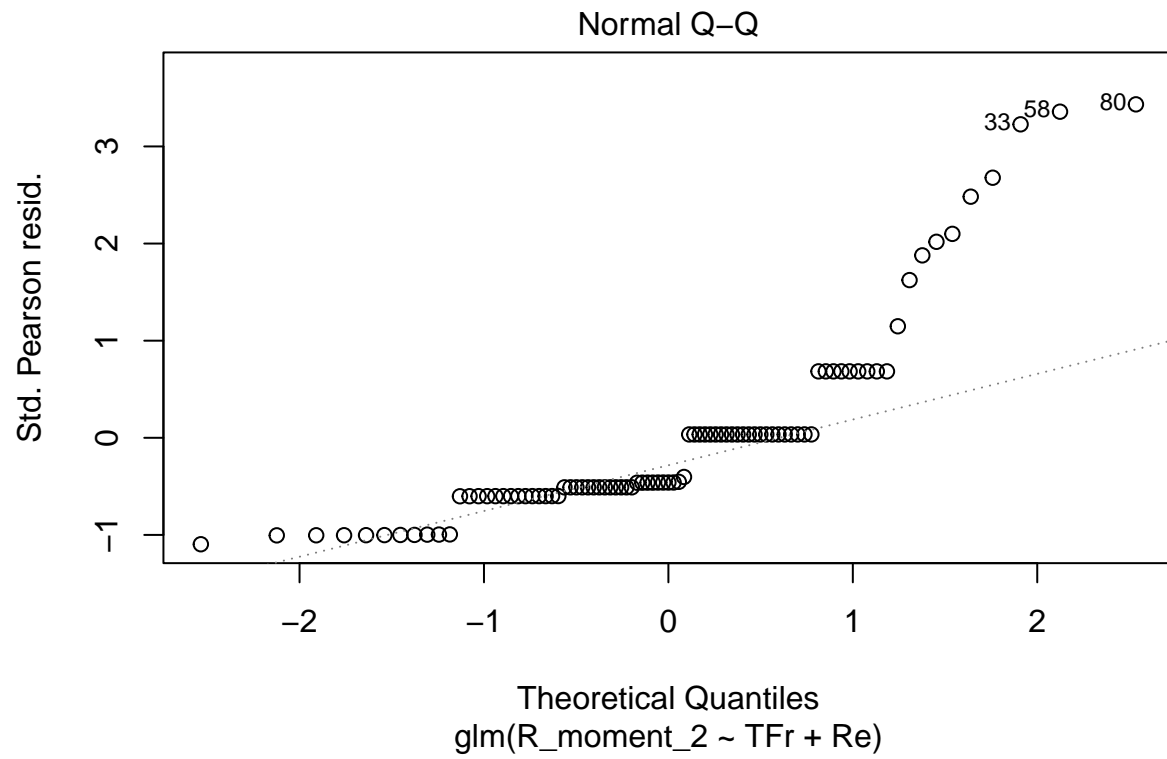

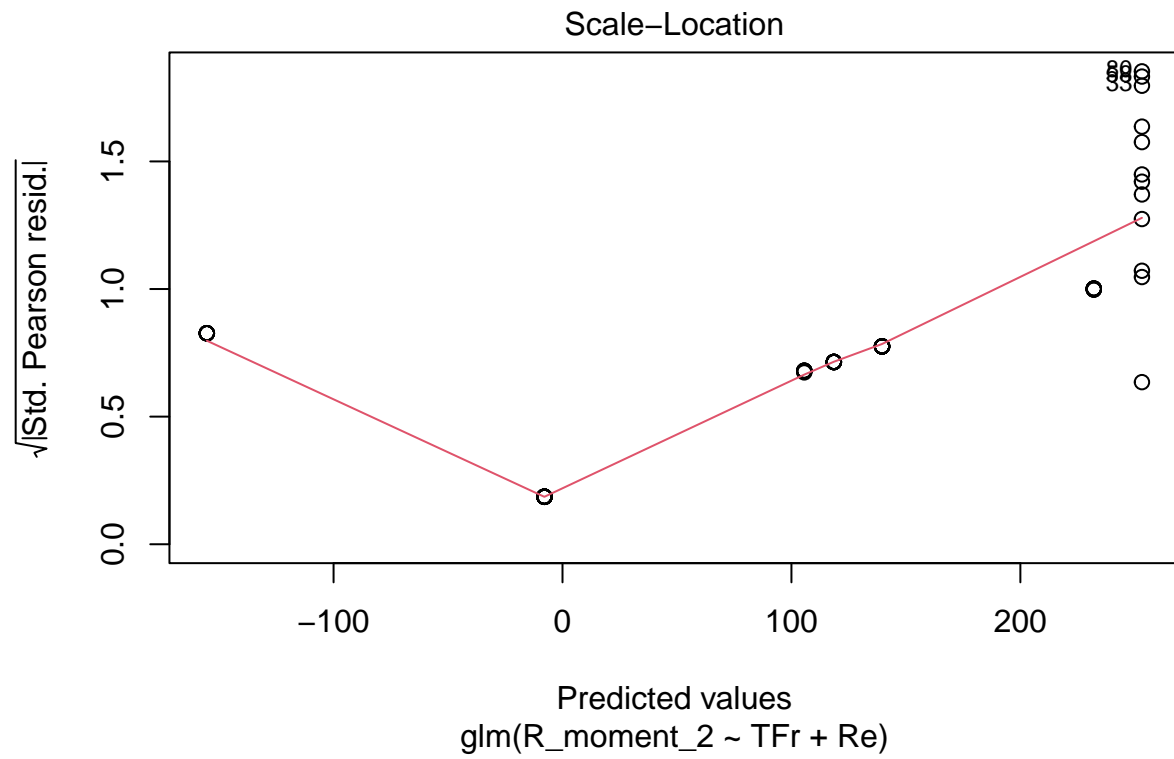

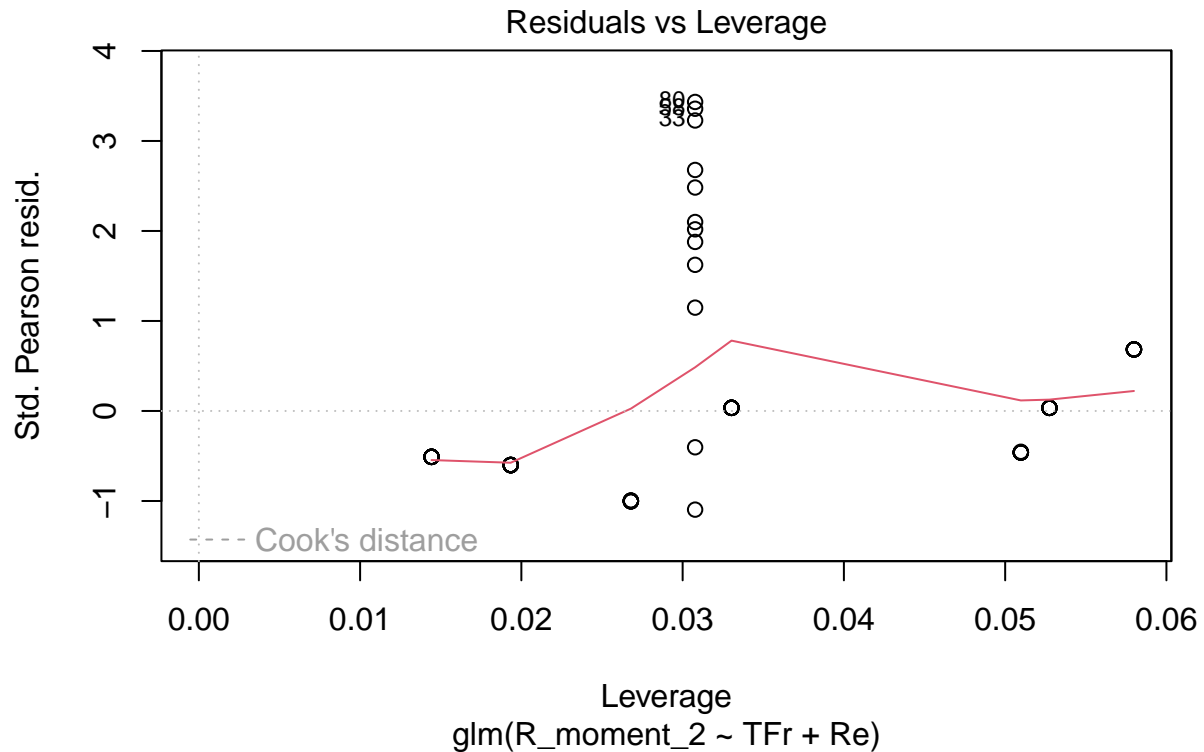



```
full_linear_E3 <- glm(R_moment_3 ~ St + TFr + Re, data = data_train)
step_full_linear_E3 <- stepAIC(full_linear_E3, direction = "both", trace = FALSE)
summary(step_full_linear_E3)
```


```
##
## Call:
## glm(formula = R_moment_3 ~ St + TFr + Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -2718782 -1025004  -660570   281888   6377805
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  2082451    508059   4.099 9.46e-05 ***
## St           394073    264795   1.488 0.140394
## TFr          -81448    32077  -2.539 0.012933 *
## Re           -6832     1851  -3.691 0.000393 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 3.801448e+12)
##
##      Null deviance: 4.1938e+14  on 88  degrees of freedom
## Residual deviance: 3.2312e+14  on 85  degrees of freedom
```


```
## AIC: 2836.5
##
## Number of Fisher Scoring iterations: 2
```

```
plot(step_full_linear_E3)
```

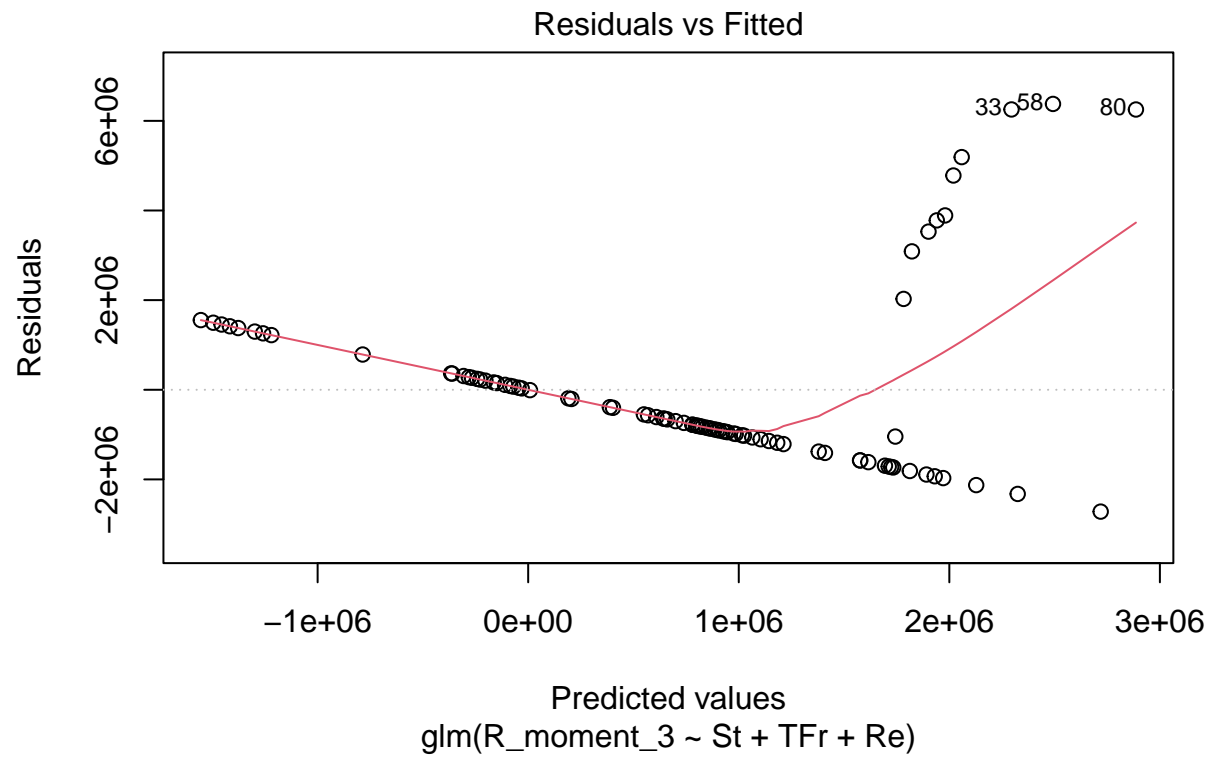

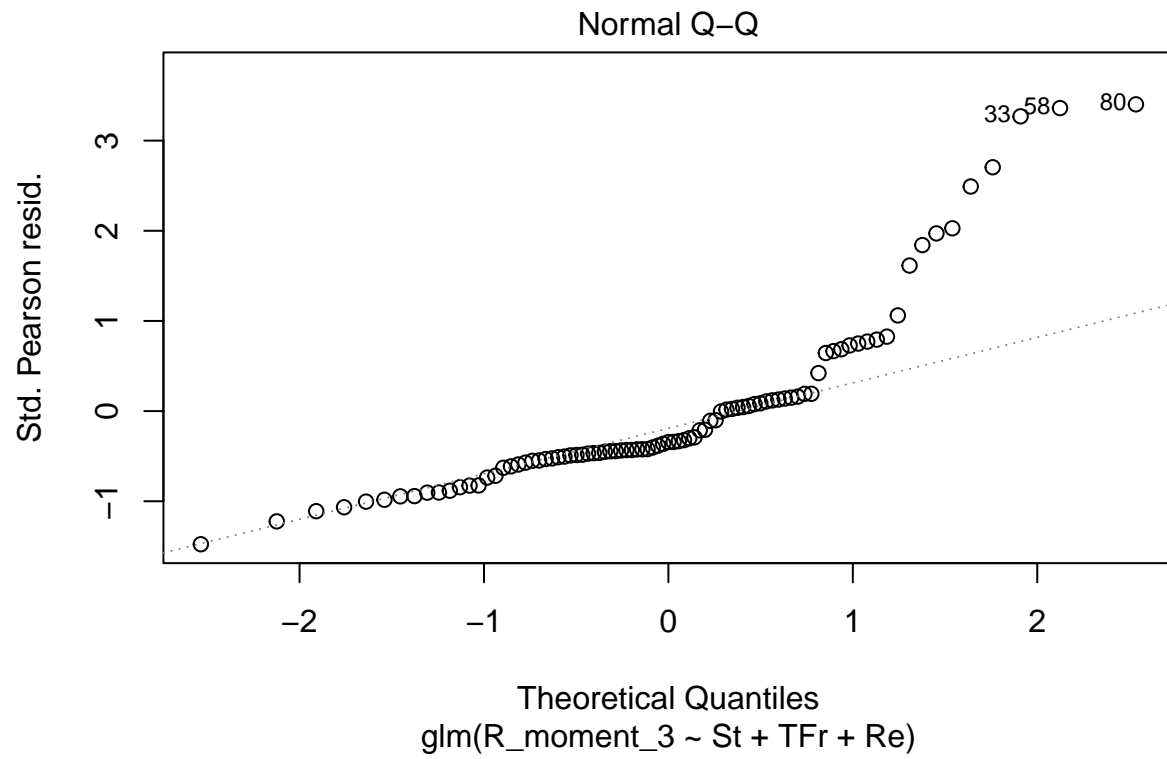

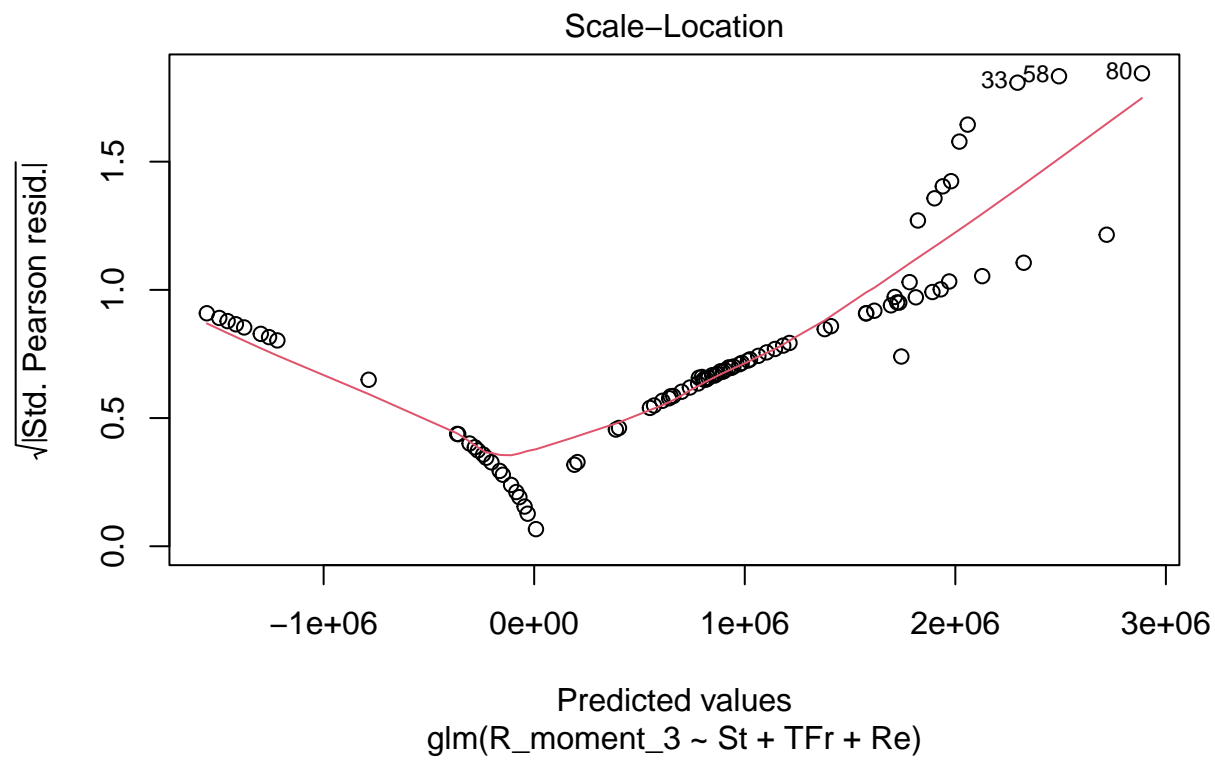

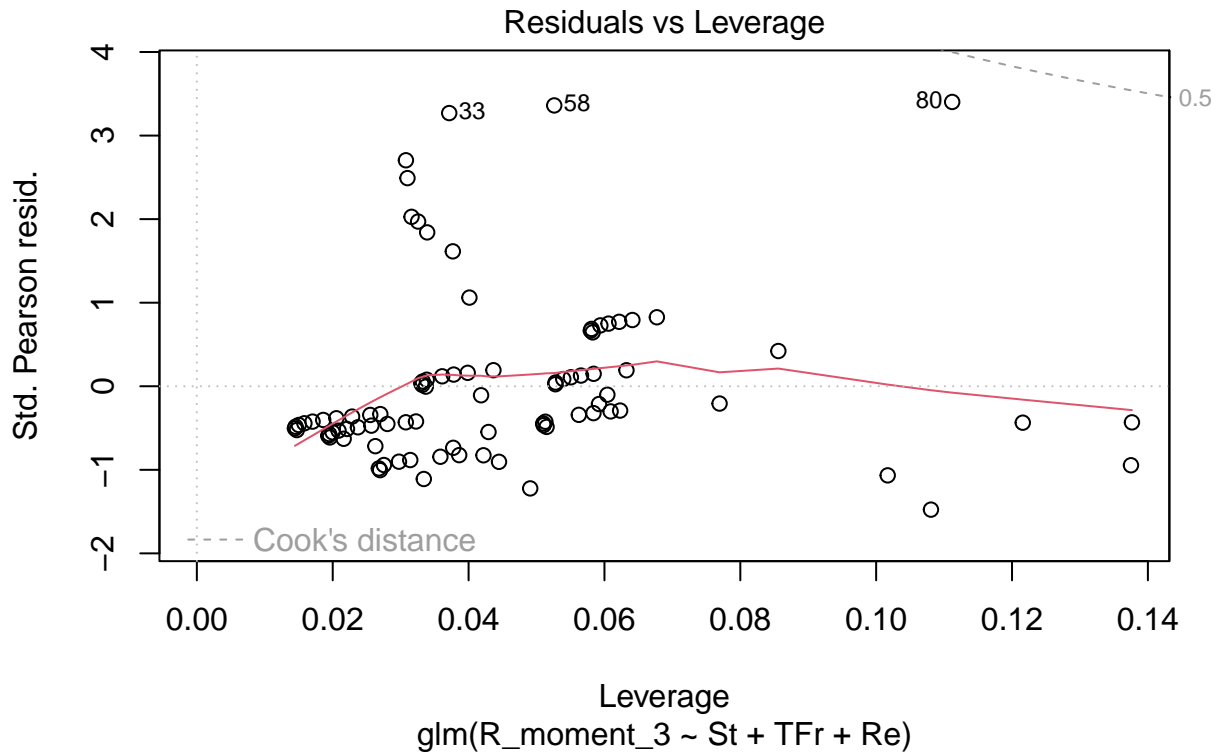



```
full_linear_E4 <- glm(R_moment_4 ~ St + TFr + Re, data = data_train)
step_full_linear_E4 <- stepAIC(full_linear_E4, direction = "both", trace = FALSE)
summary(step_full_linear_E4)
```


```
##
## Call:
## glm(formula = R_moment_4 ~ St + TFr + Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -2.325e+10  -8.400e+09  -5.101e+09   2.554e+09   5.575e+10
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  1.673e+10  4.263e+09   3.925 0.000175 ***
## St           3.667e+09  2.222e+09   1.651 0.102520
## TFr          -6.673e+08  2.691e+08  -2.480 0.015126 *
## Re           -5.609e+07  1.553e+07  -3.612 0.000513 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 2.676008e+20)
##
## Null deviance: 2.9413e+22  on 88  degrees of freedom
## Residual deviance: 2.2746e+22  on 85  degrees of freedom
```


```
## AIC: 4444.7
##
## Number of Fisher Scoring iterations: 2
```

```
plot(step_full_linear_E4)
```

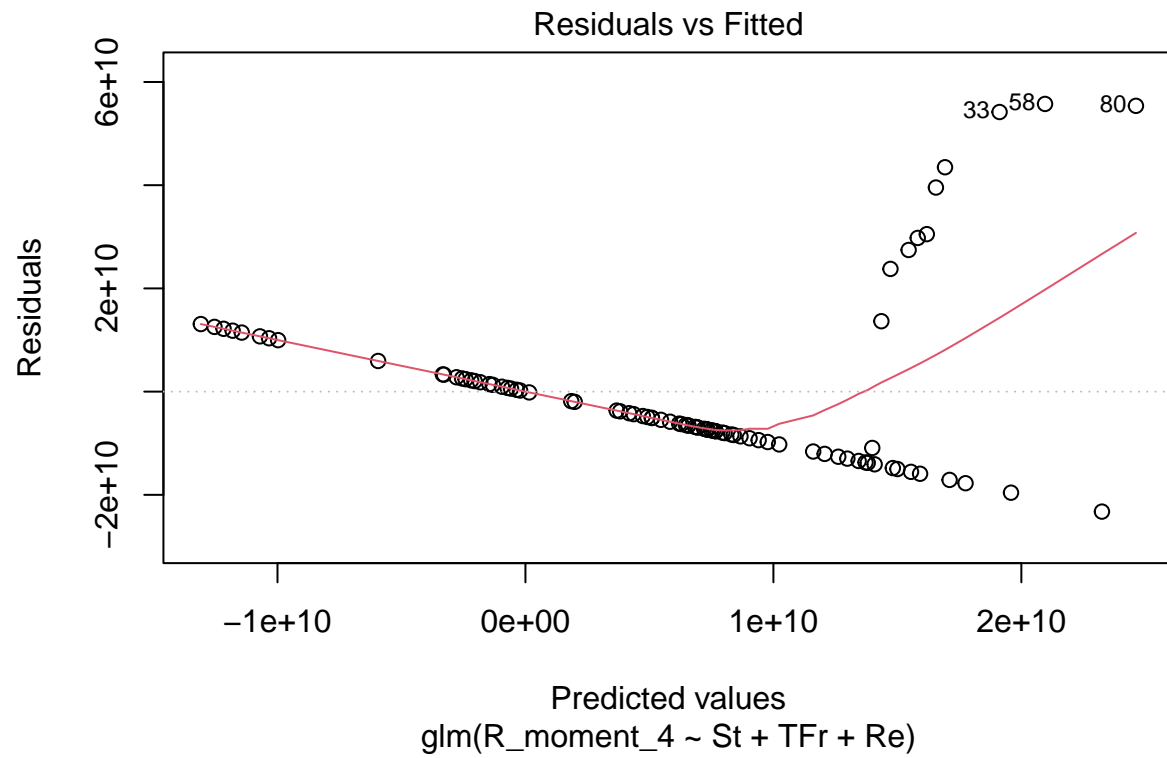

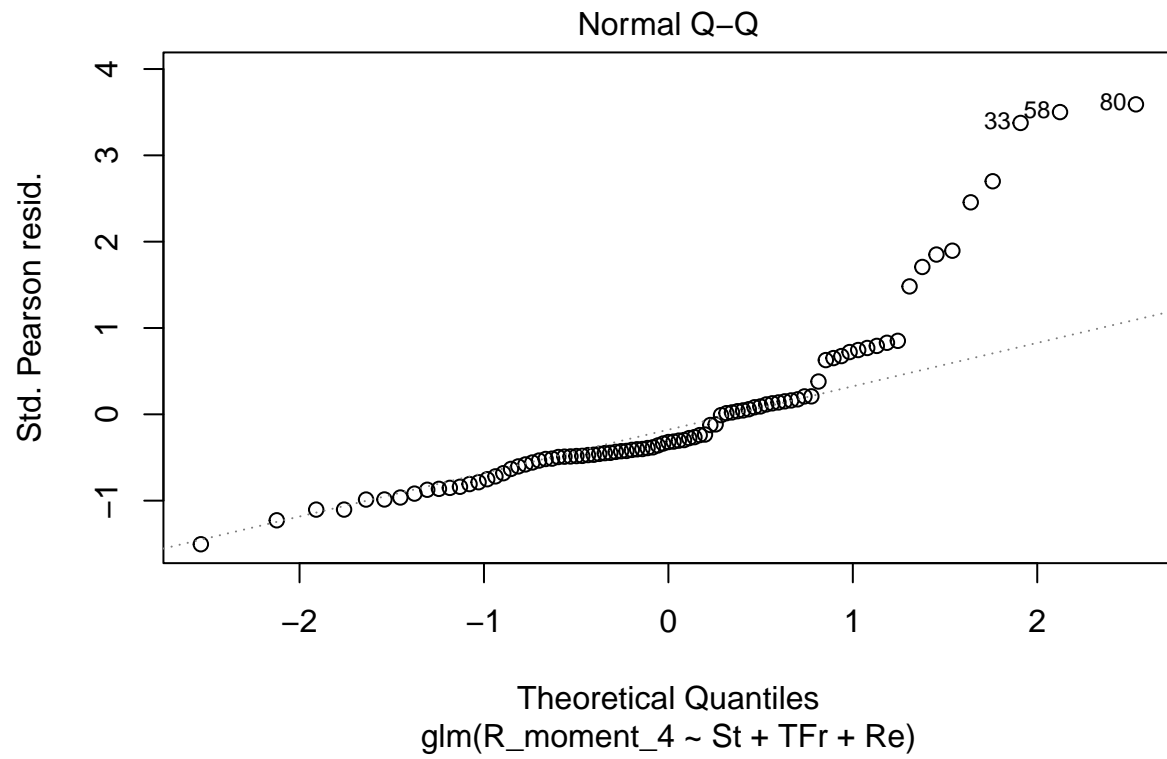

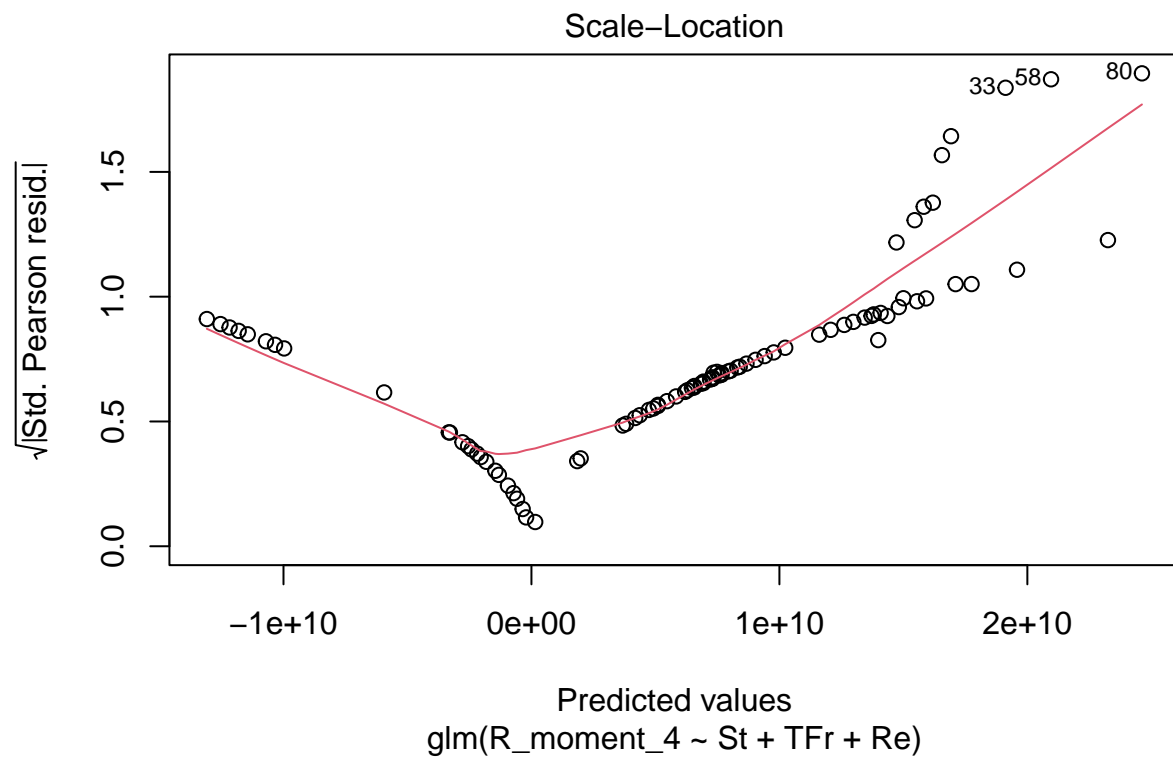

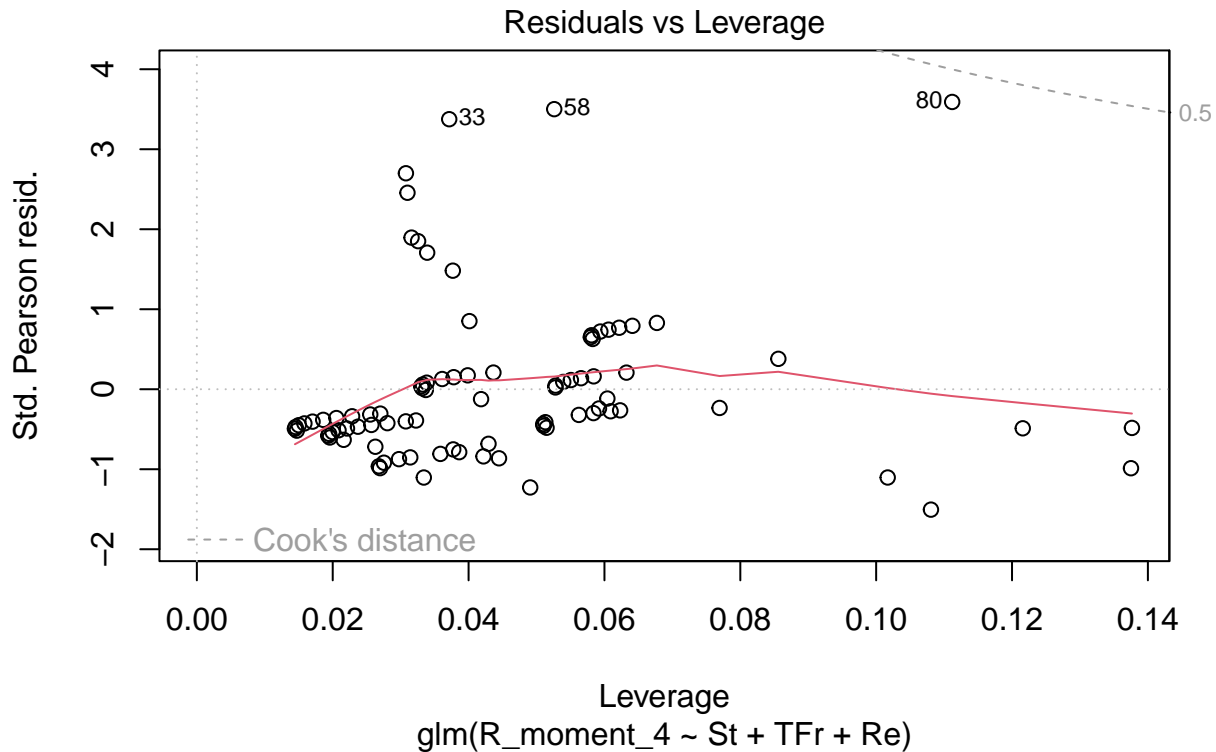


```
full_linear_E2_central <- glm(R_moment_2_central ~ St + TFr + Re, data = data_train)
step_full_linear_E2_central <- stepAIC(full_linear_E2_central, direction = "both", trace = FALSE)
summary(step_full_linear_E2_central)
```


Linear fitting on central moments 2 through 4


```
##
## Call:
## glm(formula = R_moment_2_central ~ TFr + Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -252.57  -139.16  -104.99    7.98   791.18
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  299.6445    53.6449   5.586 2.68e-07 ***
## TFr          -10.2315     3.8471  -2.660 0.009332 **
## Re            -0.8472     0.2221  -3.815 0.000256 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 54789.33)
```


```
##
## Null deviance: 6032130 on 88 degrees of freedom
## Residual deviance: 4711882 on 86 degrees of freedom
## AIC: 1228.6
##
## Number of Fisher Scoring iterations: 2
```

```
plot(step_full_linear_E2_central)
```

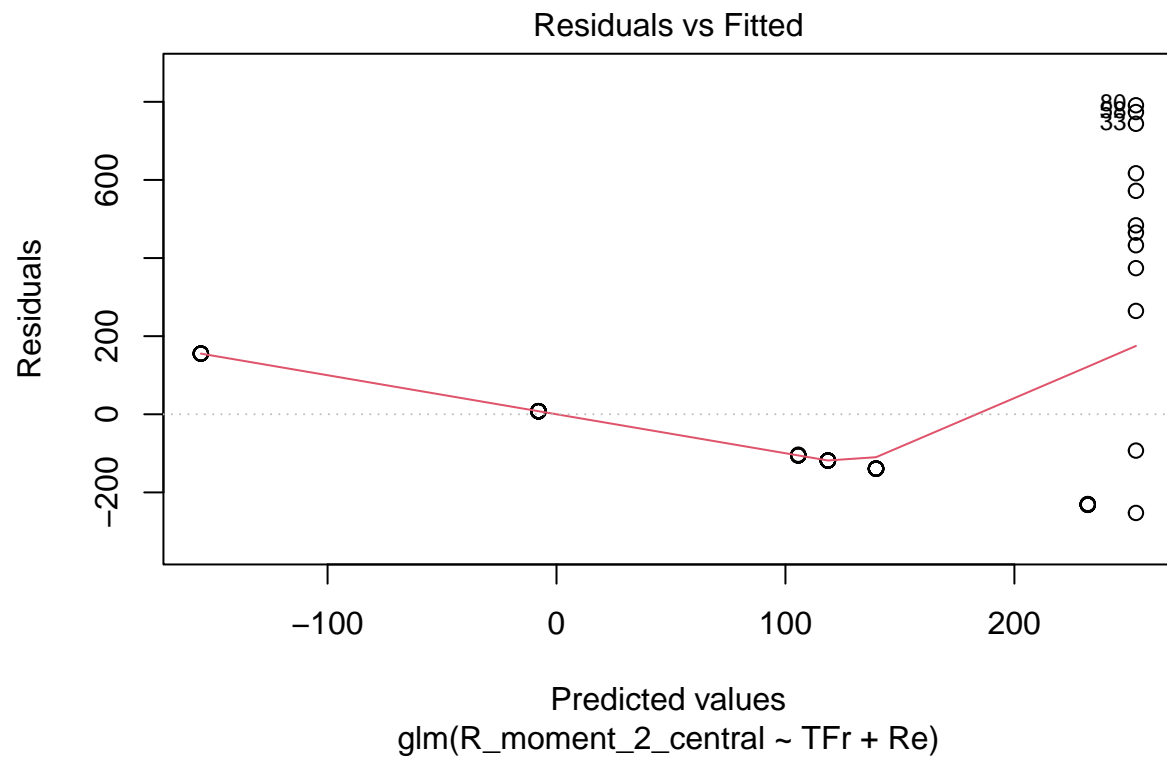

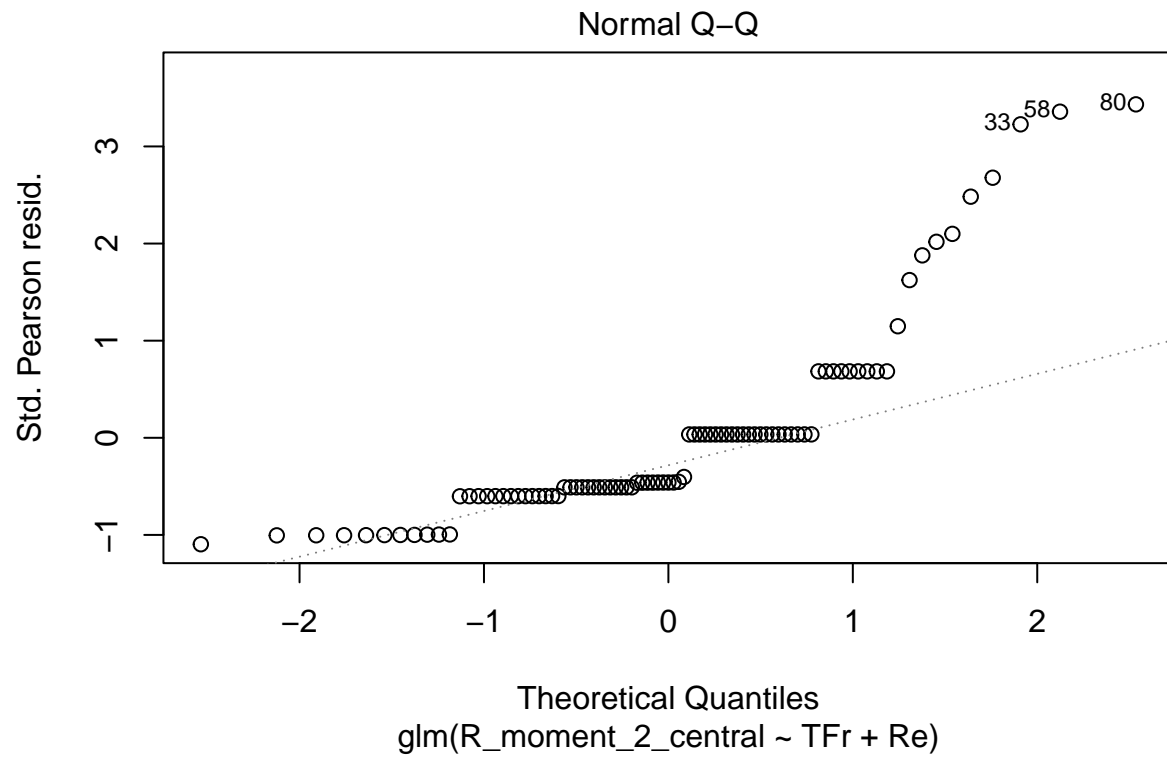

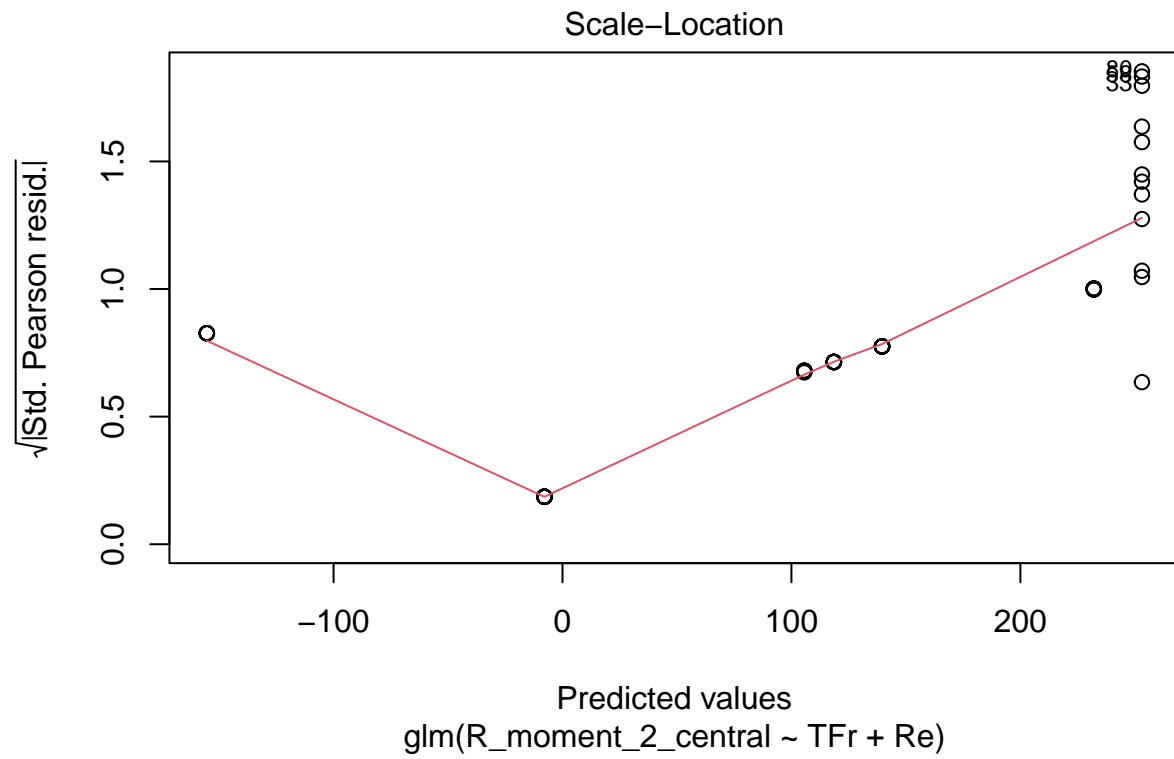

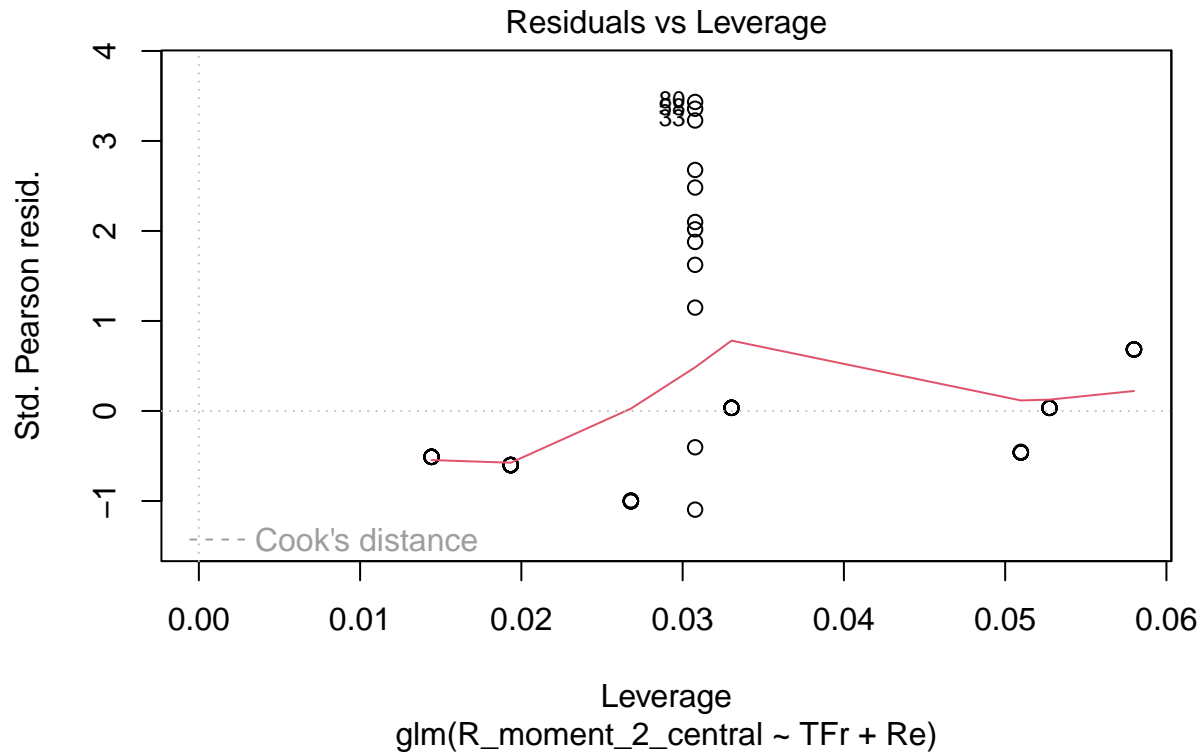



```
full_linear_E3_central <- glm(R_moment_3_central ~ St + TFr + Re, data = data_train)
step_full_linear_E3_central <- stepAIC(full_linear_E3_central, direction = "both", trace = FALSE)
summary(step_full_linear_E3_central)
```


```
##
## Call:
## glm(formula = R_moment_3_central ~ St + TFr + Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -2718640 -1024952  -660538   281872   6377459
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  2082346     508033   4.099 9.46e-05 ***
## St           394050     264781   1.488 0.140396
## TFr          -81444      32075  -2.539 0.012933 *
## Re           -6831       1851  -3.691 0.000393 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 3.801057e+12)
##
##      Null deviance: 4.1934e+14  on 88  degrees of freedom
## Residual deviance: 3.2309e+14  on 85  degrees of freedom
```


```
## AIC: 2836.5
##
## Number of Fisher Scoring iterations: 2
```

```
plot(step_full_linear_E3_central)
```

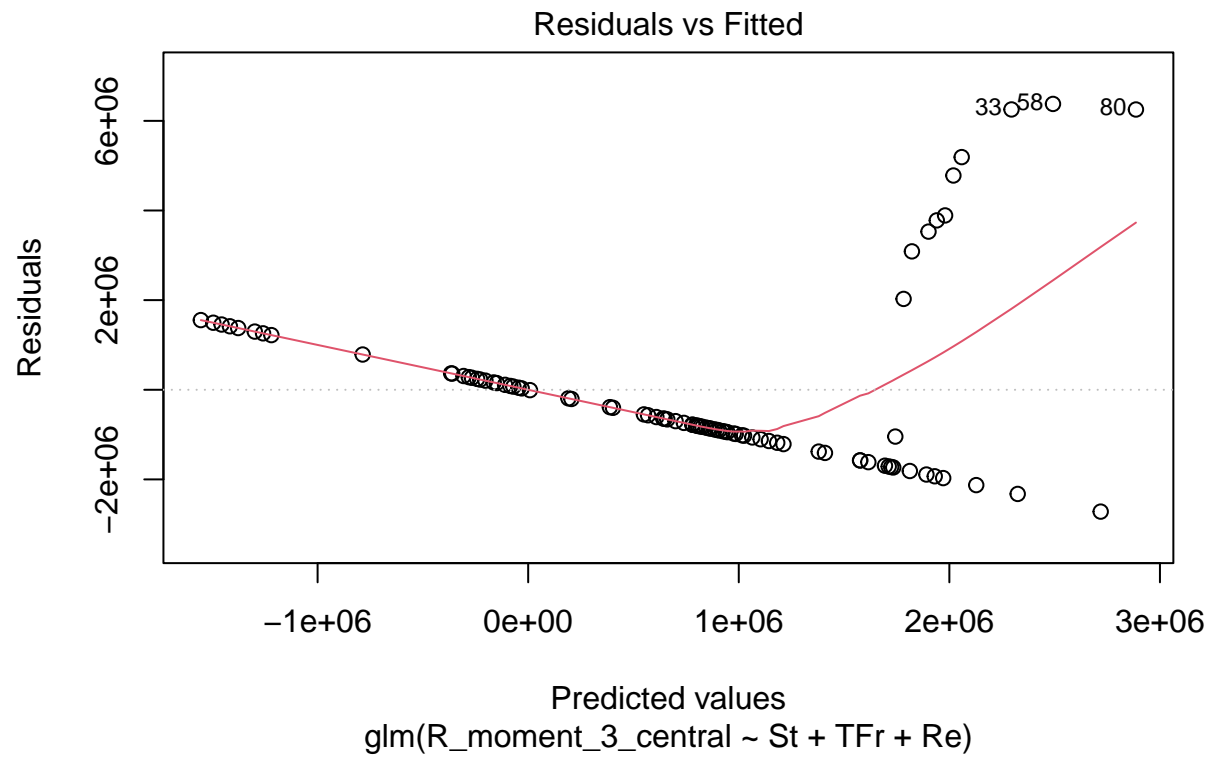

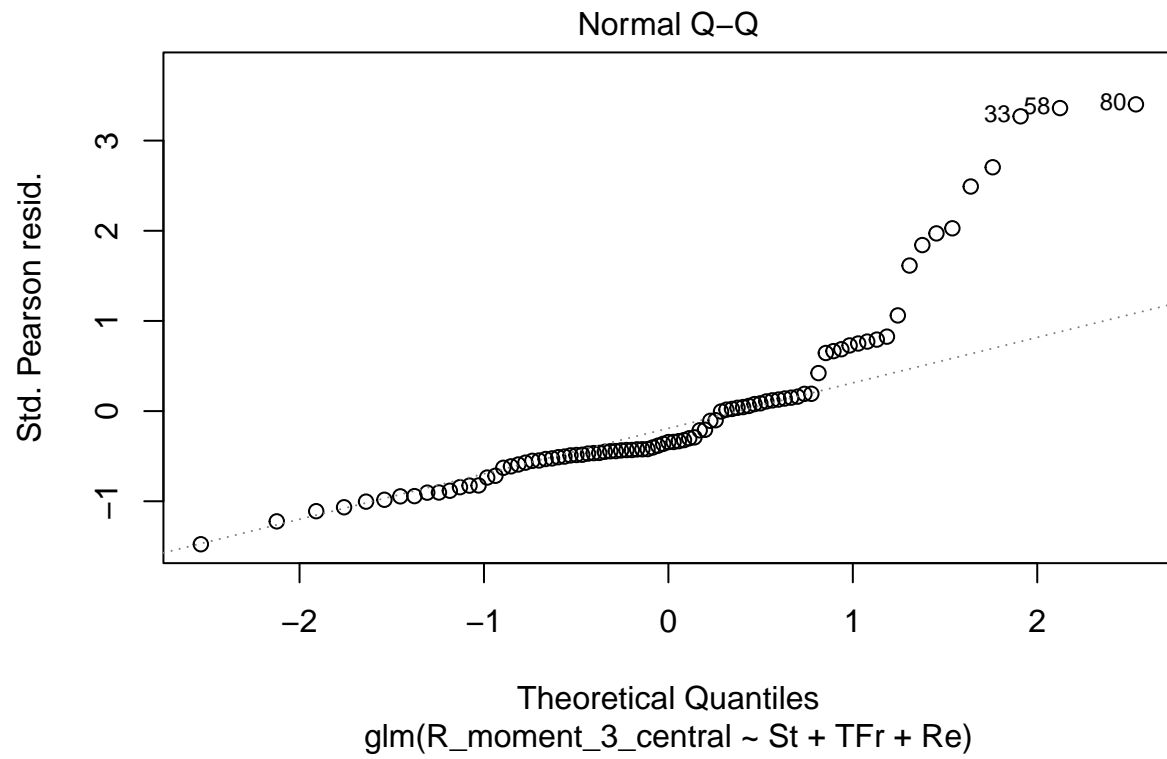

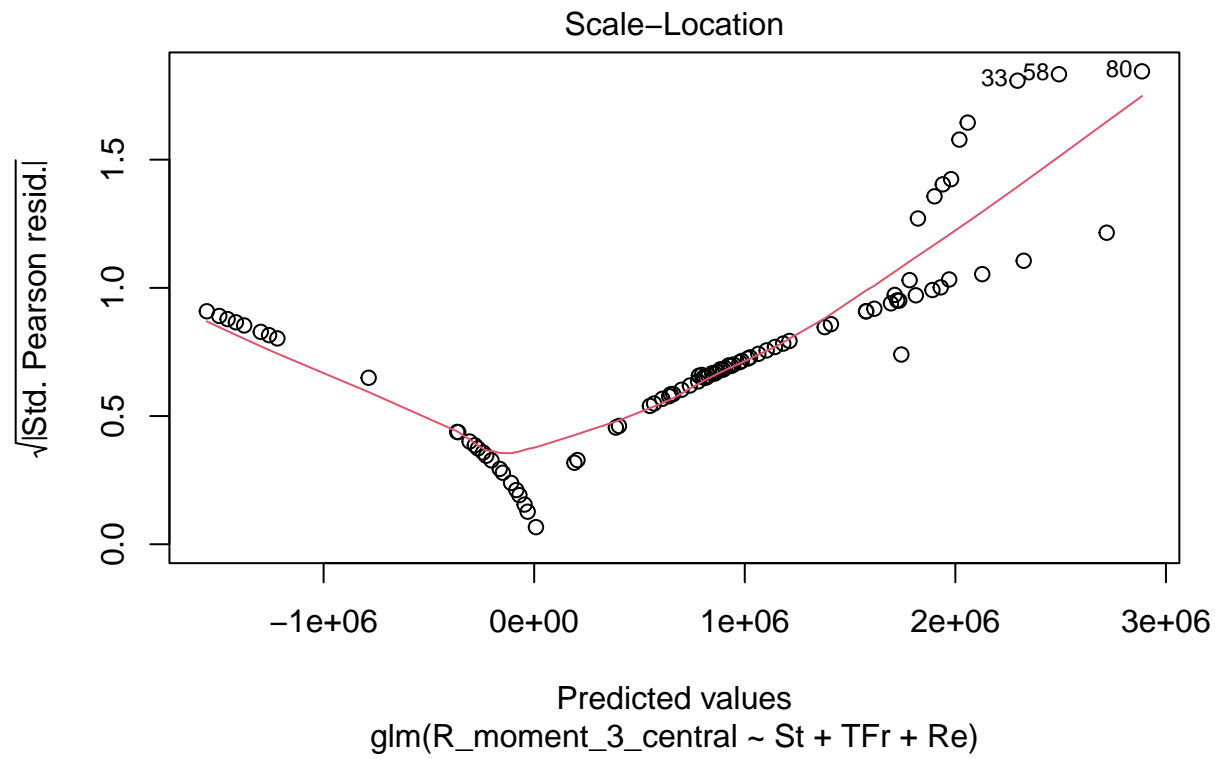

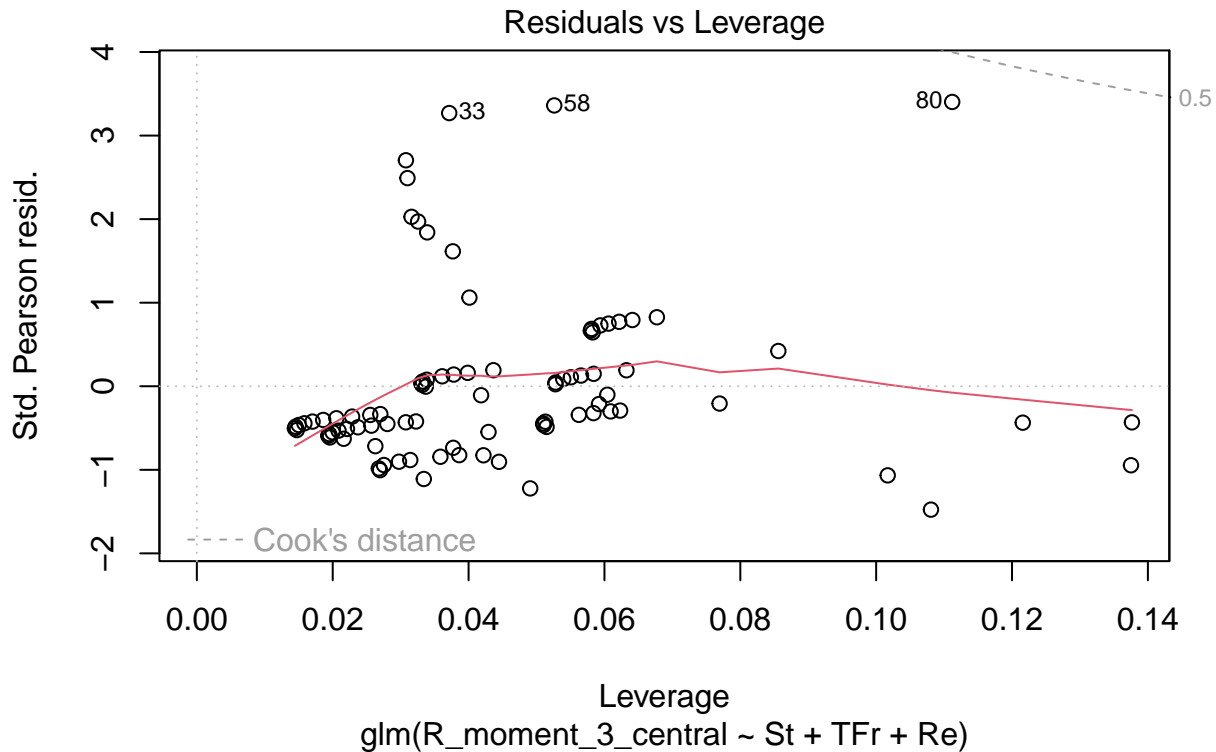



```
full_linear_E4_central <- glm(R_moment_4_central ~ St + TFr + Re, data = data_train)
step_full_linear_E4_central <- stepAIC(full_linear_E4_central, direction = "both", trace = FALSE)
summary(step_full_linear_E4_central)
```


```
##
## Call:
## glm(formula = R_moment_4_central ~ St + TFr + Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -2.325e+10  -8.400e+09  -5.100e+09   2.554e+09   5.574e+10
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  1.673e+10  4.262e+09   3.925 0.000175 ***
## St           3.667e+09  2.222e+09   1.651 0.102522
## TFr          -6.673e+08  2.691e+08  -2.480 0.015126 *
## Re           -5.609e+07  1.553e+07  -3.612 0.000513 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 2.675639e+20)
##
##      Null deviance: 2.9409e+22  on 88  degrees of freedom
## Residual deviance: 2.2743e+22  on 85  degrees of freedom
```


```
## AIC: 4444.7
##
## Number of Fisher Scoring iterations: 2
```

```
plot(step_full_linear_E4_central)
```

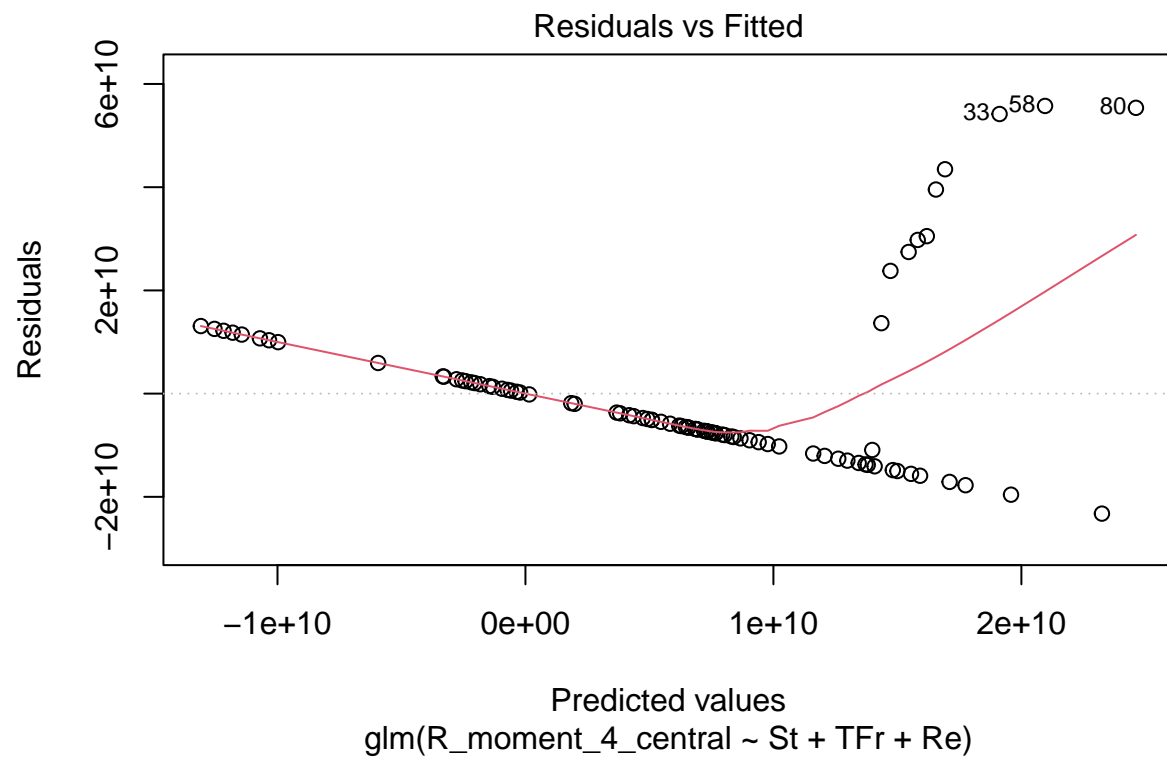

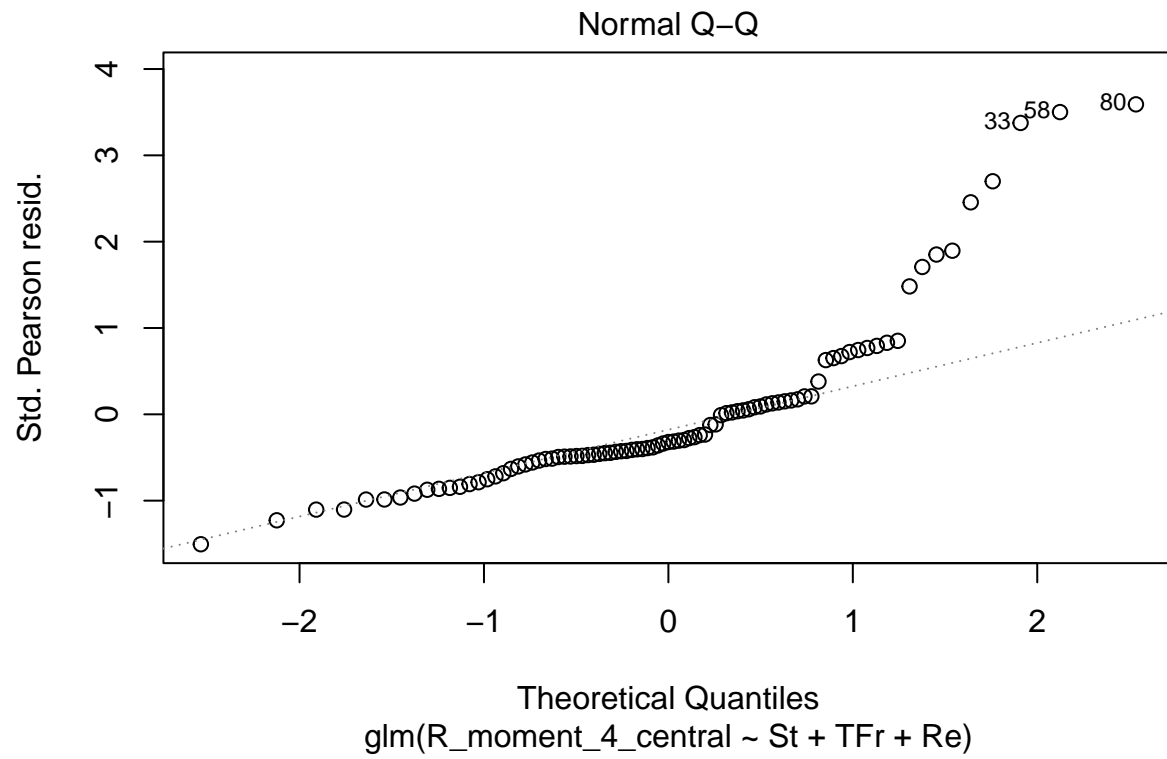

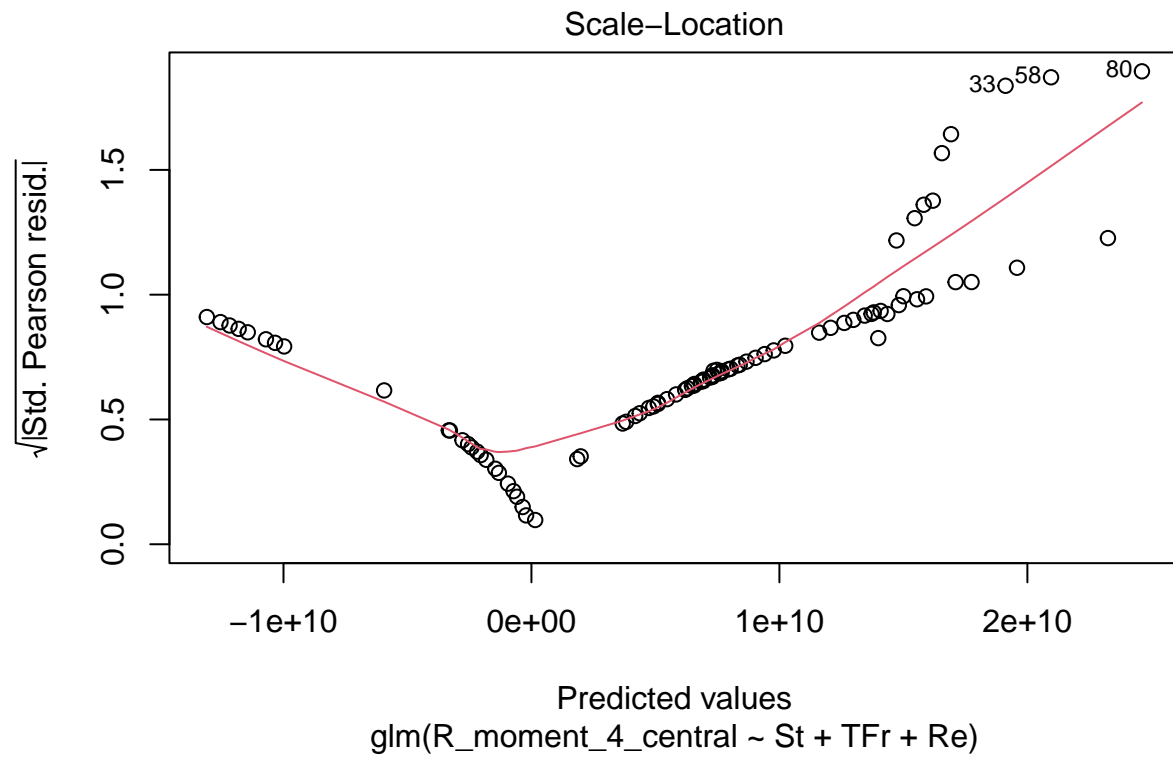

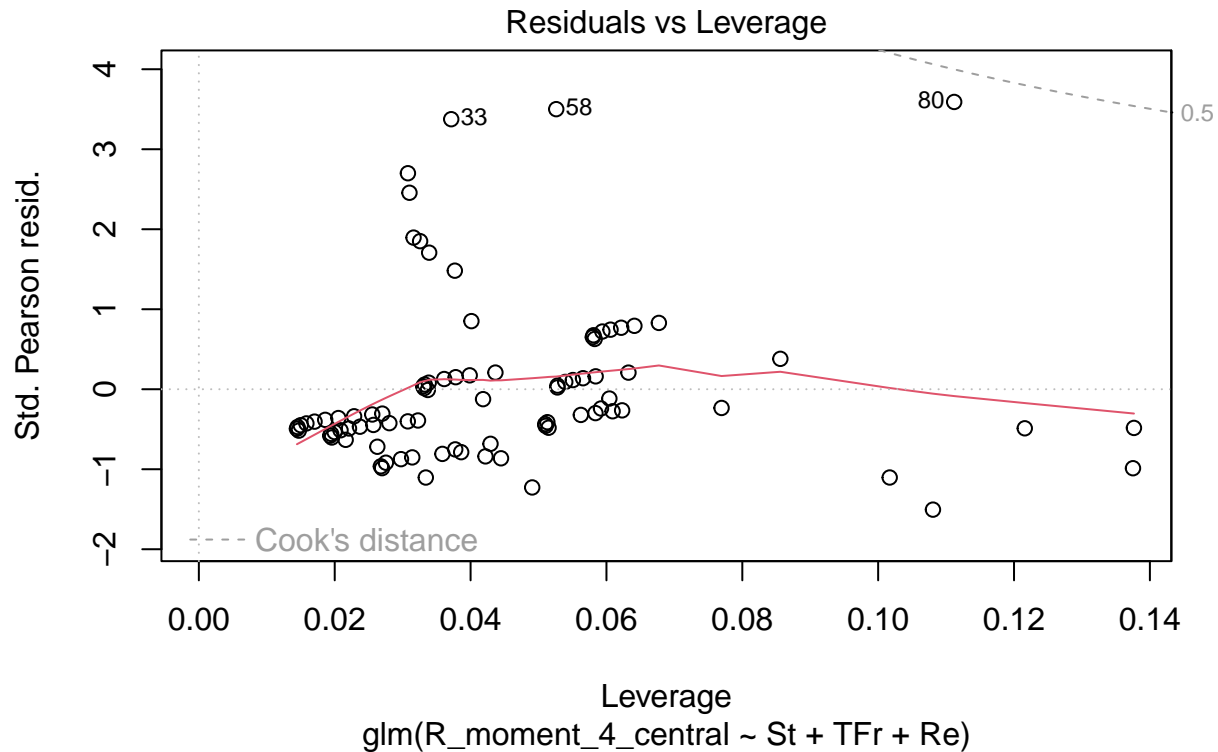


```
full_linear_interactions_E1 <- glm(R_moment_1 ~ St*TFr + St*Re + TFr*Re, data = data_train)
step_full_linear_interactions_E1 <- stepAIC(full_linear_interactions_E1, direction = "both", trace = FALSE)
summary(step_full_linear_interactions_E1)
```


Best AiC model with interactions


```
##
## Call:
## glm(formula = R_moment_1 ~ St + TFr + Re + St:Re + TFr:Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -0.059348 -0.029496  0.006145  0.027529  0.049423
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  9.822e-02  1.140e-02   8.615 3.85e-13 ***
## St           3.398e-02  8.969e-03   3.789 0.000286 ***
## TFr          -2.534e-03  1.161e-03  -2.182 0.031927 *
## Re           -3.176e-04  4.925e-05  -6.448 7.08e-09 ***
## St:Re        -1.002e-04  3.899e-05  -2.570 0.011953 *
## TFr:Re        9.098e-06  4.559e-06   1.995 0.049275 *
## ---
```


```
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 0.001036755)
##
## Null deviance: 0.274427 on 88 degrees of freedom
## Residual deviance: 0.086051 on 83 degrees of freedom
## AIC: -351.22
##
## Number of Fisher Scoring iterations: 2
```

```
plot(step_full_linear_interactions_E1)
```

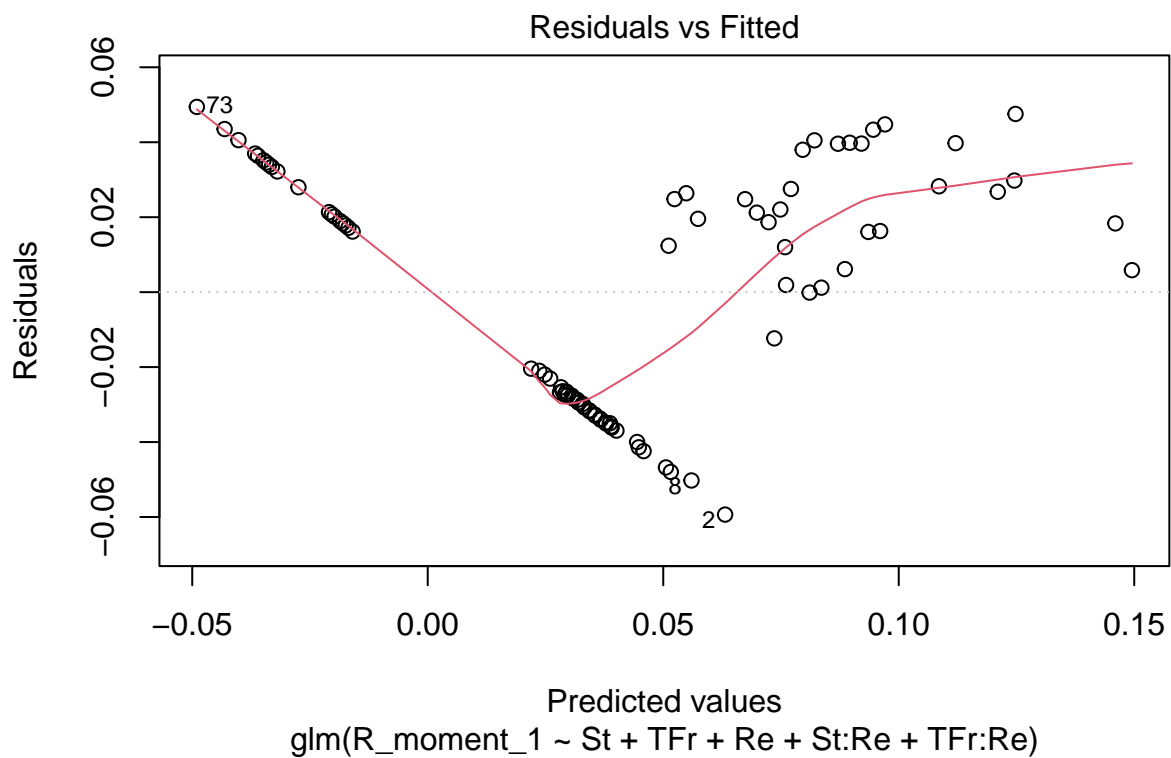

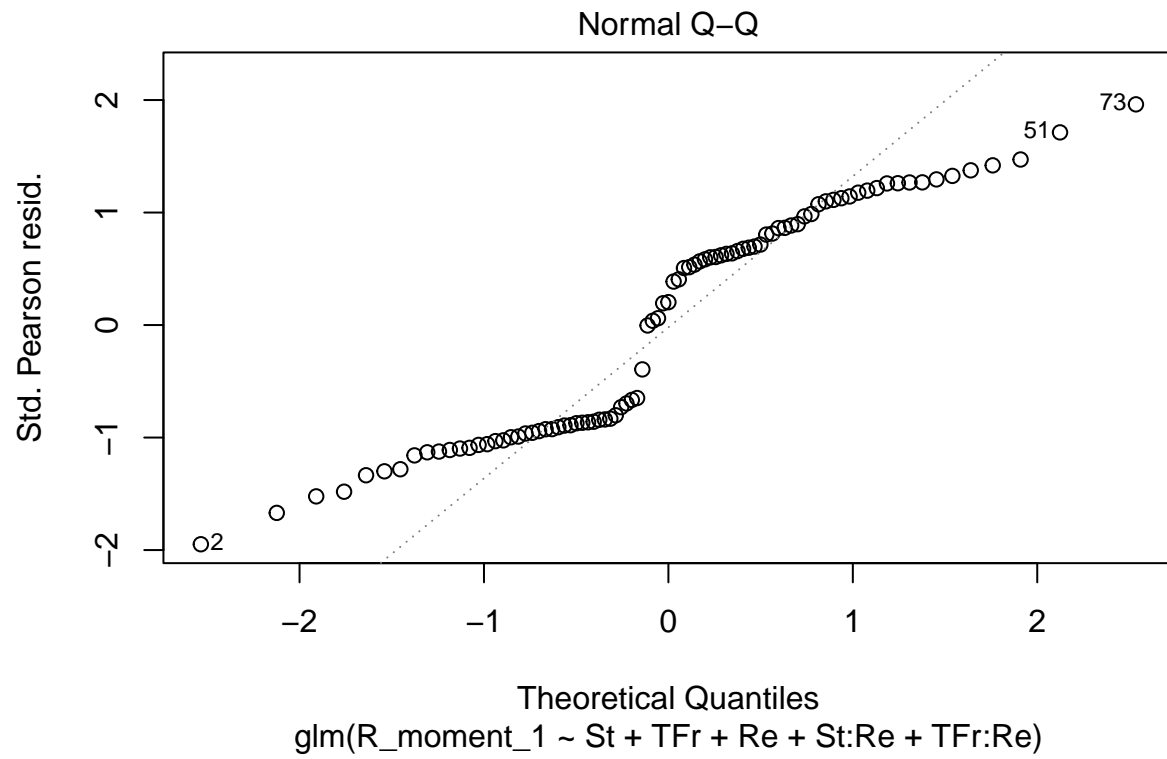

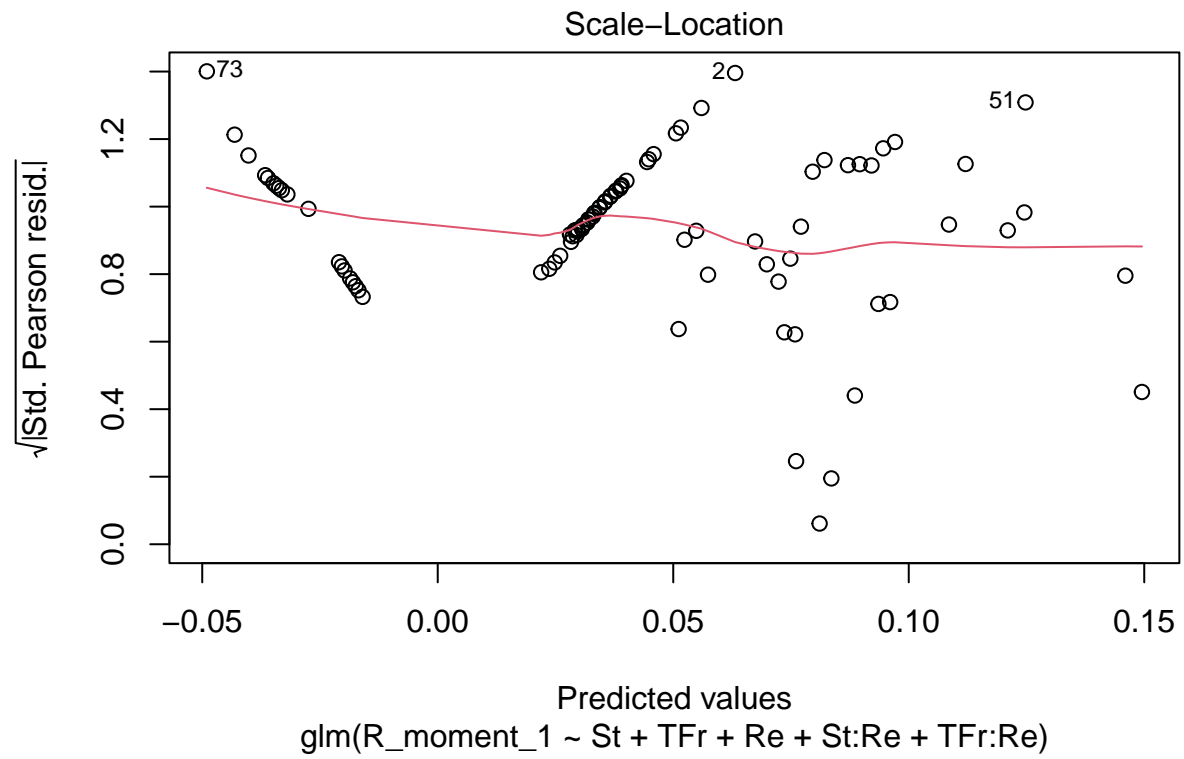

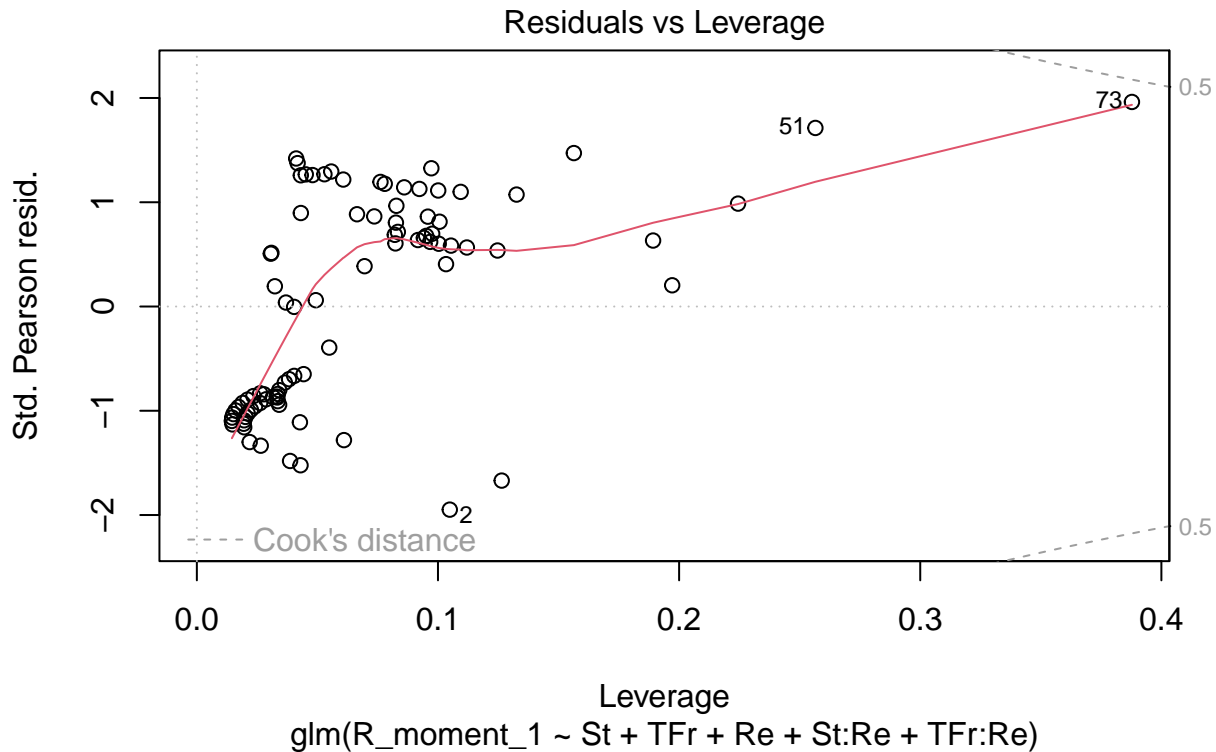



```
full_linear_interactions_E2 <- glm(R_moment_2_central ~ St*TFr + St*Re + TFr*Re, data = data_train)
step_full_linear_interactions_E2 <- stepAIC(full_linear_interactions_E2, direction = "both", trace = FALSE)
summary(step_full_linear_interactions_E2)
```


```
##
## Call:
## glm(formula = R_moment_2_central ~ St + TFr + Re + TFr:Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -379.83  -115.96  -10.12   68.41   637.30
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  327.48973   58.60963   5.588 2.78e-07 ***
## St           46.54204   29.30260   1.588 0.115970
## TFr          -36.88006    7.71023  -4.783 7.29e-06 ***
## Re           -1.19141    0.22338  -5.333 8.00e-07 ***
## TFr:Re         0.11802    0.03007   3.925 0.000177 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 46461.98)
##
##      Null deviance: 6032130  on 88  degrees of freedom
```


```
## Residual deviance: 3902807  on 84  degrees of freedom
## AIC: 1215.9
##
## Number of Fisher Scoring iterations: 2
```

```
plot(step_full_linear_interactions_E2)
```

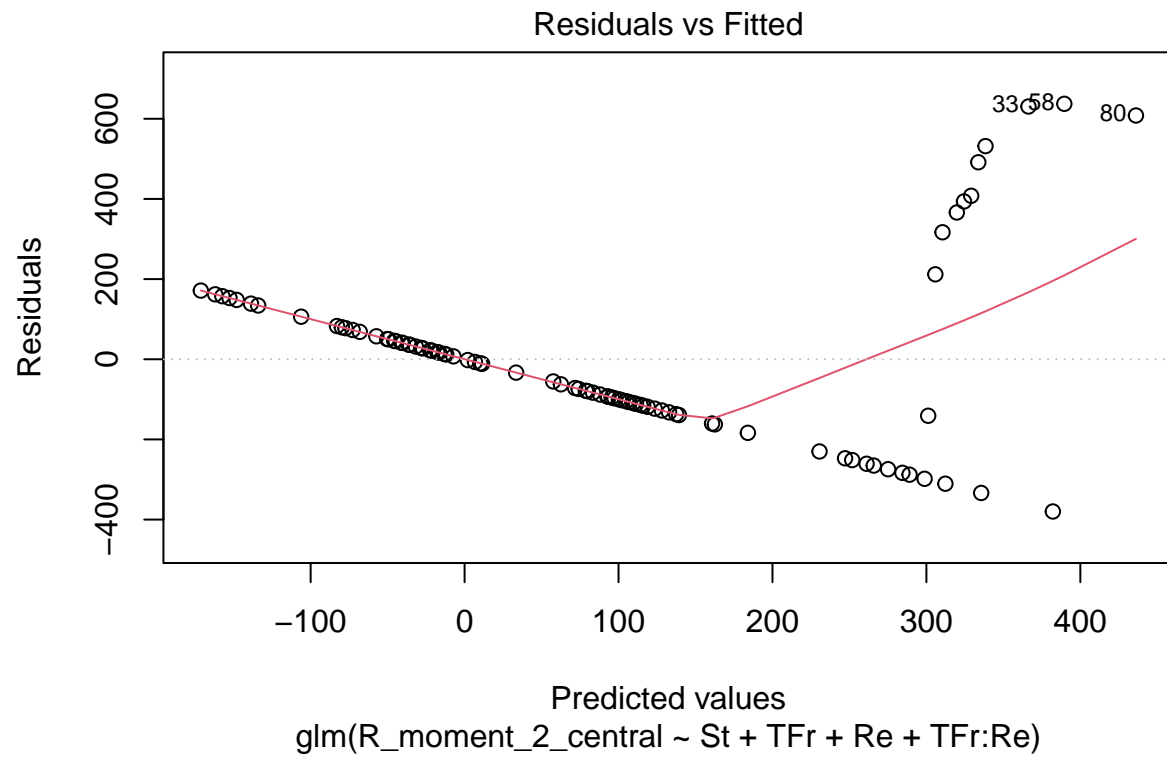

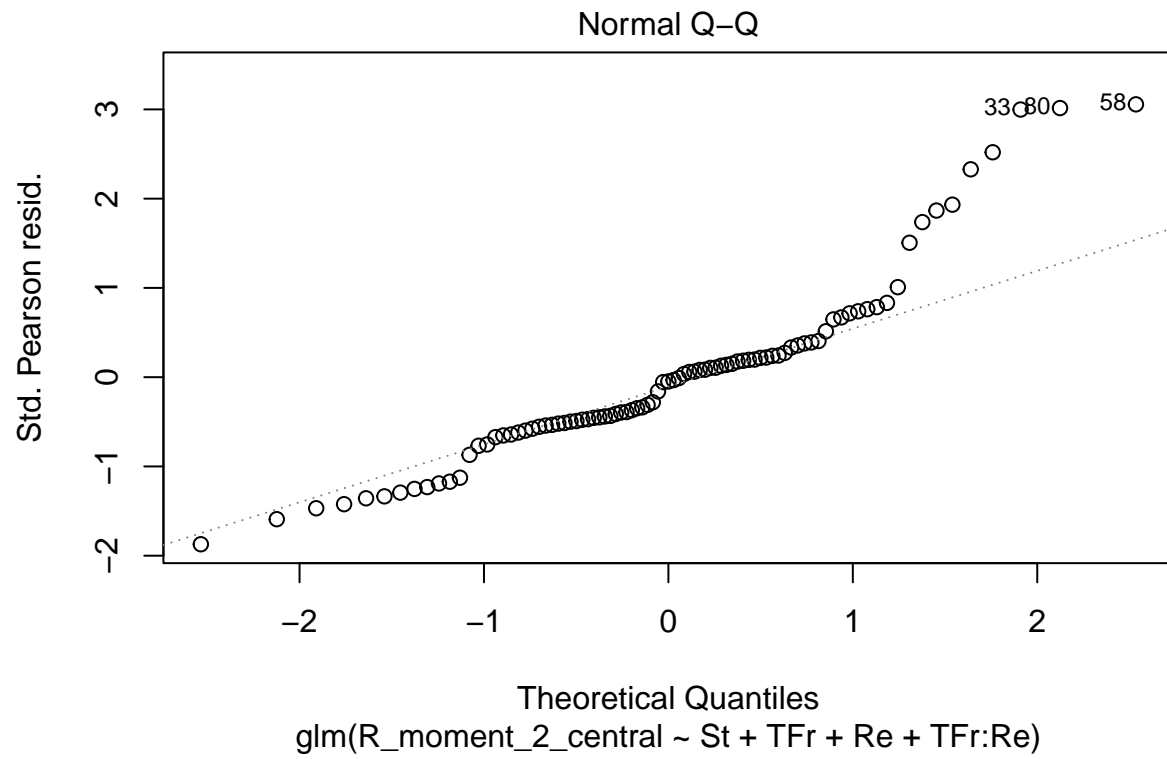

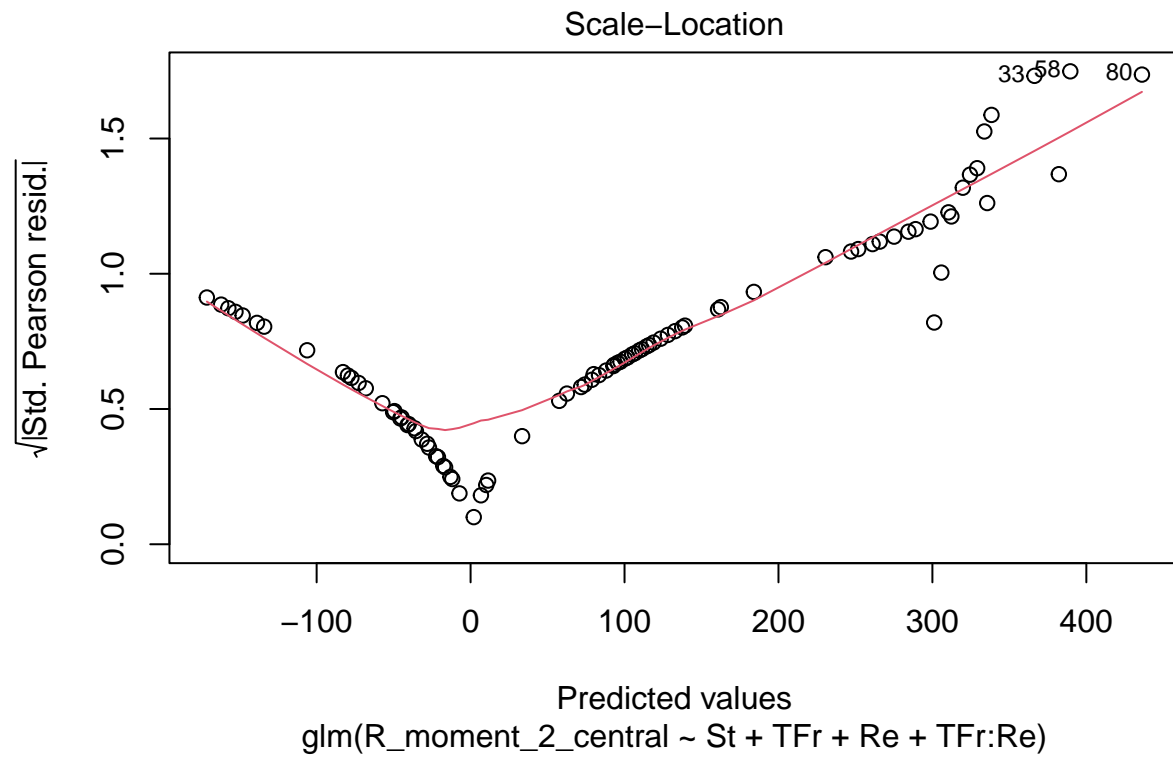

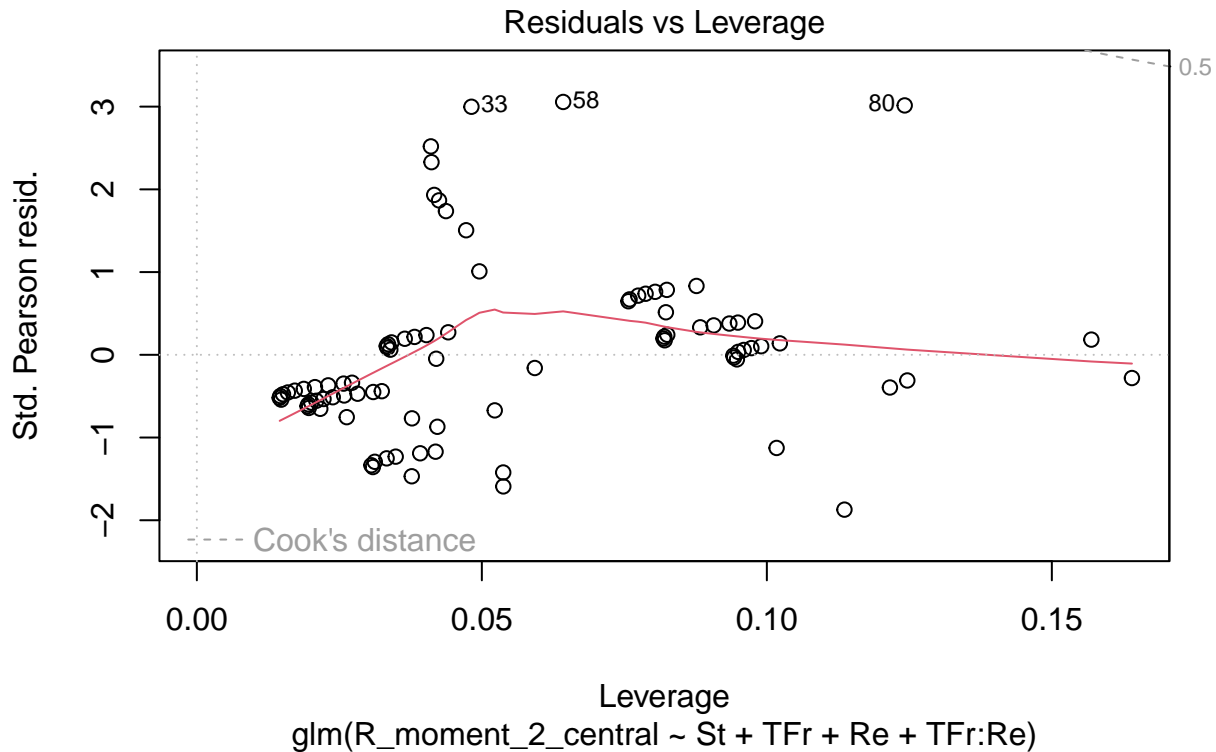



```
full_linear_interactions_E3 <- glm(R_moment_3_central ~ St*TFr + St*Re + TFr*Re, data = data_train)
step_full_linear_interactions_E3 <- stepAIC(full_linear_interactions_E3, direction = "both", trace = FALSE)
summary(step_full_linear_interactions_E3)
```


```
##
## Call:
## glm(formula = R_moment_3_central ~ St + TFr + Re + St:TFr + TFr:Re,
##      data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -3592944  -904717  -49411   332389   5349989
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept) 2525572.0   493187.5   5.121 1.94e-06 ***
## St           556593.3   258219.6   2.156 0.034018 *
## TFr        -252297.4    72716.5  -3.470 0.000829 ***
## Re          -9805.2     1864.1   -5.260 1.10e-06 ***
## St:TFr      -54689.6    37680.2  -1.451 0.150434
## TFr:Re         953.2      250.9    3.798 0.000276 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 3.231922e+12)
```


```
##
## Null deviance: 4.1934e+14 on 88 degrees of freedom
## Residual deviance: 2.6825e+14 on 83 degrees of freedom
## AIC: 2823.9
##
## Number of Fisher Scoring iterations: 2
```

```
plot(step_full_linear_interactions_E3)
```

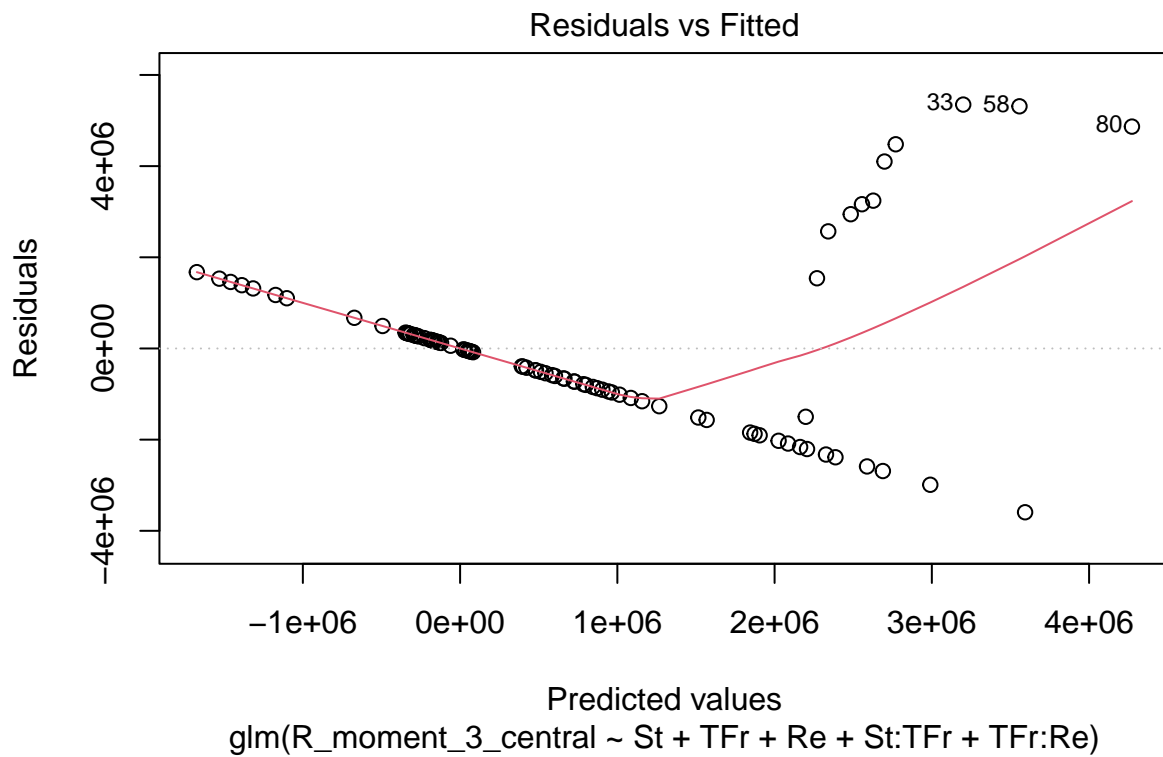

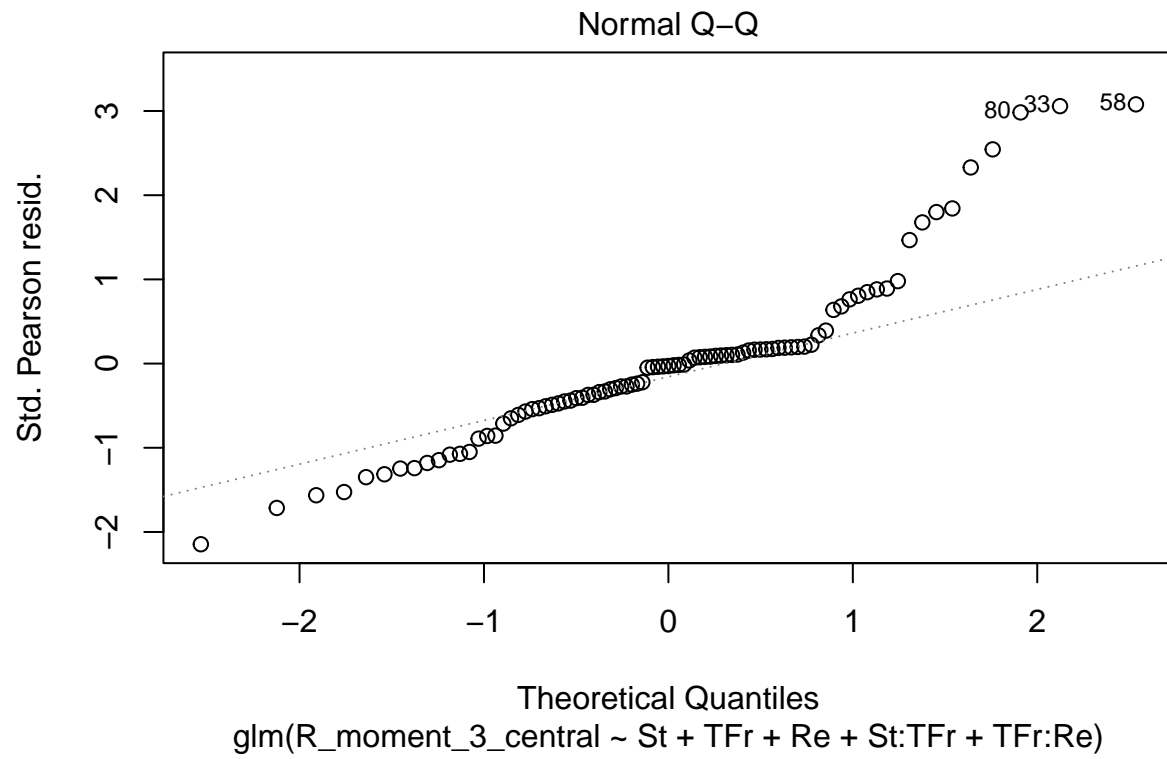

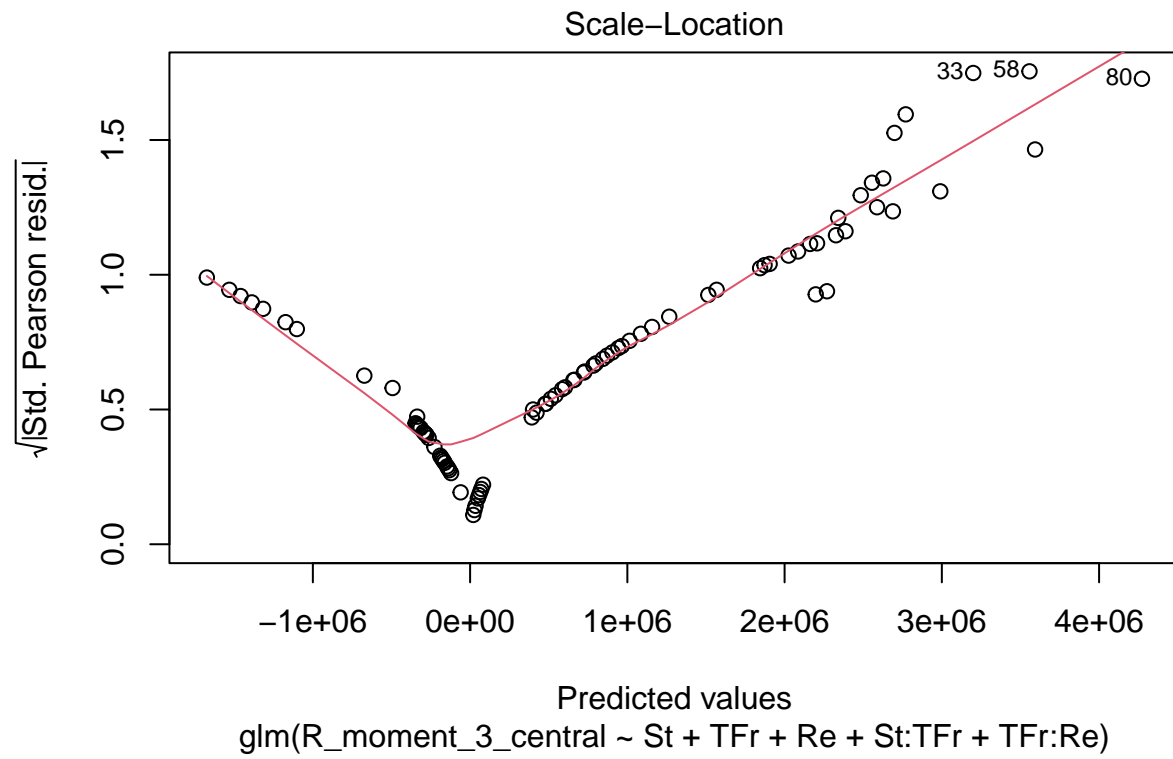

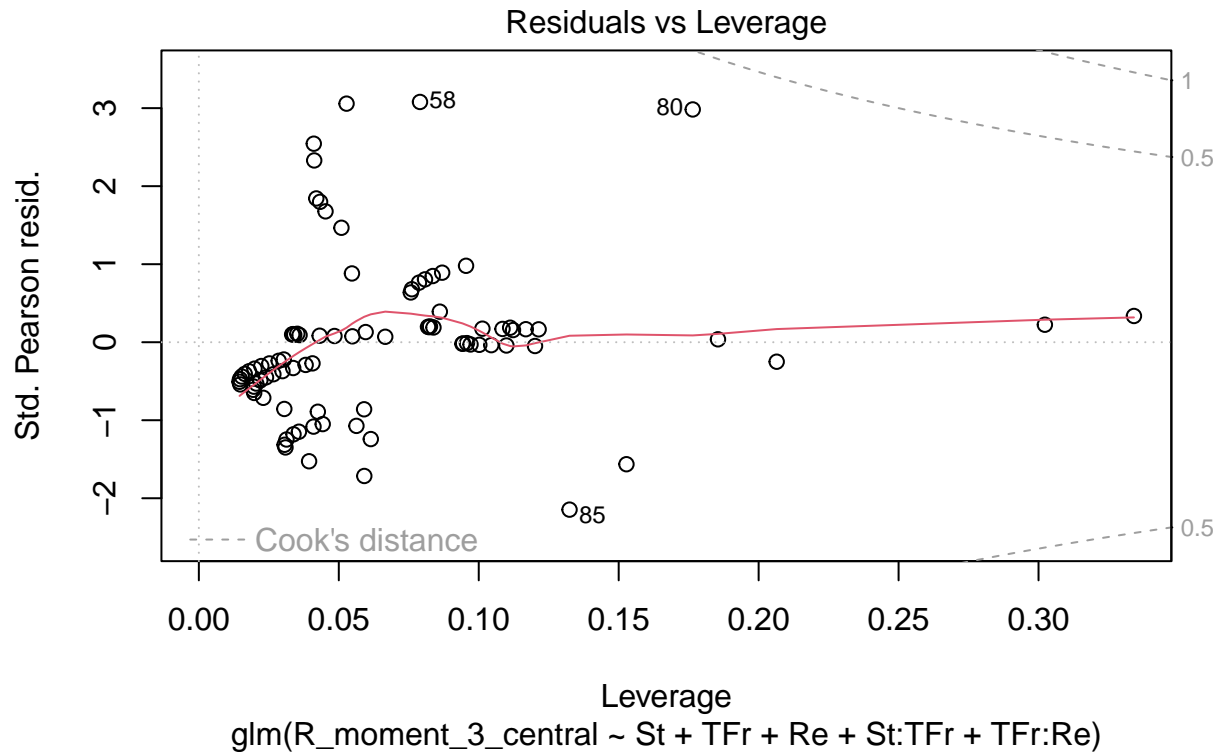



```
full_linear_interactions_E4 <- glm(R_moment_4_central ~ St*TFr + St*Re + TFr*Re, data = data_train)
step_full_linear_interactions_E4 <- stepAIC(full_linear_interactions_E4, direction = "both", trace = FALSE)
summary(step_full_linear_interactions_E4)
```


```
##
## Call:
## glm(formula = R_moment_4_central ~ St * TFr + St * Re + TFr *
##       Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -3.694e+10 -7.457e+09 -1.392e+09  4.131e+09  4.499e+10
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  1.528e+10  5.349e+09   2.857 0.005418 **
## St           1.050e+10  4.256e+09   2.467 0.015707 *
## TFr          -1.915e+09  6.113e+08  -3.133 0.002401 **
## Re           -5.598e+07  2.293e+07  -2.442 0.016773 *
## St:TFr        -5.176e+08  3.144e+08  -1.646 0.103499
## St:Re         -2.662e+07  1.816e+07  -1.466 0.146598
## TFr:Re         7.303e+06  2.125e+06   3.438 0.000924 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
```


```
## (Dispersion parameter for gaussian family taken to be 2.246926e+20)
##
## Null deviance: 2.9409e+22 on 88 degrees of freedom
## Residual deviance: 1.8425e+22 on 82 degrees of freedom
## AIC: 4431.9
##
## Number of Fisher Scoring iterations: 2
```

```
plot(step_full_linear_interactions_E4)
```

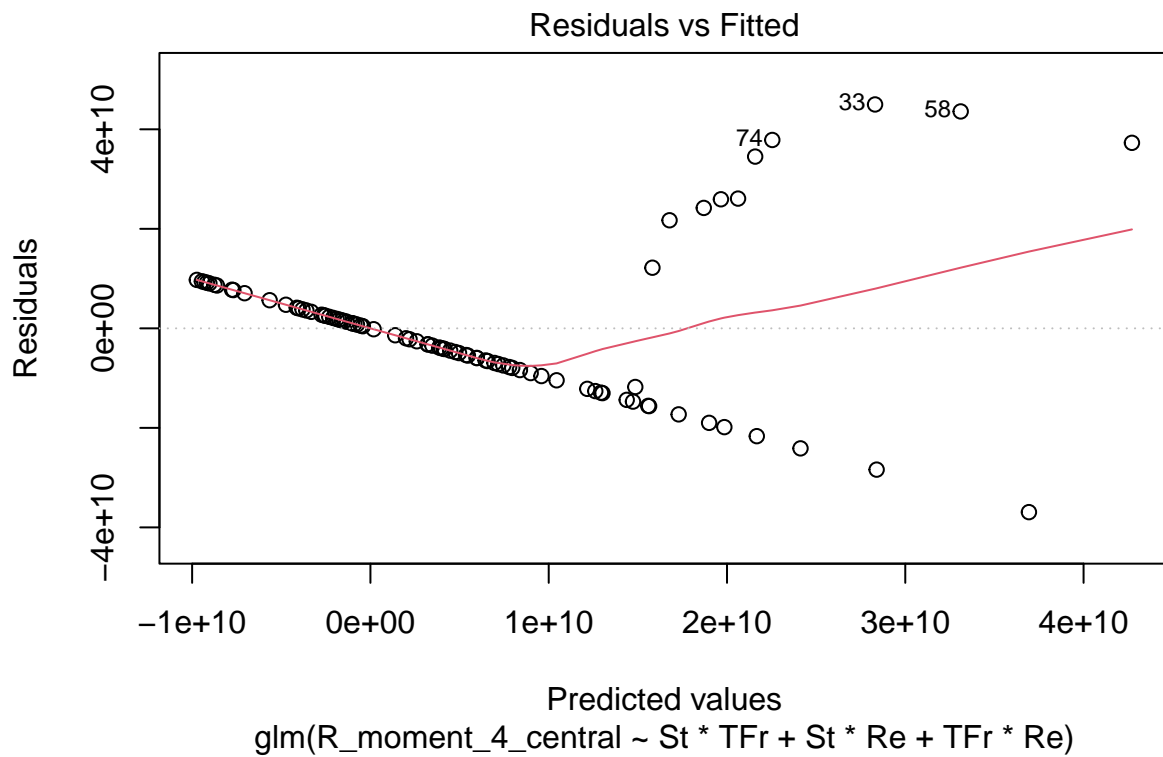

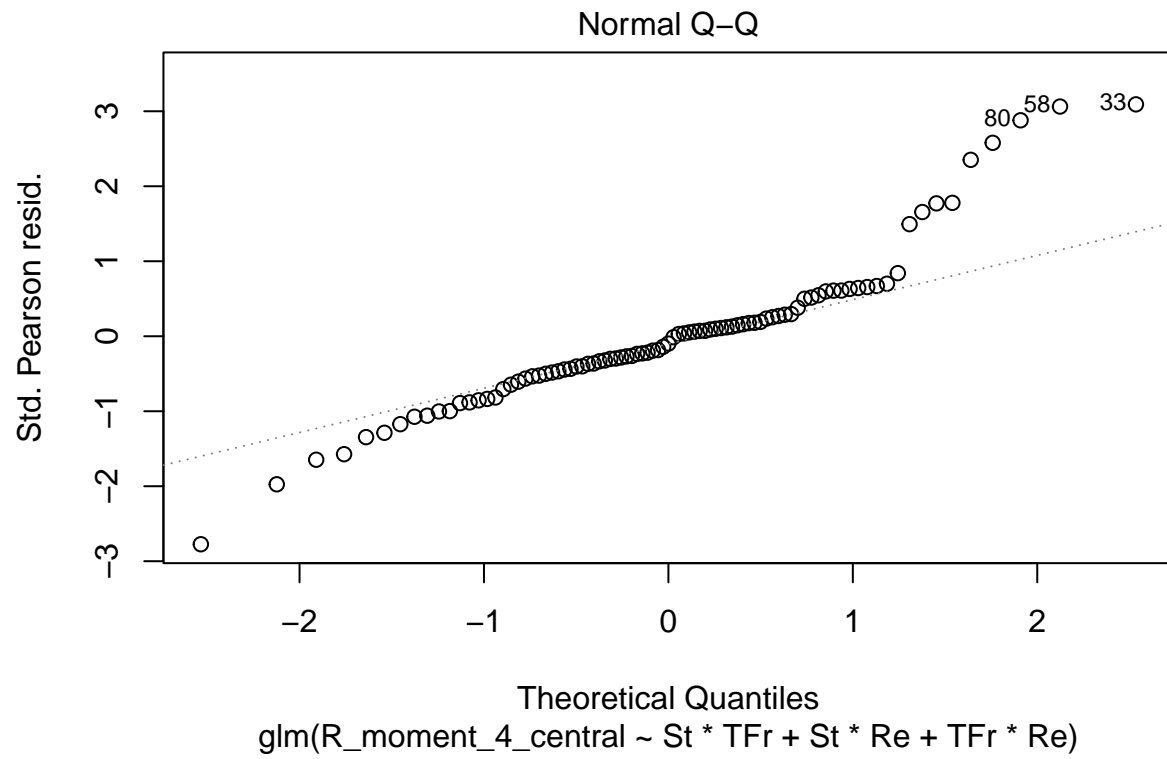

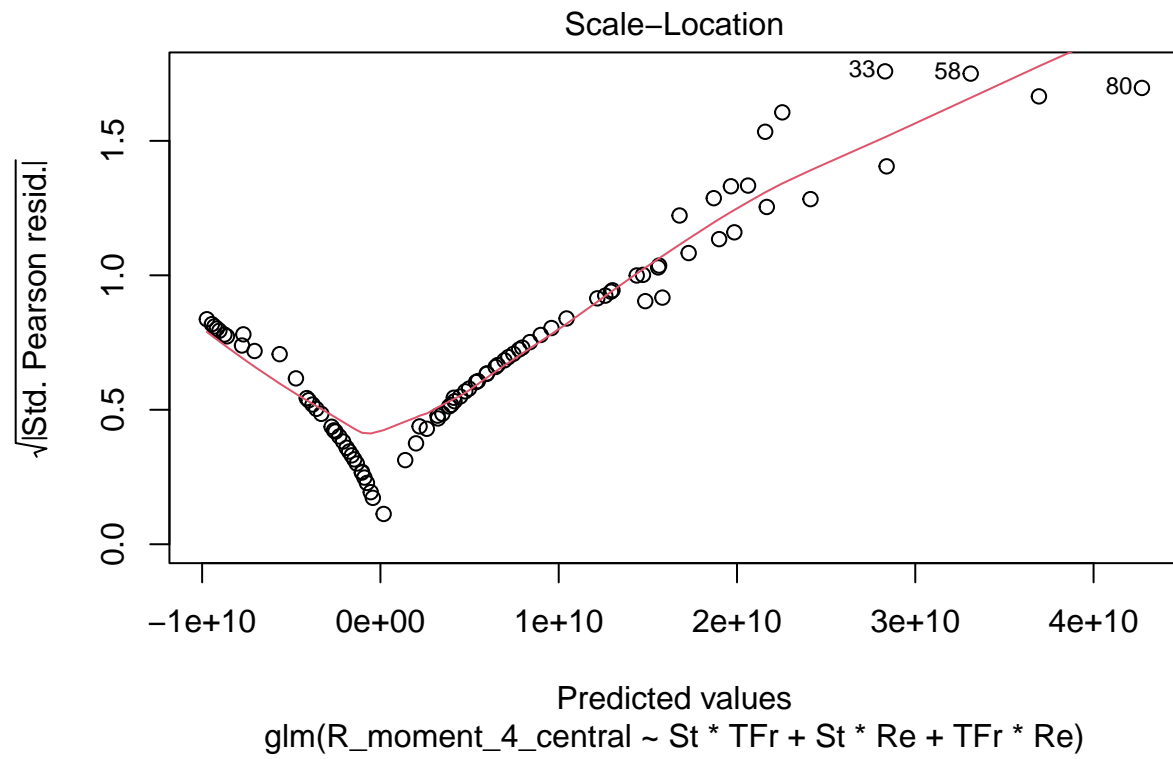

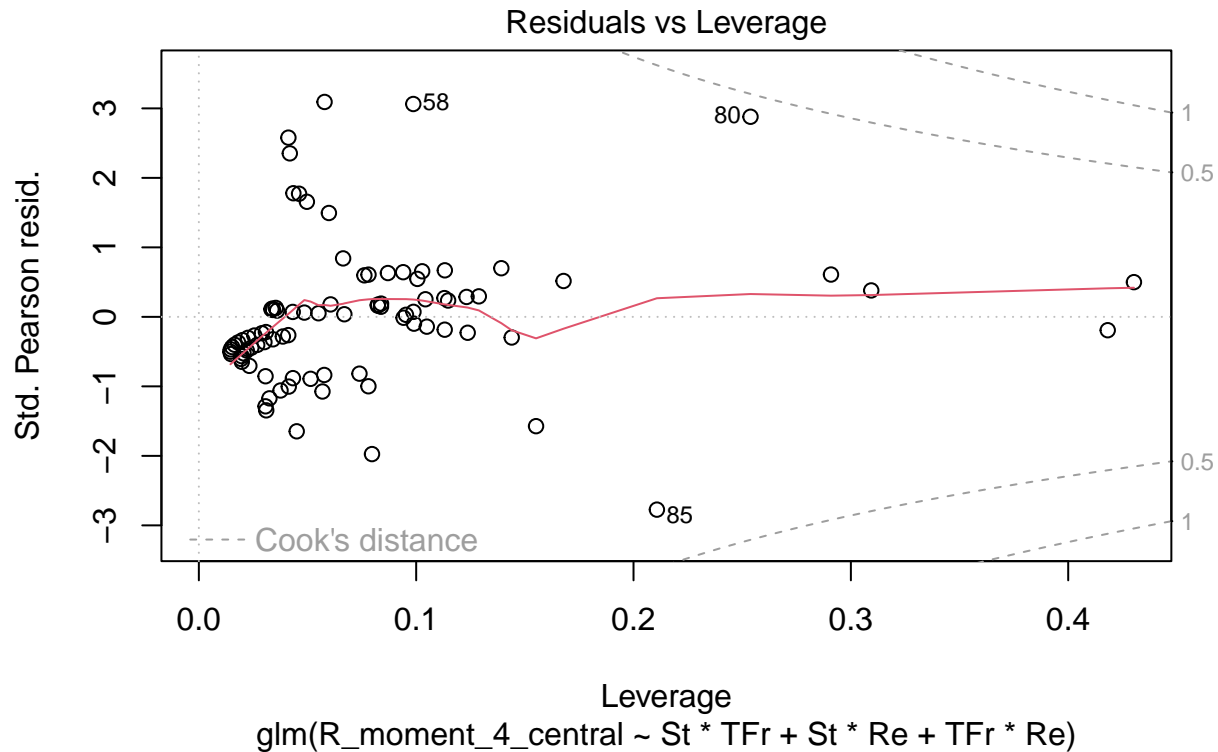

```
library(boot)
cve_linear_E1 <- cv.glm(data_train, step_full_linear_E1, K=10)
cve_linear_E1$delta
```

Model Evaluation (Linear)

```
## [1] 0.001236051 0.001229614
```

```
cve_linear_interactions_E1 <- cv.glm(data_train, step_full_linear_interactions_E1, K = 10)
cve_linear_interactions_E1$delta
```

```
## [1] 0.001163620 0.001152399
```

```
cve_linear_E2 <- cv.glm(data_train, step_full_linear_E2_central, K=10)
cve_linear_E2$delta
```

```
## [1] 56734.58 56528.98
```

```
cve_linear_interactions_E2 <- cv.glm(data_train, step_full_linear_E2_central, K = 10)
cve_linear_interactions_E2$delta
```

```
## [1] 58658.01 58352.84
```

```
cve_linear_E3 <- cv.glm(data_train, step_full_linear_E3_central, K=10)
cve_linear_E3$delta
```

```
## [1] 4.011622e+12 3.990699e+12
```

```
cve_linear_interactions_E3 <- cv.glm(data_train, step_full_linear_interactions_E3, K = 10)
cve_linear_interactions_E3$delta
```

```
## [1] 3.339432e+12 3.321640e+12
```

```
cve_linear_E4 <- cv.glm(data_train, step_full_linear_E4_central, K=10)
cve_linear_E4$delta
```

```
## [1] 3.006559e+20 2.982918e+20
```

```
cve_linear_interactions_E4 <- cv.glm(data_train, step_full_linear_interactions_E4, K = 10)
cve_linear_interactions_E4$delta
```

```
## [1] 2.568708e+20 2.540229e+20
```

It seems that the interactions are increasingly important. They are less important for the first and second moments. In fact, cross validation error increases for the second moment when interactions are added into the model. However, for the third through fourth moments, there is a pretty significant decrease in cross validation error when comparing the strictly linear models versus the ones with interactions.

This I think the linear models worth sharing with our physicist colleagues are the following:

```
summary(step_full_linear_E1)
```

```
##
## Call:
## glm(formula = R_moment_1 ~ St + Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -0.061936  -0.030347  -0.000174   0.034491   0.055714
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  1.102e-01  8.837e-03  12.475  < 2e-16 ***
## St           1.353e-02  4.621e-03   2.927  0.00438 **
## Re          -3.798e-04  3.215e-05 -11.816  < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 0.001160225)
##
##      Null deviance: 0.274427  on 88  degrees of freedom
## Residual deviance: 0.099779  on 86  degrees of freedom
## AIC: -344.04
##
## Number of Fisher Scoring iterations: 2
```

```
summary(step_full_linear_E2_central)
```

```
##
## Call:
## glm(formula = R_moment_2_central ~ TFr + Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -252.57  -139.16  -104.99    7.98   791.18
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  299.6445    53.6449   5.586 2.68e-07 ***
## TFr          -10.2315     3.8471  -2.660 0.009332 **
## Re           -0.8472     0.2221  -3.815 0.000256 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 54789.33)
##
##      Null deviance: 6032130  on 88  degrees of freedom
## Residual deviance: 4711882  on 86  degrees of freedom
## AIC: 1228.6
##
## Number of Fisher Scoring iterations: 2
```

```
summary(step_full_linear_interactions_E3)
```

```
##
## Call:
## glm(formula = R_moment_3_central ~ St + TFr + Re + St:TFr + TFr:Re,
##      data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -3592944  -904717  -49411   332389   5349989
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept) 2525572.0   493187.5   5.121 1.94e-06 ***
## St           556593.3   258219.6   2.156 0.034018 *
## TFr          -252297.4    72716.5  -3.470 0.000829 ***
## Re           -9805.2    1864.1   -5.260 1.10e-06 ***
## St:TFr       -54689.6    37680.2  -1.451 0.150434
## TFr:Re         953.2     250.9    3.798 0.000276 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 3.231922e+12)
##
##      Null deviance: 4.1934e+14  on 88  degrees of freedom
## Residual deviance: 2.6825e+14  on 83  degrees of freedom
```



```
## AIC: 2823.9
##
## Number of Fisher Scoring iterations: 2
```

```
summary(step_full_linear_interactions_E4)
```

```
##
## Call:
## glm(formula = R_moment_4_central ~ St * TFr + St * Re + TFr *
##      Re, data = data_train)
##
## Deviance Residuals:
##      Min       1Q   Median       3Q      Max
## -3.694e+10 -7.457e+09 -1.392e+09  4.131e+09  4.499e+10
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  1.528e+10  5.349e+09   2.857 0.005418 **
## St           1.050e+10  4.256e+09   2.467 0.015707 *
## TFr          -1.915e+09  6.113e+08  -3.133 0.002401 **
## Re           -5.598e+07  2.293e+07  -2.442 0.016773 *
## St:TFr        -5.176e+08  3.144e+08  -1.646 0.103499
## St:Re         -2.662e+07  1.816e+07  -1.466 0.146598
## TFr:Re         7.303e+06  2.125e+06   3.438 0.000924 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## (Dispersion parameter for gaussian family taken to be 2.246926e+20)
##
## Null deviance: 2.9409e+22 on 88 degrees of freedom
## Residual deviance: 1.8425e+22 on 82 degrees of freedom
## AIC: 4431.9
##
## Number of Fisher Scoring iterations: 2
```


OR (by calling lm version of the functions)


```
lm_fit_E1 <- lm(R_moment_1 ~ St + Re, data = data_train)
summary(lm_fit_E1)
```


```
##
## Call:
## lm(formula = R_moment_1 ~ St + Re, data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.061936 -0.030347 -0.000174  0.034491  0.055714
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  1.102e-01  8.837e-03  12.475 < 2e-16 ***
## St           1.353e-02  4.621e-03   2.927 0.00438 **
```


```
## Re          -3.798e-04  3.215e-05 -11.816  < 2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.03406 on 86 degrees of freedom
## Multiple R-squared:  0.6364, Adjusted R-squared:  0.628
## F-statistic: 75.26 on 2 and 86 DF,  p-value: < 2.2e-16
```

```
plot(lm_fit_E1)
```

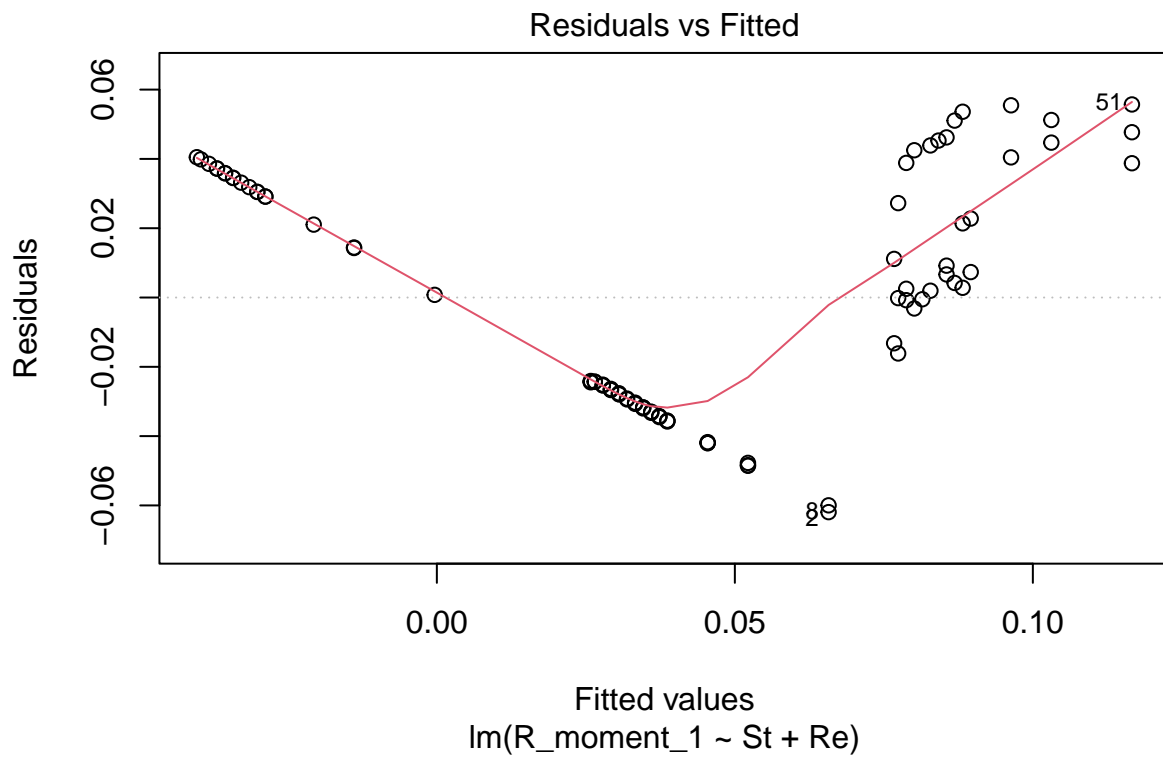

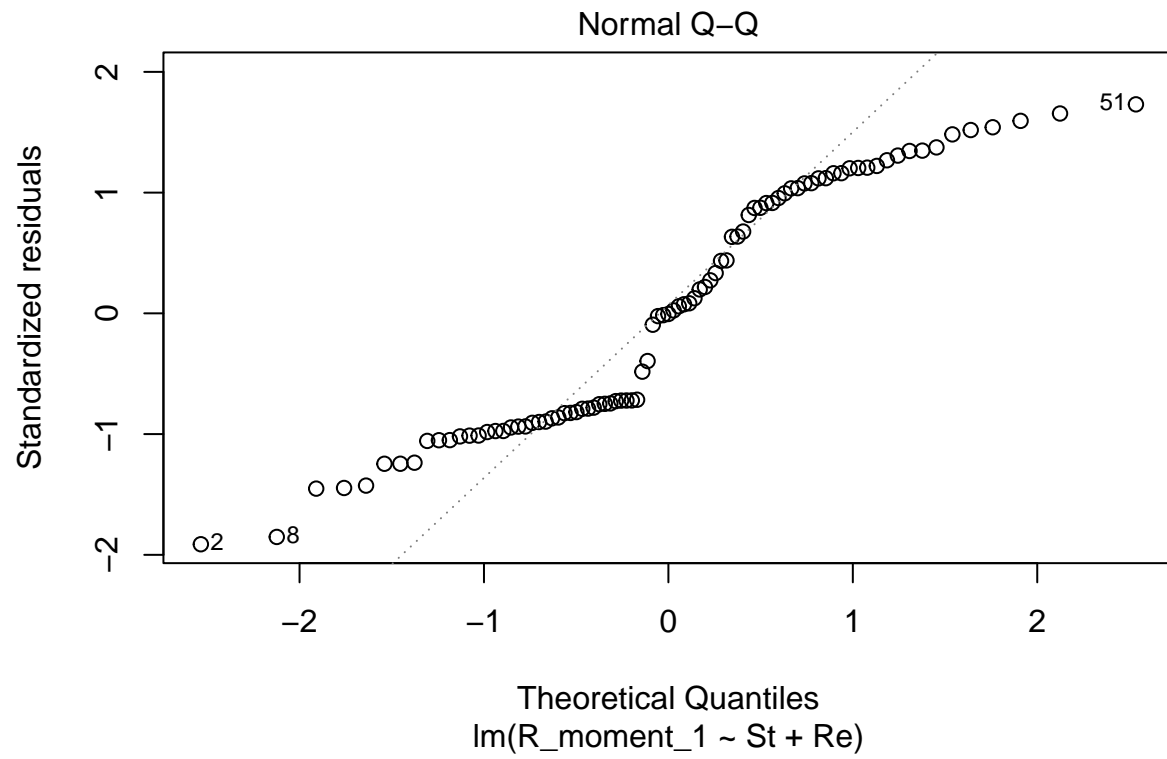

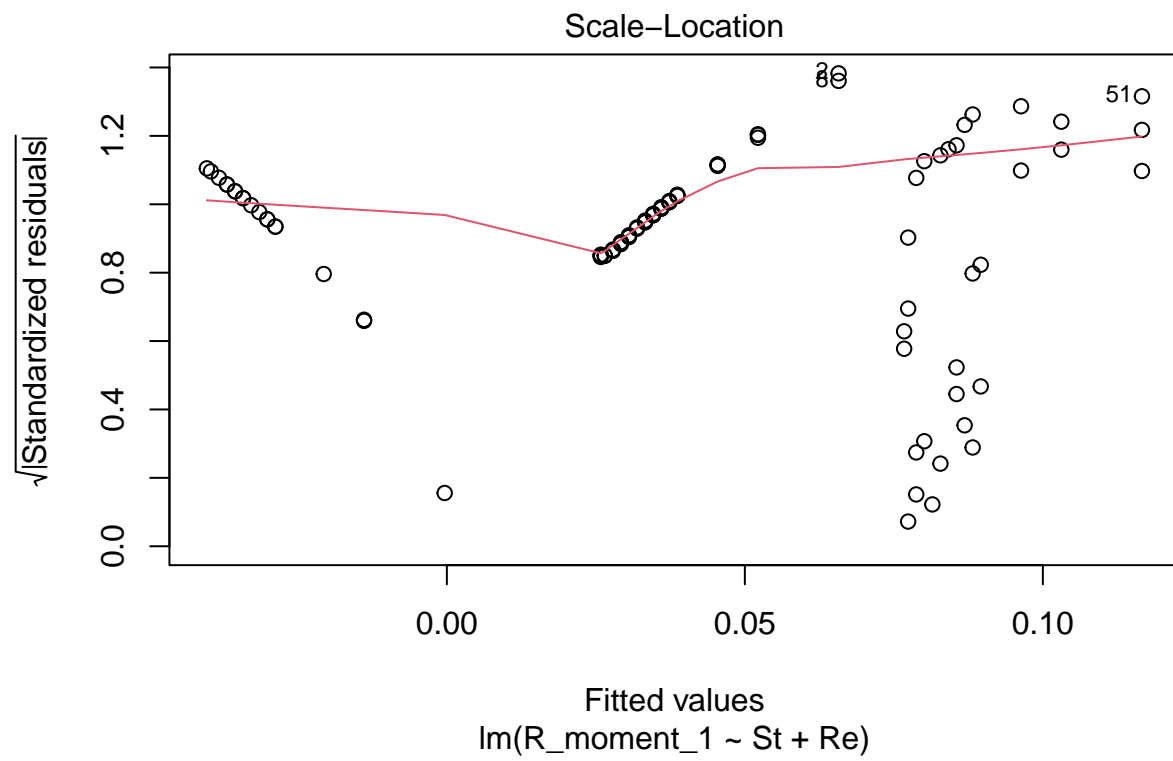

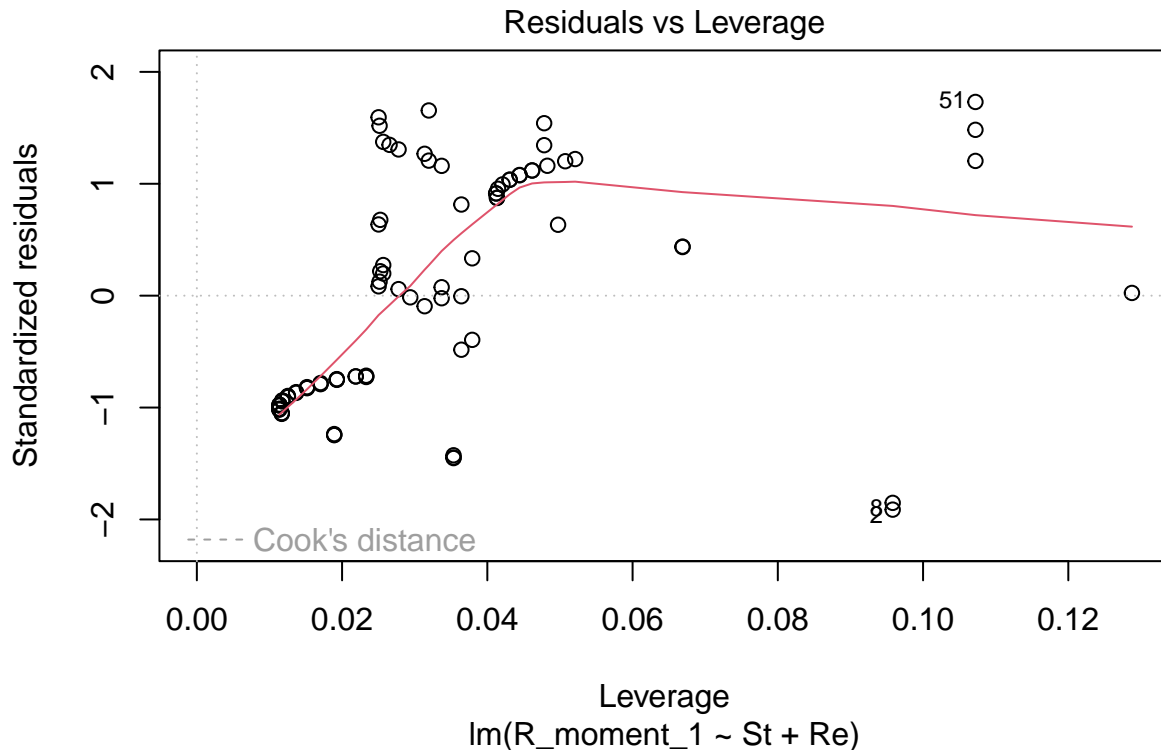

```
cve_linear_E1$delta
```

```
## [1] 0.001236051 0.001229614
```

Surprisingly, a very simple linear model with only two out of the three predictors explains about 62% of the variation of the first moment. The Reynolds number coefficient is small and negative, which contradicts physics theory. I believe this is due to the fact that the overwhelming majority of observations had small mean turbulence, so the regression fit a line with negative slope. On average, we just do not often observe turbulence no matter what predictors are used. However, the coefficient on St is slightly larger and positive. I believe this shows that perhaps the most important contributor to increases in the first moment is the size of the particles. In fact, adding interactions or the Fr predictor did not change the R^2 very much, so I believe that St is very important for increasing average turbulence. Nonetheless, there is a clear pattern to the residuals plot. First we underestimate, then overestimate, then underestimate again. This is evidence of a potential nonlinear relationship between the variables and the predictors.

```
lm_fit_E2 <- lm(R_moment_2_central ~ TFr + Re, data = data_train)
summary(lm_fit_E2)
```


```
##
## Call:
## lm(formula = R_moment_2_central ~ TFr + Re, data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
```


```
## -252.57 -139.16 -104.99    7.98  791.18
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept) 299.6445    53.6449   5.586 2.68e-07 ***
## TFr         -10.2315     3.8471  -2.660 0.009332 **
## Re           -0.8472     0.2221  -3.815 0.000256 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 234.1 on 86 degrees of freedom
## Multiple R-squared:  0.2189, Adjusted R-squared:  0.2007
## F-statistic: 12.05 on 2 and 86 DF,  p-value: 2.438e-05
```


```
cve_linear_E2$delta
```

```
## [1] 56734.58 56528.98
```

```
plot(lm_fit_E2)
```

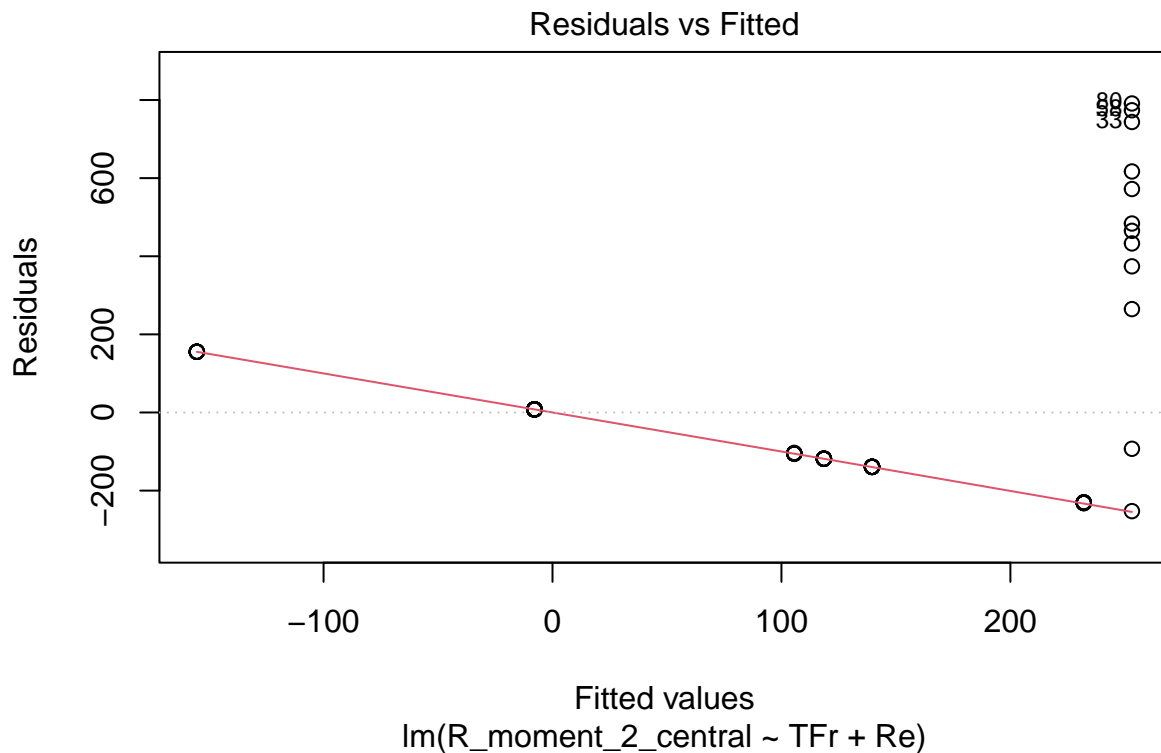

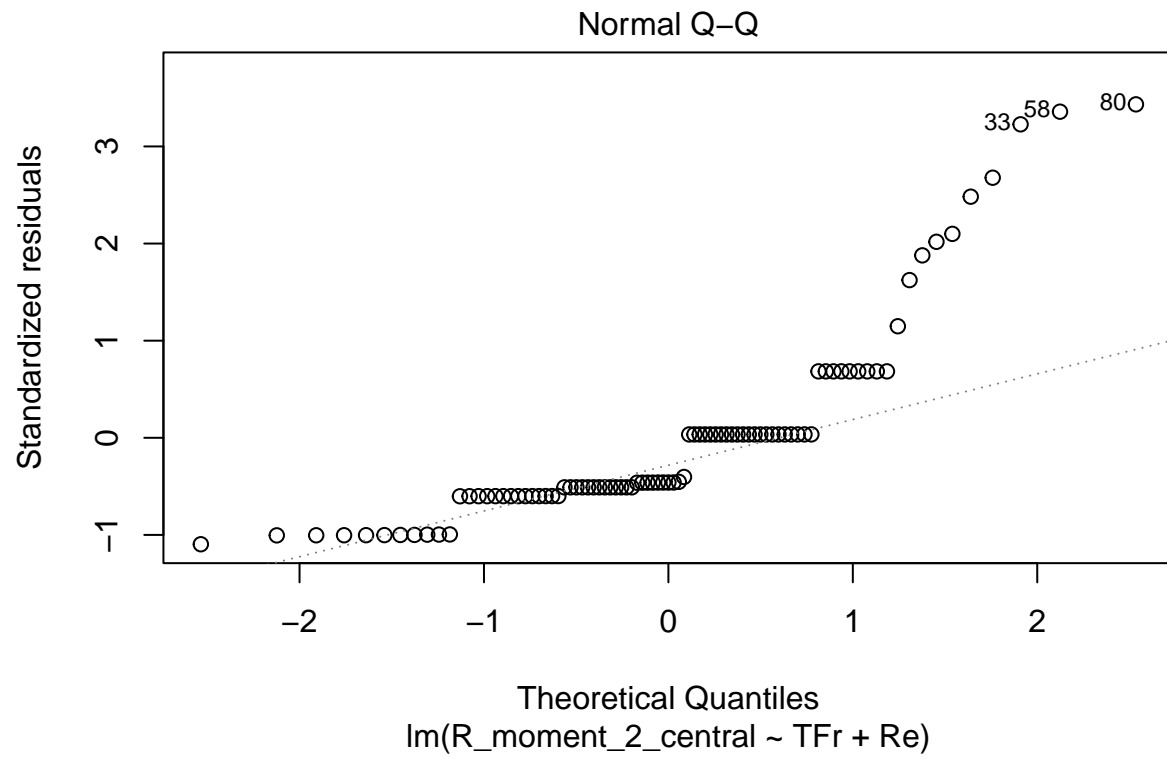

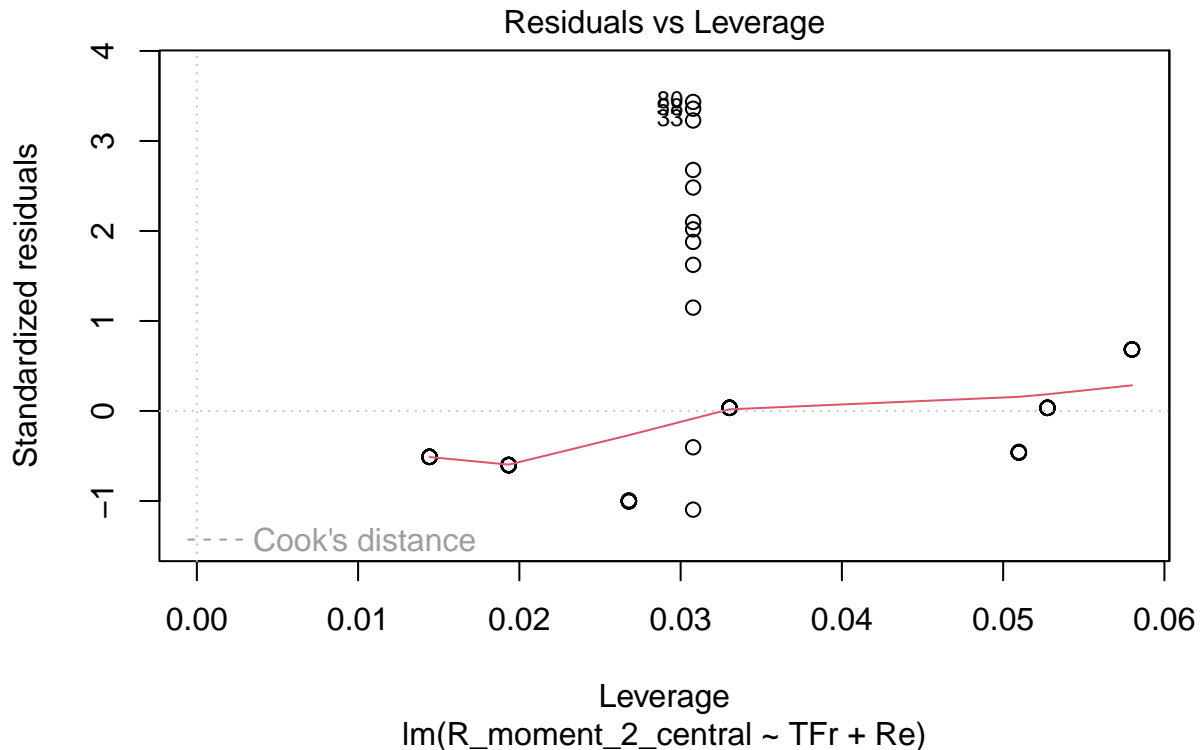


The R^2 is quite low at only about 20%. Generally, I believe this linear model is not very helpful. There is another clear pattern in the residuals plot and the linear fit consistently underestimates when the second moment is large. The truth is definitely closer to a nonlinear relationship.


```
lm_fit_E3 <- lm(R_moment_3_central ~ St + TFr + Re + St:TFr + TFr:Re, data = data_train)
summary(lm_fit_E3)
```


```
##
## Call:
## lm(formula = R_moment_3_central ~ St + TFr + Re + St:TFr + TFr:Re,
##     data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -3592944 -904717  -49411   332389  5349989
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept) 2525572.0   493187.5   5.121 1.94e-06 ***
## St           556593.3   258219.6   2.156 0.034018 *
## TFr        -252297.4    72716.5  -3.470 0.000829 ***
## Re          -9805.2     1864.1  -5.260 1.10e-06 ***
## St:TFr      -54689.6    37680.2  -1.451 0.150434
## TFr:Re         953.2      250.9   3.798 0.000276 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```


```
##
## Residual standard error: 1798000 on 83 degrees of freedom
## Multiple R-squared:  0.3603, Adjusted R-squared:  0.3218
## F-statistic: 9.35 on 5 and 83 DF,  p-value: 4.292e-07
```

```
plot(lm_fit_E3)
```

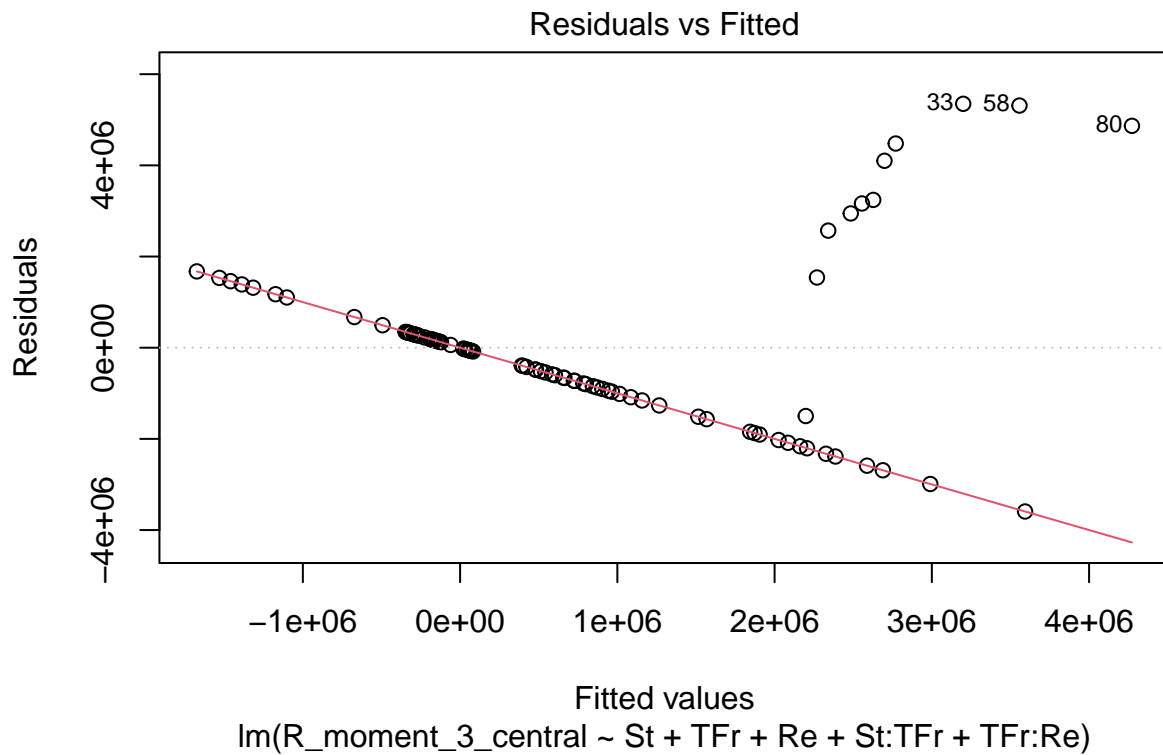

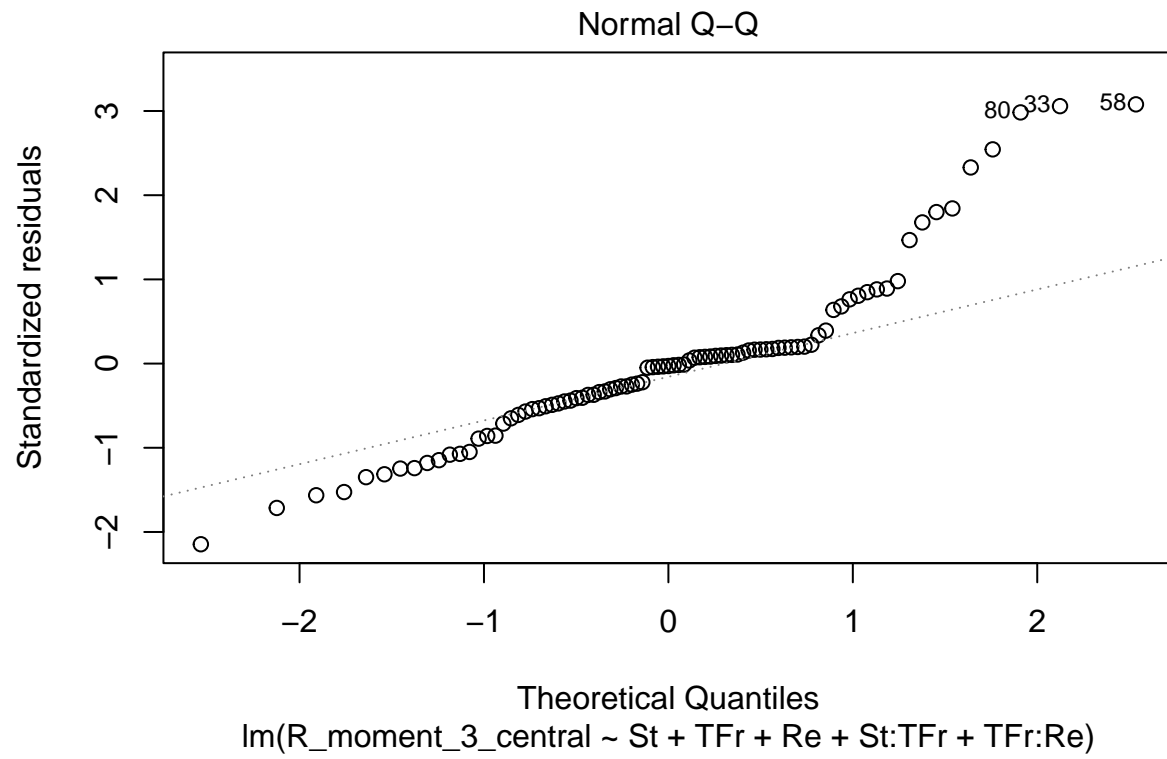

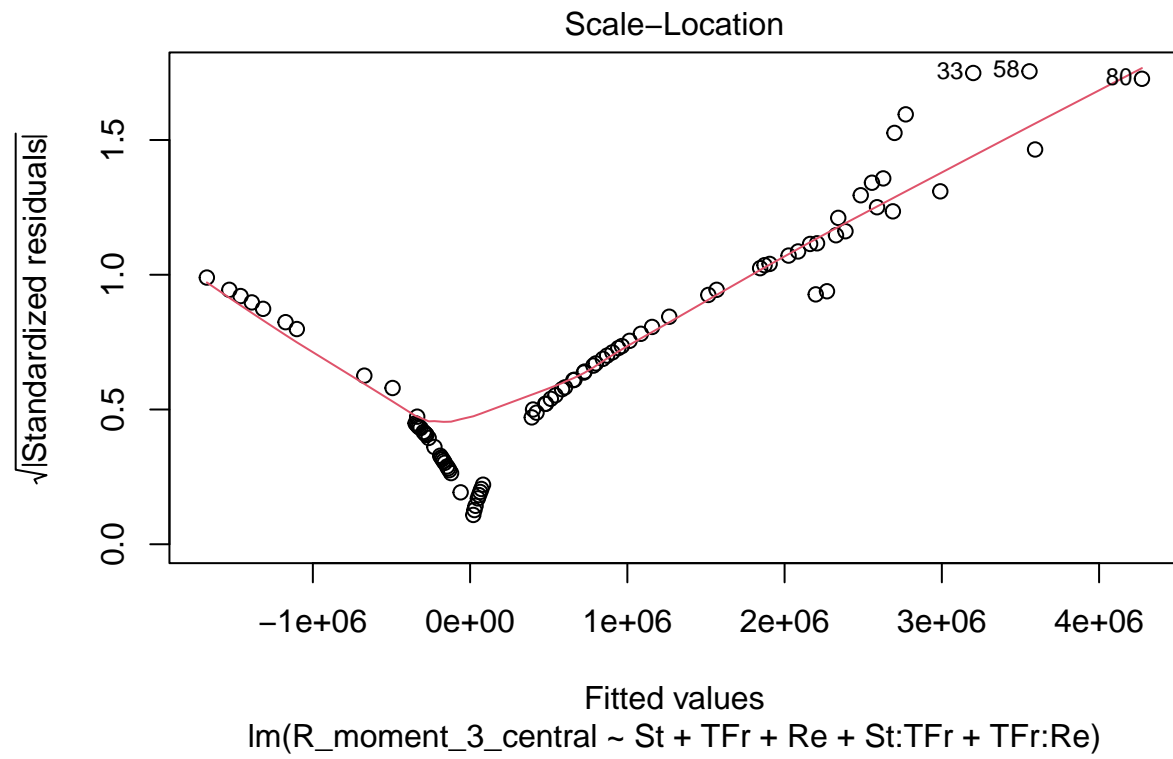

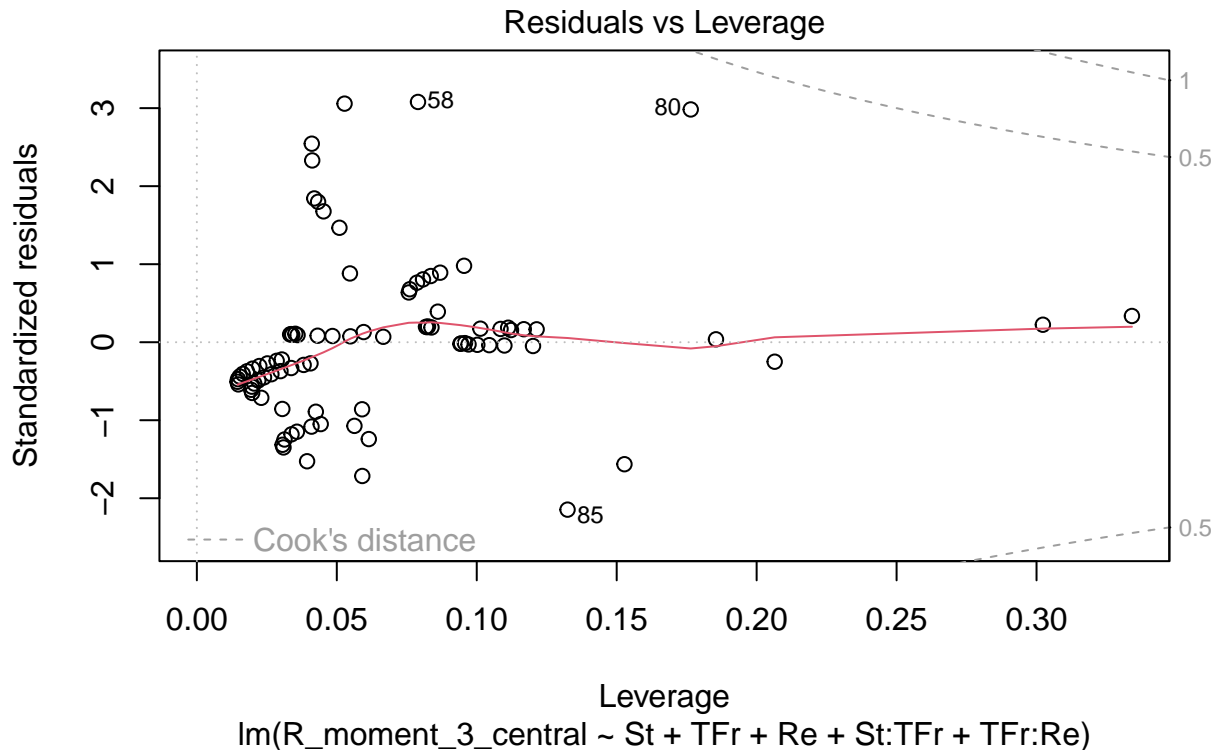

```
cve_linear_interactions_E3$delta
```

```
## [1] 3.339432e+12 3.321640e+12
```


The R^2 is still not great at only about 32%. However, the interaction terms give important theoretical insights that are more in line with the limited theory that we know. The coefficient on TFr:Re is positive, which means that even though the coefficients on Re and TFr alone are negative, we can infer that at high enough levels of TFr , the effect of Re will actually be positive (since the interaction term means that for a given TFr , the coefficient on Re is $(-9805.2 + 953.2 * \text{TFr})$). Similarly, the effect of TFr will be positive at high enough levels of Re . Thus, increasing rightward skewness of the probability density functions with Re or TFr seems to occur only for a combination of high values of TFr and Re . Otherwise, the main positive coefficient is St . Again, we see that the size of the particles has a particularly straightforward effect on turbulence. It increases the first moment and the right skewness of the PDF.


```
lm_fit_E4 <- lm(R_moment_4_central ~ St * TFr + St * Re + TFr * Re, data = data_train)
summary(lm_fit_E4)
```


```
##
## Call:
## lm(formula = R_moment_4_central ~ St * TFr + St * Re + TFr *
##     Re, data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
```


```
## -3.694e+10 -7.457e+09 -1.392e+09 4.131e+09 4.499e+10
##
## Coefficients:
##             Estimate Std. Error t value Pr(>|t|)
## (Intercept) 1.528e+10 5.349e+09 2.857 0.005418 **
## St          1.050e+10 4.256e+09 2.467 0.015707 *
## TFr         -1.915e+09 6.113e+08 -3.133 0.002401 **
## Re          -5.598e+07 2.293e+07 -2.442 0.016773 *
## St:TFr       -5.176e+08 3.144e+08 -1.646 0.103499
## St:Re        -2.662e+07 1.816e+07 -1.466 0.146598
## TFr:Re       7.303e+06 2.125e+06 3.438 0.000924 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 1.499e+10 on 82 degrees of freedom
## Multiple R-squared:  0.3735, Adjusted R-squared:  0.3277
## F-statistic: 8.147 on 6 and 82 DF, p-value: 6.439e-07
```

```
plot(lm_fit_E4)
```

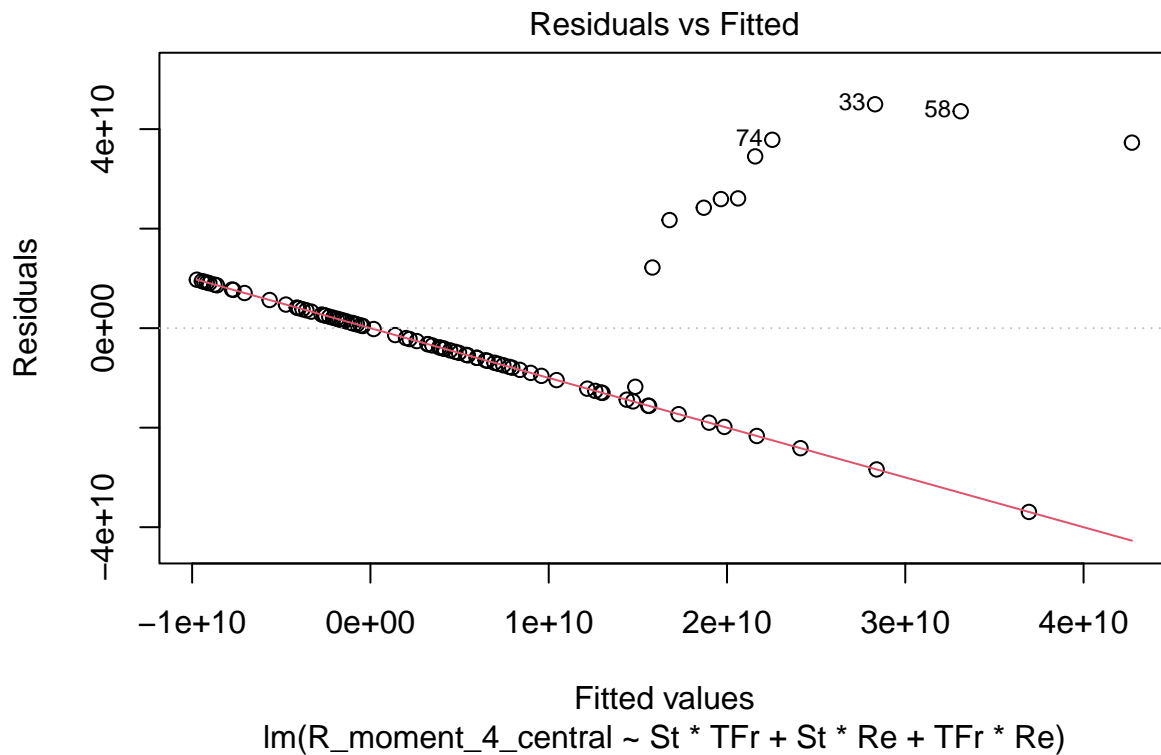

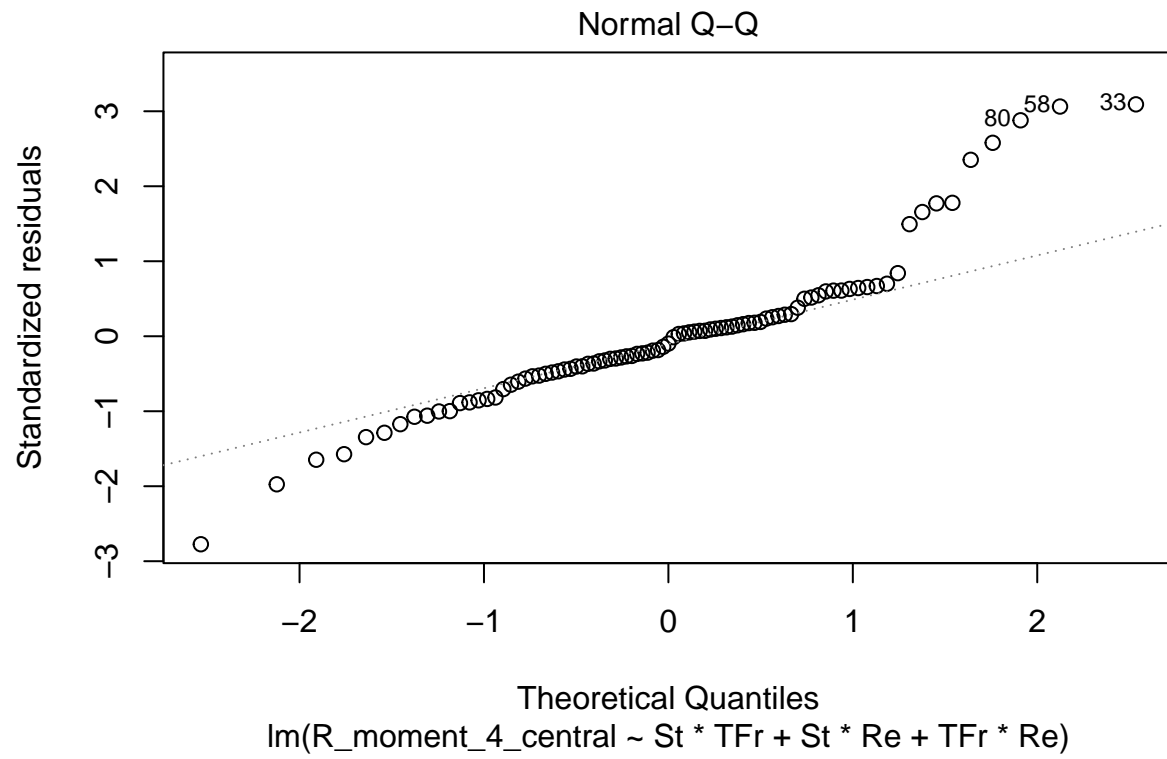

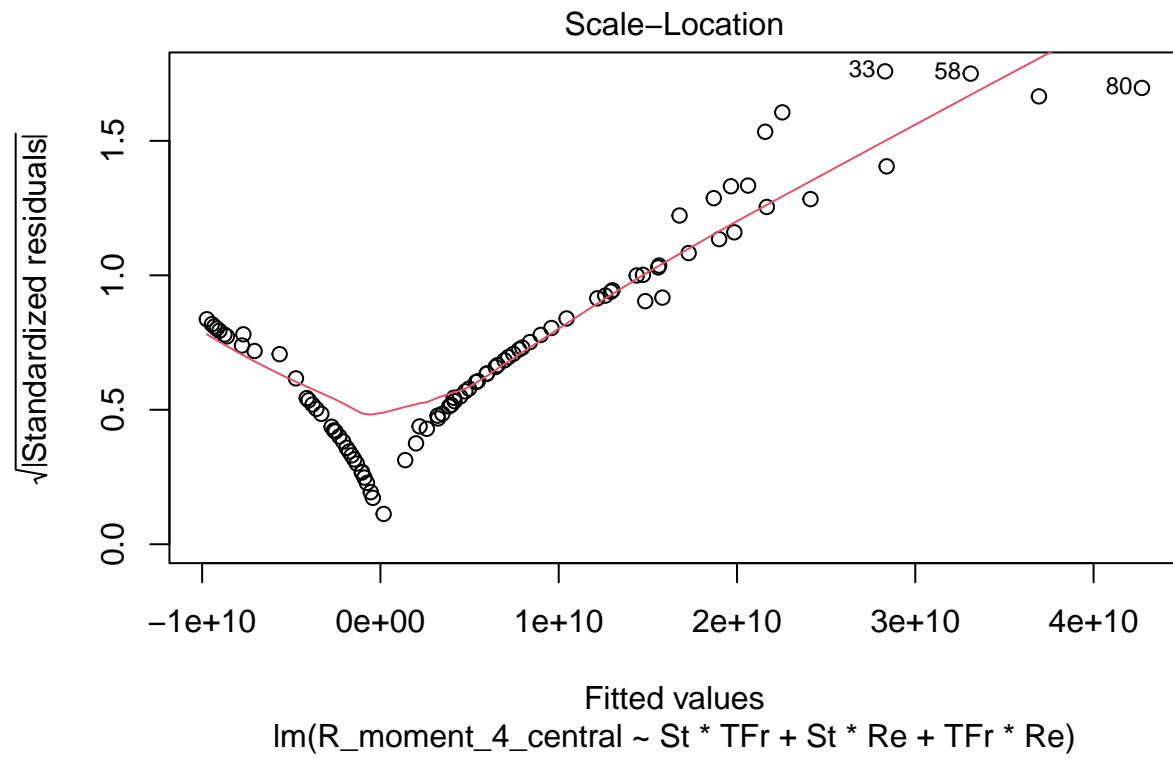

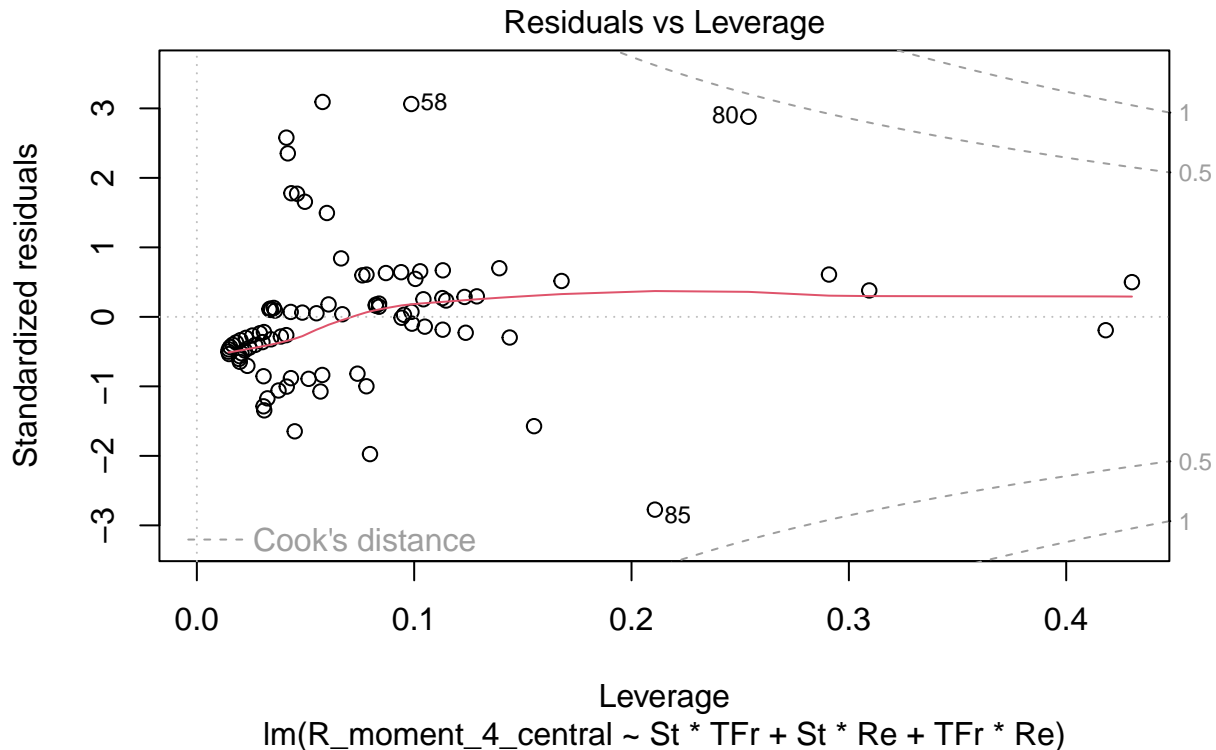

Our analysis of the best linear model for the fourth central moment is quite similar to that of the third central moment. St is the biggest positive driver of kurtosis in the PDF. TFr and Re individually are negative, but they have a positive interaction coefficient.

Complex Model

Lets First start start by evaluating a gam model to see if there is a complex relationship between our response variables and predictor variables. For this section of the project, I will be only employing the simpler lm function to keep all the models in the same format.

```
gam1<-lm(R_moment_1~ns(TFr,2)+ns(Re,2)+ns(St,3),data=data_train)
gam2<-lm(R_moment_2~ns(TFr,2)+ns(Re,2)+ns(St,3),data=data_train)
gam3<-lm(R_moment_3~ns(TFr,2)+ns(Re,2)+ns(St,3),data=data_train)
gam4<-lm(R_moment_4~ns(TFr,2)+ns(Re,2)+ns(St,3),data=data_train)
print(summary(gam1))
```

```
##
## Call:
## lm(formula = R_moment_1 ~ ns(TFr, 2) + ns(Re, 2) + ns(St, 3),
##     data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.036044 -0.007761  0.000876  0.009547  0.039340
##
```

```
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept)  0.103397   0.005175  19.979 < 2e-16 ***
## ns(TFr, 2)1 -0.028702   0.013984  -2.052  0.0434 *
## ns(TFr, 2)2 -0.003101   0.004294  -0.722  0.4722
## ns(Re, 2)1  -0.218972   0.006966 -31.434 < 2e-16 ***
## ns(Re, 2)2  -0.051078   0.004516 -11.311 < 2e-16 ***
## ns(St, 3)1   0.012423   0.008158   1.523  0.1317
## ns(St, 3)2   0.040473   0.009599   4.216 6.42e-05 ***
## ns(St, 3)3   0.033807   0.006324   5.346 8.10e-07 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.01536 on 81 degrees of freedom
## Multiple R-squared:  0.9304, Adjusted R-squared:  0.9244
## F-statistic: 154.7 on 7 and 81 DF,  p-value: < 2.2e-16
```

```
print(summary(gam2))
```

```
##
## Call:
## lm(formula = R_moment_2 ~ ns(TFr, 2) + ns(Re, 2) + ns(St, 3),
##     data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -328.27 -163.57  -25.44  105.75  595.24
##
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept)   328.80      67.37   4.881 5.22e-06 ***
## ns(TFr, 2)1  -935.18     182.04  -5.137 1.89e-06 ***
## ns(TFr, 2)2    35.10      55.89   0.628 0.53171
## ns(Re, 2)1  -548.96      90.68  -6.054 4.20e-08 ***
## ns(Re, 2)2  -173.57      58.78  -2.953 0.00412 **
## ns(St, 3)1    86.24     106.20   0.812 0.41916
## ns(St, 3)2   214.67     124.96   1.718 0.08963 .
## ns(St, 3)3    69.71      82.32   0.847 0.39958
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 199.9 on 81 degrees of freedom
## Multiple R-squared:  0.4634, Adjusted R-squared:  0.417
## F-statistic: 9.992 on 7 and 81 DF,  p-value: 6.159e-09
```

```
print(summary(gam3))
```

```
##
## Call:
## lm(formula = R_moment_3 ~ ns(TFr, 2) + ns(Re, 2) + ns(St, 3),
##     data = data_train)
##
## Residuals:
```

```
##           Min           1Q      Median           3Q           Max
## -2630267 -1310948 -161527  852632  5383248
##
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept)  2630290      569154   4.621 1.42e-05 ***
## ns(TFr, 2)1 -7633365     1537912  -4.963 3.77e-06 ***
## ns(TFr, 2)2   290780      472190   0.616  0.5397
## ns(Re, 2)1 -4471187      766090  -5.836 1.06e-07 ***
## ns(Re, 2)2 -1413605      496608  -2.847  0.0056 **
## ns(St, 3)1   816362      897205   0.910  0.3656
## ns(St, 3)2  1896317     1055663   1.796  0.0762 .
## ns(St, 3)3   707565      695437   1.017  0.3120
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 1689000 on 81 degrees of freedom
## Multiple R-squared:  0.4491, Adjusted R-squared:  0.4015
## F-statistic: 9.433 on 7 and 81 DF,  p-value: 1.659e-08
```

```
print(summary(gam4))
```


```
##
## Call:
## lm(formula = R_moment_4 ~ ns(TFr, 2) + ns(Re, 2) + ns(St, 3),
##     data = data_train)
##
## Residuals:
##           Min           1Q      Median           3Q           Max
## -2.134e+10 -1.051e+10 -1.073e+09  6.815e+09  4.835e+10
##
## Coefficients:
##           Estimate Std. Error t value Pr(>|t|)
## (Intercept)  2.134e+10  4.817e+09   4.431 2.91e-05 ***
## ns(TFr, 2)1 -6.266e+10  1.302e+10  -4.814 6.77e-06 ***
## ns(TFr, 2)2  2.406e+09  3.996e+09   0.602  0.54885
## ns(Re, 2)1 -3.670e+10  6.483e+09  -5.660 2.21e-07 ***
## ns(Re, 2)2 -1.160e+10  4.203e+09  -2.759  0.00716 **
## ns(St, 3)1  7.560e+09  7.593e+09   0.996  0.32239
## ns(St, 3)2  1.642e+10  8.934e+09   1.838  0.06969 .
## ns(St, 3)3  6.915e+09  5.886e+09   1.175  0.24347
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 1.429e+10 on 81 degrees of freedom
## Multiple R-squared:  0.4374, Adjusted R-squared:  0.3888
## F-statistic: 8.996 on 7 and 81 DF,  p-value: 3.651e-08
```

As we can see, a Gam Model performs better with all the moments than linear regression. Nevertheless, as we can see the model only performs adequately with the first moment with an adjusted r square of 0.9244 and an RSS of 0.01536 compared to an average of 0.4 for the other models. This likely is due to the lack of interaction factors in our model, which appear to affect the second, third and fourth moment more than the first. Thus, we might need to add some interaction values to our polynomial model.

Note: 2 degrees were chosen due to the number of unique values of in our data. Only 3 degrees were chosen for St since it has multiple unique values.

Plots Since the first GAM performed particularly well, it might be worthwhile to explore the relationship between our response variable and predictor variables using plots.

```
par(mfrow=c(1,3))
gam_one<- gam(R_moment_1~ns(TFr,2)+ns(Re,2)+ns(St,3),data=data_train)
plot(gam_one, se = TRUE, col = "blue")
```

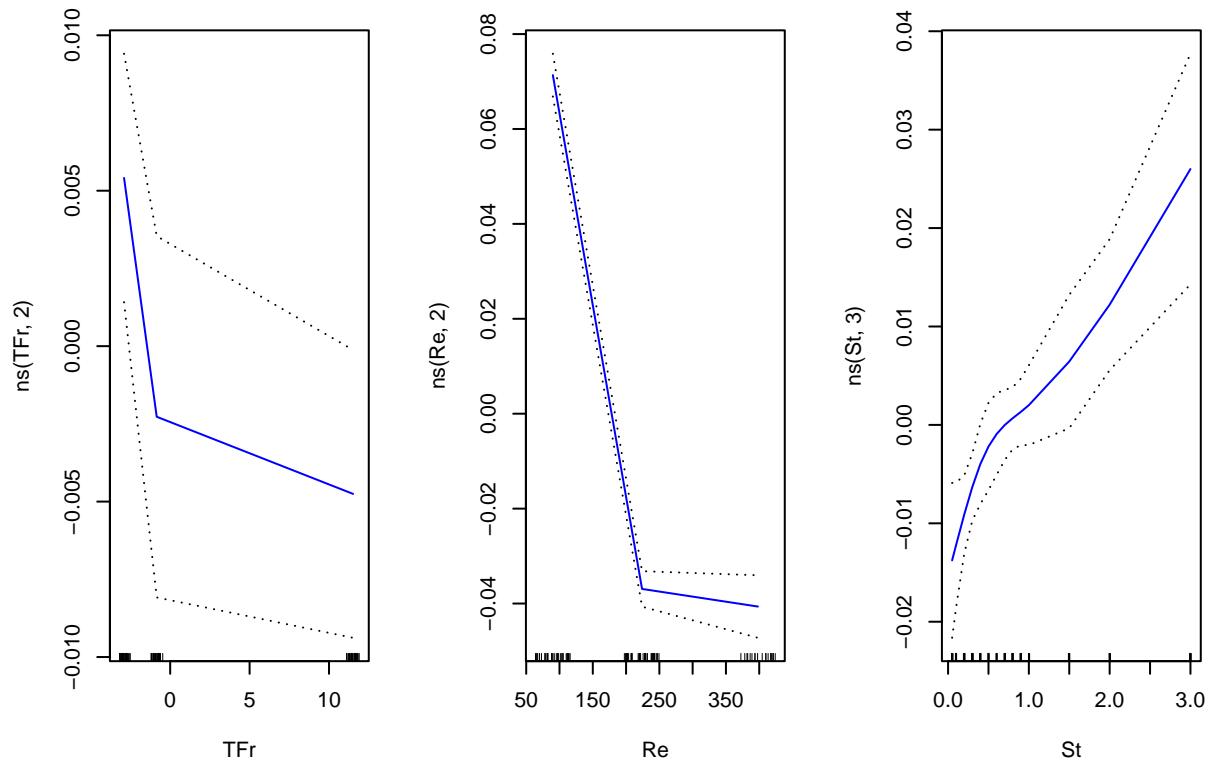

As we can see from the plots, the first moment appears to experience a steep drop for both TFr and Re from the first to the second observation. The decrease becomes much less significant from the second observation to the third observation for both TFr and Re. The relationship between St and the first moment appear to be roughly linear and increasing.

Best Degree Model We can utilize a sequential stepwise selection method with a full model. Our full model would utilize the max number of interactions with a polynomial degree of 2 for TFr and Re (Max number of degrees based on unique values). We will use one for St since throughout our linear models and GAM models, it appears that the relationship between the St and the moments is approximately linear.

```
train.control <- trainControl(method = "LOOCV")
step.model.one <- train(R_moment_1~I(TFr^2)*I(Re^2)*St+St*Re*TFr, data = data_train,
  method = "leapSeq",
  tuneGrid = data.frame(nvmax =1:13),
  trControl = train.control)
```

```
)
step.model.one$results
```


```
##      nvmax      RMSE  Rsquared      MAE
## 1      1 0.035907108 0.5821314 0.032637091
## 2      2 0.018902099 0.8841424 0.010019540
## 3      3 0.016397990 0.9128001 0.012347020
## 4      4 0.013233933 0.9432366 0.009701428
## 5      5 0.011494721 0.9571816 0.006110876
## 6      6 0.011012601 0.9607081 0.008001465
## 7      7 0.010203352 0.9662665 0.007147665
## 8      8 0.013691329 0.9392635 0.010374143
## 9      9 0.009683652 0.9696395 0.007448496
## 10     10 0.008224892 0.9781803 0.005365646
## 11     11 0.009094052 0.9733865 0.006022789
## 12     12 0.008886783 0.9745549 0.005927554
## 13     13 0.008328647 0.9776521 0.005553642
```

```
coef(step.model.one$finalModel, 5)
```

```
##      (Intercept)      I(Re^2)      St      Re      I(Re^2):St
## 1.822255e-01 1.993194e-06 6.143005e-02 -1.250385e-03 6.666005e-07
##      St:Re
## -4.195074e-04
```

```
data1<-data.frame(step.model.one$results$nvmax, step.model.one$results$RMSE)
ggplot(data1,aes(x = step.model.one.results.nvmax, y =(step.model.one.results.RMSE)^2))+
  geom_line()+
  geom_point()+
  scale_x_continuous(breaks = 1:13, minor_breaks = NULL) +
  labs(title = "Training MSE based on Number of Variables ",
       x="Best Model with x Variables", y="MSE")
```

Training MSE based on Number of Variables

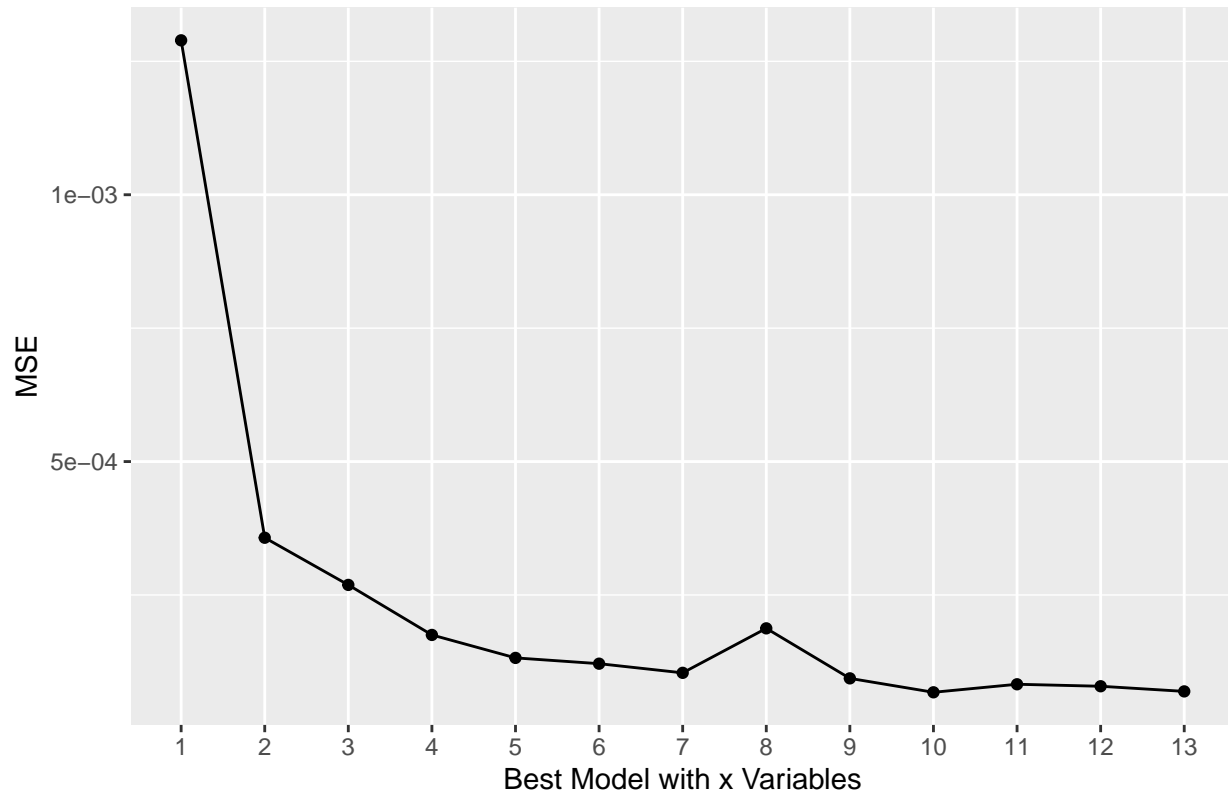

As we can see from the plot, there appears to be a decrease in MSE until about the 5 degrees best model. Then the MSE increases again until about the model with 9 variables, where it decreases again. Since, for the first moment, we are focusing more on inference and the error appears to be negligible between the fifth model and later models, we will choose the fifth model as our best model.


Next, we are going to repeat the same process for all the other moments with a focus on prediction instead of inference.

```
step.model.two <- train(R_moment_2~I(TFr^2)*I(Re^2)*St*St*Re*TFr, data = data_train,
  method = "leapSeq",
  tuneGrid = data.frame(nvmax =1:13),
  trControl = train.control
)
step.model.two$results
```

##	nvmax	RMSE	Rsquared	MAE
## 1	1	245.4204	0.1146493	170.5543
## 2	2	235.1982	0.1867807	125.3575
## 3	3	213.1774	0.3317056	156.7218
## 4	4	185.4832	0.4934326	128.1483
## 5	5	208.1486	0.3656905	172.2743
## 6	6	157.2638	0.6360246	112.6197
## 7	7	190.6828	0.4694553	152.2684
## 8	8	159.0946	0.6303544	119.3594
## 9	9	143.3013	0.6988549	110.4690
## 10	10	141.3121	0.7097159	110.7573
## 11	11	139.8139	0.7157430	105.2612

```
## 12    12 163.7361 0.6403635 115.7253
## 13    13 158.6199 0.6606477 117.0337
```

```
data2<-data.frame(step.model.two$results$nvmax, step.model.two$results$RMSE)
ggplot(data2,aes(x = step.model.two.results.nvmax, y =(step.model.two.results.RMSE)^2))+
  geom_line()+
  geom_point()+
  scale_x_continuous(breaks = 1:13, minor_breaks = NULL) +
  labs(title = "Training MSE based on Number of Variables ",
       x="Best Model with x Variables", y="MSE")
```

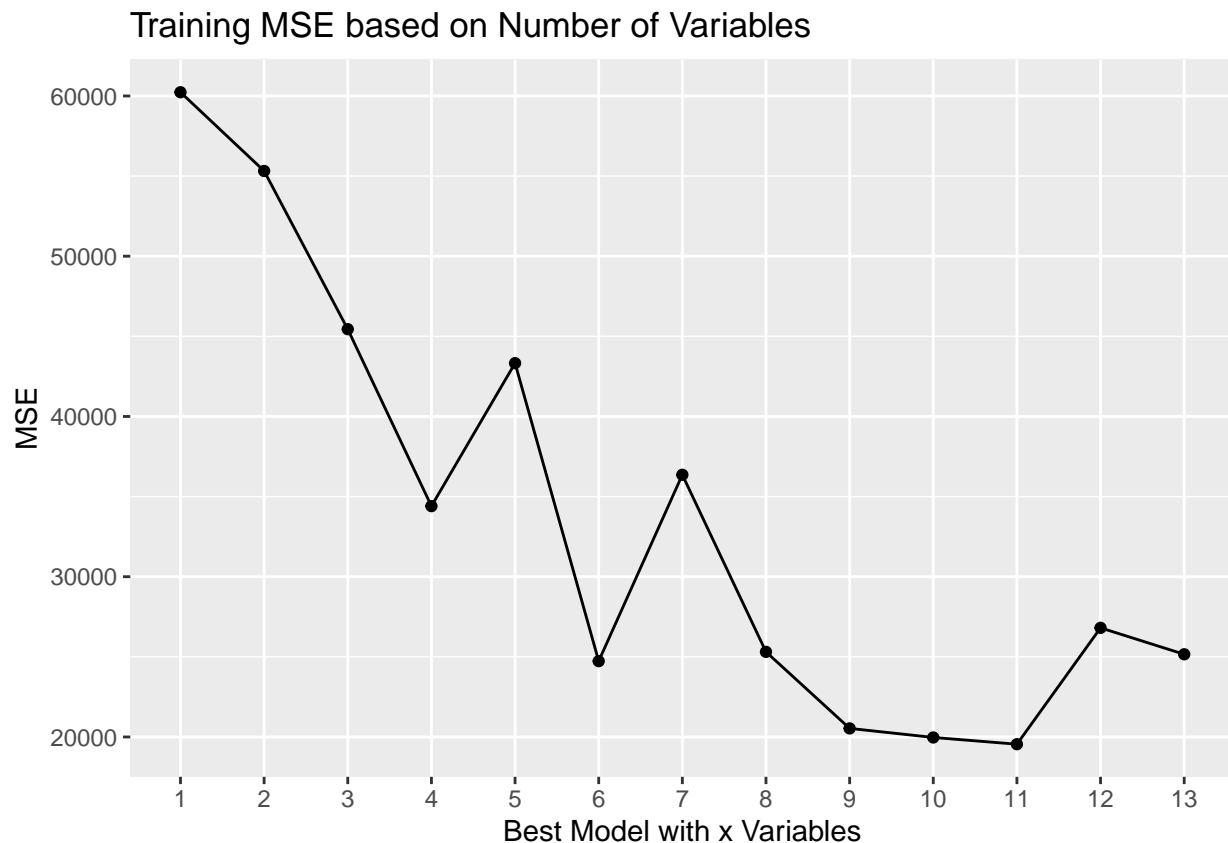


As we can see from the plot, the model does best is the one with 12 variables. However, this model is most likely not very understandable since it does include a variety of interactions including the three way interaction. So the model with 9 variables might be better for some inference. [Francis: I would prefer to go with 6 because even that is a lot of variables already.] Nevertheless, it does appear that the higher the moment the harder it is to predict.

```
step.model.three <- train(R_moment_3~I(TFr^2)*I(Re^2)*St*St*Re*TFr, data = data_train,
  method = "leapSeq",
  tuneGrid = data.frame(nvmax =1:13),
  trControl = train.control
)
step.model.three$results
```

```
##      nvmax      RMSE Rsquared      MAE
## 1         1 2054619 0.1076165 1407528.9
```

```
## 2      2 1974257 0.1759897 1038479.2
## 3      3 1800729 0.3142725 1295715.6
## 4      4 1584833 0.4682023 1067444.4
## 5      5 1774453 0.3394066 1436102.4
## 6      6 1368088 0.6039419  946062.3
## 7      7 1635166 0.4375141 1267899.5
## 8      8 1658524 0.4474426 1273711.8
## 9      9 1340900 0.6198440  952179.2
## 10     10 1190552 0.7038748  921391.3
## 11     11 1402872 0.6227703 1043704.4
## 12     12 1357809 0.6486801  911926.4
## 13     13 1336150 0.6570828  966935.1
```

```
data2<-data.frame(step.model.three$results$nvmax, step.model.three$results$RMSE)
ggplot(data2,aes(x = step.model.three.results.nvmax, y =(step.model.three.results.RMSE)^2))+
  geom_line()+
  geom_point()+
  scale_x_continuous(breaks = 1:13, minor_breaks = NULL) +
  labs(title = "Training MSE based on Number of Variables ",
       x="Best Model with x Variables", y="MSE")
```

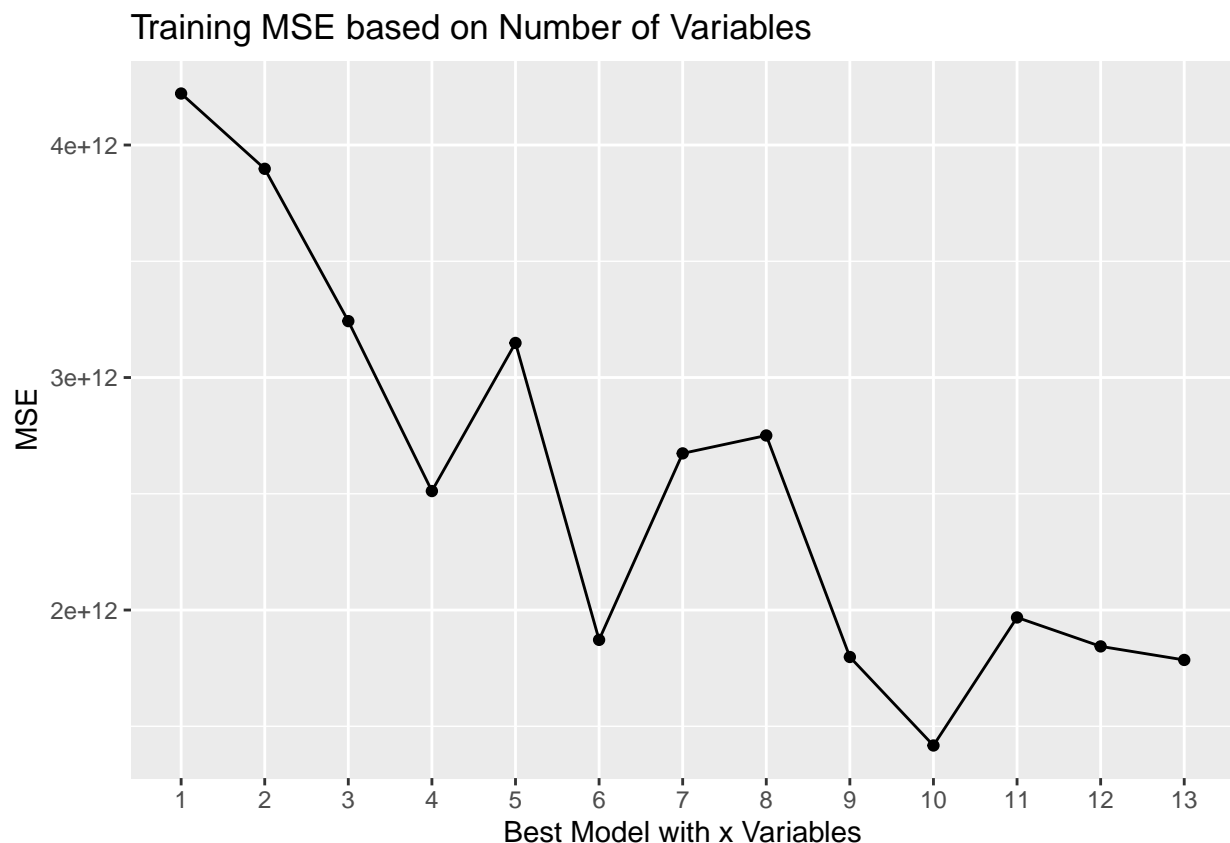

As we can see, the complex model (the almost full model with 12 variables) appears to be doing significantly best. However, since the errors are so big, it might be worth exploring the difference in error between including 12 variables and 8 variables in our final model. [Francis: 6 looks fine again]


```

step.model.four<- train(R_moment_4~I(TFr^2)*I(Re^2)*St+St*Re*TFr, data = data_train,
                        method = "leapSeq",
                        tuneGrid = data.frame(nvmax =1:13),
                        trControl = train.control
                        )
step.model.four$results


```

##	nvmax	RMSE	Rsquared	MAE
## 1	1	17260728601	0.1021434	11634306167
## 2	2	16620293460	0.1674813	8600375860
## 3	3	15242019369	0.2996575	10716341906
## 4	4	13538858265	0.4467839	8919963437
## 5	5	15168532775	0.3152105	12026775719
## 6	6	11849332824	0.5765145	7959608150
## 7	7	13908928977	0.4202629	10563572015
## 8	8	12585391177	0.5291383	8609824224
## 9	9	14229486417	0.4277501	10536571593
## 10	10	10246541749	0.6899035	7729626426
## 11	11	11369201862	0.6441956	7737004670
## 12	12	12650137730	0.5979081	8901167434
## 13	13	11216554941	0.6581971	7965270940

```

data2<-data.frame(step.model.four$results$nvmax, step.model.four$results$RMSE)
ggplot(data2,aes(x = step.model.four.results.nvmax, y =(step.model.four.results.RMSE)^2))+
  geom_line()+
  geom_point()+
  scale_x_continuous(breaks = 1:13, minor_breaks = NULL) +
  labs(title = "Training MSE based on Number of Variables ",
        x="Best Model with x Variables", y="MSE")

```

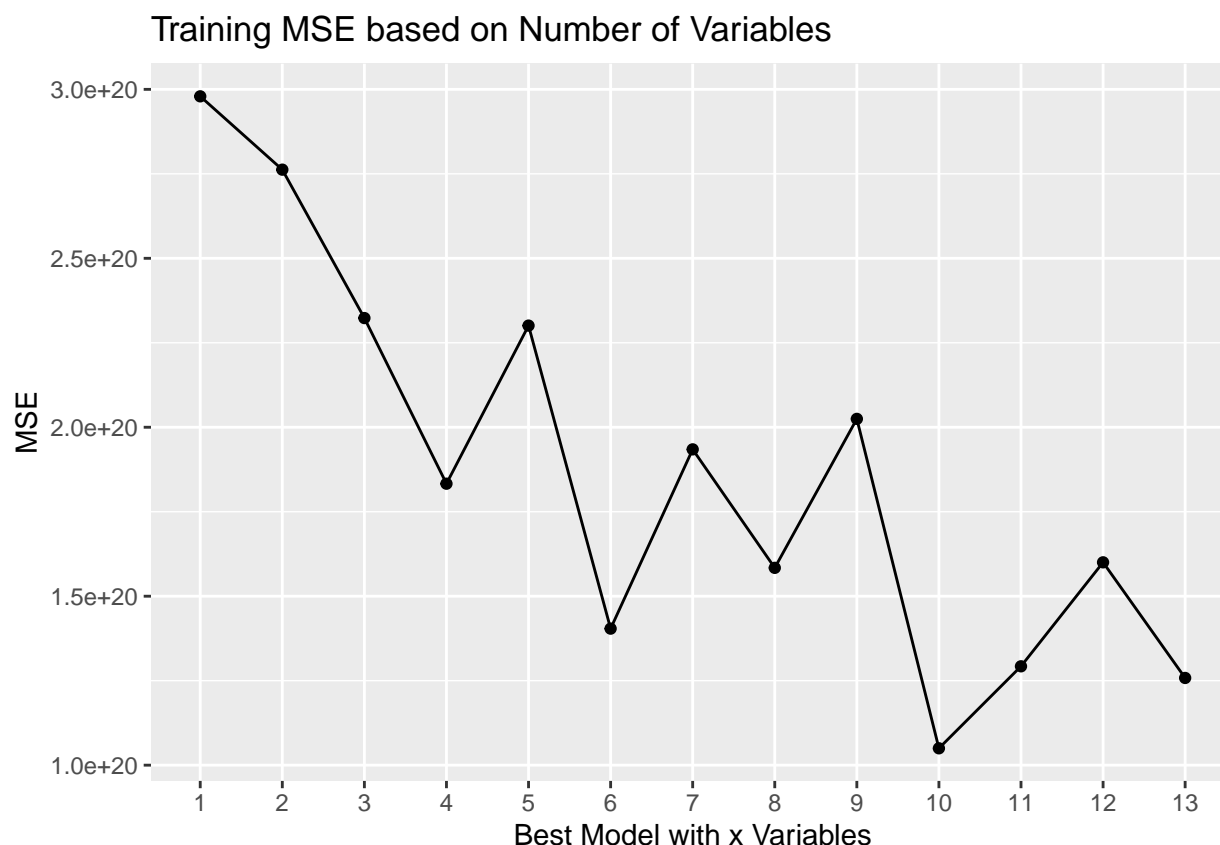

Interestingly, for the fourth moment, the full model appears to do the best. However, the model with 8 variables might of interest to explore since it might be better for inference while not sacrificing a ton of accuracy. [Francis: That's a good idea. Although for kurtosis (the fourth moment) we really aren't learning much about the distribution to begin with so there is no harm in aiming for good prediction and having a flexible model with 6 or 10 variables. I think it might be worth trying 4 variables for the other models 2 & 3 instead, so we can do more single variable plots.]

Results (Final Models)


```
model_1<-lm(R_moment_1~I(Re^2)+St+Re+I(Re^2)*St+St:Re,data=data_train)
summary(model_1)
```

```
##
## Call:
## lm(formula = R_moment_1 ~ I(Re^2) + St + Re + I(Re^2) * St +
##     St:Re, data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.0274911 -0.0003305 -0.0000063  0.0001455  0.0298379
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  1.822e-01  7.757e-03  23.492  < 2e-16 ***
```


```
## I(Re^2)      1.993e-06  1.553e-07  12.838  < 2e-16 ***
## St           6.143e-02  6.487e-03   9.470  7.50e-15 ***
## Re          -1.250e-03  7.592e-05 -16.471  < 2e-16 ***
## I(Re^2):St   6.666e-07  1.364e-07   4.887  4.93e-06 ***
## St:Re        -4.195e-04  6.588e-05  -6.368  1.01e-08 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.01127 on 83 degrees of freedom
## Multiple R-squared:  0.9616, Adjusted R-squared:  0.9593
## F-statistic: 415.7 on 5 and 83 DF,  p-value: < 2.2e-16
```

As we can see a model with 5 variables is enough to predict the first raw moment accurately. Interestingly enough, similar to the linear models TFr doesn't appear to have a significant relationship between it and the first raw moment.

```
plot_model(model_1, type = "pred", terms = c("St", "Re[90,224,398]"))
```

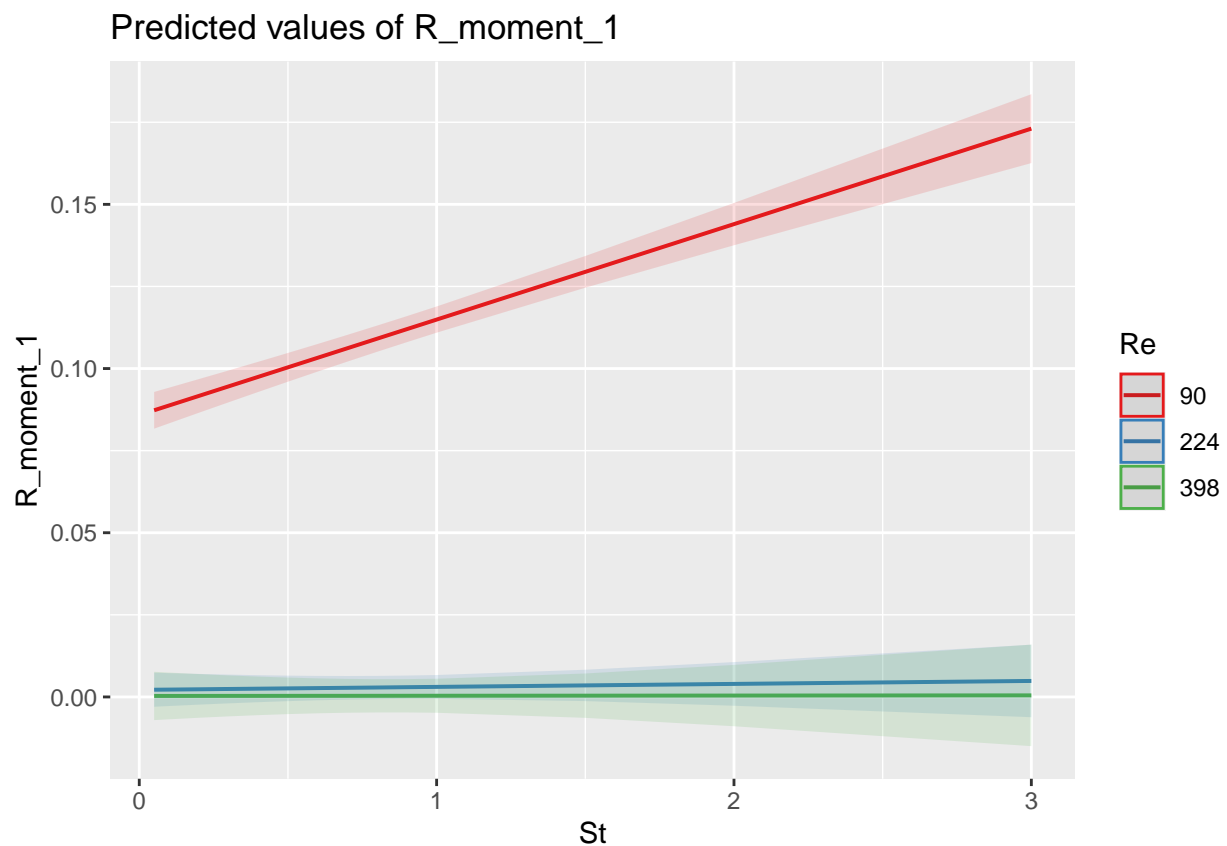

```
plot_model(model_1, type = "pred", terms = c("Re", "St[.05,.7,1.4]"))
```

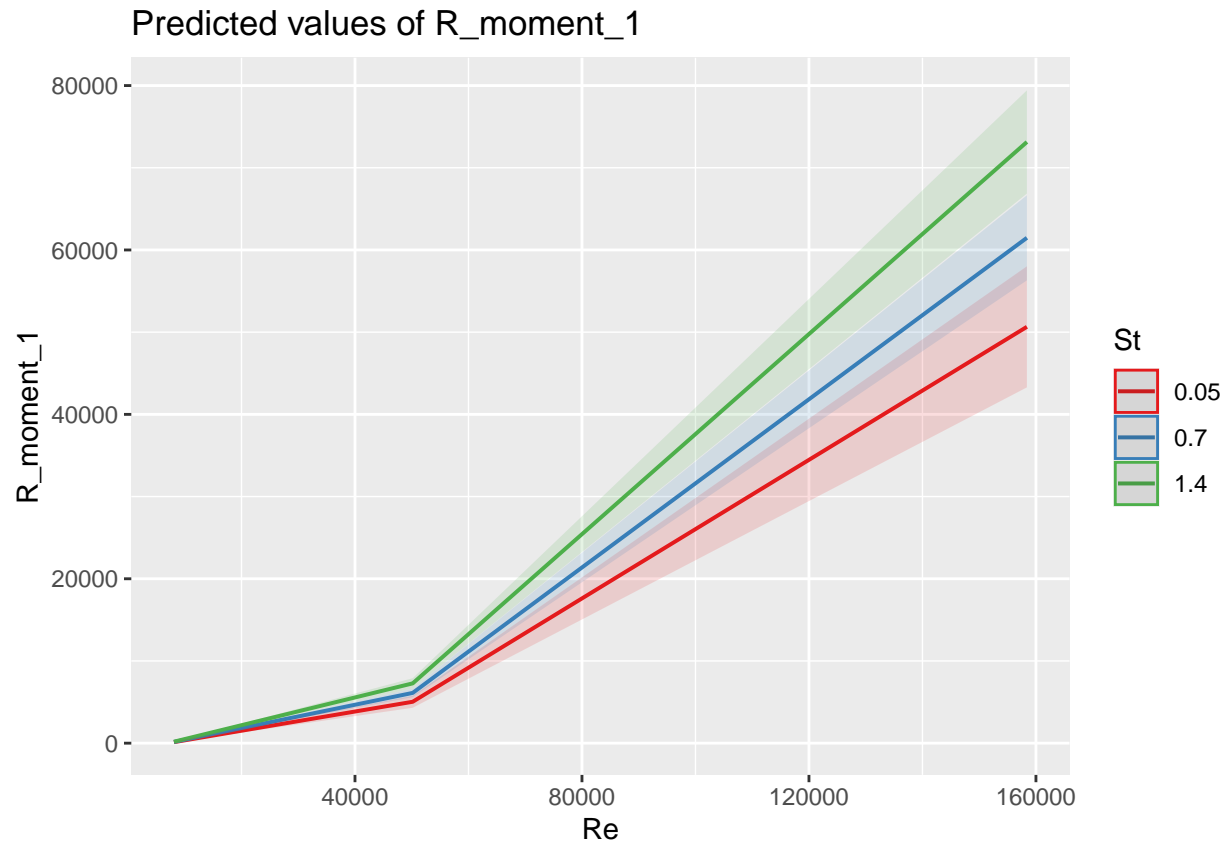


```
model_2<-lm(R_moment_2~Re*TFr*St+I(TFr^2):I(Re^2)+I(TFr^2):St +I(TFr^2)+I(Re^2)-Re:TFr:St,data=data_train)
summary(model_2)
```

```
##
## Call:
## lm(formula = R_moment_2 ~ Re * TFr * St + I(TFr^2):I(Re^2) +
##     I(TFr^2):St + I(TFr^2) + I(Re^2) - Re:TFr:St, data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -446.53  -67.92  -17.88   79.33  283.59
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   4.519e+02  9.369e+01   4.824 6.84e-06 ***
## Re            -5.346e+00  7.367e-01  -7.256 2.55e-10 ***
## TFr           -1.670e+02  2.530e+01  -6.600 4.49e-09 ***
## St            -2.838e+01  5.586e+01  -0.508 0.612807
## I(TFr^2)       8.527e+00  2.235e+00   3.815 0.000271 ***
## I(Re^2)        1.381e-02  2.023e-03   6.825 1.70e-09 ***
## Re:TFr         7.336e-01  1.024e-01   7.165 3.81e-10 ***
## Re:St         -6.071e-01  1.722e-01  -3.525 0.000713 ***
## TFr:St        -7.090e+01  1.746e+01  -4.060 0.000116 ***
## I(TFr^2):I(Re^2) -1.440e-04  2.371e-05  -6.074 4.27e-08 ***
## St:I(TFr^2)    7.216e+00  1.910e+00   3.778 0.000307 ***
```

```
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 134.5 on 78 degrees of freedom
## Multiple R-squared:  0.766, Adjusted R-squared:  0.736
## F-statistic: 25.53 on 10 and 78 DF,  p-value: < 2.2e-16
```


The final model for the second raw moment is a model with 10 variables that has up to two interaction levels.

```
plot_model(model_2, type = "pred", terms = c("TFr", "St[.05,.7,1.4]", "Re[90,224,398]")) ##checking 500
```

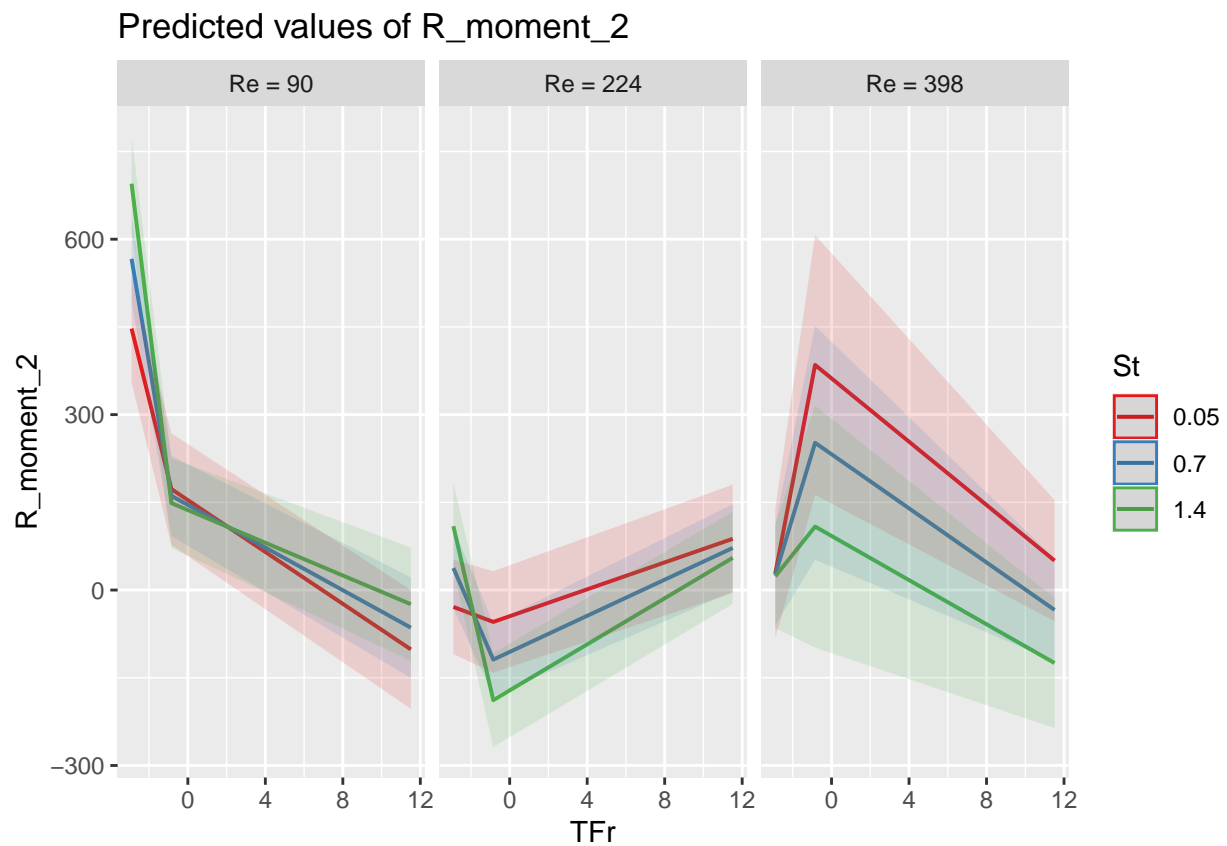


```
plot_model(model_2, type = "pred", terms = c("St", "TFr[-.84,-2.9,11.5]", "Re[90,224,398]"))
```

Predicted values of R_moment_2

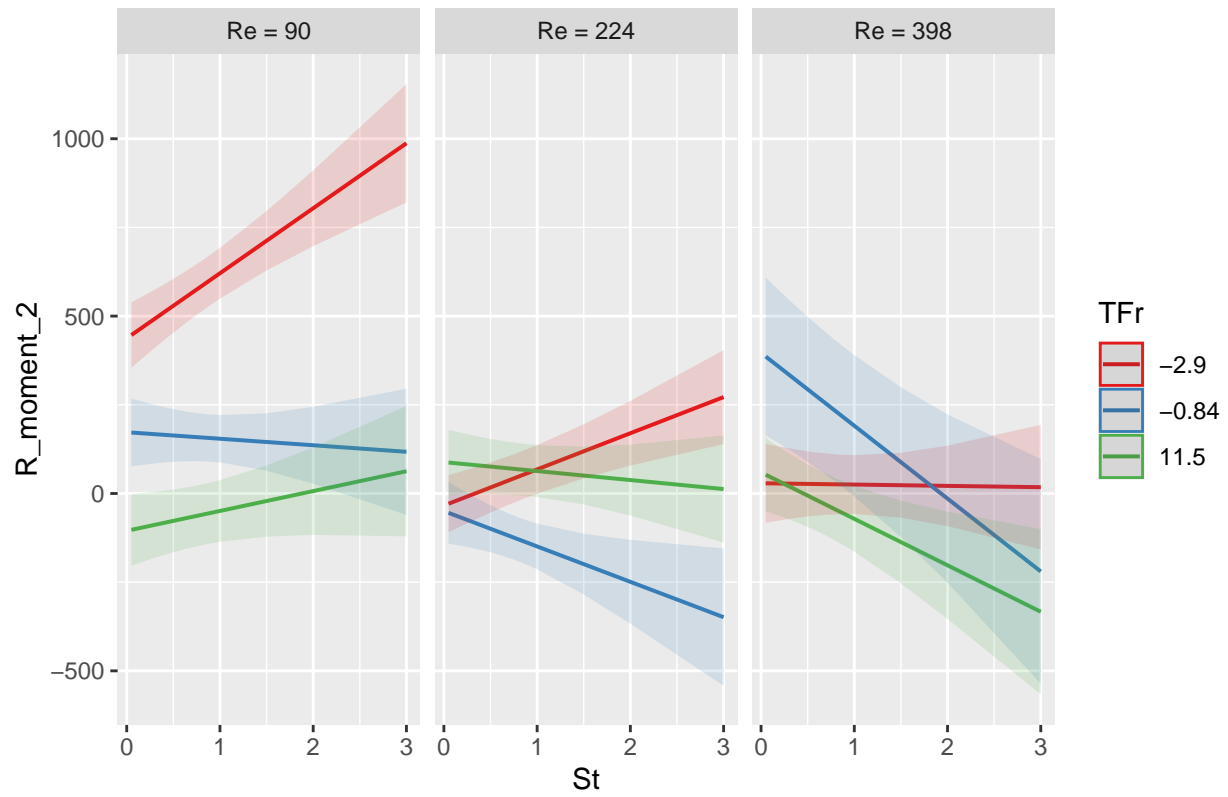

```
plot_model(model_2, type = "pred", terms = c("Re", "St[.05,.7,1.4]", "TFr[-.84,-2.9,11.5]"))
```

Predicted values of R_moment_2

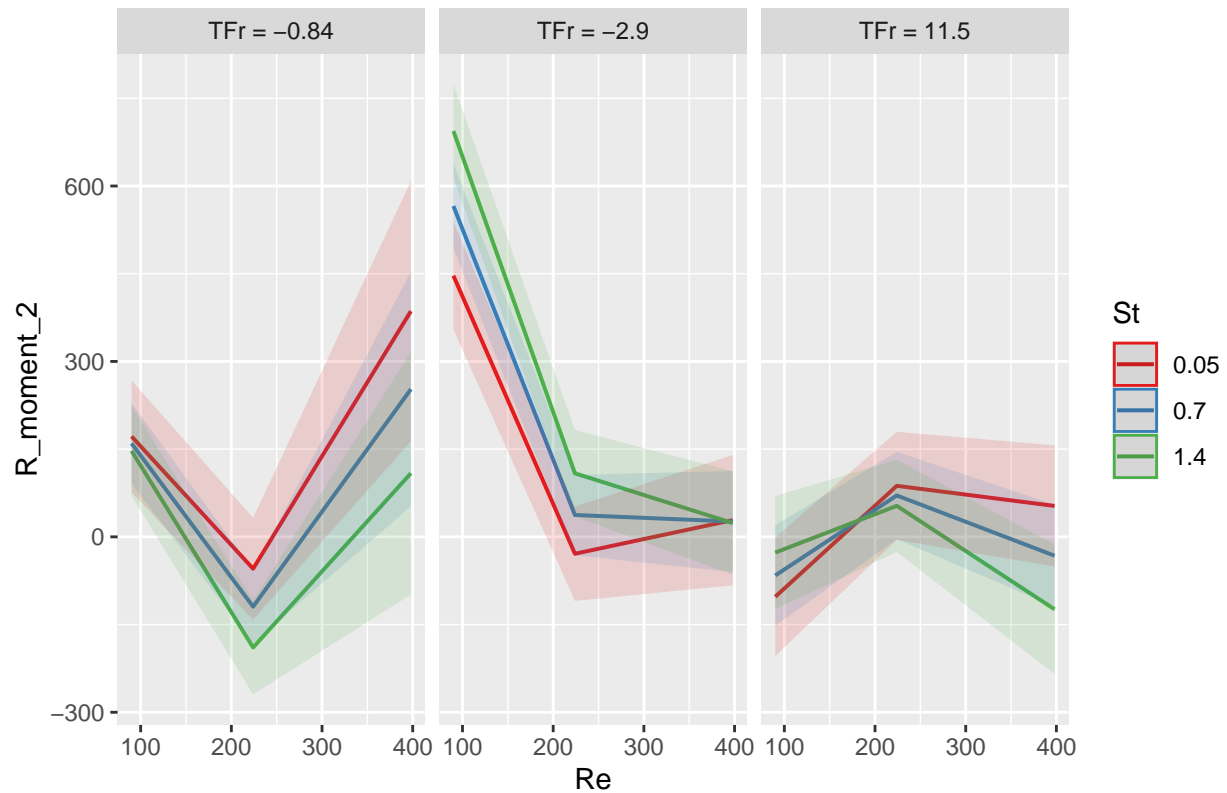

```
coef(step.model.two$finalModel, 9)
```

```
##      (Intercept)      I(TFr^2)      I(Re^2)      Re
##      4.239702e+02      9.146369e+00      1.377607e-02      -5.293138e+00
##      TFr I(TFr^2):I(Re^2)      I(TFr^2):St      St:Re
##      -1.724373e+02      -1.444094e-04      6.509192e+00      -6.362037e-01
##      St:TFr      Re:TFr
##      -6.471653e+01      7.345131e-01
```

```
model_2_alt <- lm(R_moment_2~I(TFr^2)*I(Re^2) + I(TFr^2):St + St:Re + St:TFr + Re*TFr, data=data_train)
summary(model_2_alt)
```

```
##
## Call:
## lm(formula = R_moment_2 ~ I(TFr^2) * I(Re^2) + I(TFr^2):St +
##      St:Re + St:TFr + Re * TFr, data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -443.83   -70.52   -15.86    87.34   283.59
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    4.240e+02  7.544e+01   5.620 2.77e-07 ***
```


```
## I(TFr^2)          9.146e+00  1.865e+00  4.904 4.93e-06 ***
## I(Re^2)           1.378e-02  2.013e-03  6.845 1.48e-09 ***
## Re                -5.293e+00  7.259e-01 -7.292 2.06e-10 ***
## TFr               -1.724e+02  2.284e+01 -7.550 6.52e-11 ***
## I(TFr^2):I(Re^2) -1.444e-04  2.358e-05 -6.123 3.34e-08 ***
## I(TFr^2):St        6.509e+00  1.302e+00  4.998 3.40e-06 ***
## St:Re              -6.362e-01  1.617e-01 -3.935 0.000178 ***
## St:TFr             -6.472e+01  1.247e+01 -5.191 1.59e-06 ***
## Re:TFr              7.345e-01  1.019e-01  7.209 2.97e-10 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 133.9 on 79 degrees of freedom
## Multiple R-squared:  0.7652, Adjusted R-squared:  0.7385
## F-statistic: 28.61 on 9 and 79 DF,  p-value: < 2.2e-16
```

```
plot_model(model_2_alt, type = "pred", terms = c("TFr", "St[.05,.7,1.4]", "Re[90,224,398]"))
```




```
plot_model(model_2_alt, type = "pred", terms = c("St", "TFr[-.84,-2.9,11.5]", "Re[90,224,398]"))
```


Predicted values of R_moment_2

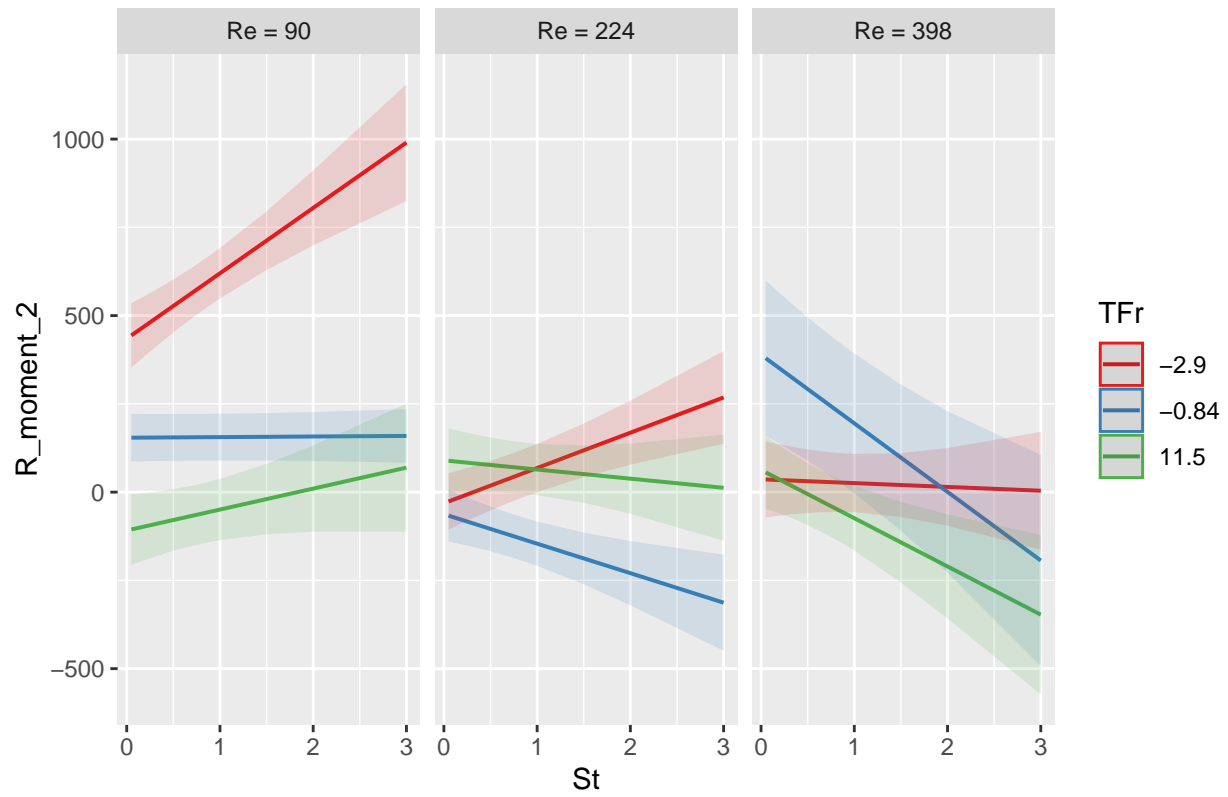

```
plot_model(model_2_alt, type = "pred", terms = c("Re", "St[.05,.7,1.4]", "TFr[-.84,-2.9,11.5]"))
```

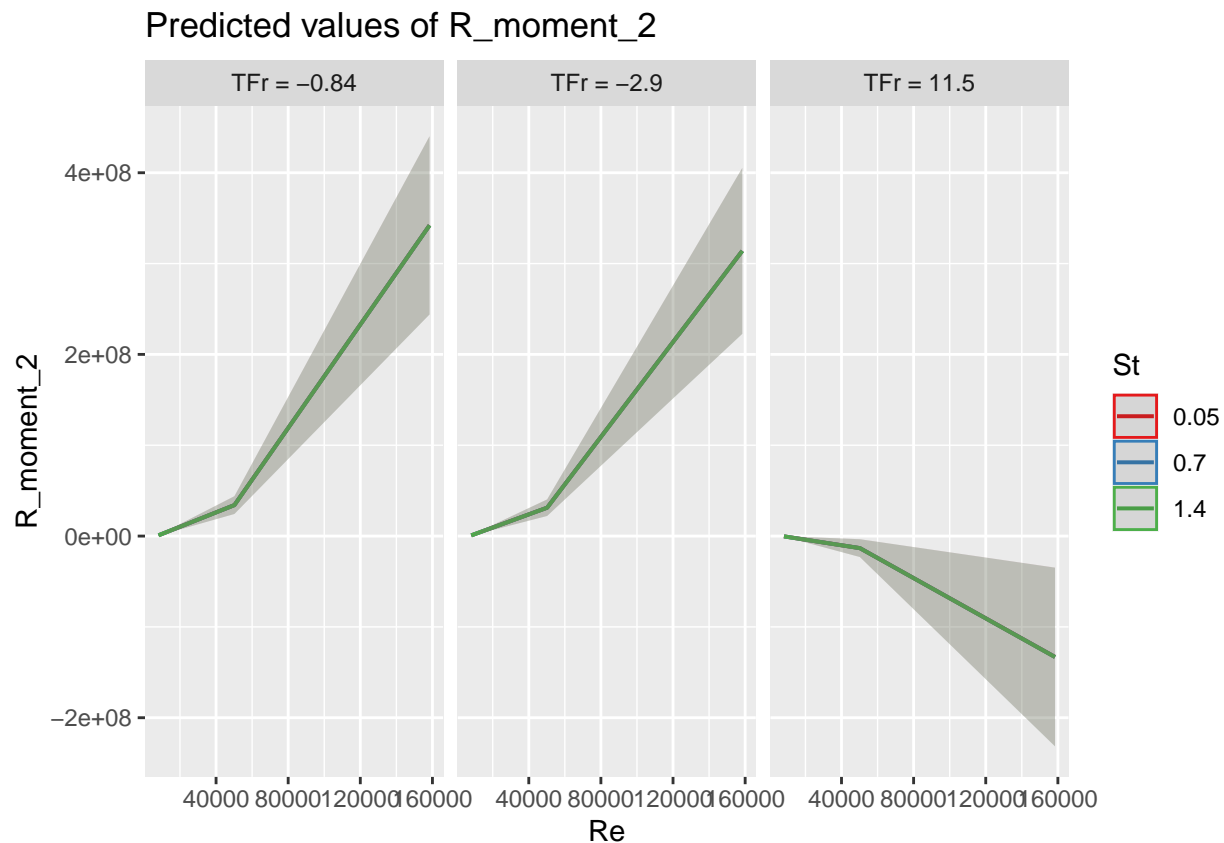


```
model_3<-lm(R_moment_3~I(TFr^2)*I(Re^2)+St*TFr+Re*TFr+I(TFr^2):St,data=data_train)
summary(model_3)
```


```
##
## Call:
## lm(formula = R_moment_3 ~ I(TFr^2) * I(Re^2) + St * TFr + Re *
##     TFr + I(TFr^2):St, data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -4107519  -580683   194083   640231  3090996
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  4.236e+06  8.449e+05   5.013 3.21e-06 ***
## I(TFr^2)      7.720e+04  2.021e+04   3.820 0.000265 ***
## I(Re^2)       1.093e+02  1.856e+01   5.890 8.99e-08 ***
## St          -8.149e+05  4.841e+05  -1.683 0.096237 .
## TFr         -1.429e+06  2.300e+05  -6.214 2.28e-08 ***
## Re          -4.711e+04  6.672e+03  -7.062 5.69e-10 ***
## I(TFr^2):I(Re^2) -1.134e+00  2.175e-01  -5.216 1.43e-06 ***
## St:TFr       -4.678e+05  1.523e+05  -3.072 0.002917 **
## TFr:Re        5.905e+03  9.404e+02   6.280 1.72e-08 ***
## I(TFr^2):St    4.616e+04  1.667e+04   2.769 0.007001 **
## ---
```

```
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 1236000 on 79 degrees of freedom
## Multiple R-squared:  0.7122, Adjusted R-squared:  0.6794
## F-statistic: 21.72 on 9 and 79 DF,  p-value: < 2.2e-16
```


```
plot_model(model_3, type = "pred", terms = c("TFr", "St[.05,.7,1.4]","Re[90,224,398]"))
```

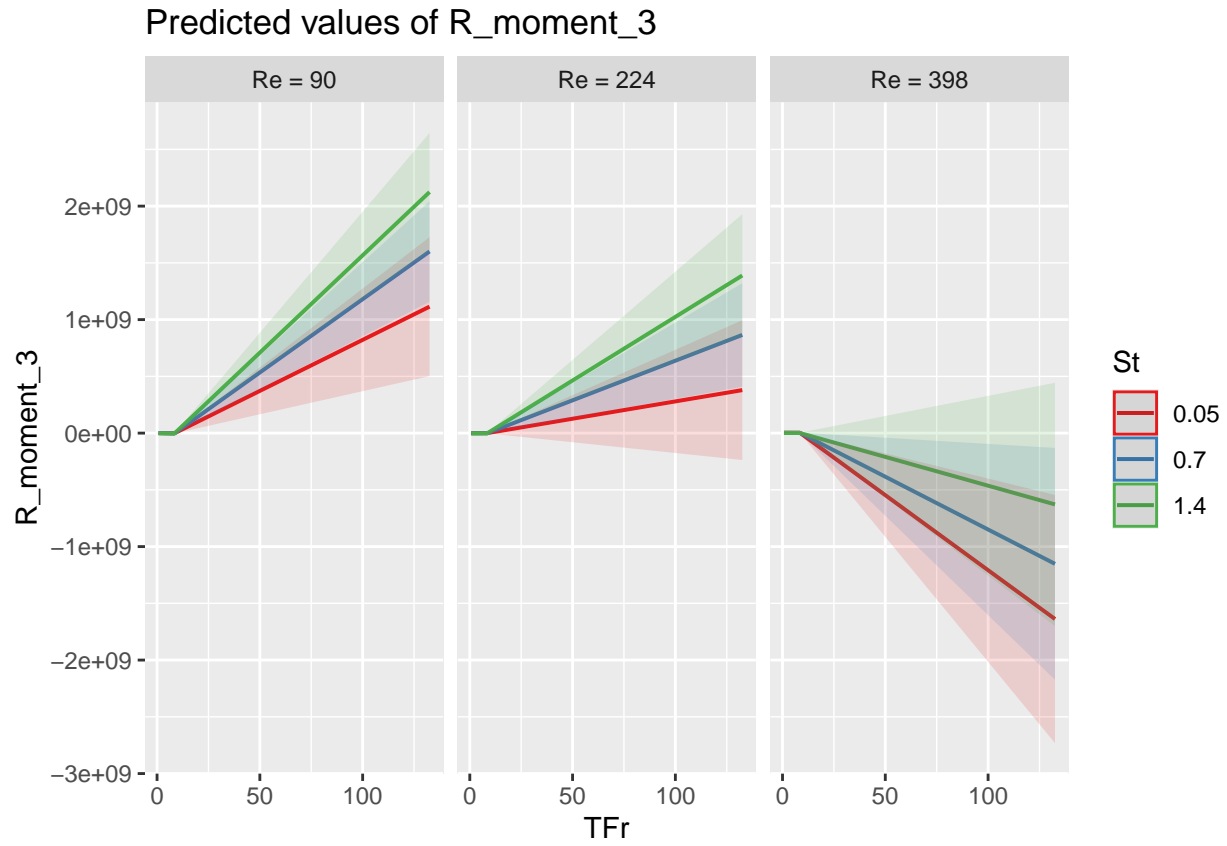

```
plot_model(model_3, type = "pred", terms = c("St", "TFr[-.84,-2.9,11.5]", "Re[90,224,398]"))
```

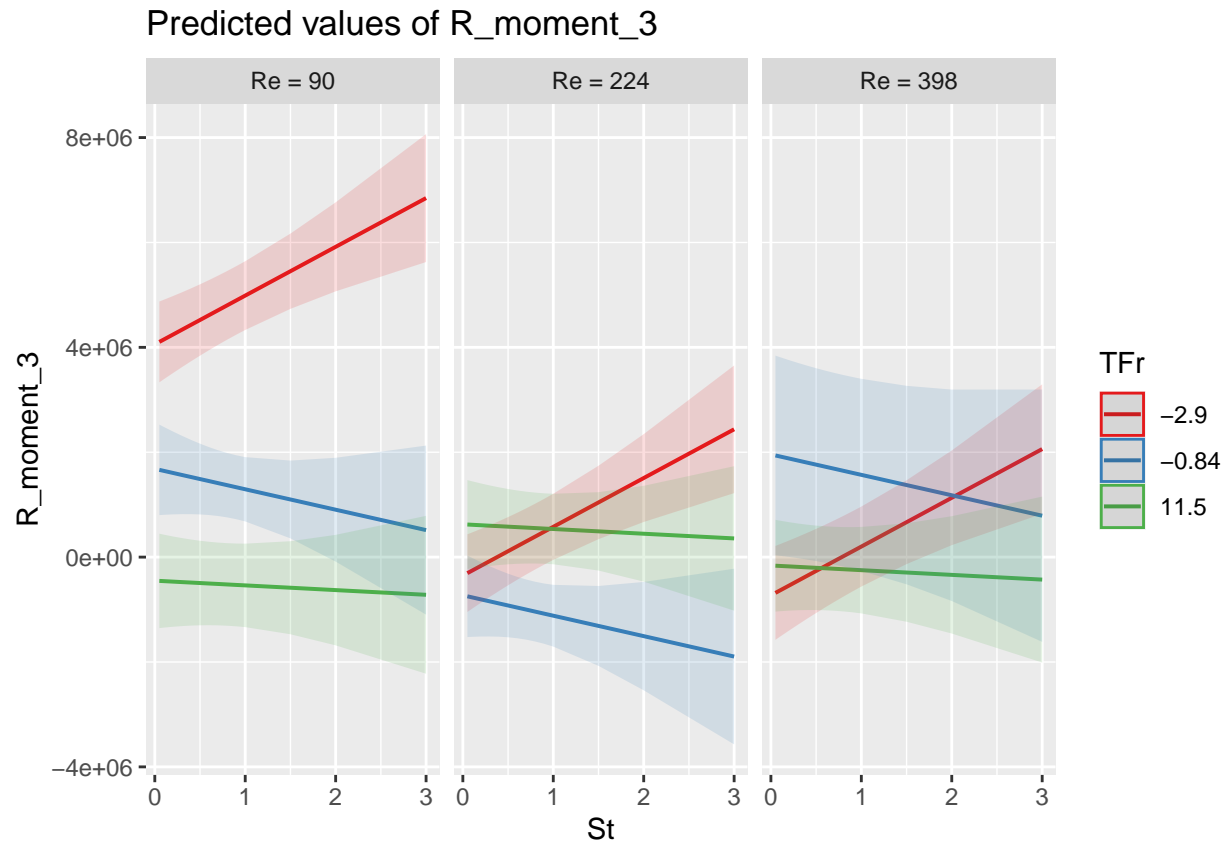

```
plot_model(model_3, type = "pred", terms = c("Re", "St[.05,.7,1.4]", "TFr[-.84,-2.9,11.5]"))
```

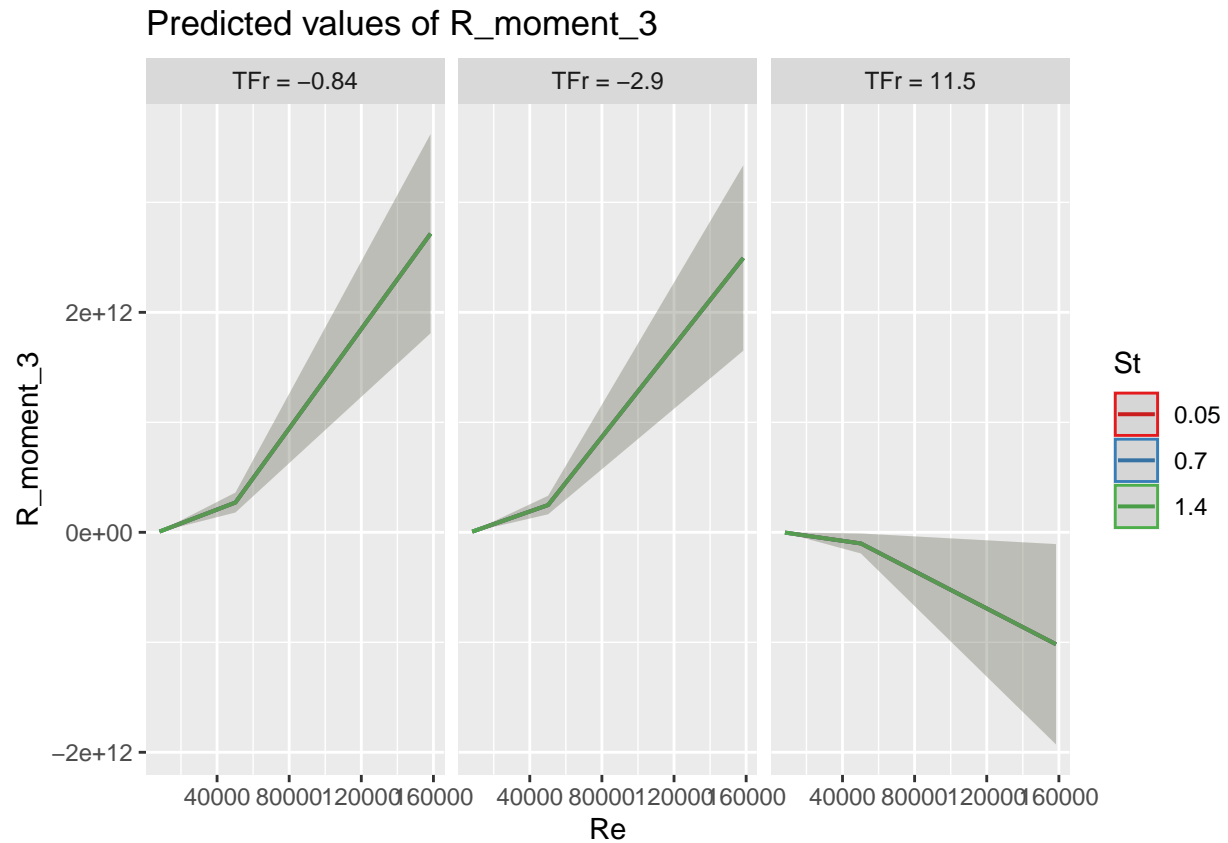

```
coef(step.model.three$finalModel, 10)
```


```
##      (Intercept)      I(TFr^2)      I(Re^2)      Re
##      3.463638e+06      6.185401e+04      1.134114e+02      -4.224438e+04
##      TFr I(TFr^2):I(Re^2)      I(TFr^2):St      St:Re
##      -1.186503e+06      -1.160563e+00      6.821466e+04      -6.800008e+03
##      St:TFr      Re:TFr      St:Re:TFr
##      -7.873823e+05      5.472355e+03      5.661473e+02
```

```
model_3_alt <- lm(R_moment_3~I(TFr^2)+I(Re^2)+Re+TFr+I(TFr^2):I(Re^2)+I(TFr^2):St+St:Re+St:TFr+Re:TFr+S
summary(model_3_alt)
```


```
##
## Call:
## lm(formula = R_moment_3 ~ I(TFr^2) + I(Re^2) + Re + TFr + I(TFr^2):I(Re^2) +
##      I(TFr^2):St + St:Re + St:TFr + Re:TFr + St:Re:TFr, data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -3142111 -563374   145198   500936  2361633
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   3.464e+06   6.151e+05   5.631 2.71e-07 ***
```

```
## I(TFr^2)          6.185e+04  1.542e+04   4.012 0.000137 ***
## I(Re^2)           1.134e+02  1.641e+01   6.911 1.16e-09 ***
## Re                -4.224e+04  5.919e+03  -7.137 4.32e-10 ***
## TFr               -1.187e+06  1.957e+05  -6.063 4.47e-08 ***
## I(TFr^2):I(Re^2) -1.161e+00  1.924e-01  -6.031 5.12e-08 ***
## I(TFr^2):St       6.821e+04  1.098e+04   6.213 2.37e-08 ***
## Re:St             -6.800e+03  1.363e+03  -4.988 3.61e-06 ***
## TFr:St            -7.874e+05  1.227e+05  -6.420 9.79e-09 ***
## Re:TFr            5.472e+03  8.544e+02   6.405 1.04e-08 ***
## Re:TFr:St         5.661e+02  2.121e+02   2.669 0.009258 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 1091000 on 78 degrees of freedom
## Multiple R-squared:  0.7784, Adjusted R-squared:  0.75
## F-statistic: 27.41 on 10 and 78 DF,  p-value: < 2.2e-16
```


```
plot_model(model_3_alt, type = "pred", terms = c("TFr", "St[.05,.7,1.4]", "Re[90,224,398]"))
```

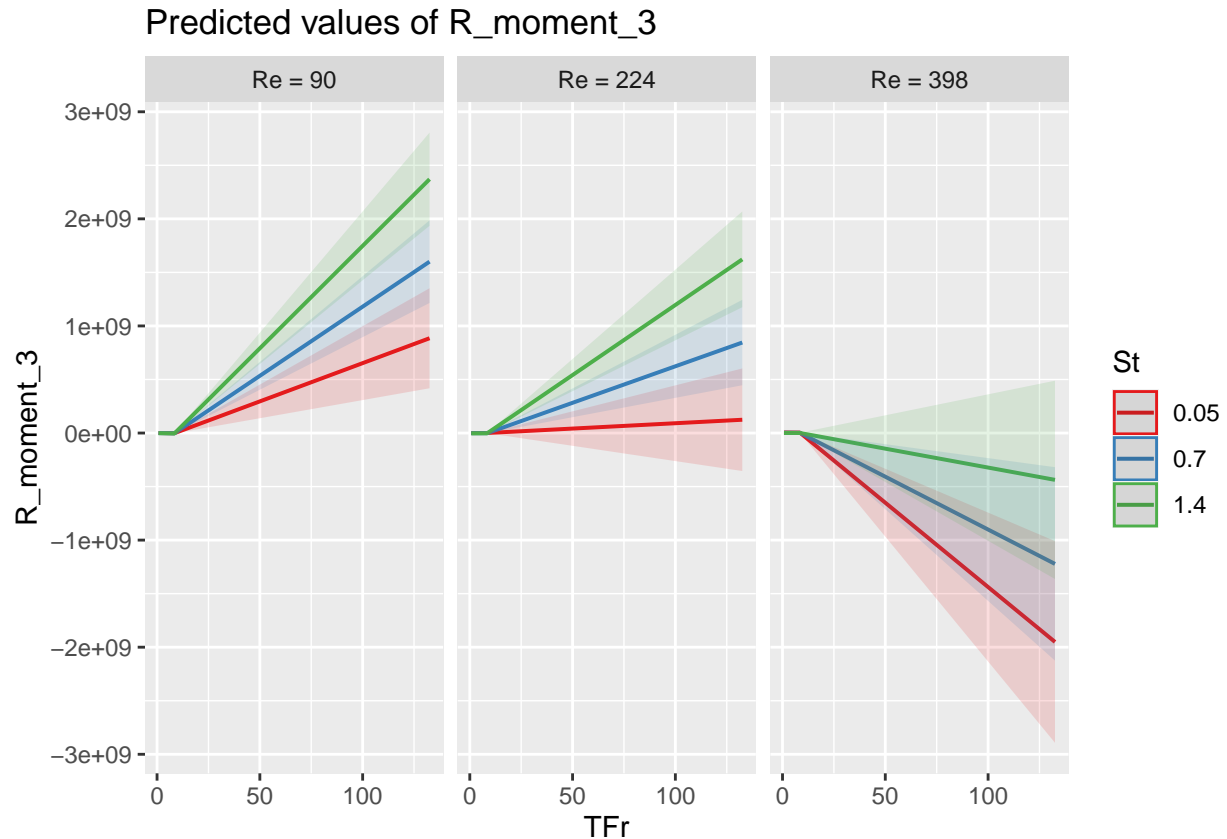

```
plot_model(model_3_alt, type = "pred", terms = c("St", "TFr[-.84,-2.9,11.5]", "Re[90,224,398]"))
```

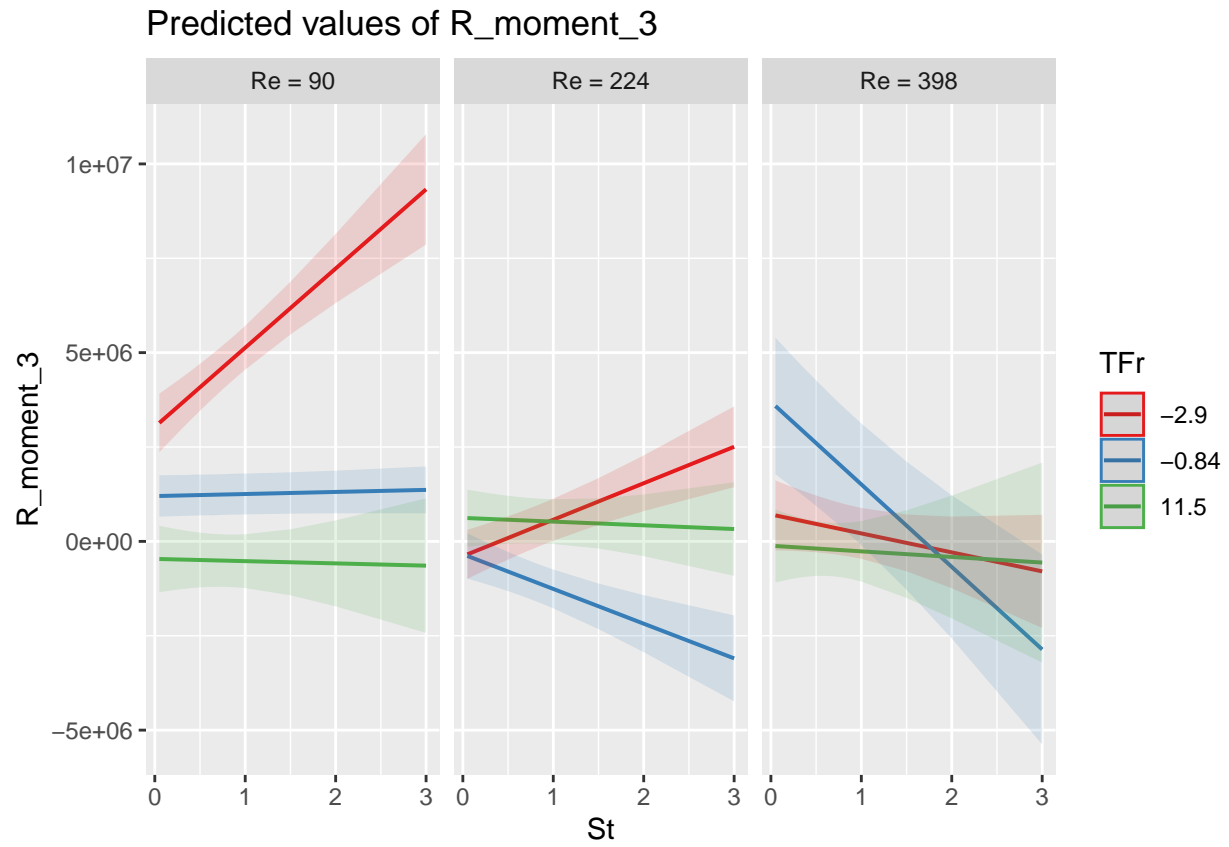

```
plot_model(model_3_alt, type = "pred", terms = c("Re", "St[.05,.7,1.4]", "TFr[-.84,-2.9,11.5]"))
```

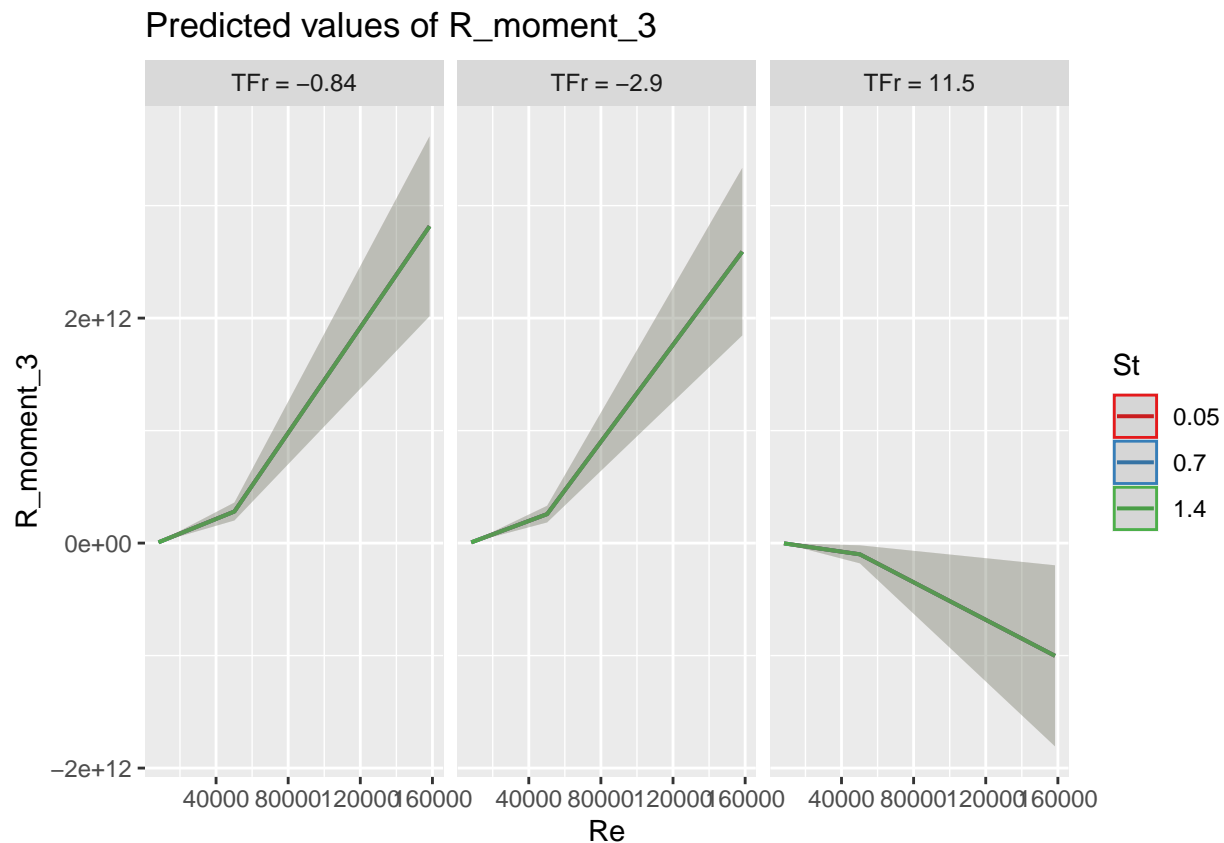

Our Final model for Moment 4 will be the full model with 13 variables (ST is in the model due to the hierarchy principle) . This model has all interaction variables up to 3, since they appear to be significant ($P < 0.05$)

```
model_4 <- lm(R_moment_4 ~ I(TFr^2) * I(Re^2) + St * TFr + Re * TFr + I(TFr^2) : St, data = data_train)
summary(model_4)
```


```
##
## Call:
## lm(formula = R_moment_4 ~ I(TFr^2) * I(Re^2) + St * TFr + Re *
##     TFr + I(TFr^2):St, data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -3.298e+10 -4.906e+09  1.731e+09  5.650e+09  2.784e+10
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  3.504e+10  7.233e+09   4.845 6.20e-06 ***
## I(TFr^2)      6.062e+08  1.730e+08   3.503 0.000759 ***
## I(Re^2)       8.955e+05  1.589e+05   5.634 2.60e-07 ***
## St           -7.011e+09  4.144e+09  -1.692 0.094617 .
## TFr          -1.144e+10  1.969e+09  -5.811 1.25e-07 ***
## Re           -3.864e+08  5.711e+07  -6.765 2.10e-09 ***
## I(TFr^2):I(Re^2) -9.301e+03  1.862e+03  -4.996 3.43e-06 ***
## St:TFr        -4.185e+09  1.304e+09  -3.211 0.001917 **
```



```
## TFr:Re          4.847e+07  8.050e+06   6.021 5.17e-08 ***
## I(TFr^2):St     4.113e+08  1.427e+08   2.882 0.005081 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 1.058e+10 on 79 degrees of freedom
## Multiple R-squared:  0.6992, Adjusted R-squared:  0.665
## F-statistic: 20.41 on 9 and 79 DF,  p-value: < 2.2e-16
```


Our Final model for Moment 4 will be the full model with 13 variables (ST is in the model due to the hierarchy principle) . This model has all interaction variables up to 3, since they appear to be significant ($P < 0.05$).

```
plot_model(model_4, type = "pred", terms = c("TFr", "St[.05,.7,1.4]", "Re[90,224,398]"))
```

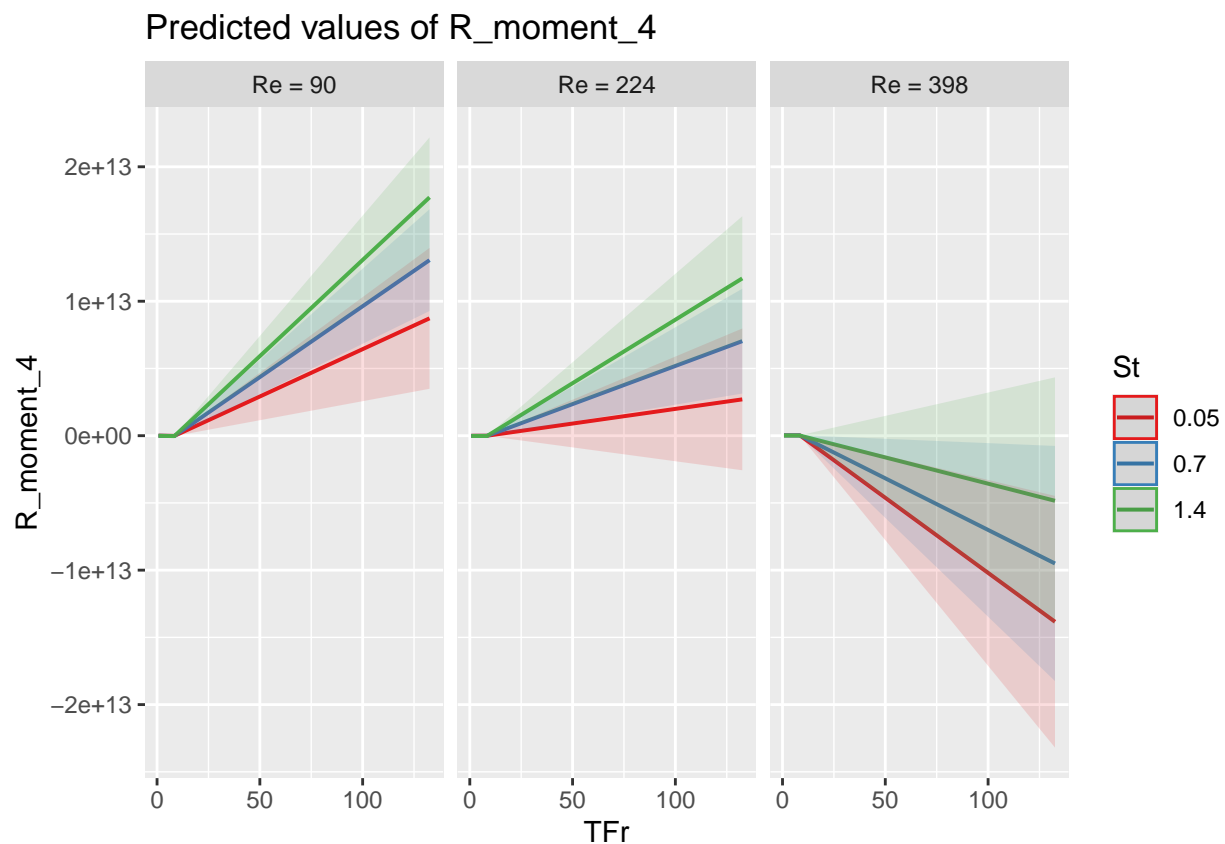


```
plot_model(model_4, type = "pred", terms = c("St", "TFr[-.84,-2.9,11.5]", "Re[90,224,398]"))
```

Predicted values of R_moment_4

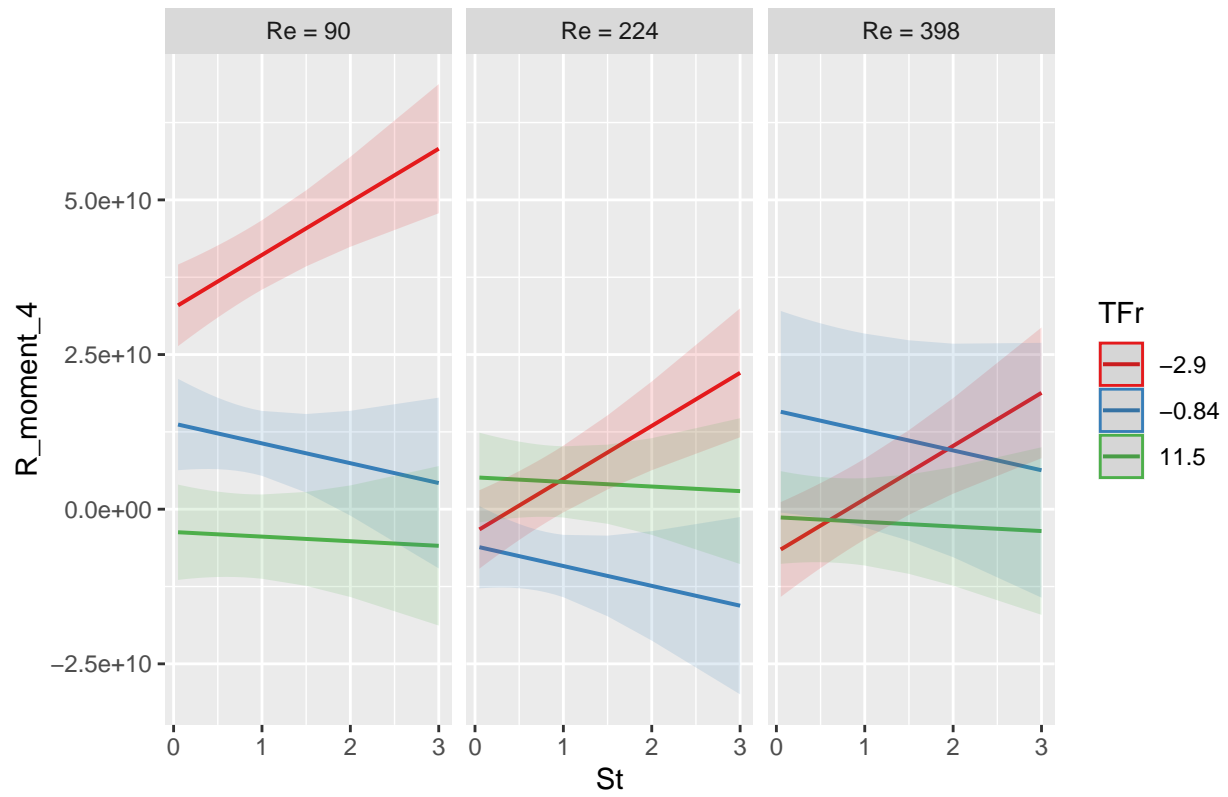

```
plot_model(model_4, type = "pred", terms = c("Re", "St[.05,.7,1.4]", "TFr[-.84,-2.9,11.5]"))
```

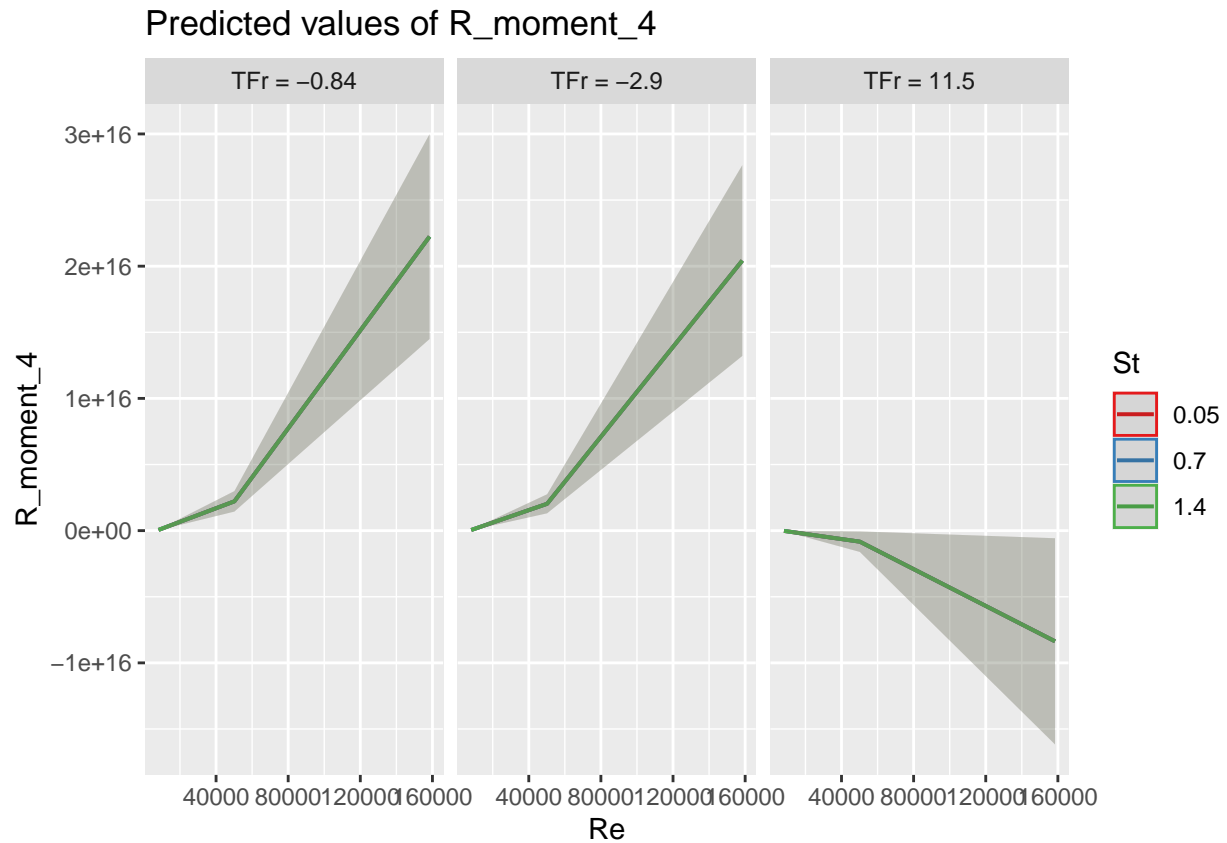

Discussion & Conclusion

References

<https://www.britannica.com/science/Reynolds-number>

Smaller Models

```
coef(step.model.two$finalModel, 6)
```


```
##      (Intercept)      I(TFr^2)      I(Re^2)      Re
##  4.323929e+02    1.438803e+01    1.364767e-02 -5.808202e+00
##      TFr I(TFr^2):I(Re^2)      Re:TFr
## -2.254036e+02 -1.413402e-04    7.297198e-01
```

```
model_2_small <- lm(R_moment_2~I(TFr^2)*I(Re^2)+Re*TFr,data=data_train)
summary(model_2_small)
```

```
##
## Call:
## lm(formula = R_moment_2 ~ I(TFr^2) * I(Re^2) + Re * TFr, data = data_train)
```

```
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -594.99  -69.98  -26.36   64.08  448.77
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)   4.324e+02  8.570e+01   5.045 2.67e-06 ***
## I(TFr^2)       1.439e+01  1.747e+00   8.235 2.39e-12 ***
## I(Re^2)        1.365e-02  2.280e-03   5.986 5.45e-08 ***
## Re            -5.808e+00  8.174e-01  -7.106 3.99e-10 ***
## TFr           -2.254e+02  2.319e+01  -9.722 2.65e-15 ***
## I(TFr^2):I(Re^2) -1.413e-04  2.663e-05  -5.307 9.32e-07 ***
## Re:TFr         7.297e-01  1.153e-01   6.327 1.25e-08 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 152.3 on 82 degrees of freedom
## Multiple R-squared:  0.6846, Adjusted R-squared:  0.6615
## F-statistic: 29.66 on 6 and 82 DF,  p-value: < 2.2e-16
```

```
plot_model(model_2_small, type = "pred", terms = c("TFr", "Re[90,224,398]"))
```

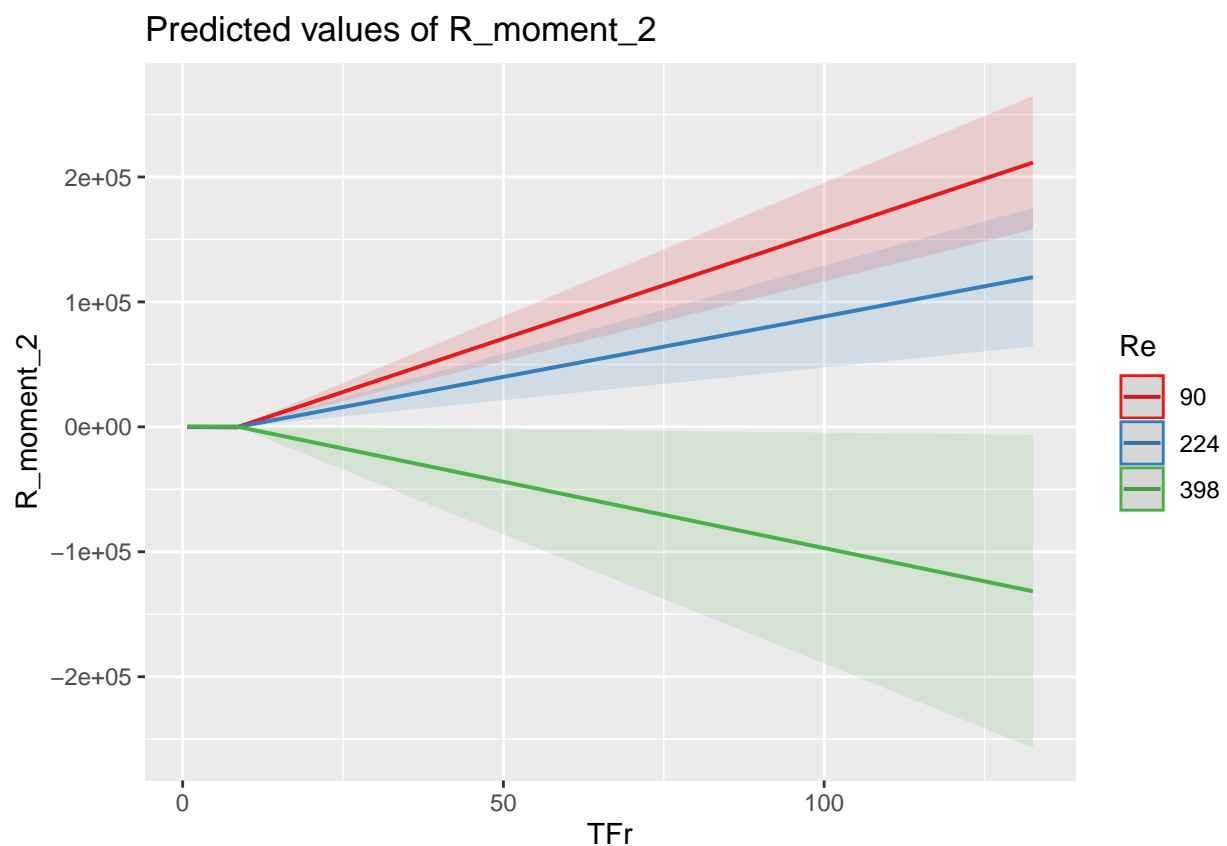

```
coef(step.model.three$finalModel, 6)
```


```
##      (Intercept)      I(TFr^2)      I(Re^2)      Re
```

```
##      3.522528e+06      1.176447e+05      1.115015e+02      -4.741731e+04
##              TFr I(TFr^2):I(Re^2)              Re:TFr
##      -1.842971e+06      -1.156087e+00      5.967790e+03
```

```
model_3_small <- lm(R_moment_3~I(TFr^2)*I(Re^2)+Re*TFr,data=data_train)
summary(model_3_small)
```

```
##
## Call:
## lm(formula = R_moment_3 ~ I(TFr^2) * I(Re^2) + Re * TFr, data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -4861786 -572778  -215754   523977  4278191
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    3.523e+06  7.453e+05   4.726 9.37e-06 ***
## I(TFr^2)        1.176e+05  1.519e+04   7.742 2.26e-11 ***
## I(Re^2)         1.115e+02  1.983e+01   5.623 2.52e-07 ***
## Re             -4.742e+04  7.109e+03  -6.670 2.77e-09 ***
## TFr            -1.843e+06  2.016e+05  -9.140 3.79e-14 ***
## I(TFr^2):I(Re^2) -1.156e+00  2.316e-01  -4.991 3.32e-06 ***
## Re:TFr          5.968e+03  1.003e+03   5.950 6.35e-08 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 1325000 on 82 degrees of freedom
## Multiple R-squared:  0.6568, Adjusted R-squared:  0.6317
## F-statistic: 26.16 on 6 and 82 DF,  p-value: < 2.2e-16
```

```
plot_model(model_3_small, type = "pred", terms = c("TFr", "Re[90,224,398]"))
```

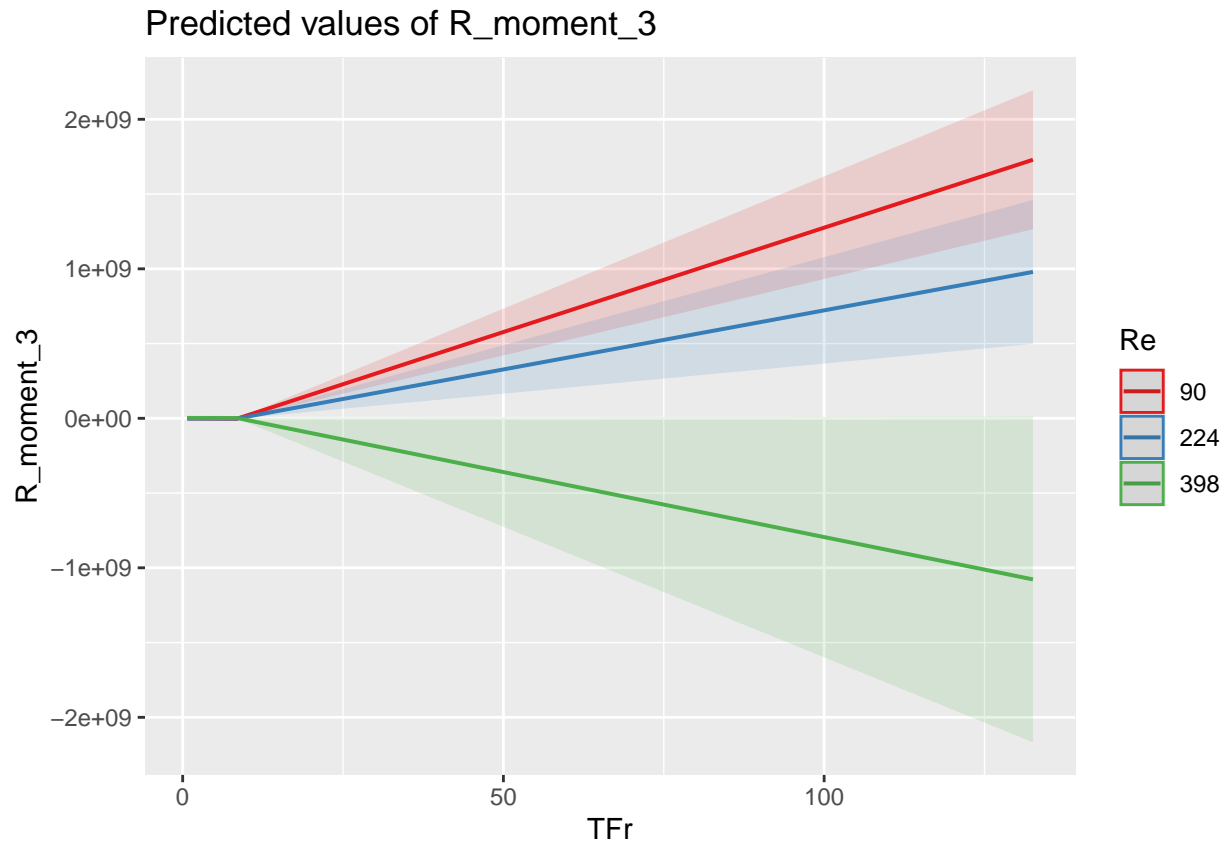

```
coef(step.model.four$finalModel, 6)
```


```
##      (Intercept)      I(TFr^2)      I(Re^2)      Re
## 2.896209e+10  9.672622e+08  9.167672e+05 -3.898643e+08
##      TFr I(TFr^2):I(Re^2)      Re:TFr
## -1.515276e+10 -9.505362e+03  4.906712e+07
```

```
model_4_small <- lm(R_moment_4~I(TFr^2)*I(Re^2)+Re*TFr,data=data_train)
summary(model_4_small)
```

```
##
## Call:
## lm(formula = R_moment_4 ~ I(TFr^2) * I(Re^2) + Re * TFr, data = data_train)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -3.997e+10 -4.709e+09 -1.774e+09  4.308e+09  4.003e+10
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  2.896e+10  6.454e+09   4.487 2.33e-05 ***
## I(TFr^2)      9.673e+08  1.316e+08   7.351 1.33e-10 ***
## I(Re^2)       9.168e+05  1.717e+05   5.339 8.16e-07 ***
## Re          -3.899e+08  6.156e+07  -6.333 1.22e-08 ***
```

```
## TFr          -1.515e+10  1.746e+09  -8.678 3.14e-13 ***
## I(TFr^2):I(Re^2) -9.505e+03  2.006e+03  -4.739 8.92e-06 ***
## Re:TFr        4.907e+07  8.686e+06   5.649 2.26e-07 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 1.147e+10 on 82 degrees of freedom
## Multiple R-squared:  0.6331, Adjusted R-squared:  0.6063
## F-statistic: 23.58 on 6 and 82 DF,  p-value: 5.21e-16
```

```
plot_model(model_4_small, type = "pred", terms = c("TFr", "Re[90,224,398]"))
```

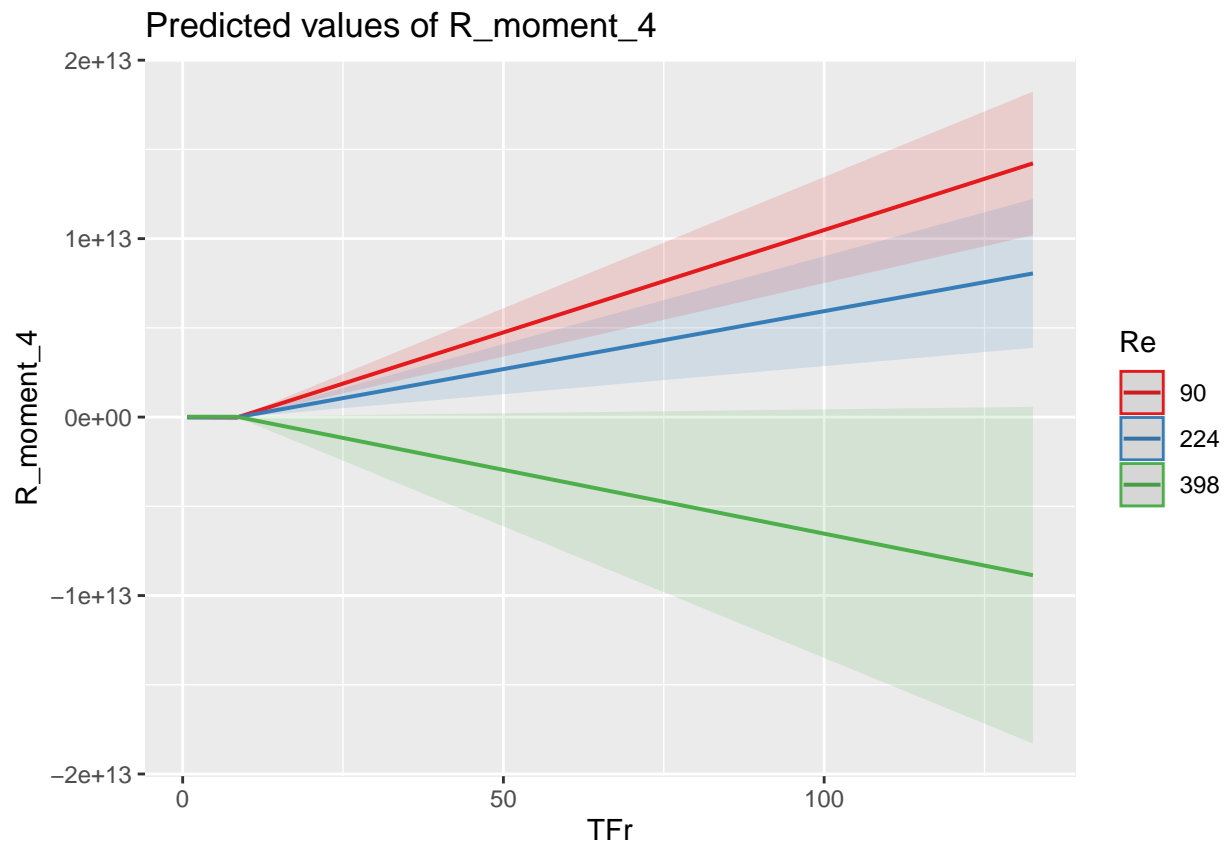

““