

Lecture 3: Loss Functions and Optimization

Administrative: Live Questions

We'll use Zoom to take questions from remote students live-streaming the lecture

Check Piazza for instructions and meeting ID:

<https://piazza.com/class/jdmurnqexkt47x?cid=108>

Administrative: Office Hours

Office hours started this week, schedule is on the course website:

http://cs231n.stanford.edu/office_hours.html

Areas of expertise for all TAs are posted on Piazza:

<https://piazza.com/class/jdmurnqexkt47x?cid=155>

Administrative: Assignment 1

Assignment 1 is released:

<http://cs231n.github.io/assignments2018/assignment1/>

Due **Wednesday April 18, 11:59pm**

Administrative: Google Cloud

You should have received an email yesterday about claiming a coupon for Google Cloud; make a private post on Piazza if you didn't get it

There was a problem with @cs.stanford.edu emails; this is resolved

If you have problems with coupons: **Post on Piazza**

DO NOT email me, DO NOT email Prof. Phil Levis

Administrative: SCPD Tutors

This year the SCPD office has hired tutors specifically for SCPD students taking CS231N; you should have received an email about this yesterday (4/9/2018)


Administrative: Poster Session

Poster session will be Tuesday June 12 (our final exam slot)

Attendance is mandatory for non-SCPD students; if you don't have a legitimate reason for skipping it then you forfeit the points for the poster presentation

Recall from last time: Challenges of recognition

Viewpoint

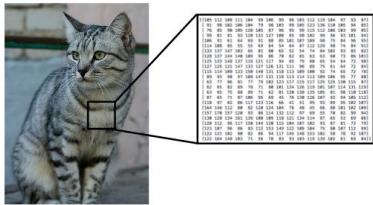

Illumination



[This image](#) is CC0 1.0 public domain

Deformation



[This image](#) by Umberto Salvagnin
is licensed under CC-BY 2.0

Occlusion



[This image](#) by jonsson is licensed
under CC-BY 2.0

Clutter




[This image](#) is CC0 1.0 public domain

Intraclass Variation




[This image](#) is CC0 1.0 public domain




Recall from last time: data-driven approach, kNN

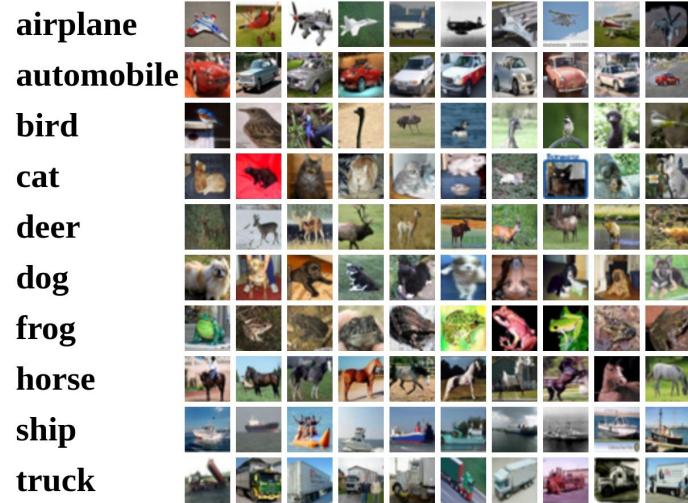


1-NN classifier

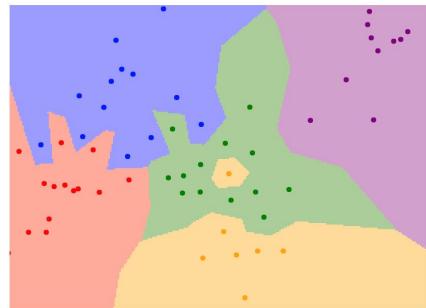

5-NN classifier

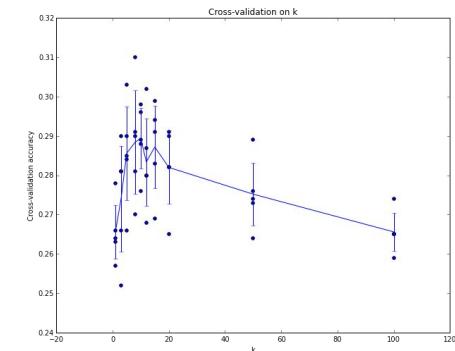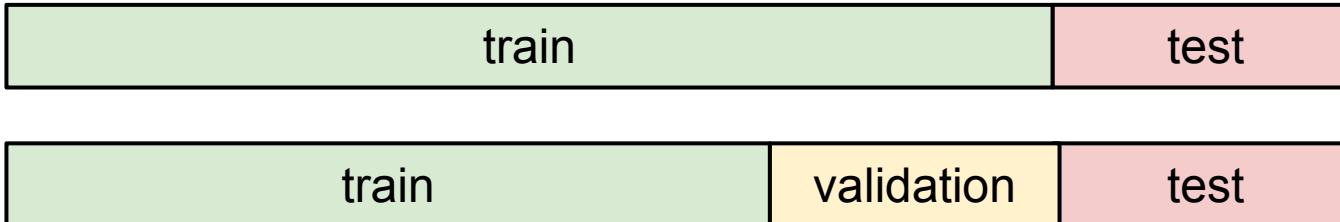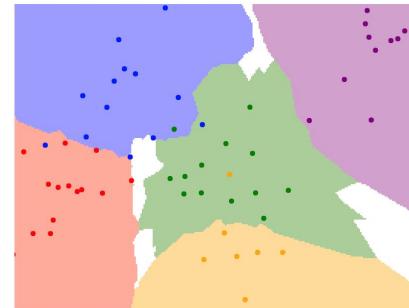


Recall from last time: Linear Classifier

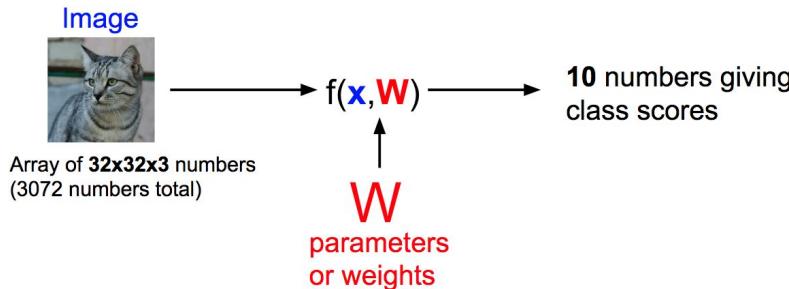

$$f(x, W) = Wx + b$$

Algebraic Viewpoint

$$f(x, W) = Wx$$

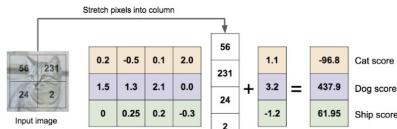


Visual Viewpoint

One template per class



Geometric Viewpoint

Hyperplanes cutting up space

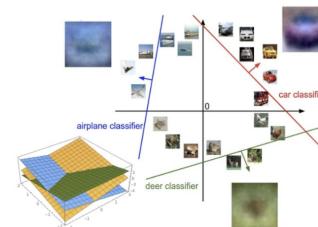


Class 1:
 $1 \leq L_2 \text{ norm} \leq 2$

Class 2:
Everything else

Class 1:
Three modes

Class 2:
Everything else

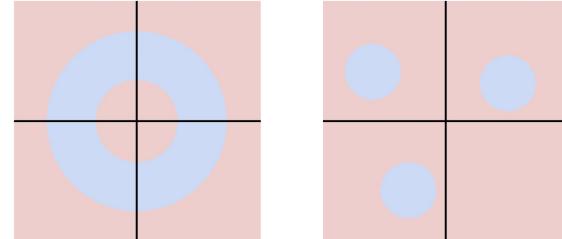

Recall from last time: Linear Classifier



airplane	-3.45	-0.51	3.42
automobile	-8.87	6.04	4.64
bird	0.09	5.31	2.65
cat	2.9	-4.22	5.1
deer	4.48	-4.19	2.64
dog	8.02	3.58	5.55
frog	3.78	4.49	-4.34
horse	1.06	-4.37	-1.5
ship	-0.36	-2.09	-4.79
truck	-0.72	-2.93	6.14

TODO:

1. Define a **loss function** that quantifies our unhappiness with the scores across the training data.
2. Come up with a way of efficiently finding the parameters that minimize the loss function.
(optimization)

Cat image by Nikita is licensed under CC-BY 2.0; Car image is CC0 1.0 public domain; Frog image is in the public domain

Suppose: 3 training examples, 3 classes.

With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1

A **loss function** tells how good our current classifier is

Given a dataset of examples

$$\{(x_i, y_i)\}_{i=1}^N$$

Where x_i is image and
 y_i is (integer) label

Loss over the dataset is a sum of loss over examples:

$$L = \frac{1}{N} \sum_i L_i(f(x_i, W), y_i)$$

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:


$$L_i = \sum_{j \neq y_i} \begin{cases} 0 & \text{if } s_{y_i} \geq s_j + 1 \\ s_j - s_{y_i} + 1 & \text{otherwise} \end{cases}$$
$$= \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1

Multiclass SVM loss:

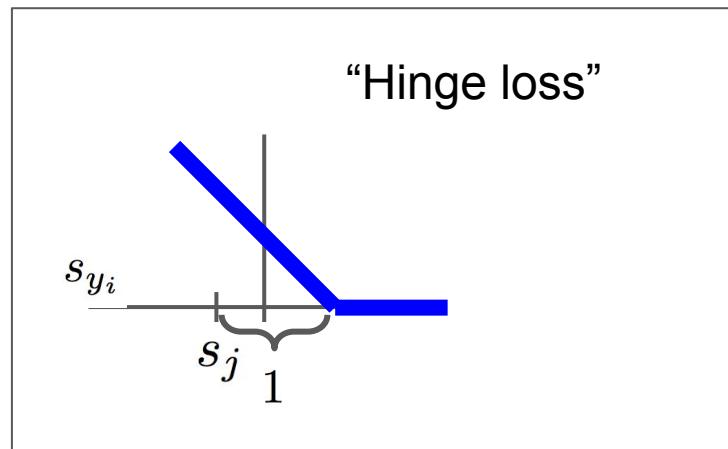

$$\begin{aligned}
 L_i &= \sum_{j \neq y_i} \begin{cases} 0 & \text{if } s_{y_i} \geq s_j + 1 \\ s_j - s_{y_i} + 1 & \text{otherwise} \end{cases} \\
 &= \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)
 \end{aligned}$$

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1
Losses:	2.9		

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:

$$\begin{aligned} L_i &= \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \\ &= \max(0, 5.1 - 3.2 + 1) \\ &\quad + \max(0, -1.7 - 3.2 + 1) \\ &= \max(0, 2.9) + \max(0, -3.9) \\ &= 2.9 + 0 \\ &= 2.9 \end{aligned}$$

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1
Losses:	2.9	0	

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:

$$\begin{aligned}
 L_i &= \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \\
 &= \max(0, 1.3 - 4.9 + 1) \\
 &\quad + \max(0, 2.0 - 4.9 + 1) \\
 &= \max(0, -2.6) + \max(0, -1.9) \\
 &= 0 + 0 \\
 &= 0
 \end{aligned}$$

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1
Losses:	2.9	0	12.9

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:

$$\begin{aligned}
 L_i &= \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \\
 &= \max(0, 2.2 - (-3.1) + 1) \\
 &\quad + \max(0, 2.5 - (-3.1) + 1) \\
 &= \max(0, 6.3) + \max(0, 6.6) \\
 &= 6.3 + 6.6 \\
 &= 12.9
 \end{aligned}$$

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1
Losses:	2.9	0	12.9

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Loss over full dataset is average:

$$L = \frac{1}{N} \sum_{i=1}^N L_i$$

$$\begin{aligned} L &= (2.9 + 0 + 12.9)/3 \\ &= 5.27 \end{aligned}$$

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1
Losses:	2.9	0	12.9

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q: What happens to loss if car scores change a bit?

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1
Losses:	2.9	0	12.9

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q2: what is the min/max possible loss?

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1
Losses:	2.9	0	12.9

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q3: At initialization W is small so all $s \approx 0$.
What is the loss?

1*C (number of class). used as sanity check

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1
Losses:	2.9	0	12.9

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q4: What if the sum was over all classes?
(including $j = y_i$)

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1
Losses:	2.9	0	12.9

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q5: What if we used mean instead of sum?

Suppose: 3 training examples, 3 classes.
With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2
car	5.1	4.9	2.5
frog	-1.7	2.0	-3.1
Losses:	2.9	0	12.9

Multiclass SVM loss:

Given an example (x_i, y_i) where x_i is the image and where y_i is the (integer) label,

and using the shorthand for the scores vector: $s = f(x_i, W)$

the SVM loss has the form:

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Q6: What if we used

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)^2$$

Multiclass SVM Loss: Example code

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

```
def L_i_vectorized(x, y, W):
    scores = W.dot(x)
    margins = np.maximum(0, scores - scores[y] + 1)
    margins[y] = 0
    loss_i = np.sum(margins)
    return loss_i
```

$$f(x, W) = Wx$$

$$L = \frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, f(x_i; W)_j - f(x_i; W)_{y_i} + 1)$$

E.g. Suppose that we found a W such that $L = 0$.
Is this W unique?

$$f(x, W) = Wx$$

$$L = \frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, f(x_i; W)_j - f(x_i; W)_{y_i} + 1)$$

E.g. Suppose that we found a W such that $L = 0$.
Is this W unique?

No! $2W$ is also has $L = 0!$

Suppose: 3 training examples, 3 classes.

With some W the scores $f(x, W) = Wx$ are:



cat	3.2	1.3	2.2	
car	5.1	4.9	2.5	
frog	-1.7	2.0	-3.1	
Losses:	2.9	0		

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Before:

$$\begin{aligned} &= \max(0, 1.3 - 4.9 + 1) \\ &\quad + \max(0, 2.0 - 4.9 + 1) \\ &= \max(0, -2.6) + \max(0, -1.9) \\ &= 0 + 0 \\ &= 0 \end{aligned}$$

With W twice as large:

$$\begin{aligned} &= \max(0, 2.6 - 9.8 + 1) \\ &\quad + \max(0, 4.0 - 9.8 + 1) \\ &= \max(0, -6.2) + \max(0, -4.8) \\ &= 0 + 0 \\ &= 0 \end{aligned}$$

$$f(x, W) = Wx$$

$$L = \frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, f(x_i; W)_j - f(x_i; W)_{y_i} + 1)$$

E.g. Suppose that we found a W such that $L = 0$.
Is this W unique?

No! $2W$ is also has $L = 0$!

How do we choose between W and $2W$?

Regularization

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss}}$$

Data loss: Model predictions
should match training data

Regularization

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss: Model predictions should match training data}} + \lambda R(W)$$


Data loss: Model predictions should match training data

Regularization: Prevent the model from doing *too well* on training data

Regularization

λ = regularization strength
(hyperparameter)

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss: Model predictions should match training data}} + \underbrace{\lambda R(W)}_{\text{Regularization: Prevent the model from doing } \textit{too well} \text{ on training data}}$$

Data loss: Model predictions should match training data

Regularization: Prevent the model from doing *too well* on training data

Regularization

λ = regularization strength
(hyperparameter)

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss: Model predictions should match training data}} + \lambda R(W)$$



Data loss: Model predictions should match training data

Regularization: Prevent the model from doing *too well* on training data

Simple examples

L2 regularization: $R(W) = \sum_k \sum_l W_{k,l}^2$

L1 regularization: $R(W) = \sum_k \sum_l |W_{k,l}|$

Elastic net (L1 + L2): $R(W) = \sum_k \sum_l \beta W_{k,l}^2 + |W_{k,l}|$

Regularization

λ = regularization strength
(hyperparameter)

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss: Model predictions should match training data}} + \lambda R(W)$$



Data loss: Model predictions should match training data

Regularization: Prevent the model from doing *too well* on training data

Simple examples

L2 regularization: $R(W) = \sum_k \sum_l W_{k,l}^2$

L1 regularization: $R(W) = \sum_k \sum_l |W_{k,l}|$

Elastic net (L1 + L2): $R(W) = \sum_k \sum_l \beta W_{k,l}^2 + |W_{k,l}|$

More complex:

Dropout

Batch normalization

Stochastic depth, fractional pooling, etc

Regularization

λ = regularization strength
(hyperparameter)

$$L(W) = \underbrace{\frac{1}{N} \sum_{i=1}^N L_i(f(x_i, W), y_i)}_{\text{Data loss: Model predictions should match training data}} + \lambda R(W)$$


Data loss: Model predictions should match training data

Regularization: Prevent the model from doing *too well* on training data

Why regularize?

- Express preferences over weights
- Make the model *simple* so it works on test data
- Improve optimization by adding curvature

Regularization: Expressing Preferences

$$x = [1, 1, 1, 1]$$

L2 Regularization

$$R(W) = \sum_k \sum_l W_{k,l}^2$$

$$w_1 = [1, 0, 0, 0]$$

$$w_2 = [0.25, 0.25, 0.25, 0.25]$$

$$w_1^T x = w_2^T x = 1$$

Regularization: Expressing Preferences

$$x = [1, 1, 1, 1]$$

$$w_1 = [1, 0, 0, 0]$$

$$w_2 = [0.25, 0.25, 0.25, 0.25]$$


L2 Regularization

$$R(W) = \sum_k \sum_l W_{k,l}^2$$


L2 regularization likes to
“spread out” the weights

$$w_1^T x = w_2^T x = 1$$


Regularization: Prefer Simpler Models

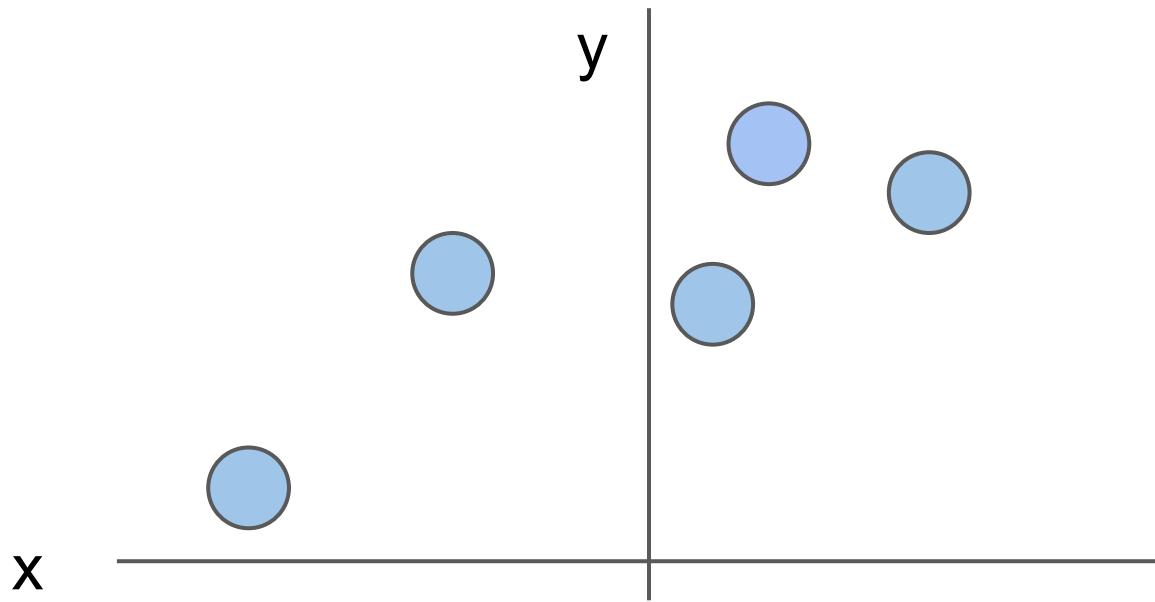

Regularization: Prefer Simpler Models

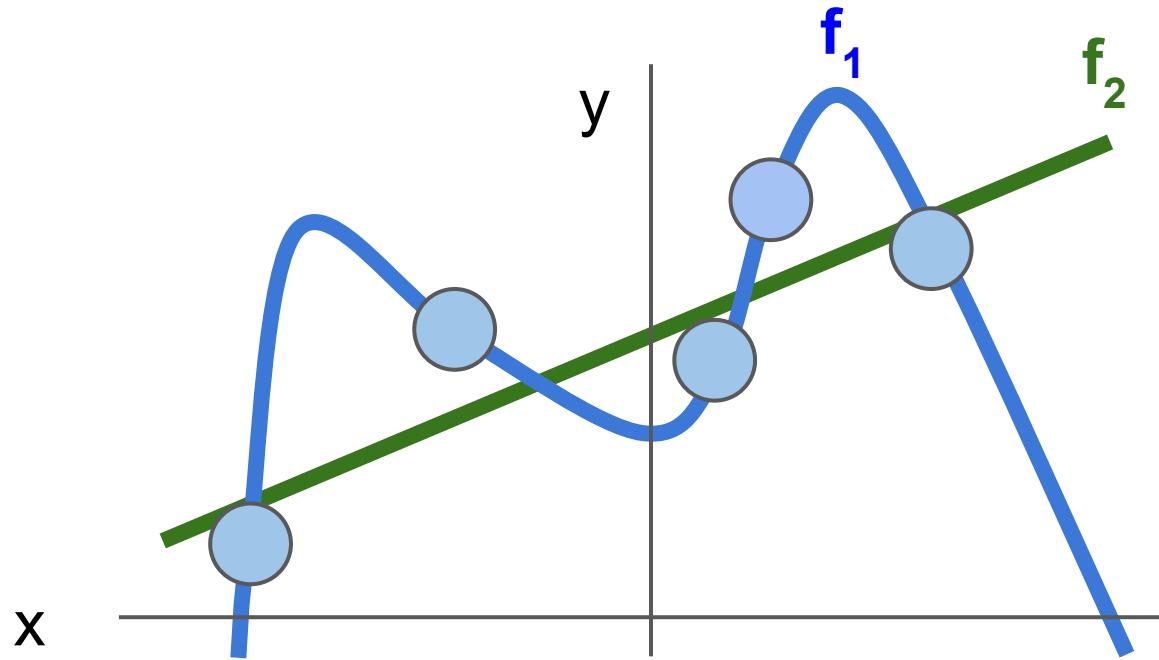

Regularization: Prefer Simpler Models

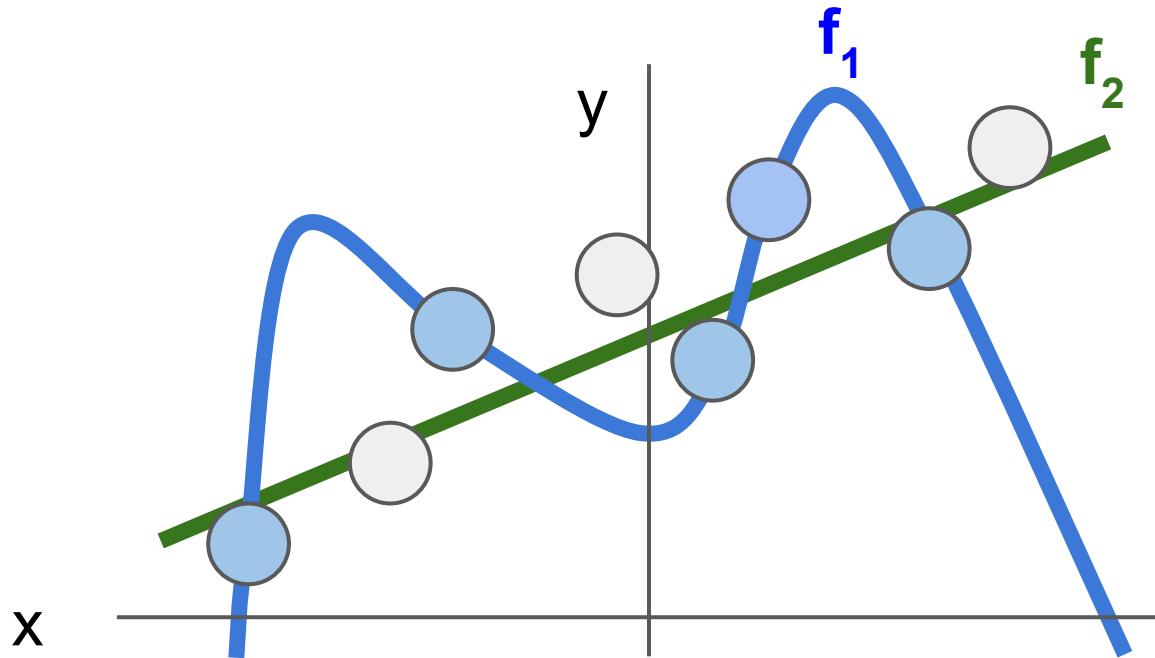

Regularization pushes against fitting the data
too well so we don't fit noise in the data

Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



cat	3.2
car	5.1
frog	-1.7

Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k | X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax
Function

cat	3.2
car	5.1
frog	-1.7

Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**


$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax
Function

Probabilities
must be ≥ 0

cat	3.2
car	5.1
frog	-1.7

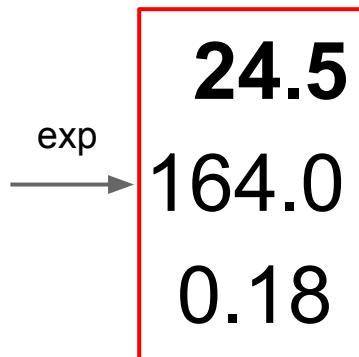

unnormalized
probabilities

Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

Probabilities
must be ≥ 0

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax
Function

cat	3.2
car	5.1
frog	-1.7

exp

24.5
164.0
0.18

unnormalized
probabilities

normalize

0.13
0.87
0.00

probabilities

Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax Function

cat
car
frog

3.2
5.1
-1.7

Unnormalized
log-probabilities / logits

exp

24.5
164.0
0.18

unnormalized
probabilities

normalize

0.13
0.87
0.00

probabilities

Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$
 Softmax Function

Probabilities
must be ≥ 0

Probabilities
must sum to 1

cat
car
frog

3.2
5.1
-1.7

exp

24.5
164.0
0.18

normalize

0.13
0.87
0.00

probabilities

Unnormalized
log-probabilities / logits

unnormalized
probabilities

$$L_i = -\log P(Y = y_i|X = x_i)$$

$$\rightarrow L_i = -\log(0.13) \\ = 0.89$$

when $W \sim 0$, loss = $-\log(1/c) = \log(c)$, used as sanity check

Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$
 Softmax Function

Probabilities
must be ≥ 0

Probabilities
must sum to 1

cat
car
frog

3.2
5.1
-1.7

Unnormalized
log-probabilities / logits

exp

24.5
164.0
0.18

unnormalized
probabilities

normalize

0.13
0.87
0.00

probabilities

$$L_i = -\log P(Y = y_i|X = x_i)$$

$$\rightarrow L_i = -\log(0.13) \\ = 2.04$$

Maximum Likelihood Estimation
Choose probabilities to maximize
the likelihood of the observed data
(See CS 229 for details)

Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**

$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax Function

Probabilities
must be ≥ 0

Probabilities
must sum to 1

cat
car
frog

3.2
5.1
-1.7

Unnormalized
log-probabilities / logits

exp

24.5
164.0
0.18

unnormalized
probabilities

normalize

0.13
0.87
0.00

probabilities

compare

1.00
0.00
0.00

Correct
probs

Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax Function

cat
car
frog

3.2
5.1
-1.7

Unnormalized
log-probabilities / logits

exp

24.5
164.0
0.18

unnormalized
probabilities

normalize

0.13
0.87
0.00

probabilities

$$D_{KL}(P\|Q) = \sum_y P(y) \log \frac{P(y)}{Q(y)}$$

1.00

0.00

0.00

Correct
probs

$$L_i = -\log P(Y = y_i|X = x_i)$$

Probabilities
must sum to 1

compare

Kullback–Leibler
divergence

$$D_{KL}(P\|Q) = \sum_y P(y) \log \frac{P(y)}{Q(y)}$$

Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**

$$s = f(x_i; W)$$

Probabilities
must be ≥ 0

cat
car
frog

3.2
5.1
-1.7

Unnormalized
log-probabilities / logits

24.5
164.0
0.18

unnormalized
probabilities

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax
Function

Probabilities
must sum to 1

0.13
0.87
0.00

probabilities

$$L_i = -\log P(Y = y_i|X = x_i)$$

1.00
0.00
0.00

Cross Entropy

$$H(P, Q) = H(p) + D_{KL}(P||Q)$$

Correct
probs

Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax
Function

Maximize probability of correct class

$$L_i = -\log P(Y = y_i|X = x_i)$$

Putting it all together:

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

cat	3.2
car	5.1
frog	-1.7

Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**

$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax Function

cat	3.2
car	5.1
frog	-1.7

Maximize probability of correct class

$$L_i = -\log P(Y = y_i|X = x_i)$$

Putting it all together:

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

Q: What is the min/max possible loss L_i ?

Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**

$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax
Function

Maximize probability of correct class

cat	3.2
car	5.1
frog	-1.7

Putting it all together:

$$L_i = -\log P(Y = y_i|X = x_i)$$

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

Q: What is the min/max possible loss L_i ?
A: min 0, max infinity

Softmax Classifier (Multinomial Logistic Regression)

Want to interpret raw classifier scores as **probabilities**



$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax
Function

Maximize probability of correct class

Putting it all together:

$$L_i = -\log P(Y = y_i|X = x_i)$$

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

cat	3.2
car	5.1
frog	-1.7

Q2: At initialization all s will be approximately equal; what is the loss?

Softmax Classifier (Multinomial Logistic Regression)



Want to interpret raw classifier scores as **probabilities**

$$s = f(x_i; W)$$

$$P(Y = k|X = x_i) = \frac{e^{s_k}}{\sum_j e^{s_j}}$$

Softmax
Function

Maximize probability of correct class

Putting it all together:

$$L_i = -\log P(Y = y_i|X = x_i)$$




$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

cat	3.2
car	5.1
frog	-1.7

Q2: At initialization all s will be approximately equal; what is the loss?
A: $\log(C)$, eg $\log(10) \approx 2.3$

Softmax vs. SVM

matrix multiply + bias offset

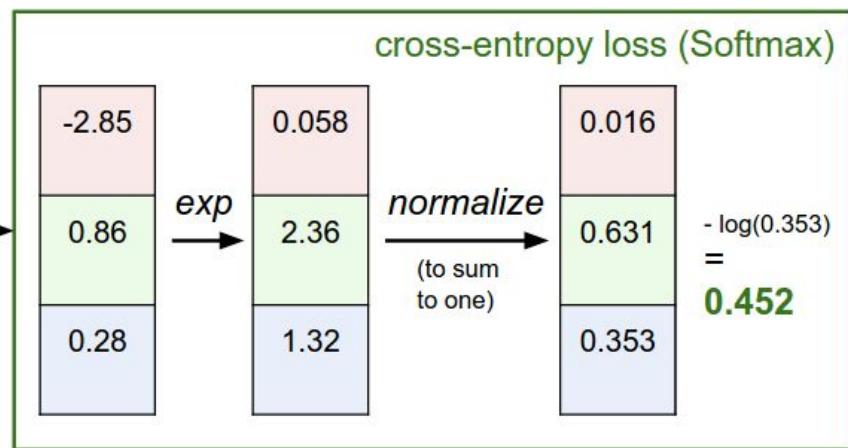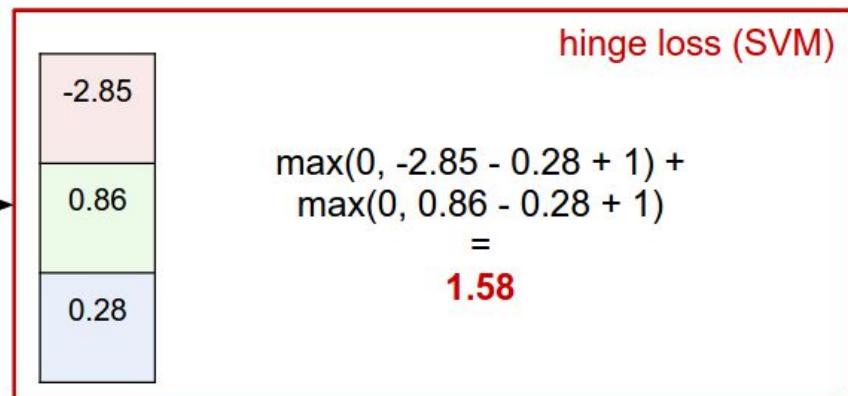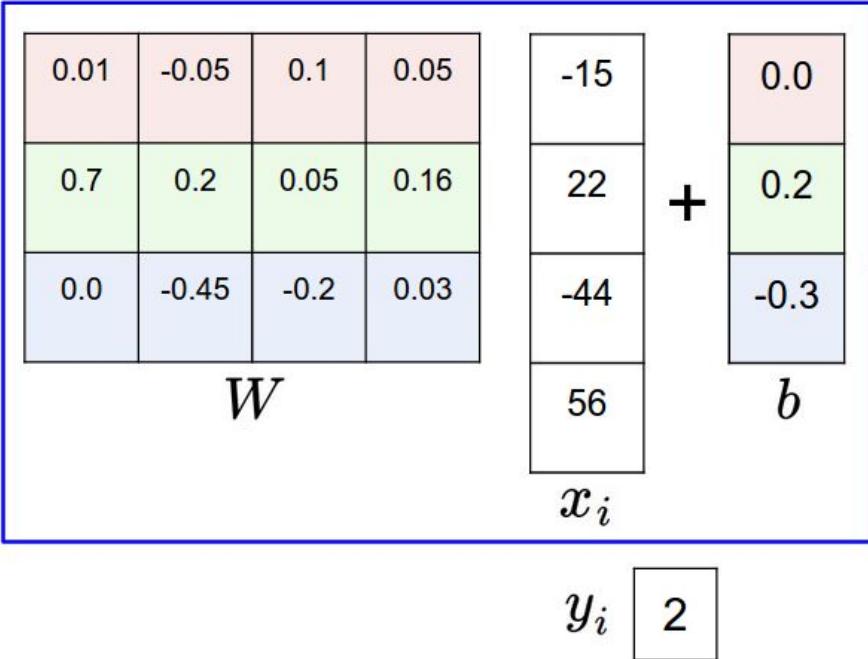

Softmax vs. SVM

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

Softmax vs. SVM

$$L_i = -\log\left(\frac{e^{s_{y_i}}}{\sum_j e^{s_j}}\right)$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

assume scores:

[10, -2, 3]

[10, 9, 9]

[10, -100, -100]

and $y_i = 0$

Q: Suppose I take a datapoint and I jiggle a bit (changing its score slightly). What happens to the loss in both cases?


Recap

- We have some dataset of (x, y)
- We have a **score function**: $s = f(x; W) = Wx$ e.g.
- We have a **loss function**:

$$L_i = -\log\left(\frac{e^{sy_i}}{\sum_j e^{sj}}\right) \quad \text{Softmax}$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \quad \text{SVM}$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + R(W) \quad \text{Full loss}$$

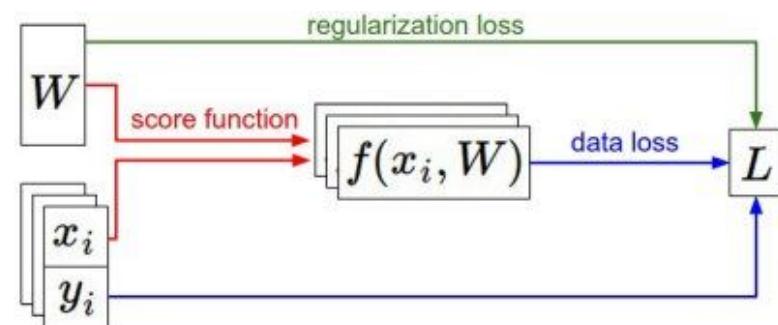

Recap


How do we find the best W ?

- We have some dataset of (x, y)
- We have a **score function**: $s = f(x; W) = Wx$ e.g.
- We have a **loss function**:

$$L_i = -\log\left(\frac{e^{sy_i}}{\sum_j e^{sj}}\right) \quad \text{Softmax}$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1) \quad \text{SVM}$$

$$L = \frac{1}{N} \sum_{i=1}^N L_i + R(W) \quad \text{Full loss}$$

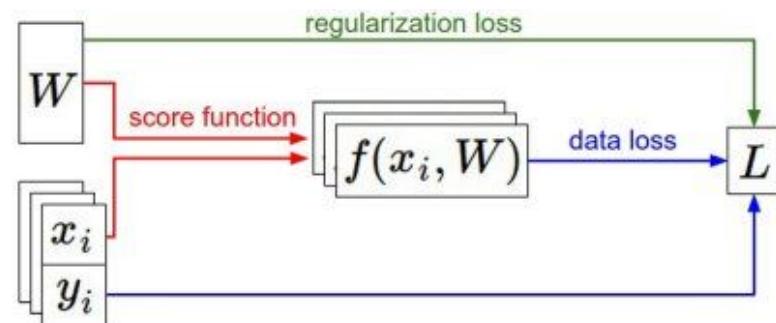

Optimization



[This image](#) is CC0 1.0 public domain



[Walking man image is CC0 1.0 public domain](#)

Strategy #1: A first very bad idea solution: Random search

```
# assume X_train is the data where each column is an example (e.g. 3073 x 50,000)
# assume Y_train are the labels (e.g. 1D array of 50,000)
# assume the function L evaluates the loss function

bestloss = float("inf") # Python assigns the highest possible float value
for num in xrange(1000):
    W = np.random.randn(10, 3073) * 0.0001 # generate random parameters
    loss = L(X_train, Y_train, W) # get the loss over the entire training set
    if loss < bestloss: # keep track of the best solution
        bestloss = loss
        bestW = W
    print 'in attempt %d the loss was %f, best %f' % (num, loss, bestloss)

# prints:
# in attempt 0 the loss was 9.401632, best 9.401632
# in attempt 1 the loss was 8.959668, best 8.959668
# in attempt 2 the loss was 9.044034, best 8.959668
# in attempt 3 the loss was 9.278948, best 8.959668
# in attempt 4 the loss was 8.857370, best 8.857370
# in attempt 5 the loss was 8.943151, best 8.857370
# in attempt 6 the loss was 8.605604, best 8.605604
# ... (truncated: continues for 1000 lines)
```

Lets see how well this works on the test set...

```
# Assume X_test is [3073 x 10000], Y_test [10000 x 1]
scores = Wbest.dot(Xte_cols) # 10 x 10000, the class scores for all test examples
# find the index with max score in each column (the predicted class)
Yte_predict = np.argmax(scores, axis = 0)
# and calculate accuracy (fraction of predictions that are correct)
np.mean(Yte_predict == Yte)
# returns 0.1555
```

15.5% accuracy! not bad!
(SOTA is ~95%)

Strategy #2: Follow the slope



Strategy #2: Follow the slope

In 1-dimension, the derivative of a function:

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x + h) - f(x)}{h}$$

In multiple dimensions, the **gradient** is the vector of (partial derivatives) along each dimension

The slope in any direction is the **dot product** of the direction with the gradient
The direction of steepest descent is the **negative gradient**

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

gradient dW:

[?,
?,
?,
?,
?,
?,
?,
?,
?,
?,...]

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

W + h (first dim):

[0.34 + 0.0001,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25322

gradient dW:

[?,
?,
?,
?,
?,
?,
?,
?,
?,...]

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

W + h (first dim):

[0.34 + 0.0001,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25322

gradient dW:

[-2.5,

? ,

? ,

$$\frac{(1.25322 - 1.25347)}{0.0001} = -2.5$$

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x + h) - f(x)}{h}$$

? ,

? ,...]

current W:	W + h (second dim):	gradient dW:
[0.34, -1.11, 0.78, 0.12, 0.55, 2.81, -3.1, -1.5, 0.33,...]	[0.34, -1.11 + 0.0001 , 0.78, 0.12, 0.55, 2.81, -3.1, -1.5, 0.33,...]	[-2.5, ?, ?, ?, ?, ?, ?, ?, ?, ?,...]

loss 1.25347 **loss 1.25353**

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss **1.25347**

W + h (second dim):

[0.34,
-1.11 + **0.0001**,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss **1.25353**

gradient dW:

[-2.5,
0.6,
?,
?,

$$\frac{(1.25353 - 1.25347)}{0.0001} = 0.6$$

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x + h) - f(x)}{h}$$

?,...]

current W:	W + h (third dim):	gradient dW:
[0.34, -1.11, 0.78, 0.12, 0.55, 2.81, -3.1, -1.5, 0.33,...]	[0.34, -1.11, 0.78 + 0.0001 , 0.12, 0.55, 2.81, -3.1, -1.5, 0.33,...]	[-2.5, 0.6, ?, ?, ?, ?, ?, ?, ?, ?,...]

loss 1.25347 **loss 1.25347**

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

W + h (third dim):

[0.34,
-1.11,
0.78 + **0.0001**,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

gradient dW:

[-2.5,
0.6,
0,
?,
?]

$$\frac{(1.25347 - 1.25347)}{0.0001} = 0$$

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x + h) - f(x)}{h}$$

?, ...]

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

W + h (third dim):

[0.34,
-1.11,
0.78 + **0.0001**,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

gradient dW:

[-2.5,
0.6,
0,
?,
?]

[...,]

Numeric Gradient

- Slow! Need to loop over all dimensions
- Approximate

This is silly. The loss is just a function of W :

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \sum_k W_k^2$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

$$s = f(x; W) = Wx$$

want $\nabla_W L$

This is silly. The loss is just a function of W:

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \sum_k W_k^2$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

$$s = f(x; W) = Wx$$

want $\nabla_W L$

Use calculus to compute an analytic gradient



[This image](#) is in the public domain



[This image](#) is in the public domain

current W:


[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

gradient dW:

[-2.5,
0.6,
0,
0.2,
0.7,
-0.5,
1.1,
1.3,
-2.1,...]

dW = ...
(some function
data and W)

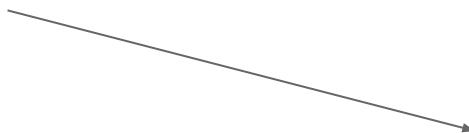

In summary:

- Numerical gradient: approximate, slow, easy to write
- Analytic gradient: exact, fast, error-prone


=>

In practice: Always use analytic gradient, but check implementation with numerical gradient. This is called a **gradient check**.


Gradient Descent

```
# Vanilla Gradient Descent

while True:
    weights_grad = evaluate_gradient(loss_fun, data, weights)
    weights += - step_size * weights_grad # perform parameter update
```

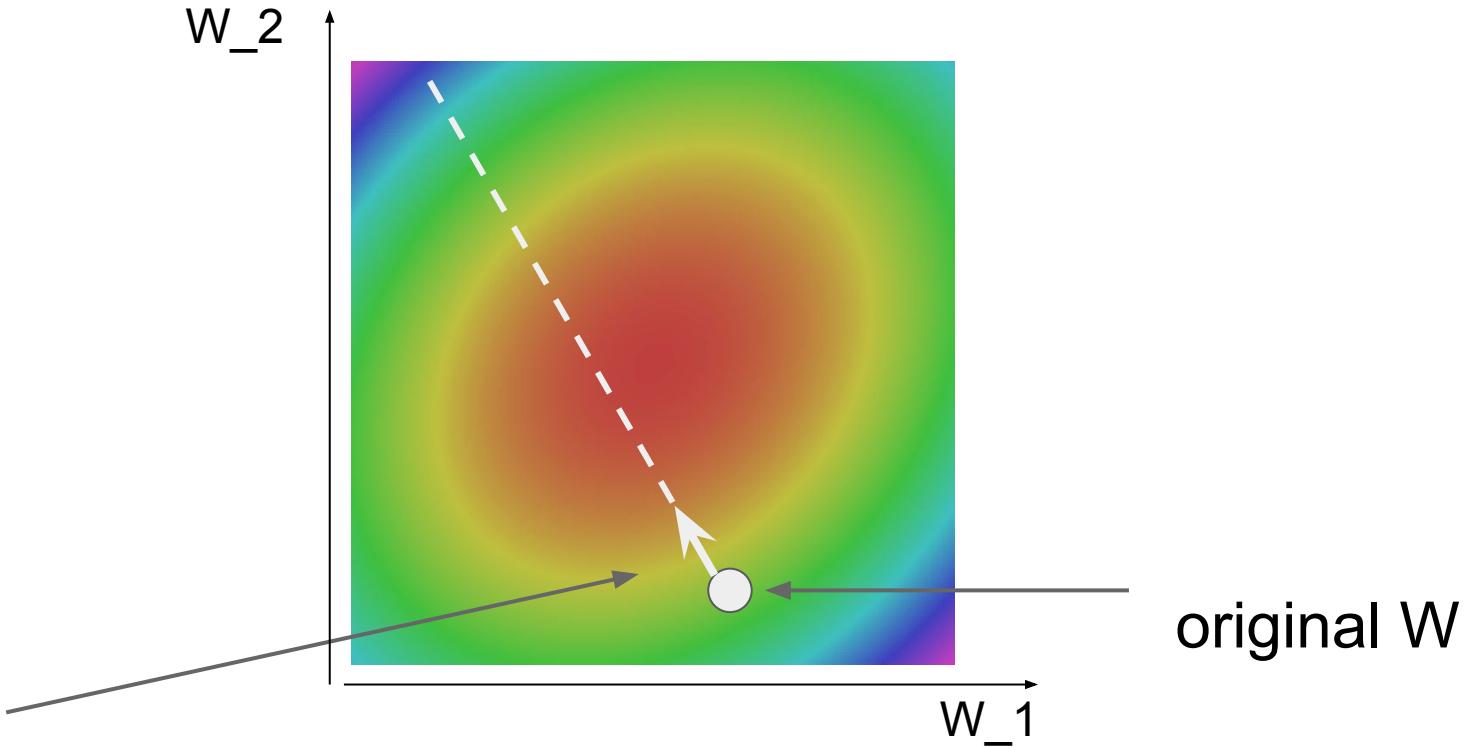

negative gradient direction



Stochastic Gradient Descent (SGD)

$$L(W) = \frac{1}{N} \sum_{i=1}^N L_i(x_i, y_i, W) + \lambda R(W)$$

$$\nabla_W L(W) = \frac{1}{N} \sum_{i=1}^N \nabla_W L_i(x_i, y_i, W) + \lambda \nabla_W R(W)$$


Full sum expensive
when N is large!

Approximate sum
using a **minibatch** of
examples
32 / 64 / 128 common

```
# Vanilla Minibatch Gradient Descent
```


```
while True:  
    data_batch = sample_training_data(data, 256) # sample 256 examples  
    weights_grad = evaluate_gradient(loss_fun, data_batch, weights)  
    weights += - step_size * weights_grad # perform parameter update
```

Interactive Web Demo time....

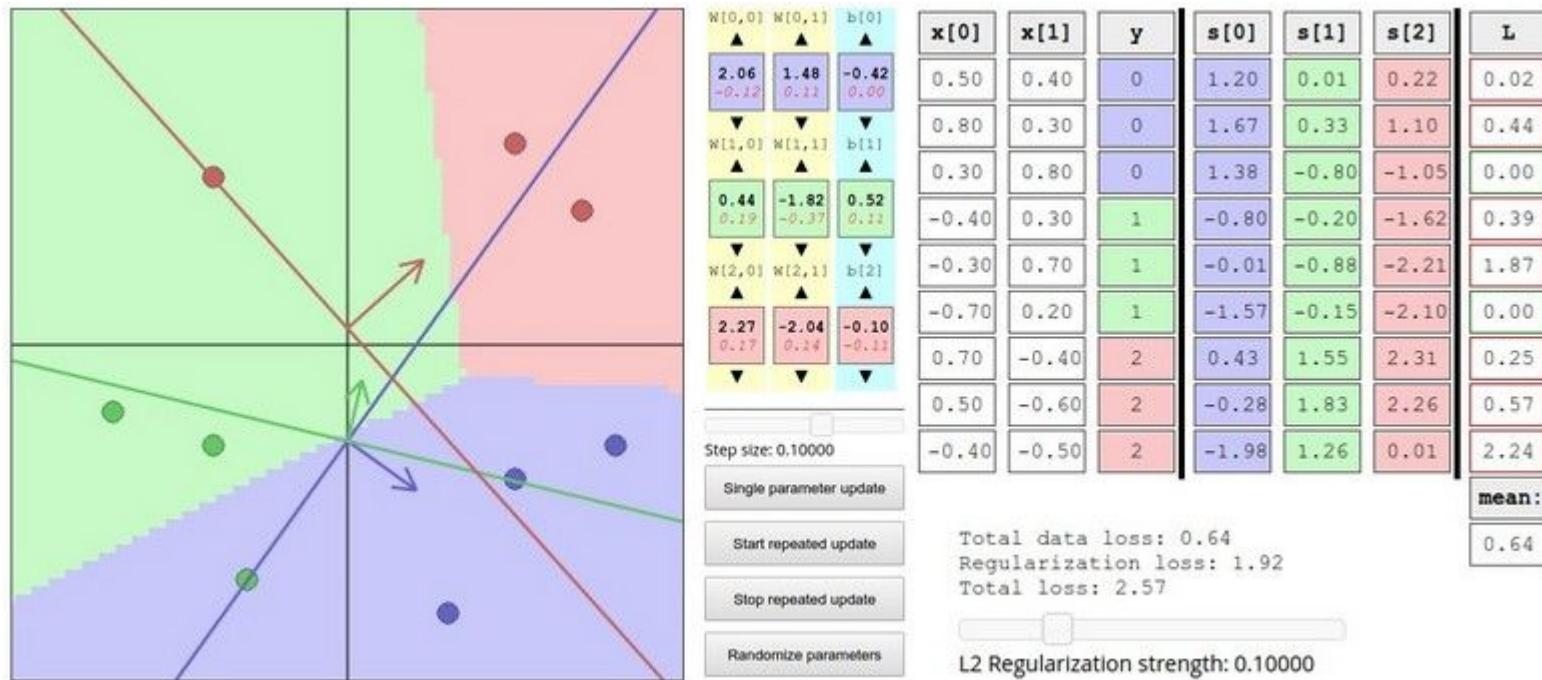

<http://vision.stanford.edu/teaching/cs231n-demos/linear-classify/>

Interactive Web Demo time....




Aside: Image Features



$$f(x) = Wx$$

Class
scores

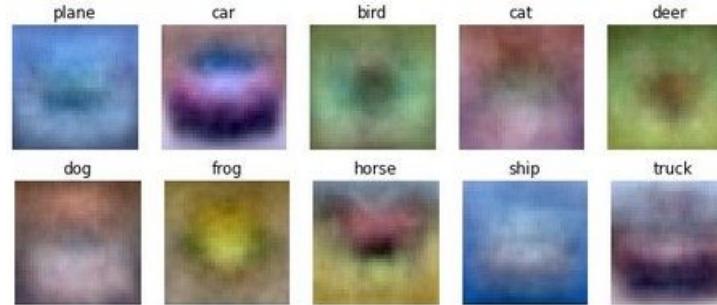

Aside: Image Features



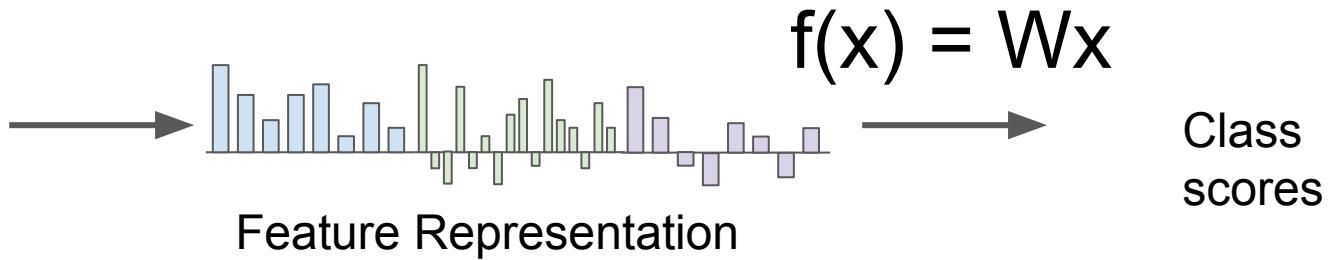


Image Features: Motivation

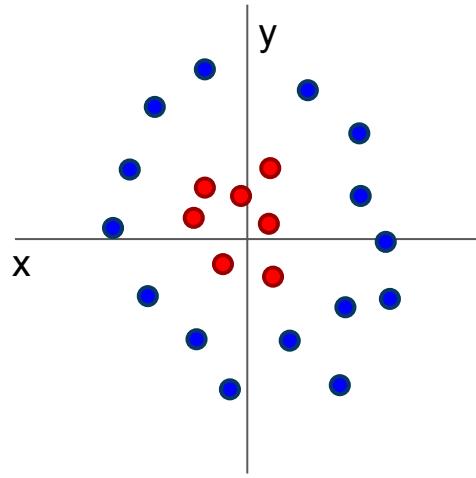


Cannot separate red
and blue points with
linear classifier

Image Features: Motivation

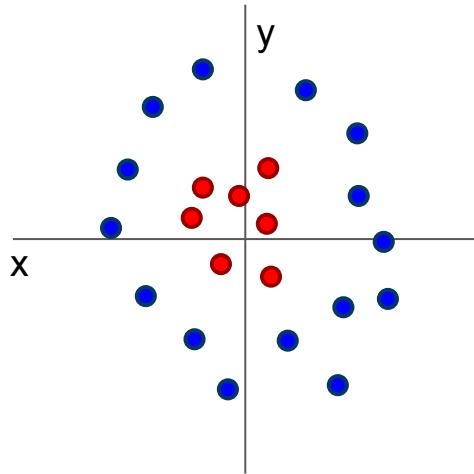


Cannot separate red
and blue points with
linear classifier

$$f(x, y) = (r(x, y), \theta(x, y))$$

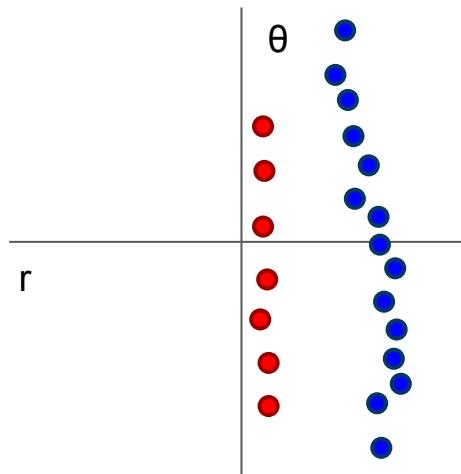

After applying feature
transform, points can
be separated by linear
classifier


Example: Color Histogram

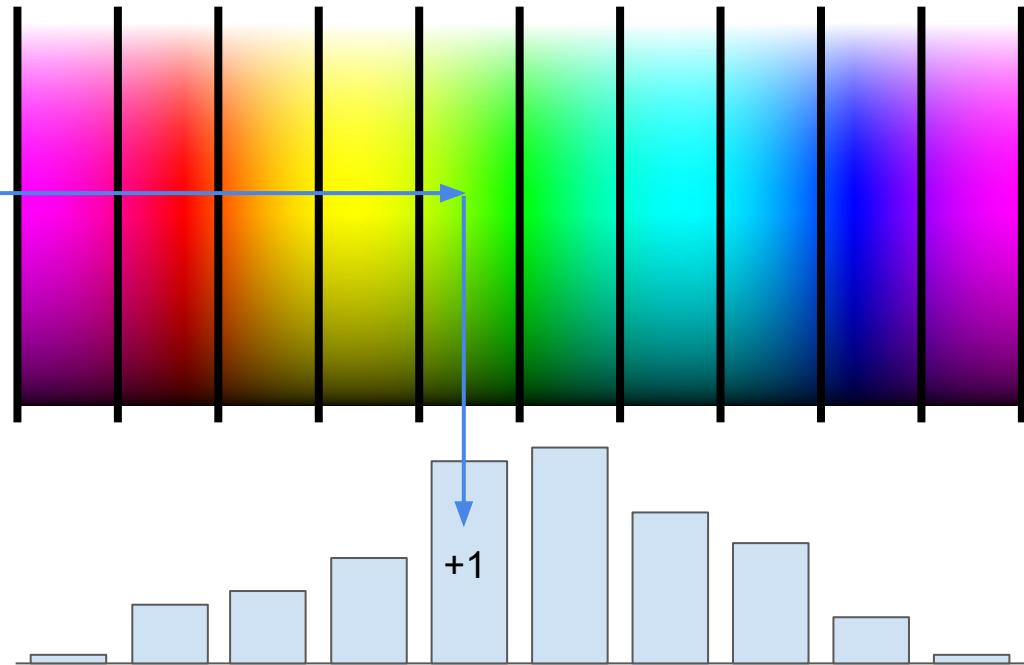

Example: Histogram of Oriented Gradients (HoG)



Divide image into 8x8 pixel regions
Within each region quantize edge
direction into 9 bins

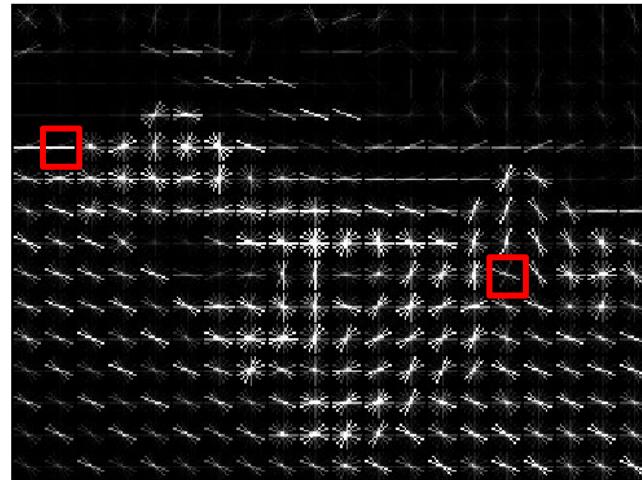

Example: 320x240 image gets divided
into 40x30 bins; in each bin there are
9 numbers so feature vector has
 $30*40*9 = 10,800$ numbers


Lowe, "Object recognition from local scale-invariant features", ICCV 1999
Dalal and Triggs, "Histograms of oriented gradients for human detection," CVPR 2005

Example: Bag of Words


Step 1: Build codebook




Extract random patches

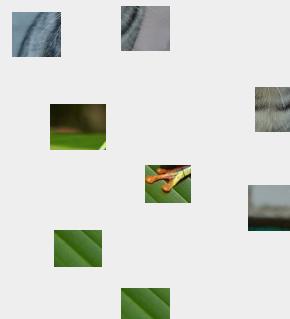

Cluster patches to form “codebook” of “visual words”

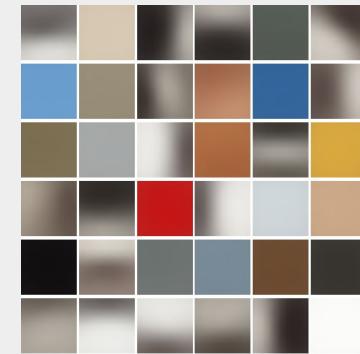

Step 2: Encode images

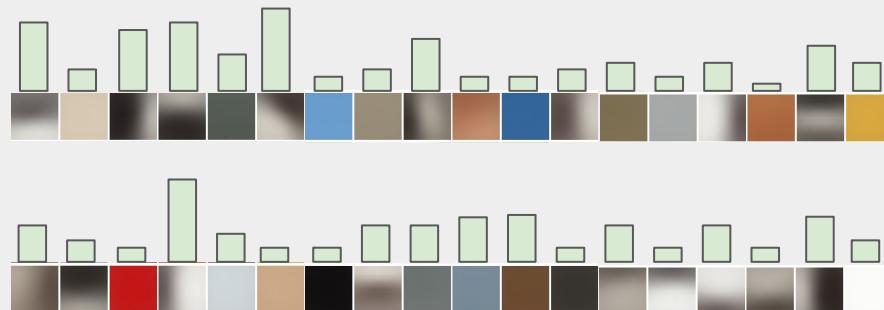

Fei-Fei and Perona, "A bayesian hierarchical model for learning natural scene categories", CVPR 2005

Aside: Image Features




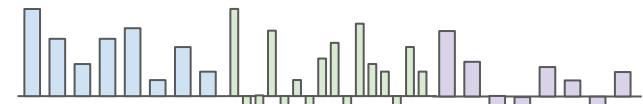


Image features vs ConvNets

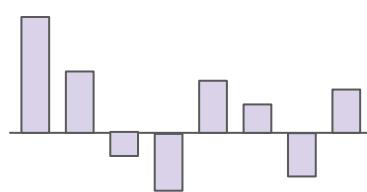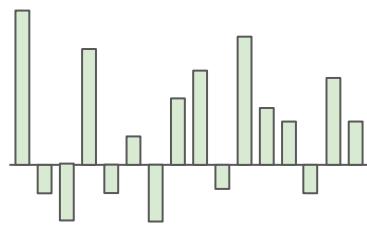


Feature Extraction

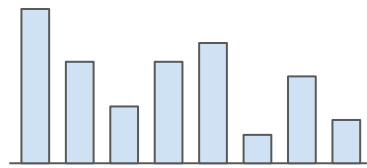

f

training

10 numbers giving scores for classes

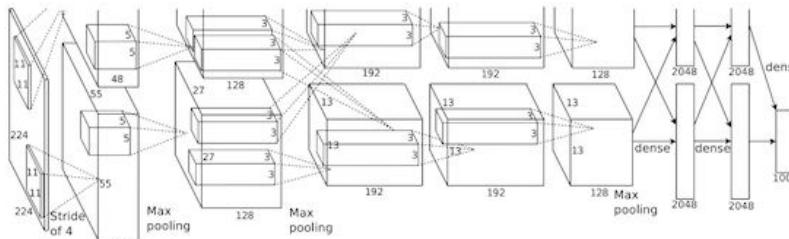

Krizhevsky, Sutskever, and Hinton, "Imagenet classification with deep convolutional neural networks", NIPS 2012.
Figure copyright Krizhevsky, Sutskever, and Hinton, 2012.
Reproduced with permission.

training

10 numbers giving scores for classes

Next time:

Introduction to neural networks

Backpropagation