



-id: ur -name: -city:
+School +School +getId(+getNan +getCit +setNan +setCit

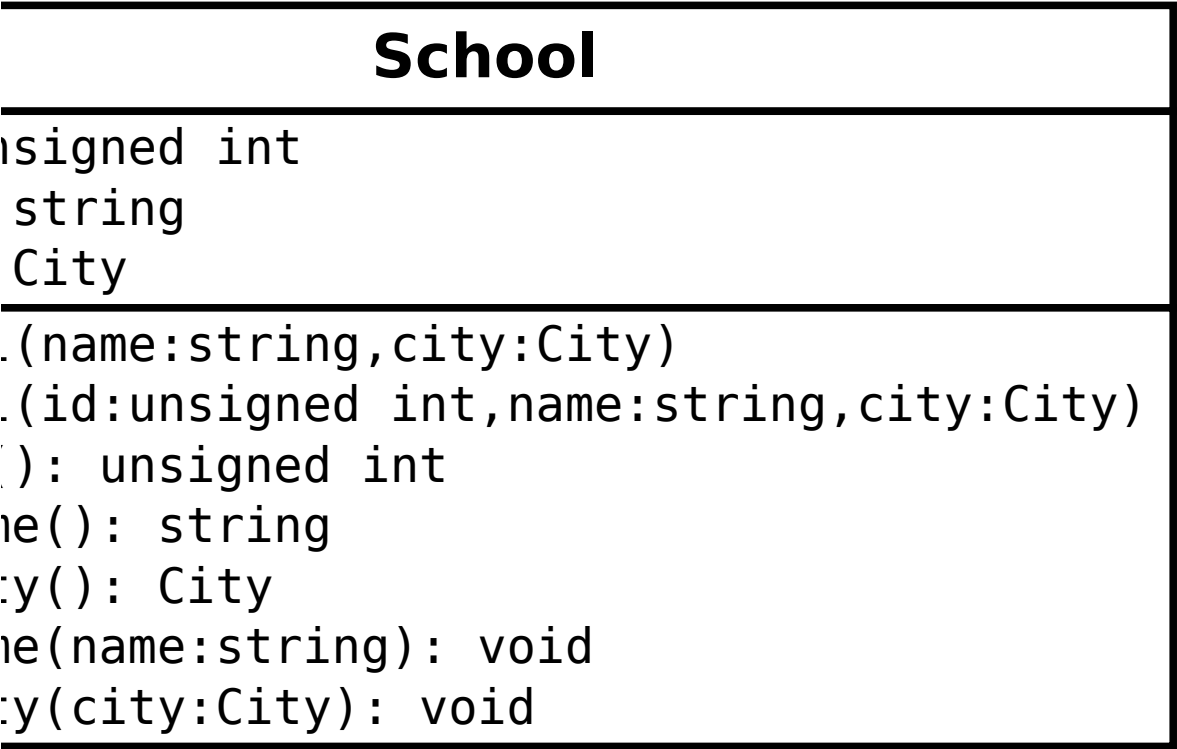

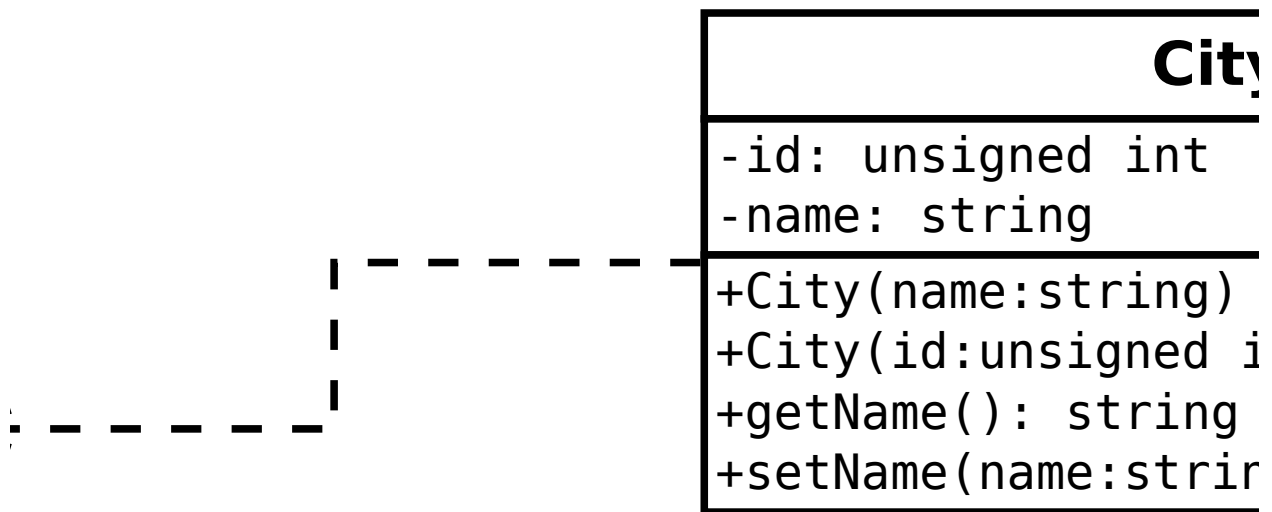

y
<code>.nt,name:string)</code> <code>ig): void</code>

-id: uns -name: s -school:
+Class(n +Class(i +getId() +getName +getScho

|
|

Class

igned int
tring
School

ame:string,school:School)
d:unsigned int,name:string,school:School)
: unsigned int
(): string
ol(): School

+id: unsi +firstNam +lastName -current
+Student(+Student(+getId(): +getFirst +getLastN +getClass +setClass

Student

```
igned int  
e: string  
: string  
Class: Class
```

```
firstName:string,lastName:string,  
currentClass:Class)  
id:unsigned int,firstName:string,  
lastName:string,currentClass:Class)  
    unsigned int  
Name(): string  
ame(): string  
(): Class  
(currentClass:Class): void
```