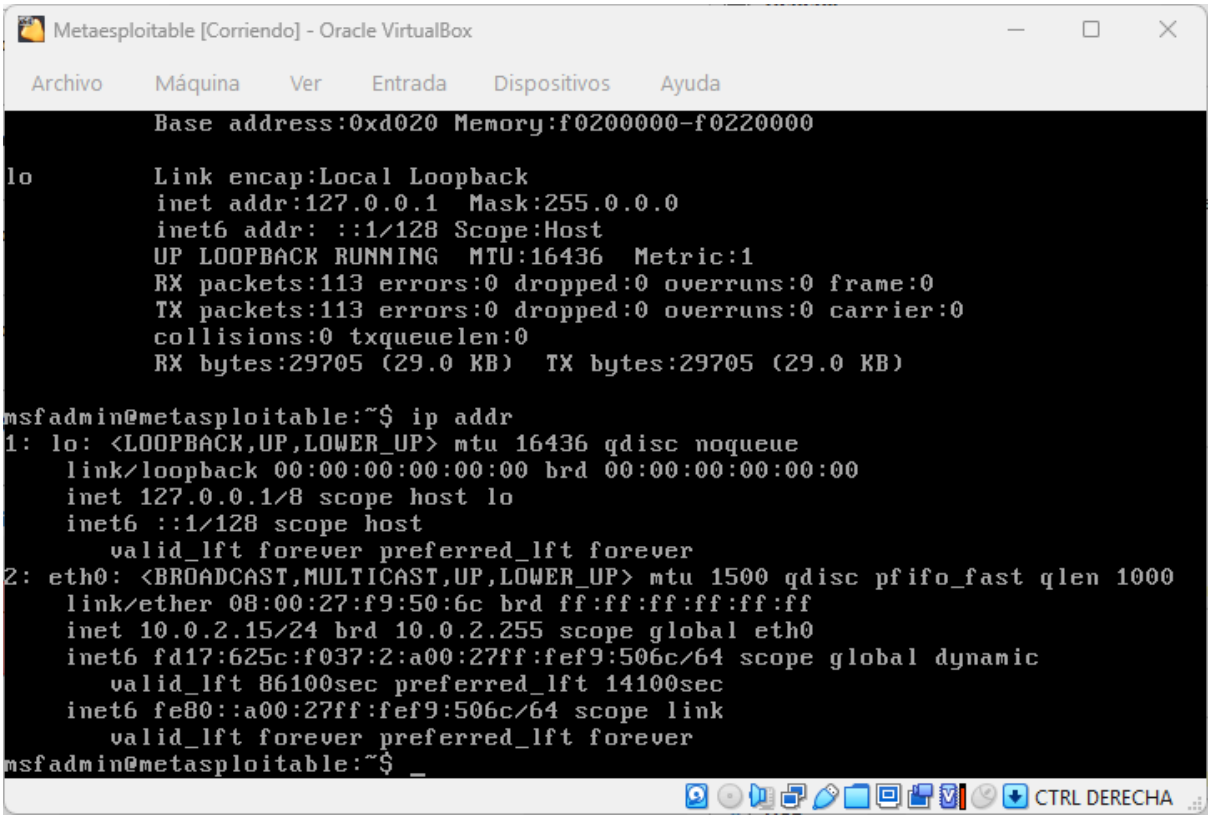

primero iniciamos la maquina metoesploitable y usamos el comando ifconfig y luego el ipaddr para buscar la IP

```
Session  Actions  Edit  View  Help
┌──(kali㉿kali)-[~]
└─$ nmap 10.0.2.15
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-04 05:57 -0500
Nmap scan report for 10.0.2.15
Host is up (0.000088s latency).
Not shown: 983 closed tcp ports (reset)
PORT     STATE SERVICE
21/tcp   open  ftp
22/tcp   open  ssh
25/tcp   open  smtp
80/tcp   open  http
139/tcp  open  netbios-ssn
443/tcp  open  https
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
514/tcp  open  shell
666/tcp  open  doom
3306/tcp open  mysql
5901/tcp open  vnc-1
6001/tcp open  X11:1
8080/tcp open  http-proxy
8443/tcp open  https-alt
9080/tcp open  glrpc
MAC Address: 08:00:27:DE:20:9C (Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 0.68 seconds

┌──(kali㉿kali)-[~]
└─$ reboot
```

luego usamos el nmap con la ip encontrada en la maquina kali para buscar los puertos

```
┌──(kali㉿kali)-[~]
└─$ nmap -sV -p 21,22,23,25,80 10.0.2.15
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-04 06:06 -0500
Stats: 0:01:16 elapsed; 0 hosts completed (1 up), 1 undergoing Service Scan
Service scan Timing: About 60.00% done; ETC: 06:08 (0:00:51 remaining)
Stats: 0:01:36 elapsed; 0 hosts completed (1 up), 1 undergoing Service Scan
Service scan Timing: About 60.00% done; ETC: 06:09 (0:01:04 remaining)
Nmap scan report for 10.0.2.15
Host is up (0.00021s latency).

PORT   STATE SERVICE VERSION
21/tcp open  ftp     vsftpd 2.3.4
22/tcp open  ssh     OpenSSH 4.7p1 Debian 8ubuntu1 (protocol 2.0)
23/tcp open  telnet?
25/tcp open  smtp    Postfix smtpd
80/tcp open  http    Apache httpd 2.2.8 ((Ubuntu) DAV/2)
MAC Address: 08:00:27:F9:50:6C (Oracle VirtualBox virtual NIC)
Service Info: Host:  bee-box; OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 121.94 seconds
```

con el comando nmap -sV -p 21,22,23,25,80 10.0.2.15 encontramos los 5 primeros puertos y sus versiones

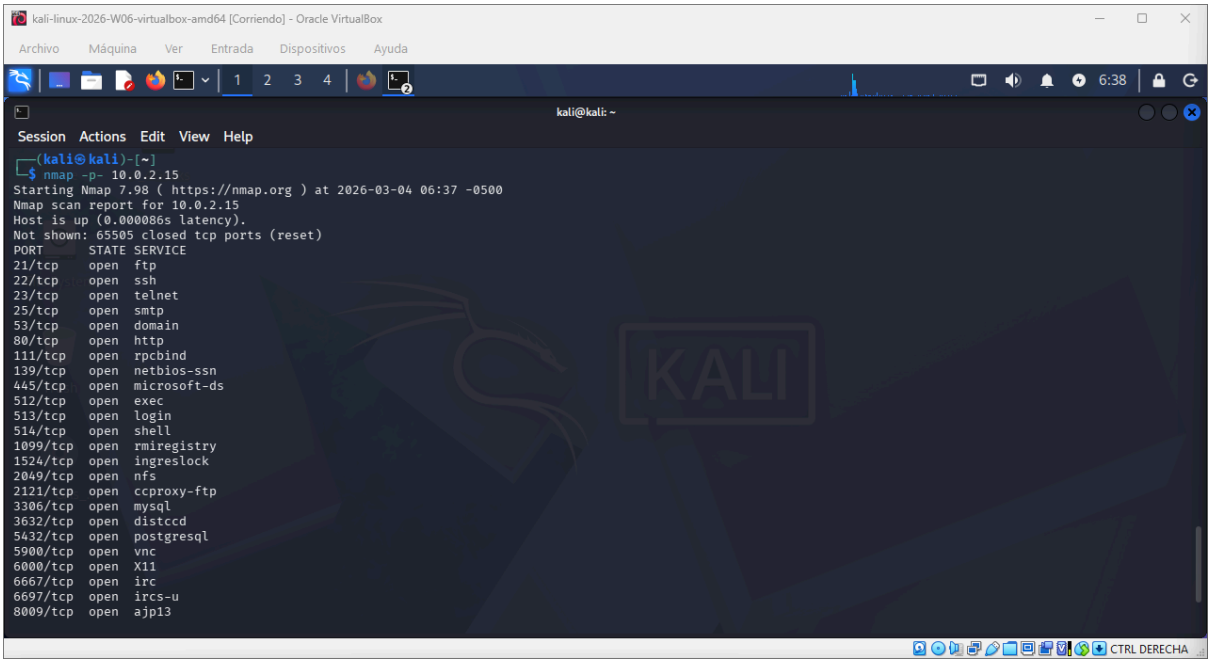

con el comando nmap -p-10.0.2.15 realizamos el escaneo completo de los puertos

```
┌──(kali㉿kali)-[~]
└─$ nmap -sC 10.0.2.15
Starting Nmap 7.98 ( https://nmap.org ) at 2026-03-04 06:40 -0500
Nmap scan report for 10.0.2.15
Host is up (0.000087s latency).
Not shown: 983 closed tcp ports (reset)
PORT     STATE SERVICE
21/tcp   open  ftp
| ftp-anon: Anonymous FTP login allowed (FTP code 230)
| -rw-rw-r--    1 root     www-data   543803 Nov  2  2014 Iron_Man.pdf
| -rw-rw-r--    1 root     www-data   462949 Nov  2  2014 Terminator_Salvation.pdf
| -rw-rw-r--    1 root     www-data   544600 Nov  2  2014 The_Amazing_Spider-Man.pdf
| -rw-rw-r--    1 root     www-data   526187 Nov  2  2014 The_Cabin_in_the_Woods.pdf
| -rw-rw-r--    1 root     www-data   756522 Nov  2  2014 The_Dark_Knight_Rises.pdf
| -rw-rw-r--    1 root     www-data   618117 Nov  2  2014 The_Incredible_Hulk.pdf
|_-rw-rw-r--    1 root     www-data  5010042 Nov  2  2014 bWAPP_intro.pdf
22/tcp   open  ssh
| ssh-hostkey:
|   1024 45:a4:66:ec:3a:ba:97:f8:3e:1a:ba:1c:24:68:22:e8 (DSA)
|_  2048 63:e7:c5:d1:8d:8a:94:02:36:6a:d7:d2:75:e9:8b:ce (RSA)
25/tcp   open  smtp
|_ssl-date: 2026-03-03T08:39:14+00:00; -1d03h02m45s from scanner time.
| ssl-cert: Subject: commonName=ubuntu/organizationName=OCOSA/stateOrProvinceName=There is no such thing outside US/countryName=XX
| Not valid before: 2013-03-28T19:14:17
|_Not valid after:  2013-04-27T19:14:17
| sslv2:
|   SSLv2 supported
|   ciphers:
|     SSL2_RC2_128_CBC_WITH_MD5
|     SSL2_DES_64_CBC_WITH_MD5
|     SSL2_RC4_128_WITH_MD5
|     SSL2_RC4_128_EXPORT40_WITH_MD5
|     SSL2_RC2_128_CBC_EXPORT40_WITH_MD5
|_    SSL2_DES_192_EDE3_CBC_WITH_MD5
|_smtp-commands: bee-box, PIPELINING, SIZE 10240000, VRFY, ETRN, STARTTLS, ENHANCEDSTATUSCODES, 8BITMIME, DSN
80/tcp   open  http
|_http-title: Site doesn't have a title (text/html).
| http-methods:
|_  Potentially risky methods: TRACE
139/tcp  open  netbios-ssn
443/tcp  open  https
| sslv2:
|   SSLv2 supported
|   ciphers:
|     SSL2_RC2_128_CBC_WITH_MD5
|     SSL2_DES_64_CBC_WITH_MD5
|     SSL2_RC4_128_WITH_MD5
|     SSL2_RC4_128_EXPORT40_WITH_MD5
|     SSL2_RC2_128_CBC_EXPORT40_WITH_MD5
|_    SSL2_DES_192_EDE3_CBC_WITH_MD5
| ssl-cert: Subject: commonName=bee-box.bwapp.local/organizationName=MME/stateOrProvinceName=Flanders/countryName=BE
| Not valid before: 2013-04-14T18:11:32
|_Not valid after:  2018-04-13T18:11:32
|_http-title: Site doesn't have a title (text/html).
| http-methods:
|_  Potentially risky methods: TRACE
|_ssl-date: 2026-03-03T08:38:09+00:00; -1d03h02m45s from scanner time.
445/tcp  open  microsoft-ds
512/tcp  open  exec
513/tcp  open  login
514/tcp  open  shell
666/tcp  open  doom
3306/tcp open  mysql
| mysql-info:
|   Protocol: 10
|   Version: 5.0.96-0ubuntu3
|   Thread ID: 82
|   Capabilities flags: 41516
|   Some Capabilities: Support41Auth, SupportsTransactions, Speaks41ProtocolNew, ConnectWithDatabase, SupportsCompression, LongColumnFlag
|   Status: Autocommit
|_  Salt: T{1~J7r\VwxqOt~:E.R6
5901/tcp open  vnc-1
| vnc-info:
|   Protocol version: 3.8
|   Security types:
```

usamos el comando (nmap -sC 10.0.2.15)

Ejecuta los scripts de enumeración predeterminados de Nmap para obtener información extra (como títulos de páginas web o métodos permitidos en FTP).