

# Table of Contents

Map .....	1
Open .....	1
Close .....	1
List .....	2
Add Layer .....	2
Add Raster .....	3
Add Tile Layer .....	5
Remove Layer .....	6
Reorder .....	7
Layers .....	9
Draw .....	10
Display .....	11
Map Cube .....	13

## Map

### Open

Open a new Map.

```
geo-shell> map open --name earth
```

Name	Description	Mandatory	Specified Default	Unspecified Default
name	The map name	true		

```
geo-shell> map open --name earth
```

Map earth opened!

```
geo-shell> map close --name earth
```

Map earth closed!

### Close

Close a Map.

```
geo-shell> map close --name earth
```

Name	Description	Mandatory	Specified Default	Unspecified Default
name	The map name	true		

```
geo-shell> map open --name earth
Map earth opened!
```

```
geo-shell> map close --name earth
Map earth closed!
```

## List

List open Maps.

```
geo-shell> map list
```



No parameters

```
geo-shell> map open --name earth
Map earth opened!
```

```
geo-shell> map open --name us
Map us opened!
```

```
geo-shell> map list
earth
us
```

```
geo-shell> map close --name earth
Map earth closed!
```

```
geo-shell> map close --name us
Map us closed!
```

## Add Layer

Add a Vector Layer.

```
geo-shell> map add layer --name world --layer countries
```

Name	Description	Mandatory	Specified Default	Unspecified Default
name	The map name	true		
layer	The layer	true		
mapLayerName	The map layer name	false		

```
geo-shell> map open --name world
Map world opened!
```

```
geo-shell> workspace open --name naturalearth --params examples/naturalearth.gpkg
Workspace naturalearth opened!
```

```
geo-shell> layer open --workspace naturalearth --layer countries --name countries  
Opened Workspace naturalearth Layer countries as countries
```

```
geo-shell> layer style set --name countries --style examples/countries.sld  
Style /home/runner/work/geo-shell/geo-shell/examples/countries.sld set on countries
```

```
geo-shell> layer open --workspace naturalearth --layer ocean --name ocean  
Opened Workspace naturalearth Layer ocean as ocean
```

```
geo-shell> layer style set --name ocean --style examples/ocean.sld  
Style /home/runner/work/geo-shell/geo-shell/examples/ocean.sld set on ocean
```

```
geo-shell> map add layer --name world --layer ocean  
Added ocean layer to map world
```

```
geo-shell> map add layer --name world --layer countries  
Added countries layer to map world
```

```
geo-shell> map draw --name world --file examples/map_add_layer.png  
Done drawing /home/runner/work/geo-shell/geo-shell/examples/map_add_layer.png!
```

```
geo-shell> map close --name world  
Map world closed!
```



## Add Raster

Add a Raster Layer.

```
geo-shell> map add raster --name world --raster earth
```

Name	Description	Mandatory	Specified Default	Unspecified Default
name	The map name	true		
raster	The raster	true		
mapLayerName	The map layer name	false		

```
geo-shell> map open --name world
Map world opened!
```

```
geo-shell> format open --name earth --input src/test/resources/earth.tif
Format earth opened!
```

```
geo-shell> raster open --format earth --raster earth --name earth
Opened Format earth Raster earth as earth
```

```
geo-shell> map add raster --name world --raster earth
Added earth layer to map world
```

```
geo-shell> workspace open --name naturalearth --params examples/naturalearth.gpkg
Workspace naturalearth opened!
```

```
geo-shell> layer open --workspace naturalearth --layer countries --name countries
Opened Workspace naturalearth Layer countries as countries
```

```
geo-shell> style create --params "stroke=black stroke-width=0.1" --file examples/outline.sld
Style stroke=black stroke-width=0.1 written to /home/runner/work/geo-shell/geo-shell/examples/outline.sld!
```

```
geo-shell> layer style set --name countries --style examples/outline.sld
Style /home/runner/work/geo-shell/geo-shell/examples/outline.sld set on countries
```

```
geo-shell> map add layer --name world --layer countries
Added countries layer to map world
```

```
geo-shell> map draw --name world --file examples/map_add_raster.png
Done drawing /home/runner/work/geo-shell/geo-shell/examples/map_add_raster.png!
```

```
geo-shell> map close --name world
Map world closed!
```



## Add Tile Layer

Add a Tile Layer.

```
geo-shell> map add tile --name world --tile tiles
```

Name	Description	Mandatory	Specified Default	Unspecified Default
name	The map name	true		
tile	The tile	true		
mapLayerName	The map layer name	false		

```
geo-shell> map open --name world  
Map world opened!
```

```
geo-shell> tile open --name tiles --params src/test/resources/countries.mbtiles  
Tile Layer tiles opened!
```

```
geo-shell> map add tile --name world --tile tiles  
Added tiles layer to map world
```

```
geo-shell> workspace open --name naturalearth --params examples/naturalearth.gpkg  
Workspace naturalearth opened!
```

```
geo-shell> layer open --workspace naturalearth --layer places --name places  
Opened Workspace naturalearth Layer places as places
```

```

geo-shell> style vector default --layer places --color #1E90FF --file examples/places.sld
Default Vector Style for places written to /home/runner/work/geo-shell/geo-shell/examples/places.sld!


geo-shell> layer style set --name places --style examples/places.sld
Style /home/runner/work/geo-shell/geo-shell/examples/places.sld set on places

geo-shell> map add layer --name world --layer places
Added places layer to map world

geo-shell> map draw --name world --width 400 --height 400 --file examples/map_add_tile.png
Done drawing /home/runner/work/geo-shell/geo-shell/examples/map_add_tile.png!

geo-shell> map close --name world
Map world closed!

```

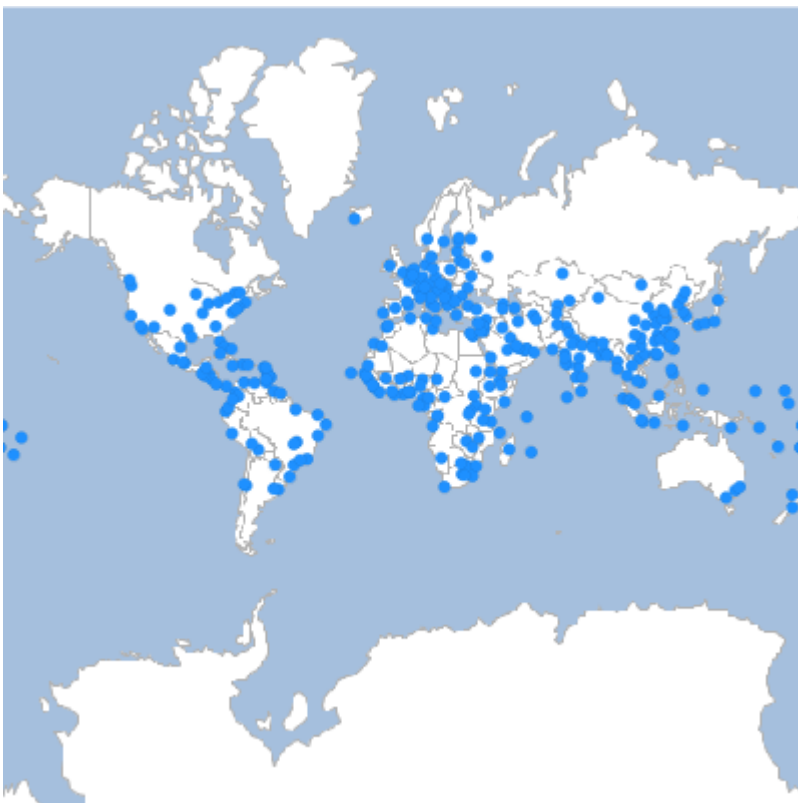

## Remove Layer

Remove a Layer.

```

geo-shell> map remove layer --name world --layer countries

```

Name	Description	Mandatory	Specified Default	Unspecified Default
name	The map name	true		
layer	The layer name	true		

```

geo-shell> map open --name world

```

Map world opened!

geo-shell> **format open** --name earth --input src/test/resources/earth.tif  
Format earth opened!

geo-shell> **raster open** --format earth --raster earth --name earth  
Opened Format earth Raster earth as earth

geo-shell> **map add raster** --name world --raster earth  
Added earth layer to map world

geo-shell> **workspace open** --name naturalearth --params examples/naturalearth.gpkg  
Workspace naturalearth opened!

geo-shell> **layer open** --workspace naturalearth --layer countries --name countries  
Opened Workspace naturalearth Layer countries as countries

geo-shell> **style create** --params "stroke=black stroke-width=0.1" --file examples/outline.sld  
Style stroke=black stroke-width=0.1 written to /home/runner/work/geo-shell/geo-shell/examples/outline.sld!

geo-shell> **layer style set** --name countries --style examples/outline.sld  
Style /home/runner/work/geo-shell/geo-shell/examples/outline.sld set on countries

geo-shell> **map add layer** --name world --layer countries  
Added countries layer to map world

geo-shell> **map layers** --name world  
earth  
countries

geo-shell> **map remove layer** --name world --layer countries  
Removed countries layer from map world

geo-shell> **map layers** --name world  
earth

geo-shell> **map close** --name world  
Map world closed!

## Reorder

Reorder a Layer in the Map.

Name	Description	Mandatory	Specified Default	Unspecified Default
name	The map name	true		
layer	The layer name	true		

order	The order parameters	true		
-------	----------------------	------	--	--

geo-shell> **map open** --name world  
Map world opened!

geo-shell> **workspace open** --name naturalearth --params examples/naturalearth.gpkg  
Workspace naturalearth opened!

geo-shell> **layer open** --workspace naturalearth --layer countries --name countries  
Opened Workspace naturalearth Layer countries as countries

geo-shell> **style create** --params "stroke=black stroke-width=0.1" --file examples/outline.sld  
Style stroke=black stroke-width=0.1 written to /home/runner/work/geo-shell/geo-shell/examples/outline.sld!

geo-shell> **layer style set** --name countries --style examples/outline.sld  
Style /home/runner/work/geo-shell/geo-shell/examples/outline.sld set on countries

geo-shell> **map add layer** --name world --layer countries  
Added countries layer to map world

geo-shell> **format open** --name earth --input src/test/resources/earth.tif  
Format earth opened!

geo-shell> **raster open** --format earth --raster earth --name earth  
Opened Format earth Raster earth as earth

geo-shell> **map add raster** --name world --raster earth  
Added earth layer to map world

geo-shell> **map layers** --name world  
countries  
earth


geo-shell> **map reorder** --name world --layer countries --order 1  
Moved countries from 0 to 1

geo-shell> **map layers** --name world  
earth  
countries

geo-shell> **map draw** --name world --file examples/map\_reorder.png  
Done drawing /home/runner/work/geo-shell/geo-shell/examples/map\_reorder.png!

geo-shell> **map close** --name world  
Map world closed!



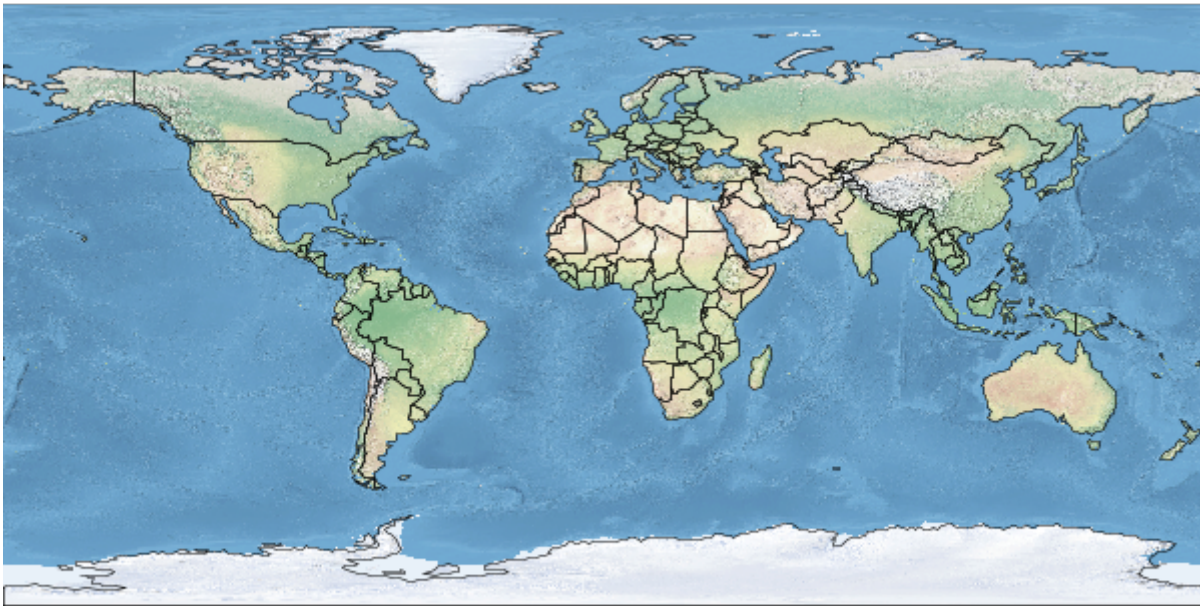

## Layers

List the Map's Layers.

```
geo-shell> map layers --name world
```

Name	Description	Mandatory	Specified Default	Unspecified Default
name	The map name	true		

```
geo-shell> map open --name world
```

Map world opened!

```
geo-shell> format open --name earth --input src/test/resources/earth.tif
```

Format earth opened!

```
geo-shell> raster open --format earth --raster earth --name earth
```

Opened Format earth Raster earth as earth

```
geo-shell> map add raster --name world --raster earth
```

Added earth layer to map world

```
geo-shell> workspace open --name naturalearth --params examples/naturalearth.gpkg
```

Workspace naturalearth opened!

```
geo-shell> layer open --workspace naturalearth --layer countries --name countries
```

Opened Workspace naturalearth Layer countries as countries

```
geo-shell> style create --params "stroke=black stroke-width=0.1" --file examples/outline.sld
```

Style stroke=black stroke-width=0.1 written to /home/runner/work/geo-shell/geo-shell/examples/outline.sld!

```
geo-shell> layer style set --name countries --style examples/outline.sld
Style /home/runner/work/geo-shell/geo-shell/examples/outline.sld set on countries
```

```
geo-shell> map add layer --name world --layer countries
Added countries layer to map world
```

```
geo-shell> map layers --name world
earth
countries
```

```
geo-shell> map close --name world
Map world closed!
```

## Draw

Draw a map.

```
geo-shell> map draw --name world --file examples/map_draw.png
```

Name	Description	Mandatory	Specified Default	Unspecified Default
name	The map name	true		
bounds	The Bounds	false		
projection	The Projection	false		
width	The width	false	600	600
height	The height	false	400	400
type	The type	false	png	png
file	The file	false		
background-color	The background color	false		

```
geo-shell> map open --name world
Map world opened!
```

```
geo-shell> workspace open --name naturalearth --params examples/naturalearth.gpkg
Workspace naturalearth opened!
```

```
geo-shell> layer open --workspace naturalearth --layer countries --name countries
Opened Workspace naturalearth Layer countries as countries
```

```
geo-shell> layer style set --name countries --style examples/countries.sld
Style /home/runner/work/geo-shell/geo-shell/examples/countries.sld set on countries
```

```
geo-shell> layer open --workspace naturalearth --layer ocean --name ocean
```

Opened Workspace naturalearth Layer ocean as ocean

```
geo-shell> layer style set --name ocean --style examples/ocean.sld
```

Style /home/runner/work/geo-shell/geo-shell/examples/ocean.sld set on ocean

```
geo-shell> map add layer --name world --layer ocean
```

Added ocean layer to map world

```
geo-shell> map add layer --name world --layer countries
```

Added countries layer to map world

```
geo-shell> map draw --name world --file examples/map_draw.png
```

Done drawing /home/runner/work/geo-shell/geo-shell/examples/map\_draw.png!

```
geo-shell> map close --name world
```

Map world closed!



## Display

Display a map in a GUI.

```
geo-shell> map display --name world
```

Name	Description	Mandatory	Specified Default	Unspecified Default
name	The map name	true		
bounds	The Bounds	false		
projection	The Projection	false		

width	The width	false	600	600
height	The height	false	400	400
background-color	The background color	false		

```
geo-shell> map open --name world
Map world opened!
```

```
geo-shell> workspace open --name naturalearth --params examples/naturalearth.gpkg
Workspace naturalearth opened!
```

```
geo-shell> layer open --workspace naturalearth --layer countries --name countries
Opened Workspace naturalearth Layer countries as countries
```

```
geo-shell> layer style set --name countries --style examples/countries.sld
Style /Users/jericks/Projects/geo-shell/examples/countries.sld set on countries
```

```
geo-shell> layer open --workspace naturalearth --layer ocean --name ocean
Opened Workspace naturalearth Layer ocean as ocean
```

```
geo-shell> layer style set --name ocean --style examples/ocean.sld
Style /Users/jericks/Projects/geo-shell/examples/ocean.sld set on ocean
```

```
geo-shell> map add layer --name world --layer ocean
Added ocean layer to map world
```

```
geo-shell> map add layer --name world --layer countries
Added countries layer to map world
```

```
geo-shell> map display --name world
Displaying...
```



## Map Cube

Draw a map cube.

```
geo-shell> map cube --name world --file examples/map_cube.png --title World --source NaturalEarth
--draw-tabs true --draw-outline true
```

Name	Description	Mandatory	Specified Default	Unspecified Default
name	The map name	true		
draw-outline	Whether to draw outline or now	false	false	false
draw-tabs	Whether to draw tabs or not	false	false	false
tab-size	The size of the tabs	false	30	30
title	The map title	false		
source	The map source	false		
type	The type	false	png	png
file	The file	false		

```
geo-shell> map open --name world
Map world opened!
```

```
geo-shell> workspace open --name naturalearth --params examples/naturalearth.gpkg
```

Workspace naturalearth opened!

```
geo-shell> layer open --workspace naturalearth --layer countries --name countries  
Opened Workspace naturalearth Layer countries as countries
```

```
geo-shell> layer style set --name countries --style examples/countries.sld  
Style /home/runner/work/geo-shell/geo-shell/examples/countries.sld set on countries
```

```
geo-shell> layer open --workspace naturalearth --layer ocean --name ocean  
Opened Workspace naturalearth Layer ocean as ocean
```

```
geo-shell> layer style set --name ocean --style examples/ocean.sld  
Style /home/runner/work/geo-shell/geo-shell/examples/ocean.sld set on ocean
```

```
geo-shell> map add layer --name world --layer ocean  
Added ocean layer to map world
```

```
geo-shell> map add layer --name world --layer countries  
Added countries layer to map world
```

```
geo-shell> map cube --name world --file examples/map_cube.png --title World --source NaturalEarth  
--draw-tabs true --draw-outline true  
Done drawing /home/runner/work/geo-shell/geo-shell/examples/map_cube.png!
```

```
geo-shell> map close --name world  
Map world closed!
```

