# **Table of Contents**

R	aster Commands	1
	Absolute	1
	Add Constant	2
	Add	3
	Animated GIF	5
	Convolve	8
	Contour	10
	Crop with Bounds.	11
	Crop with Geometry	12
	Crop with Layer	13
	Display	14
	Divide	15
	Divide Constant	17
	Envelope	18
	Info	19
	Get Projection	20
	Get Size	21
	Reclassify	21
	World File	22

# **Raster Commands**


## **Absolute**

Calculate the absolute value of the values of a Raster.

Short Name	Long Name	Description
-0	output-raster	The output raster
-f	output-raster-format	The output raster format
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-р	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc raster abs -i src/test/resources/absolute.tif -o target/absolute\_abs.tif

-7.0	3.0	-6.0	3.0
	8.0		1.0
-1.0	3.0	-2.0	9.0
-3.0		-5.0	2.0

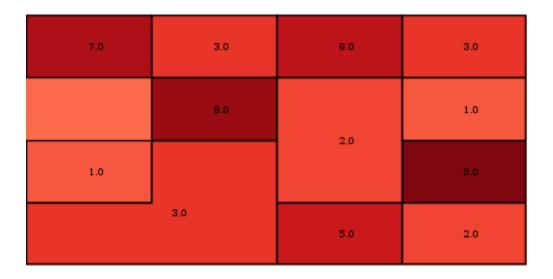

# **Add Constant**

Add a constant value to a Raster.

Short Name	Long Name	Description
-V	value	The value
-0	output-raster	The output raster
-f	output-raster-format	The output raster format
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-p	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

### Get original value

geoc raster get value -i src/test/resources/pc.tif -x -121.799927 -y 46.867703

3069.0


### Add 100 to all cells

geoc raster add constant -i src/test/resources/pc.tif -v 100 -o target/pc\_add.tif

### Get new value

geoc raster get value -i target/pc\_add.tif -x -121.799927 -y 46.867703

3169.0

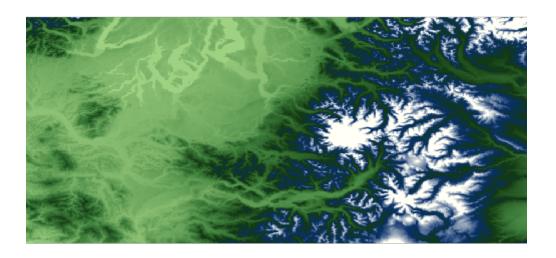

## Add

Add two Raster together.

Short Name	Long Name	Description
-k	other-raster	The other raster
-у	other-raster-name	The other raster name
-j	other-projection	The other projection
-0	output-raster	The output raster

Short Name	Long Name	Description
-f	output-raster-format	The output raster format
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-p	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc raster add -i src/test/resources/low.tif -k src/test/resources/high.tif -o
target/lowPlusHigh.tif

### Low

13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0
1.0	2.0	3.0	4.0

## High

17.0	18.0	19.0	20.0
13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0

30.0	32.0	34.0	36.0
22.0	24.0	26.0	28.0
14.0	16.0	18.0	20.0
6.0	8.0	10.0	12.0

## **Animated GIF**


Create an animated GIF from a list of GIFs.

Short Name	Long Name	Description
-f	file	The GIF file
-0	output-file	The output animated GIF file
-d	delay	The delay between images
-r	repeat	Whether to repeat the animation or not
	help	Print the help message
	web-help	Open help in a browser

First, lets create individual maps of 3 states.


### Washington

```
geoc map draw -1 "layertype=layer file=src/test/resources/data.gpkg layername=ocean
style=src/test/resources/ocean.sld" -1 "layertype=layer
file=src/test/resources/data.gpkg layername=countries
style=src/test/resources/countries.sld" -1 "layertype=layer
file=src/test/resources/data.gpkg layername=states
style=src/test/resources/states.sld" -b -124.68721008300781,45.59199778907822,
-116.90652787968992,49.000885321643864 -f target/state_washington.png
```

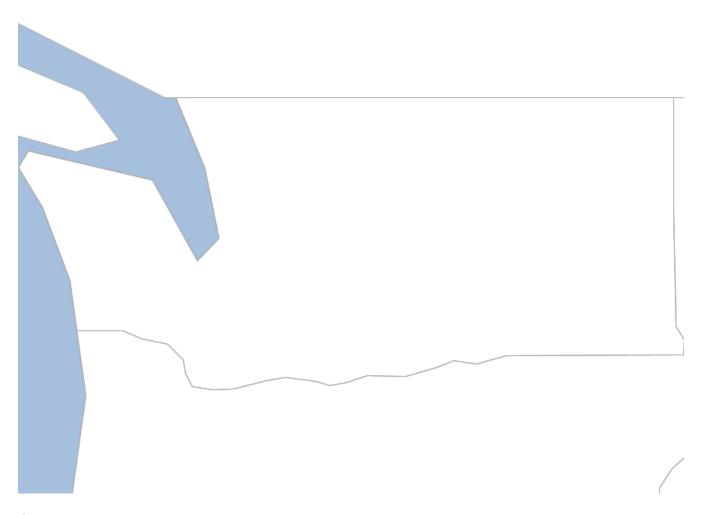


### Oregon

geoc map draw -l "layertype=layer file=src/test/resources/data.gpkg layername=ocean
style=src/test/resources/ocean.sld" -l "layertype=layer
file=src/test/resources/data.gpkg layername=countries
style=src/test/resources/countries.sld" -l "layertype=layer
file=src/test/resources/data.gpkg layername=states
style=src/test/resources/states.sld" -b -124.5328399999996,41.99260508886846,
-116.45779557988342,46.2830694871044 -f target/state\_oregon.png

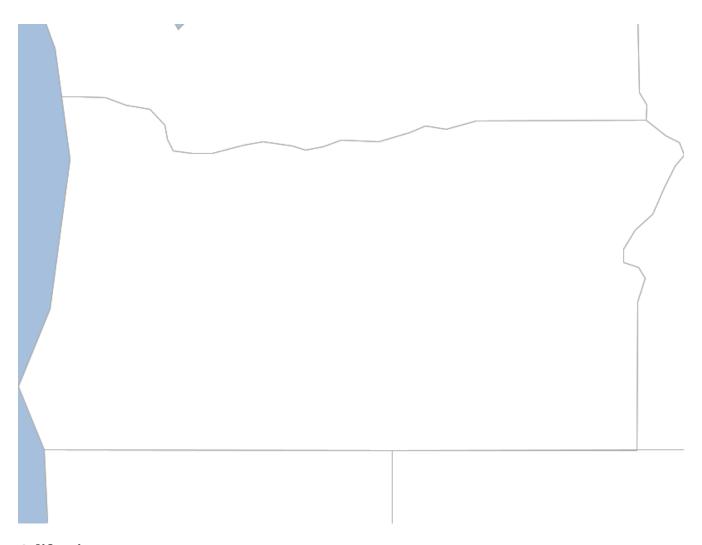

#### California

geoc map draw -l "layertype=layer file=src/test/resources/data.gpkg layername=ocean
style=src/test/resources/ocean.sld" -l "layertype=layer
file=src/test/resources/data.gpkg layername=countries
style=src/test/resources/countries.sld" -l "layertype=layer
file=src/test/resources/data.gpkg layername=states
style=src/test/resources/states.sld" -b -124.39795772362243,32.535327053348965,
-114.16597164595498,41.99947805436335 -f target/state\_california.png

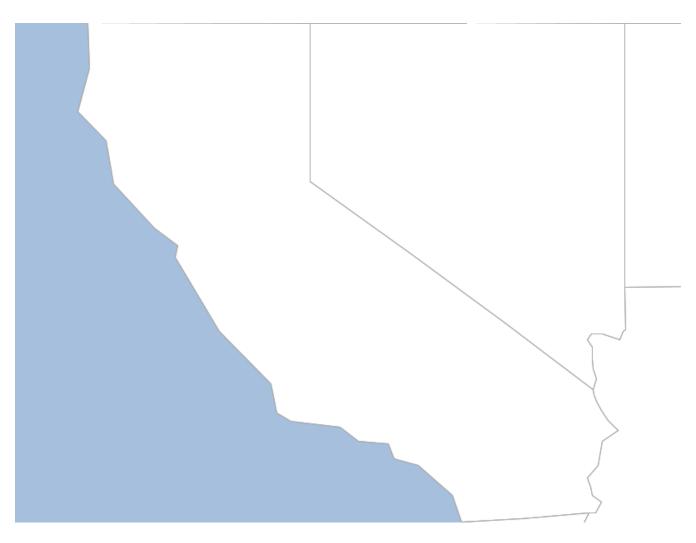

Now lets stitch them together into an animated GIF.

geoc raster animatedgif -f target/state\_washington.png -f target/state\_oregon.png -f
target/state\_california.png -o target/states.gif

[geoc animatedgif] | geoc\_animatedgif.gif


## Convolve

Convolve the values of a Raster.

Short Name	Long Name	Description
-W	width	The kernel width
-h	height	The kernel height
-0	output-raster	The output raster
-f	output-raster-format	The output raster format
-i	input-raster	The input raster
-l	input-raster-name	The input raster name
-p	input-projection	The input projection

Short Name	Long Name	Description
	help	Print the help message
	web-help	Open help in a browser

geoc raster convolve -i src/test/resources/pc.tif -o target/pc\_convolve.tif -w 2 -h 2

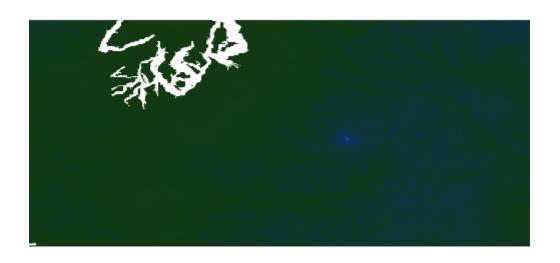

### Original

```
geoc raster info -i src/test/resources/pc.tif
```

```
Format: GeoTIFF
Size: 800, 400
Projection ID: EPSG:4326
Projection WKT: GEOGCS["WGS 84",
 DATUM["World Geodetic System 1984",
    SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG","7030"]],
   AUTHORITY["EPSG","6326"]],
 PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG", "8901"]],
 UNIT["degree", 0.017453292519943295],
 AXIS["Geodetic longitude", EAST],
 AXIS["Geodetic latitude", NORTH],
 AUTHORITY["EPSG","4326"]]
Extent: -123.55291606131708, 46.25375026634816, -120.73958272798374,
47.522916933014834
Pixel Size: 0.0035166666666666658, 0.0031729166666666763
Block Size: 800, 5
Bands:
   GRAY INDEX
     Min Value: -23.0 Max Value: 4370.0
```

```
geoc raster info -i target/pc_convolve.tif
```


```
Format: GeoTIFF
Size: 800, 400
Projection ID: EPSG:4326
Projection WKT: GEOGCS["WGS 84",
  DATUM["World Geodetic System 1984",
    SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG","7030"]],
    AUTHORITY["EPSG","6326"]],
  PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG", "8901"]],
  UNIT["degree", 0.017453292519943295],
  AXIS["Geodetic longitude", EAST],
  AXIS["Geodetic latitude", NORTH],
  AUTHORITY["EPSG","4326"]]
Extent: -123.55291606131708, 46.25375026634816, -120.73958272798374,
47.522916933014834
Pixel Size: 0.0035166666666666658, 0.0031729166666666763
Block Size: 800, 10
Bands:
   GRAY INDEX
      Min Value: -32767.0 Max Value: 17278.0
```

### **Contour**

Create contours from a Raster.

Short Name	Long Name	Description
-b	band	The band
-v	level	A level or interval
-S	simplify	Whether to simplify
-m	smooth	Whether to smooth
-n	bounds	The bounds
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-p	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc raster contour -i src/test/resources/pc.tif -b 0 -v 300 -s -m -o
target/contours.shp

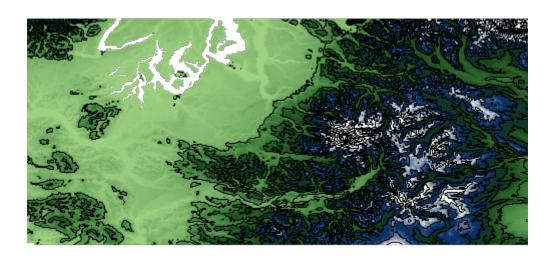


# **Crop with Bounds**

Crop a Raster with Bounds.

Short Name	Long Name	Description	
-b	bound	The Bounds	
-X	pixel	Whether the Bounds is pixel or geographic	
-0	output-raster	The output raster	
-f	output-raster-format	The output raster format	
-i	input-raster	The input raster	
-1	input-raster-name	The input raster name	
-р	input-projection	The input projection	
	help	Print the help message	
	web-help	Open help in a browser	

geoc raster crop -i src/test/resources/earth.tif -b -160.927734,6.751896,
-34.716797,57.279043 -o target/earth\_cropped.tif

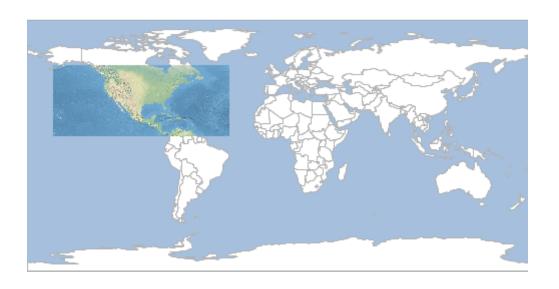


## **Crop with Geometry**

Crop a Raster with Geometry.

Short Name	Long Name	Description
-g	geometry	The Geometry
-0	output-raster	The output raster
-f	output-raster-format	The output raster format
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-р	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc raster crop with geometry -i src/test/resources/earth.tif -g "POLYGON ((-120.06886118446164 54.657570186377484, -131.4744345802818 40.88641840854305, -120.66873293244274 27.841500134049014, -91.23852896646747 22.376168381822453, -75.66538001484537 23.99772020337508, -54.66444615739175 45.994788780815526, -91.94198075352523 53.20175611636799, -120.06886118446164 54.657570186377484))" -o target/earth\_cropped.tif

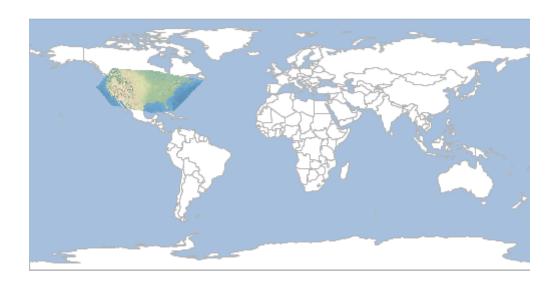

## **Crop with Layer**


Crop a Raster with a Layer.

Short Name	Long Name	Description
-W	input-workspace	The input workspace
-у	input-layer	The input layer
-0	output-raster	The output raster
-f	output-raster-format	The output raster format
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-р	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc vector randompoints -n 10 -g -180,-90,180,90 -o target/locations.shp

geoc vector buffer -d 10 -i target/locations.shp -o target/buffers.shp

geoc raster crop with layer -i src/test/resources/earth.tif -o
target/earth\_cropped.tif -w target/buffers.shp

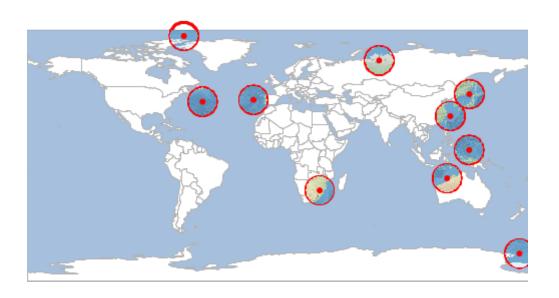

# Display

Display a Raster in a simple GUI Window.

Short Name	Long Name	Description
-W	width	The width
-h	height	The height
-S	sld-file	The sld file
-b	bounds	The bounds
-m	layer	The map layer
-g	background-color	The background color
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-p	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc raster display -i src/test/resources/pc.tif



# Divide

Divide one Raster by another Raster.

Short Name	Long Name	Description
-k	other-raster	The other raster
-у	other-raster-name	The other raster name
-j	other-projection	The other projection
-0	output-raster	The output raster
-f	output-raster-format	The output raster format
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-р	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc raster divide -i src/test/resources/high.tif -k src/test/resources/low.tif -o target/divided.tif

Low

13.00	14.00	15.00	16.00
9.00	10.00	11.00	12.00
5.00	6.00	7.00	8.00
1.00	2.00	3.00	4.00

High

17.00	18.00	19.00	20.00
13.00	14.00	15.00	16.00
9.00	10.00	11.00	12.00
5.00	6.00	7.00	8.00

High / Low

1.31	1.29	1.27	1.25
1.44	1.40	1.36	1.33
1.80	1.67	1.57	1.50
5.00	3.00	2.33	2.00

## **Divide Constant**

Divide a Raster by a constant value.

Short Name	Long Name	Description
-V	value	The value
-0	output-raster	The output raster
-f	output-raster-format	The output raster format
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-p	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc raster divide constant -i src/test/resources/high.tif -v 2.1 -o target/divided.tif

Raster

17.00	18.00	19.00	20.00
13.00	14.00	15.00	16.00
9.00	10.00	11.00	12.00
5.00	6.00	7.00	8.00

Raster / 2.1


8.10	8.57	9.05	9.52
6.19	6.67	7.14	7.62
4.29	4.76	5.24	5.71
2.38	2.86	3.33	3.81

# Envelope

Get the Envelope of a Raster as a Vector Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-р	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc raster envelope -i src/test/resources/earth.tif -o target/earth\_envelope.shp

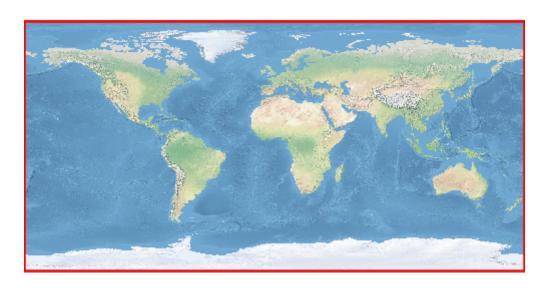

# Info

Get information about a Raster.

Short Name	Long Name	Description
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-р	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc raster info -i src/test/resources/earth.tif

```
Format: GeoTIFF
Size: 800, 400
Projection ID: EPSG:4326
Projection WKT: GEOGCS["WGS 84",
 DATUM["World Geodetic System 1984",
   SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG","7030"]],
   AUTHORITY["EPSG","6326"]],
 PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG", "8901"]],
 UNIT["degree", 0.017453292519943295],
 AXIS["Geodetic longitude", EAST],
 AXIS["Geodetic latitude", NORTH],
 AUTHORITY["EPSG","4326"]]
Extent: -179.999999999997, -89.9999999998205, 179.9999999996405, 90.0
Pixel Size: 0.4499999999995505, 0.44999999999551
Block Size: 800, 8
Bands:
   RED BAND
     Min Value: 56.0 Max Value: 255.0
   GREEN_BAND
     Min Value: 84.0 Max Value: 255.0
   BLUE BAND
      Min Value: 91.0 Max Value: 255.0
```

## **Get Projection**

Get the Raster Projection.

Short Name	Long Name	Description
-t	type	The output type (epsg, id, srs, wkt)
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-p	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

```
geoc raster projection -i src/test/resources/earth.tif
```

EPSG:4326

### **Get Size**

Get the Raster size (width,height).

Short Name	Long Name	Description
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-p	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc raster size -i src/test/resources/earth.tif


800,400

# Reclassify

Reclassify a Raster.

Short Name	Long Name	Description
-b	band	The band
-n	nodata	The NODATA value
-r	range	A range: from-to=value or 1- 10=5
-0	output-raster	The output raster
-f	output-raster-format	The output raster format
-i	input-raster	The input raster
-1	input-raster-name	The input raster name
-р	input-projection	The input projection
	help	Print the help message
	web-help	Open help in a browser

geoc raster reclassify -i src/test/resources/pc.tif -o target/pc\_reclass.tif -r 0-0=1 -r 0-50=2 -r 50-200=3 -r 200-1000=5 -r 1000-1500=4 -r 1500-4000=6

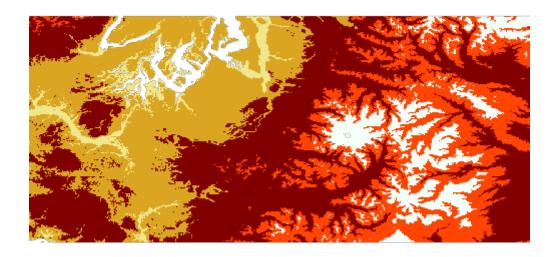

## **World File**

### Create a Raster world file

Short Name	Long Name	Description
-b	bounds	The bounds
-S	size	The size
-f	file	The world file
	help	Print the help message
	web-help	Open help in a browser

geoc raster worldfile -b 10,11,20,21 -s 800,751

0.0125

0.0

0.0

-0.013315579227696404

10.00625

20.993342210386153