

Table of Contents

Vector Commands	2
Add	2
Add Fields	3
Add Area Field	3
Add Length Field	4
Add ID Field	5
Add XY Fields	6
Append	7
Buffer	8
Centroid	9
Convexhull	10
Convexhulls	11
Coordinates	12
Count	13
Create	13
Default Style	14
Delaunay	16
Geometry Reader	16
Geometry Writer	17
Ellipse	18
Envelope	19
Envelopes	20
From	20
Graticule - Hexagon	22
Graticule - Line	23
Graticule - Oval	24
Graticule - Rectangle	25
Graticule - Square	25
Info	26
Interior Point	27
Layer List	28
Minimum Bounding Circle	28
Minimum Bounding Circles	29
Minimum Bounding Rectangle	30
Minimum Bounding rects	31
Octagonal Envelope	31
Octagonal Envelopes	32
Project	33

Random Points	34
Rectangle	35
Shapes	36
To	39
Schema	40
Unique Values	44
Unique Values Style	44
Voronoi	48

Vector Commands

Add

Add a Feature to a Layer.

Short Name	Long Name	Description
-v	--value	A value 'field=value'
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector add -i target/locations.shp -v id=1 -v name=Seattle -v "the_geom=POINT (-122.334758 47.578364)"
```

the_geom	name	id
POINT (-122.334758 47.578364)	Seattle	1



Add Fields

Add one or more Fields to a Layer

Short Name	Long Name	Description
-f	--field	A Field in the format 'name=type'
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector addfields -i target/locations.shp -o target/locations_idname.shp -f id=int  
-f name=string
```

Schema

Name	Type
the_geom	Point
name	String
id	Integer

Add Area Field

Add an area Field.

Short Name	Long Name	Description
-f	--area-fieldname	The name for the area Field
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector addareafield -i src/test/resources/states.shp -o target/states_area.shp
```

Schema

Name	Type
the_geom	MultiPolygon
STATE_NAME	String
SUB_REGION	String
STATE_ABBR	String
AREA	Double

Values

STATE_NAME	SUB_REGION	STATE_ABBR	AREA
Illinois	E N Cen	IL	15.396467068063995
District of Columbia	S Atl	DC	0.017769720828999
Delaware	S Atl	DE	0.553317799081003
West Virginia	S Atl	WV	6.493194953114009
Maryland	S Atl	MD	2.625116892757991

Add Length Field

Add an Length Field.

Short Name	Long Name	Description
-f	--length-fieldname	The name for the length Field
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace

Short Name	Long Name	Description
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector addlengthfield -i src/test/resources/data.gpkg -l rivers -o
target/rivers_length.shp -f length
```

Schema

Name	Type
the_geom	MultiLineString
name	String
label	String
length	Double

Values

name	label	length
Brahmaputra	Brahmaputra	25.21241966609205
Mekong	Mekong	34.97738061177052
Ob	Ob	48.39570358268261
Peace	Peace	44.84258394589285
Donau	Donau	26.67902946932429

Add ID Field

Add an ID Field.

Short Name	Long Name	Description
-f	--id-fieldname	The name for the ID Field
-s	--start	The number of start at
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector addidfield -i src/test/resources/data.gpkg -l places -o
target/places_id.shp
```

Schema

Name	Type
the_geom	Point
NAME	String
ID	Integer

Values

NAME	ID
Vatican City	1
San Marino	2
Vaduz	3
Lobamba	4
Luxembourg	5

Add XY Fields

Add XY Fields.

Short Name	Long Name	Description
-x	--x-fieldname	The name for the X Field
-y	--y-fieldname	The name for the Y Field
-a	--algorithm	The XY generation algorithm (centroid or interiorpoint)
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector addxyfields -i src/test/resources/data.gpkg -l places -o
target/places_xy.shp -x x_coord -y y_coord -a centroid
```

Schema

Name	Type
the_geom	Point
NAME	String
x_coord	Double
y_coord	Double

Values


NAME	x_coord	y_coord
Vatican City	12.4533865	41.9032822
San Marino	12.4417702	43.9360958
Vaduz	9.5166695	47.1337238
Lobamba	31.1999971	-26.4666675
Luxembourg	6.1300028	49.6116604

Append

Add a Features from one layer to another Layer.

Short Name	Long Name	Description
-k	--other-workspace	The other workspace
-y	--other-layer	The other layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector append -i target/points1.shp -k target/points2.shp
```

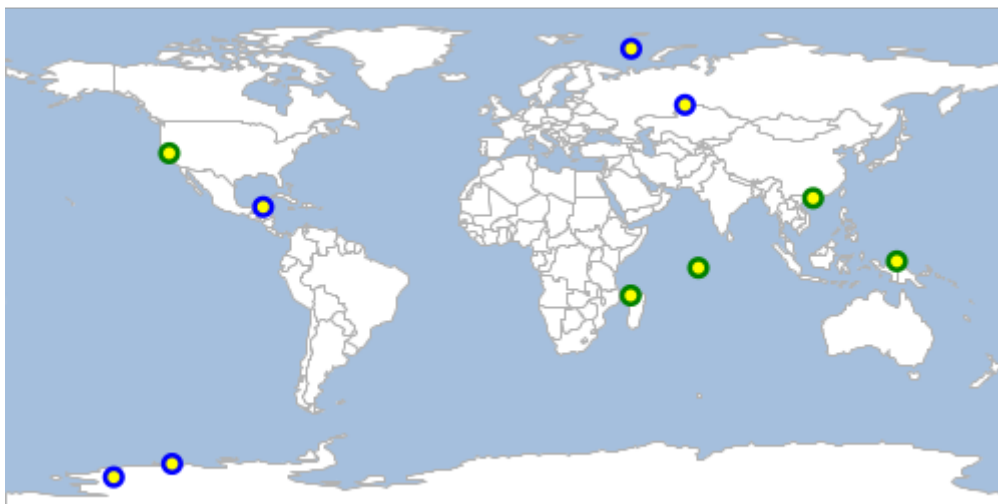


Buffer

Buffer all of the features in a Layer.

Short Name	Long Name	Description
-d	--distance	The buffer distance
-q	--quadrantsegments	The number of quadrant segments
-s	--singlesided	Whether buffer should be single sided or not
-c	--capstyle	The cap style
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector buffer -i src/test/resources/data.gpkg -l places -o
target/places_buffer.shp -d 10
```

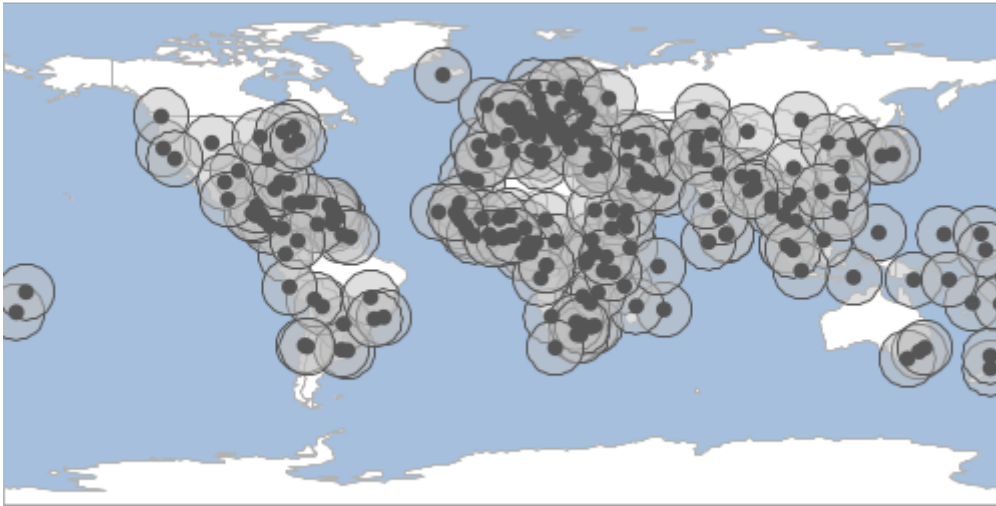



Centroid

Calculate the centroid of all the features in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector centroid -i src/test/resources/data.gpkg -l countries -o
target/countries_centroids.shp
```

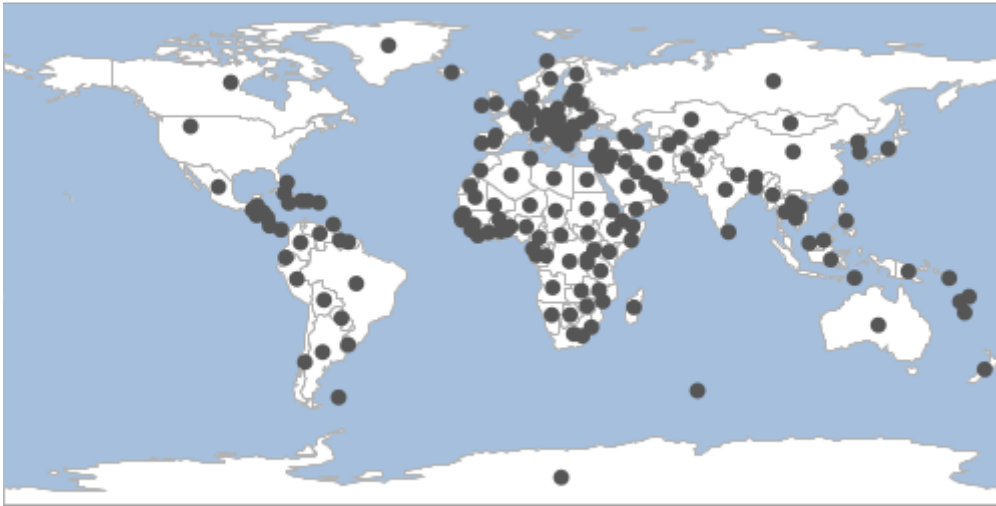


Convexhull

Calculate the convexhull of all the features in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector convexhull -i src/test/resources/data.gpkg -l places -o  
target/convexhull.shp
```

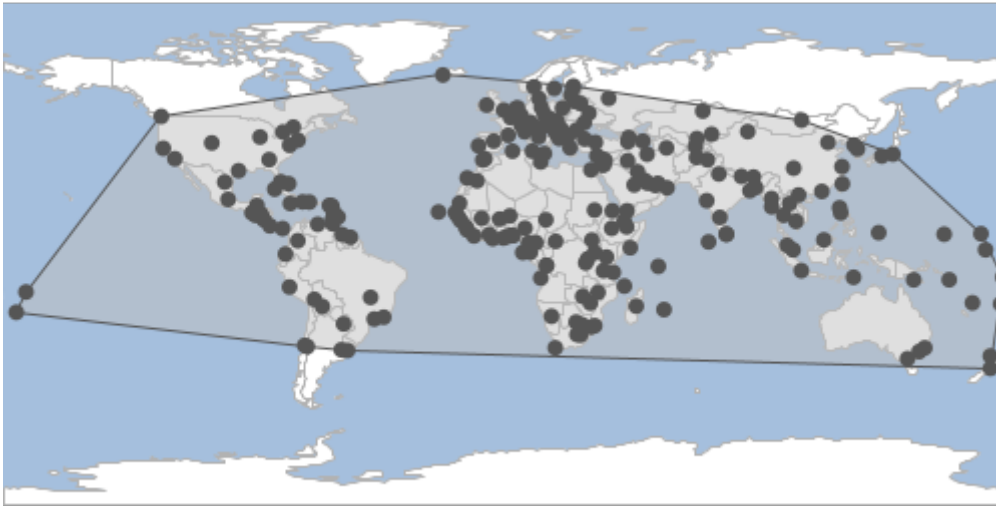


Convexhulls

Calculate the convexhulls for each feature in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector convexhulls -i src/test/resources/data.gpkg -l countries -o
target/convexhulls.shp
```

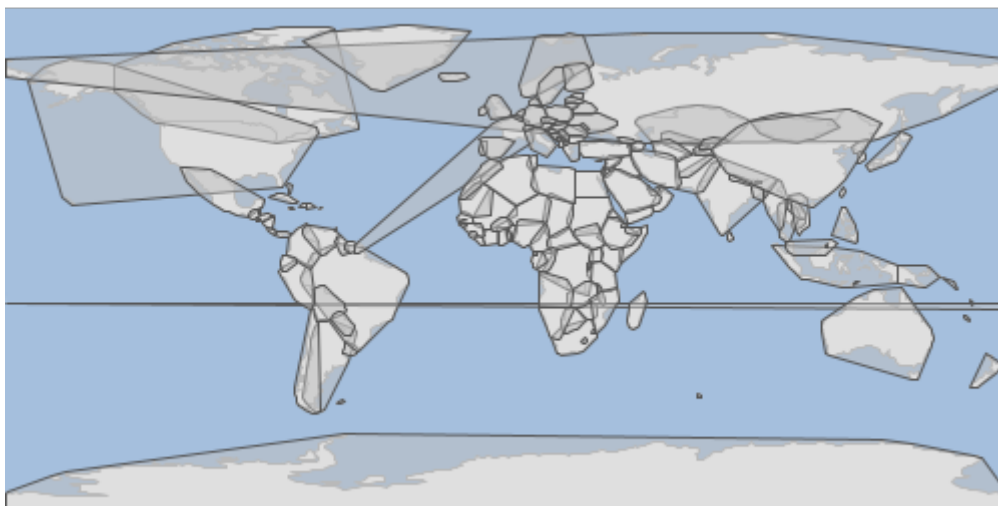


Coordinates

Extract coordinates from the input Layer and save them to the output Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector coordinates -i src/test/resources/data.gpkg -l states -o
target/coordinates.shp
```

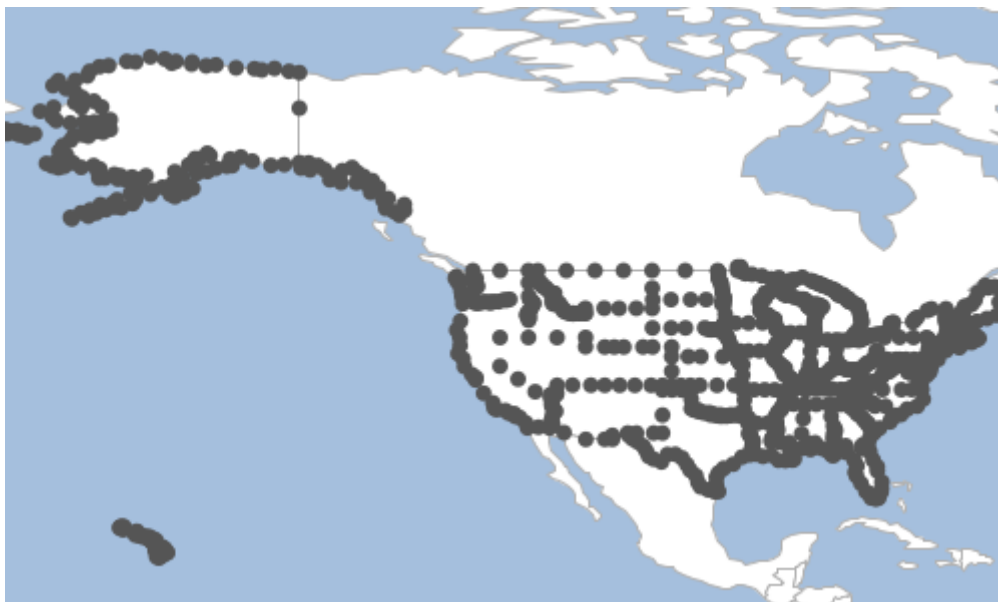

Count

Count the Features in a Layer.

Short Name	Long Name	Description
-t	--type	Count features, geometries, or points
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector count -i src/test/resources/data.gpkg -l places
```

243

Create

Create a new Layer.

Short Name	Long Name	Description
-f	--field	A Field in the format 'name=type'
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
	--help	Print the help message

Short Name	Long Name	Description
	--web-help	Open help in a browser

```
geoc vector create -o target/locations.shp -f "the_geom=POINT EPSG:4326" -f id=integer
-f name=string
```

Name	Type
the_geom	Point
name	String
id	Integer

Default Style

Get the default style for a Layer.


Short Name	Long Name	Description
-g	--geometry-type	The geometry type
-c	--color	The base color
-o	--opacity	The opacity (defaults to 1.0)
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector defaultstyle -i src/test/resources/data.gpkg -l places -c cornflowerblue
```

```

<?xml version="1.0" encoding="UTF-8"?><sld:StyledLayerDescriptor xmlns=
"http://www.opengis.net/sld" xmlns:sld="http://www.opengis.net/sld" xmlns:gml=
"http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc" version="1.0.0">
  <sld:UserLayer>
    <sld:LayerFeatureConstraints>
      <sld:FeatureTypeConstraint/>
    </sld:LayerFeatureConstraints>
    <sld:UserStyle>
      <sld:Name>Default Styler</sld:Name>
      <sld:FeatureTypeStyle>
        <sld:Name>name</sld:Name>
        <sld:Rule>
          <sld:PointSymbolizer>
            <sld:Graphic>
              <sld:Mark>
                <sld:WellKnownName>circle</sld:WellKnownName>
                <sld:Fill>
                  <sld:CssParameter name="fill">#6495ed</sld:CssParameter>
                </sld:Fill>
                <sld:Stroke>
                  <sld:CssParameter name="stroke">#4668a5</sld:CssParameter>
                  <sld:CssParameter name="stroke-width">0.1</sld:CssParameter>
                </sld:Stroke>
              </sld:Mark>
              <sld:Size>6</sld:Size>
            </sld:Graphic>
          </sld:PointSymbolizer>
        </sld:Rule>
      </sld:FeatureTypeStyle>
    </sld:UserStyle>
  </sld:UserLayer>
</sld:StyledLayerDescriptor>

```

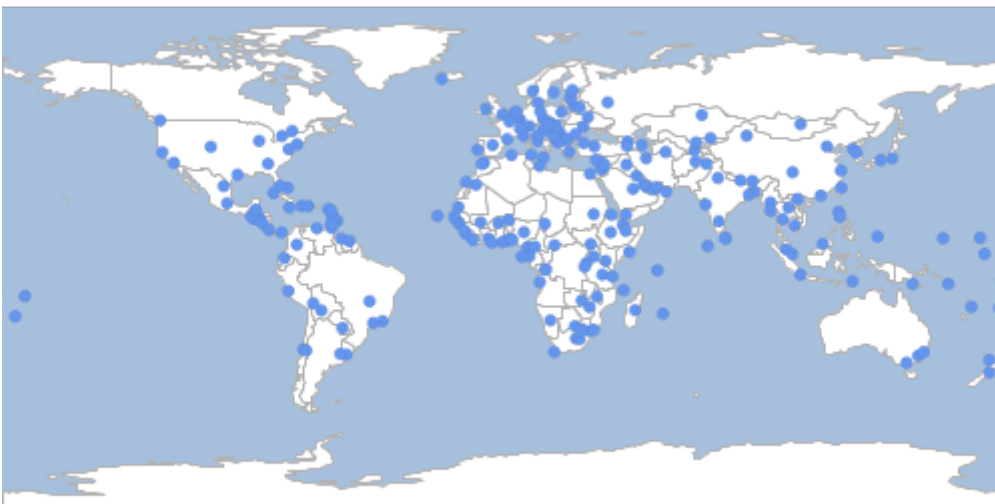


Delaunay

Calculate a delaunay diagram of all the features in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector delaunay -i src/test/resources/data.gpkg -l places -o target/delaunay.shp
```

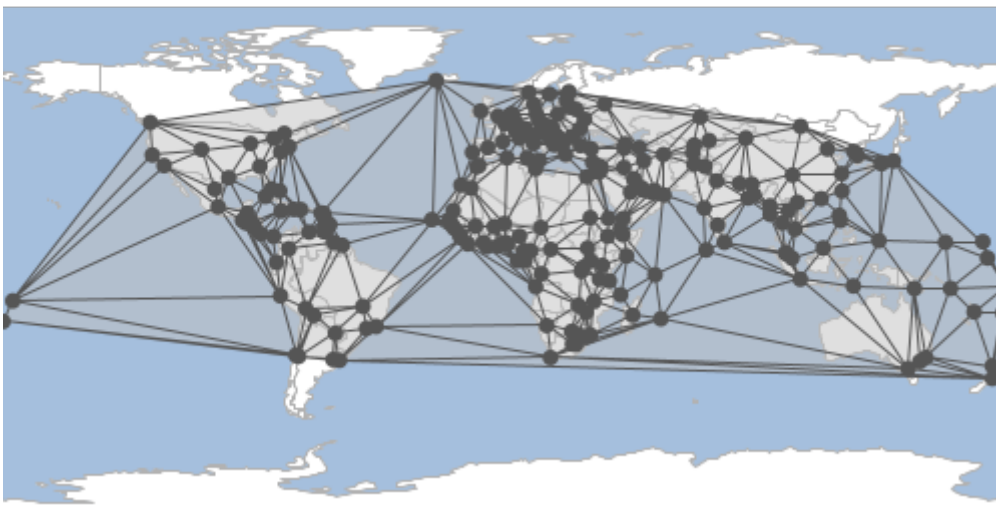

Geometry Reader

Convert a text stream of WKT geometries to a Layer.

Short Name	Long Name	Description
-t	--text	The text
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
	--help	Print the help message
	--web-help	Open help in a browser

places.txt


```
POINT (95.93096088300103 -21.052562876111054)
POINT (108.68699242651462 31.906673138178704)
POINT (67.21295358024213 37.71179581778536)
POINT (134.80355671499728 -81.23567389016853)
POINT (140.6972351264812 63.79594874701479)
```

```
cat places.txt | geoc vector geomr -o target/places.shp
```




Geometry Writer

Convert the input layer to a text stream of WKT geometries that can be read by the [geom commands](#).

Short Name	Long Name	Description
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector geomw -i target/locations.shp
```

```
POINT (-101.95042307162927 -31.178262939552468)
POINT (-8.143171830346688 86.94528458885901)
POINT (116.1548297506298 49.73603796911118)
POINT (81.72583460781794 -16.012283095956718)
POINT (96.95947497904126 66.1781910310543)
```

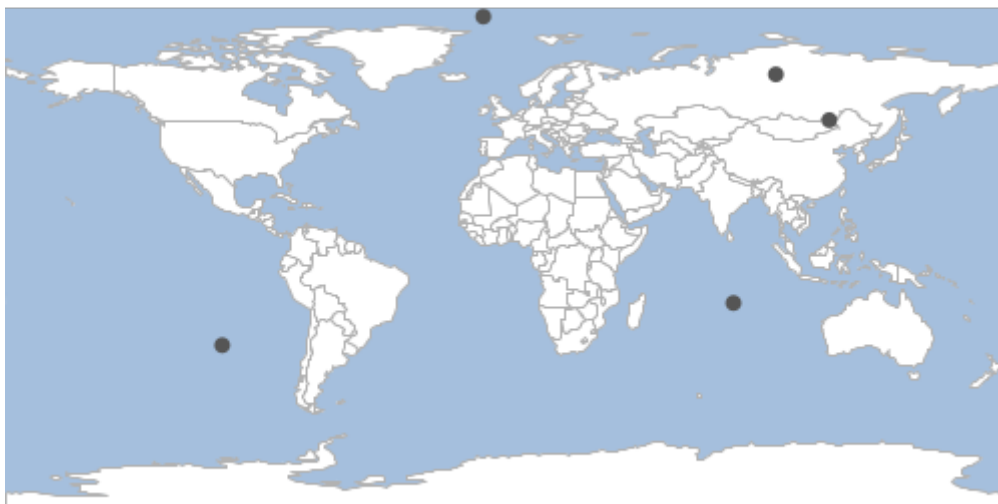


Ellipse

Calculate the ellipse around each feature in a Layer.

Short Name	Long Name	Description
-g	--geometry	The geometry expression
-w	--width	The width of the bounds
-h	--height	The height of the bounds
-p	--num-points	The number of points
-a	--rotation	The angle of rotation
-u	--unit	The unit can either be degrees(d) or radians(r). The default is degrees.
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector ellipse -i src/test/resources/data.gpkg -l countries -o target/ellipse.shp
```

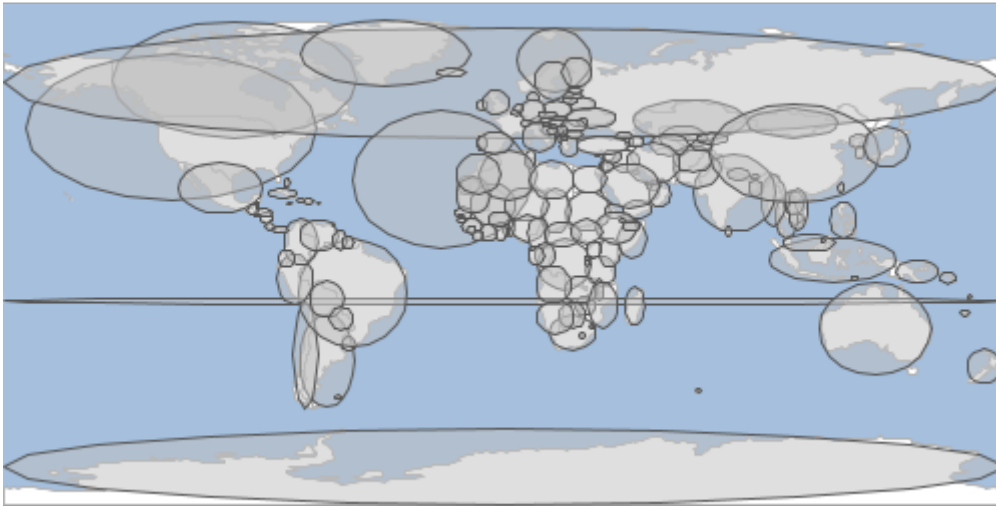


Envelope

Calculate the envelope of all the features in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector envelope -i src/test/resources/data.gpkg -l places -o target/envelope.shp
```

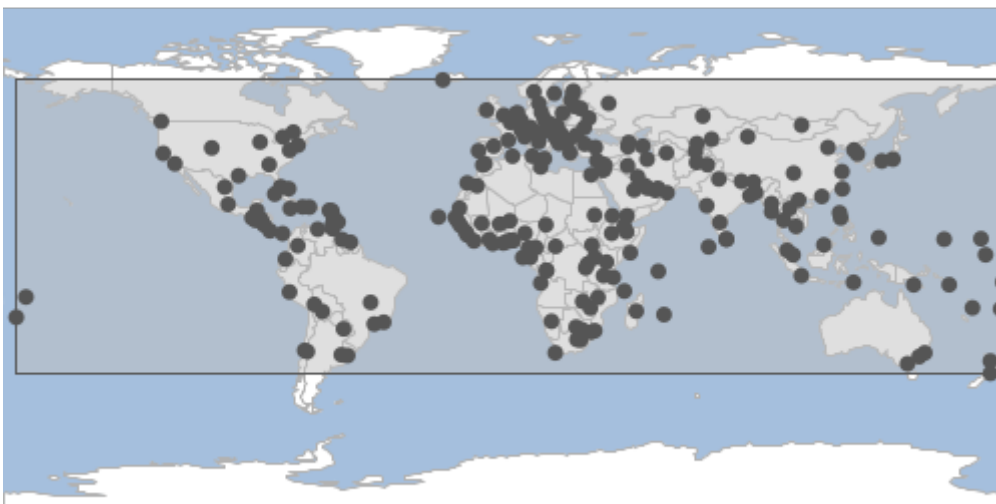


Envelopes

Calculate the envelopes for each feature in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector envelopes -i src/test/resources/data.gpkg -l countries -o  
target/envelopes.shp
```

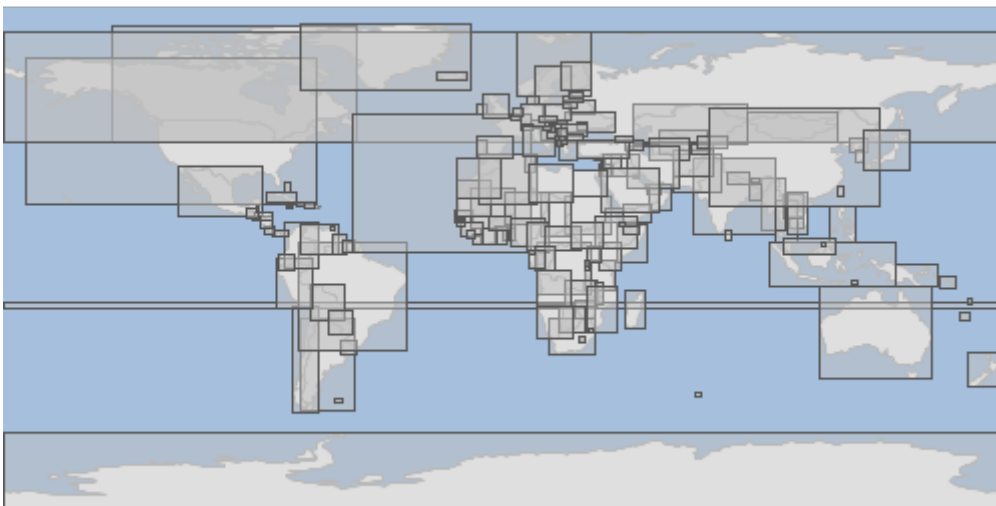

From

Create a Layer from a string of KML, CSV, GML, GEORSS, GEOBUF, GPX or GeoJSON.

Short Name	Long Name	Description
-t	--text	The text
-f	--format	The string format (CSV, GeoJSON, KML, GML)
-g	--geometry-type	The geometry type
-p	--format-options	A format options 'key=value'
-o	--output-workspace	The output workspace


Short Name	Long Name	Description
-r	--output-layer	The output layer
	--help	Print the help message
	--web-help	Open help in a browser

GeoJSON

points.json

```
{
  "type": "FeatureCollection",
  "features": [
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [-153.5772, 6.5246]
      },
      "properties": {
        "id": 0,
        "id": "randompoints.1"
      }
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [-20.1044, -75.0523]
      },
      "properties": {
        "id": 1,
        "id": "randompoints.2"
      }
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [7.4944, -32.6365]
      },
      "properties": {
        "id": 2,
        "id": "randompoints.3"
      }
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [33.4565, 7.3167]
      },
      "properties": {
        "id": 3,
        "id": "randompoints.4"
      }
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [169.5289, -62.6828]
      },
      "properties": {
        "id": 4,
        "id": "randompoints.5"
      }
    }
  ]
}
```

```
cat points.json | geoc vector from -f csv
```

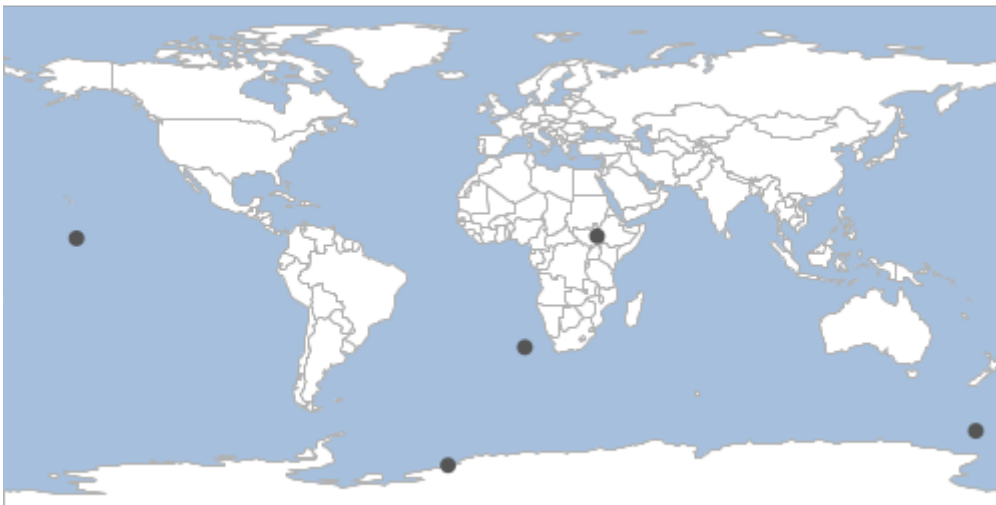

CSV

points.csv

```
"the_geom:Point:EPSG:4326","id:Integer"
"POINT (-130.5746382311777 40.29307470133844)","0"
"POINT (-160.66494628921032 -15.817933544852607)","1"
"POINT (-167.16562582446275 34.730037777073235)","2"
"POINT (95.83887180574465 -21.32343648531294)","3"
"POINT (-174.9758695028724 -62.4955039926686)","4"
```

```
cat points.csv | geoc vector from -f csv
```




Graticule - Hexagon

Create hexagon graticules.

Short Name	Long Name	Description
-g	--geometry	The geometry
-l	--length	The length
-s	--spacing	The spacing (defaults to -1)
-t	--orientation	The orientation (flat or angled).
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector graticule hexagon -g -180,-90,180,90 -l 10 -o target/hexagons.shp
```

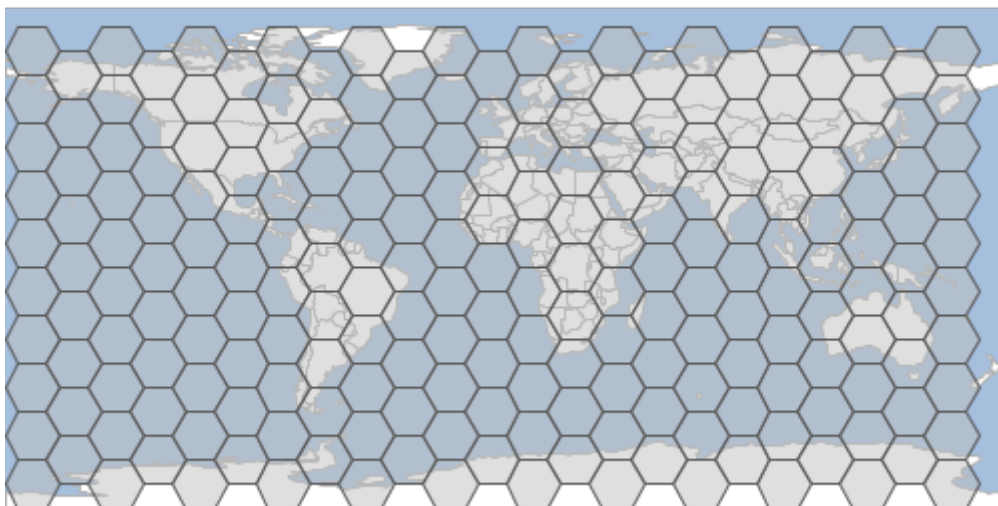


Graticule - Line

Create line graticules.

Short Name	Long Name	Description
-g	--geometry	The geometry
-s	--spacing	The spacing (defaults to -1)
-l	--line-definition	Each line definition has comma delimited orientation (vertical or horizontal), level, and spacing)
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector graticule line -g -180,-90,180,90 -l vertical,2,10 -l horizontal,1,2 -o
target/lines.shp
```

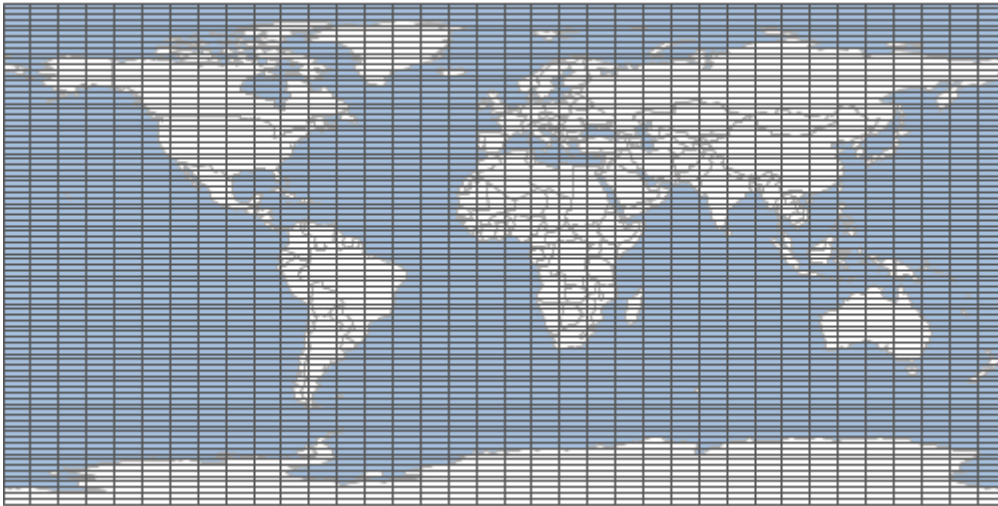


Graticule - Oval

Create oval graticules.

Short Name	Long Name	Description
-g	--geometry	The geometry
-l	--length	The length
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector graticule oval -g -180,-90,180,90 -l 20 -o target/ovals.shp
```

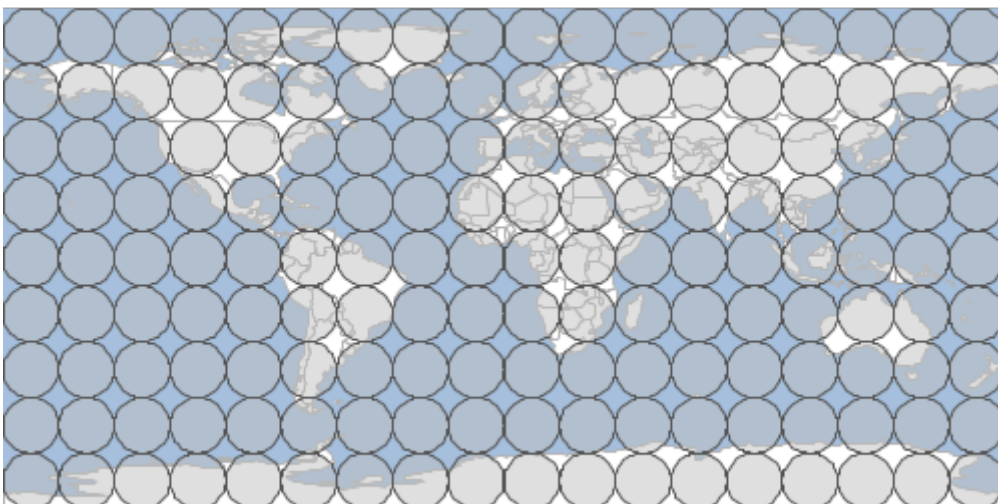


Graticule - Rectangle

Create rectangle graticules.

Short Name	Long Name	Description
-g	--geometry	The geometry
-w	--width	The width
-h	--height	The height
-s	--spacing	The spacing (defaults to -1)
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector graticule rectangle -g -180,-90,180,90 -w 10 -h 20 -o  
target/rectangles.shp
```

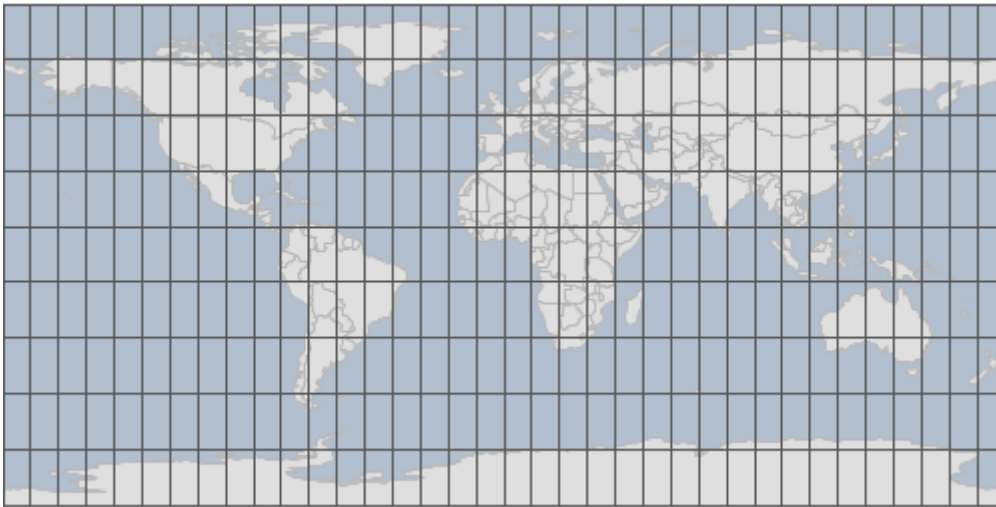


Graticule - Square

Create square graticules.

Short Name	Long Name	Description
-g	--geometry	The geometry
-l	--length	The length
-s	--spacing	The spacing (defaults to -1)
-o	--output-workspace	The output workspace

Short Name	Long Name	Description
-r	--output-layer	The output layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector graticule square -g -180,-90,180,90 -l 20 -o target/squares.shp
```

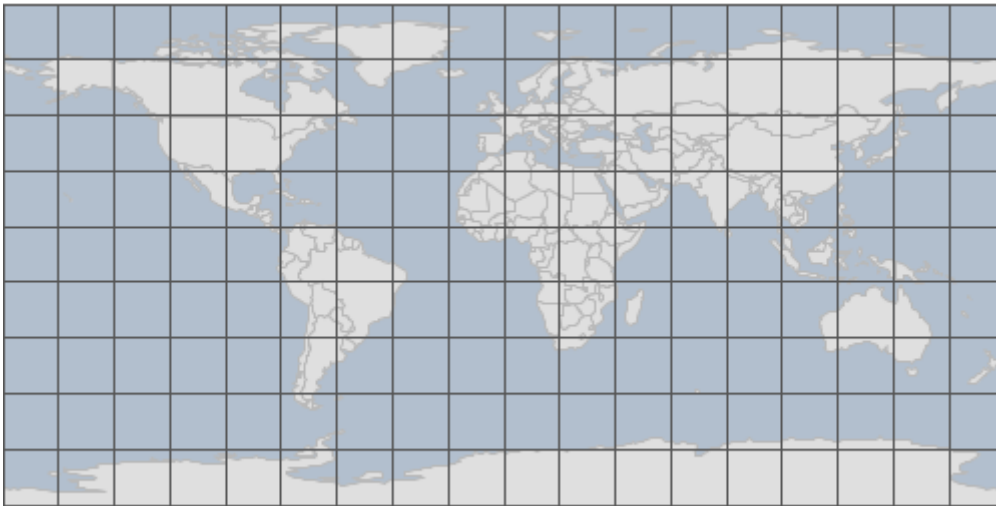

Info

Get information about a Layer.

Short Name	Long Name	Description
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector info -i src/test/resources/data.gpkg -l countries
```

```

Name: countries
Geometry: MultiPolygon
Extent: -180.0, -90.0, 180.00000000000006, 83.64513000000001
Projection ID: EPSG:4326
Projection WKT: GEOGCS["WGS 84",
  DATUM["World Geodetic System 1984",
    SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG","7030"]],
    AUTHORITY["EPSG","6326"]],
  PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG","8901"]],
  UNIT["degree", 0.017453292519943295],
  AXIS["Geodetic longitude", EAST],
  AXIS["Geodetic latitude", NORTH],
  AUTHORITY["EPSG","4326"]]
Feature Count: 177
Fields:
the_geom: MultiPolygon
featurecla: String
scalerank: Integer
LABELRANK: Integer
SOVEREIGNT: String
SOV_A3: String
ADM0_DIF: Integer
...

```

Interior Point


Calculate the interior point of all the features in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```

geoc vector interiorPoint -i src/test/resources/data.gpkg -l countries -o
target/countries_interiorpoints.shp

```

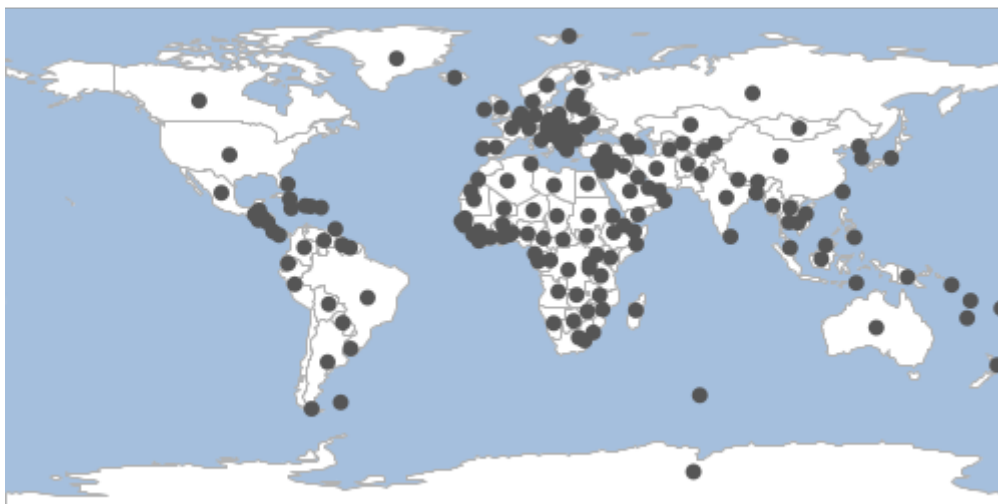

Layer List

List the Layers in a Workspace.

Short Name	Long Name	Description
-i	--input-workspace	The input workspace
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector list layers -i src/test/resources/data.gpkg
```

```
countries  
graticules  
ocean  
places  
rivers  
states
```


Minimum Bounding Circle

Calculate the minimum bounding circle of all the features in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer

Short Name	Long Name	Description
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector mincircle -i src/test/resources/data.gpkg -l places -o
target/mincircle.shp
```

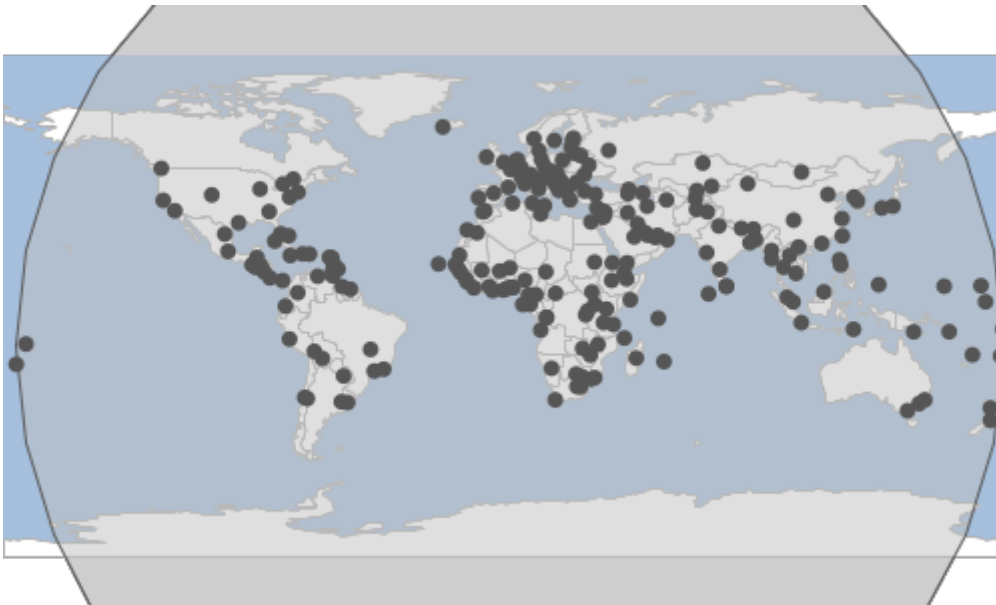


Minimum Bounding Circles

Calculate the minimum bounding circle for each feature in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector mincircles -i src/test/resources/data.gpkg -l countries -o
target/mincircles.shp
```

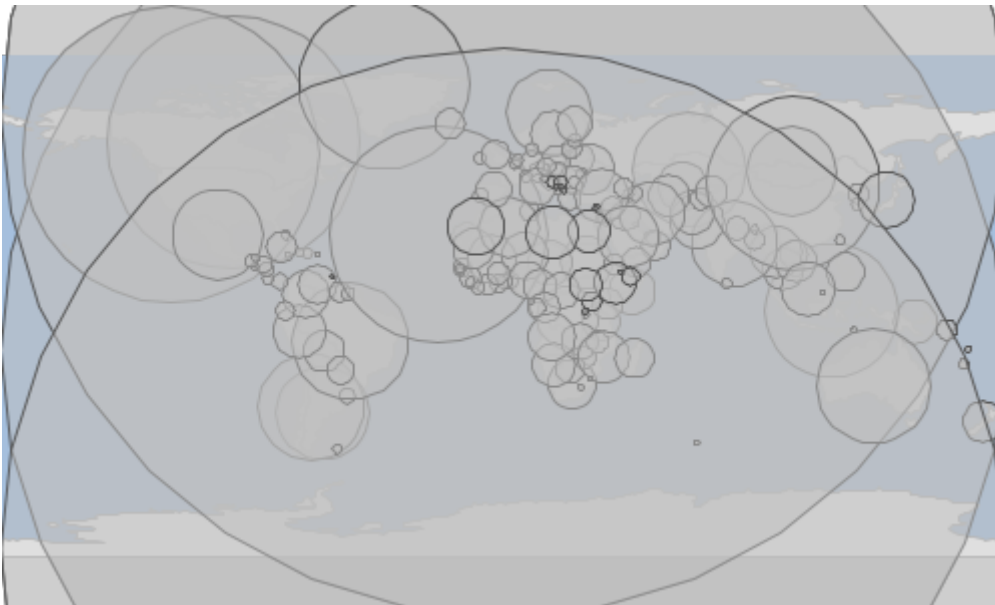


Minimum Bounding Rectangle

Calculate the minimum bounding rectangle of all the features in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector minrect -i src/test/resources/data.gpkg -l places -o target/minrect.shp
```

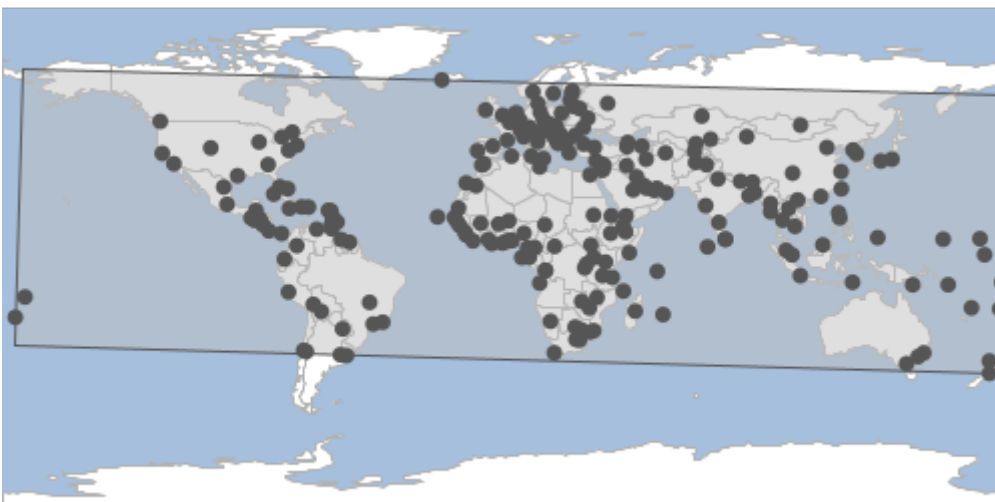


Minimum Bounding rects

Calculate the minimum bounding rectangle for each feature in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector minrects -i src/test/resources/data.gpkg -l countries -o  
target/minrects.shp
```

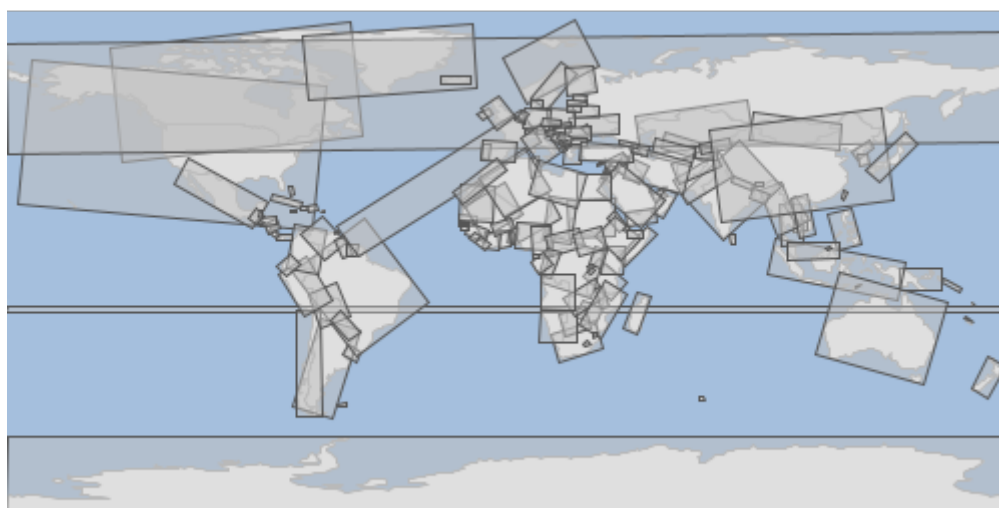


Octagonal Envelope

Calculate the octagonal envelope of the input Layer and save it to the output Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector octagonalenvelope -i src/test/resources/data.gpkg -l places -o
target/octagonalenvelope.shp
```

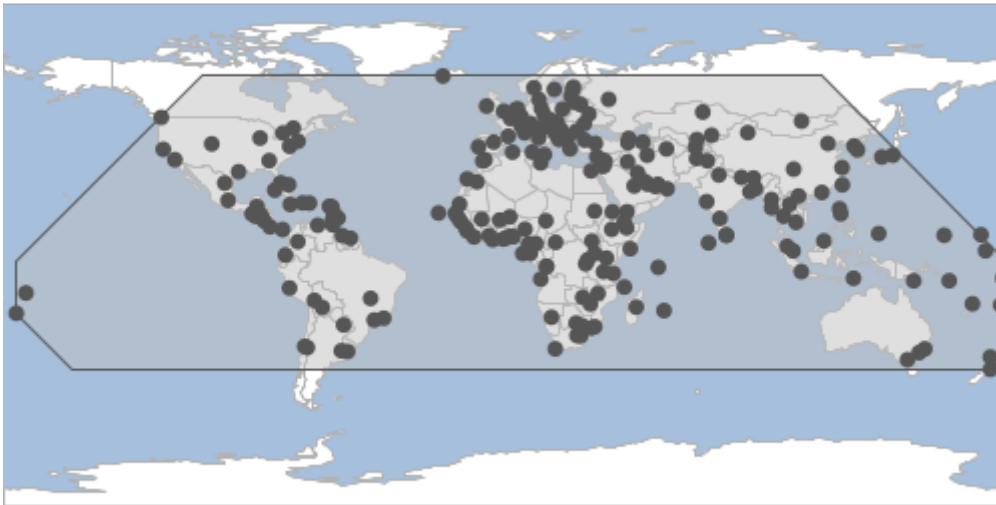


Octangonal Envelopes

Calculate the octagonal envelope for each Feature of the input Layer and save it to the output Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector octagonalenvelopes -i src/test/resources/data.gpkg -l countries -o
target/octagonalenvelopes.shp
```

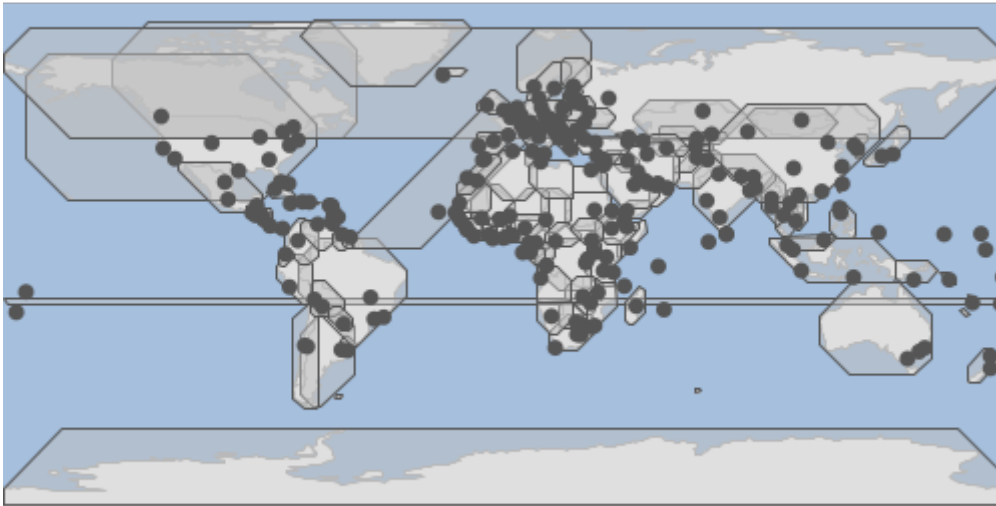



Project

Project the input Layer to another Projection and save it as the output Layer.

Short Name	Long Name	Description
-s	--source-projection	The source projection
-t	--target-projection	The target projection
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector project -i src/test/resources/data.gpkg -l places -o target/mercator.gpkg
-r places -s EPSG:4326 -t EPSG:3857
```

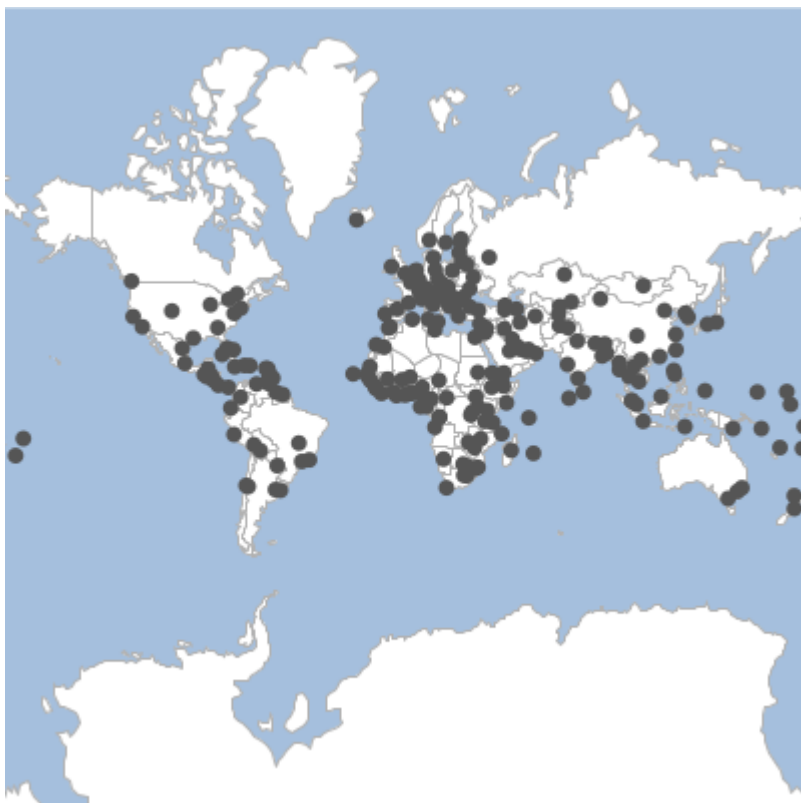


Random Points

Generate random points.

Short Name	Long Name	Description
-n	--number	The number of points
-p	--projection	The projection
-g	--geometry	The geometry
-d	--grid	Whether to create random points in grid
-c	--constrained-to-circle	Whether the points should be constrained to a circle or not
-f	--gutter-fraction	The size of the gutter between cells
-e	--geom-fieldname	The geometry field name
-u	--id-fieldname	The id field name
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector randompoints -n 100 -g -180,-90,180,90 -o target/randompoints.shp
```

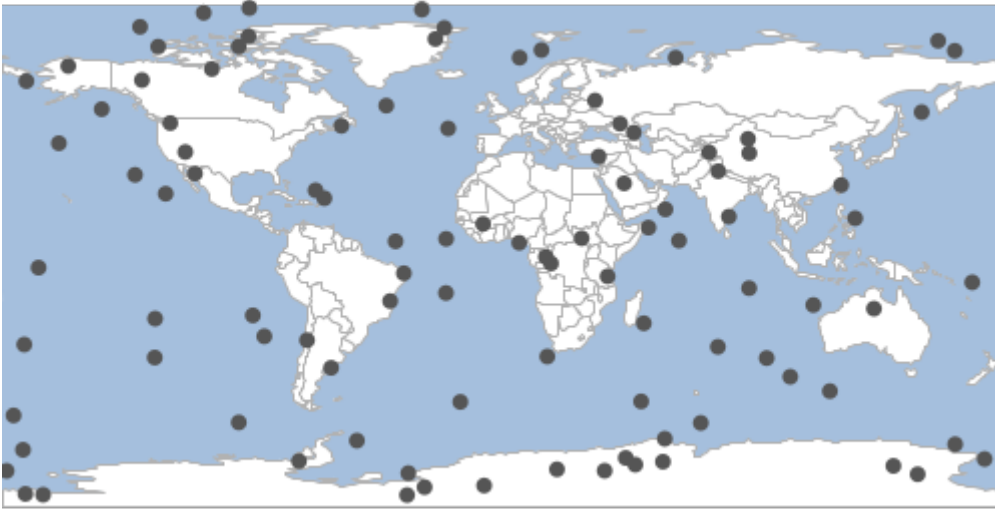


Rectangle

Create a rectangle shape around each feature of the input Layer.

Short Name	Long Name	Description
-g	--geometry	The geometry expression
-w	--width	The width of the bounds
-h	--height	The height of the bounds
-p	--num-points	The number of points
-a	--rotation	The angle of rotation
-u	--unit	The unit can either be degrees(d) or radians(r). The default is degrees.
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector rectangle -i src/test/resources/data.gpkg -l countries -o  
target/rectangle.shp
```

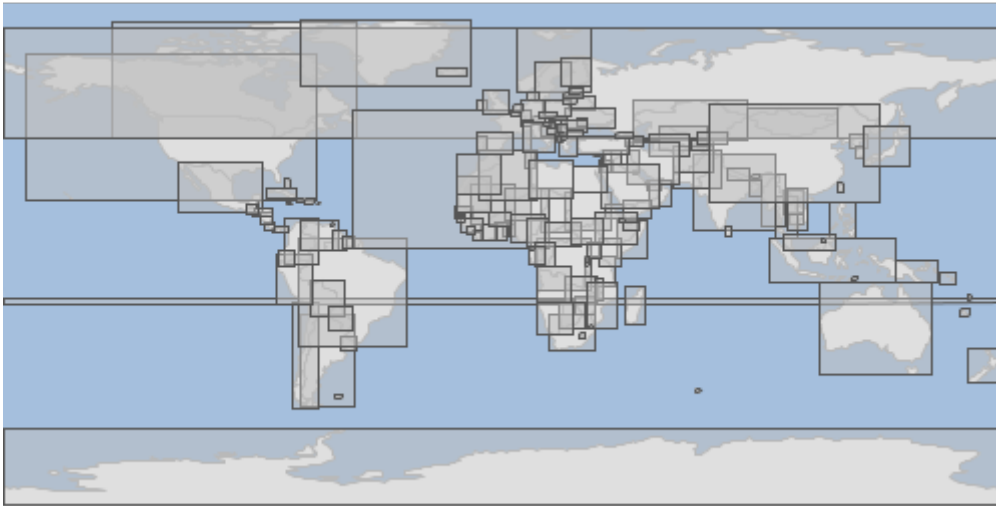


Shapes

Arc

Create a arc shape around each feature of the input Layer.

Short Name	Long Name	Description
-s	--start-angle	The start angle
-e	--end-angle	The end angle
-g	--geometry	The geometry expression
-w	--width	The width of the bounds
-h	--height	The height of the bounds
-p	--num-points	The number of points
-a	--rotation	The angle of rotation
-u	--unit	The unit can either be degrees(d) or radians(r). The default is degrees.
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector arc -i src/test/resources/data.gpkg -l countries -o
target/country_arcs.shp -s 45 -e 90
```

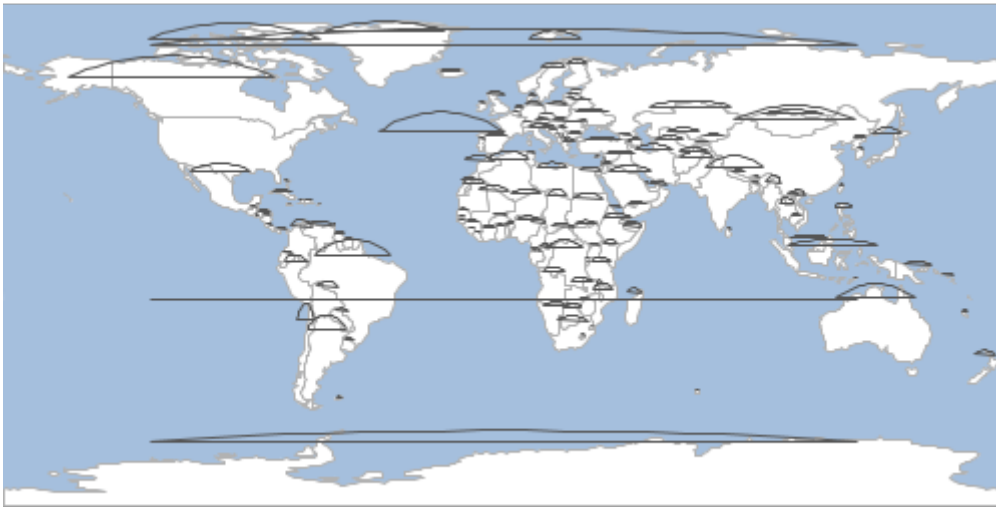


Arc Polygon

Create a arc polygon shape around each feature of the input Layer.

Short Name	Long Name	Description
-s	--start-angle	The start angle
-e	--end-angle	The end angle
-g	--geometry	The geometry expression
-w	--width	The width of the bounds
-h	--height	The height of the bounds
-p	--num-points	The number of points
-a	--rotation	The angle of rotation
-u	--unit	The unit can either be degrees(d) or radians(r). The default is degrees.
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector arcpolygon -i src/test/resources/data.gpkg -l countries -o
target/country_arcs.shp -s 45 -e 90
```

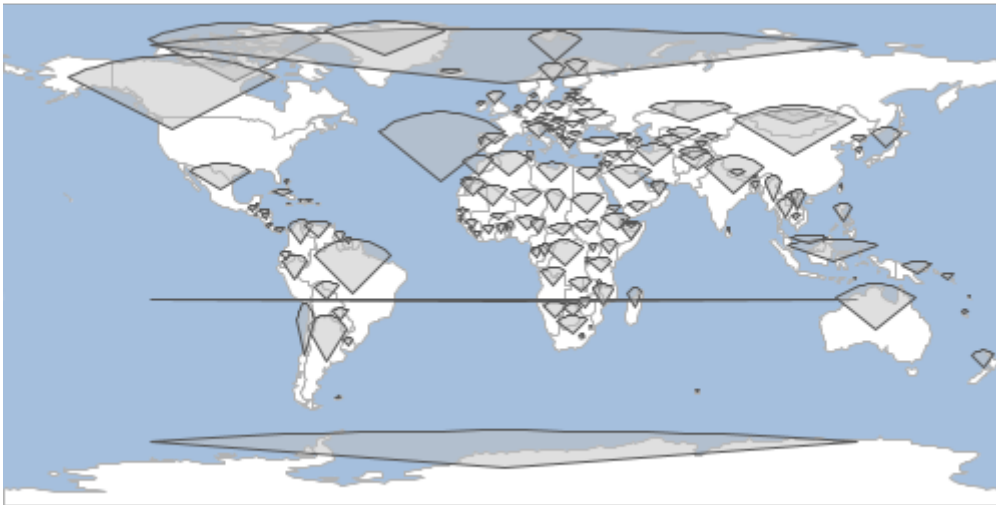


Sine Star

Create a sinestar shape around each feature of the input Layer.

Short Name	Long Name	Description
-n	--number-of-arms	The number of arms
-e	--arm-length-ratio	The arm length ratio
-g	--geometry	The geometry expression
-w	--width	The width of the bounds
-h	--height	The height of the bounds
-p	--num-points	The number of points
-a	--rotation	The angle of rotation
-u	--unit	The unit can either be degrees(d) or radians(r). The default is degrees.
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector sinestar -i src/test/resources/data.gpkg -l countries -o
target/country_stars.shp -n 10 -e 2
```

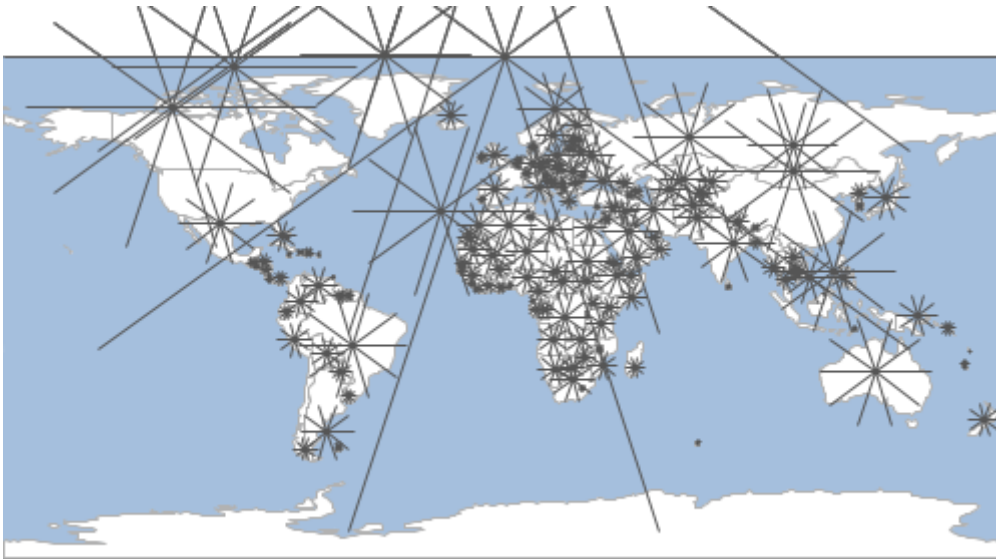

To

Write a Layer to a String format (CSV, GeoJSON, KML, GML, GEORSS, GPX).

Short Name	Long Name	Description
-f	--format	The string format (CSV, GeoJSON, KML, GML, GEORSS, GPX)
-p	--format-options	A format options 'key=value'
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

GeoJSON

```
geoc vector to -i target/randompoints.shp -f geojson
```

```
{
  "type": "FeatureCollection",
  "features": [
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [138.3927, -52.2107]
      },
      "properties": {
        "id": 0,
        "id": "randompoints.1"
      }
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [94.3947, -39.2645]
      },
      "properties": {
        "id": 1,
        "id": "randompoints.2"
      }
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [166.4458, -38.6346]
      },
      "properties": {
        "id": 2,
        "id": "randompoints.3"
      }
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [3.9661, 13.099]
      },
      "properties": {
        "id": 3,
        "id": "randompoints.4"
      }
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [87.4897, -14.8495]
      },
      "properties": {
        "id": 4,
        "id": "randompoints.5"
      }
    }
  ]
}
```

CSV

```
geoc vector to -i target/randompoints.shp -f csv
```

```
"the_geom:Point:EPSG:4326","id:Integer"
"POINT (23.282377707499933 -81.0943265704691)", "0"
"POINT (28.925226965405642 15.19152528094962)", "1"
"POINT (-152.1442652356808 76.97304717394425)", "2"
"POINT (-114.04075540627004 84.13220930928406)", "3"
"POINT (40.69373408702995 -15.01033745799694)", "4"
```

Schema

Get a Layer's Schema.

Short Name	Long Name	Description
-p	--pretty-print	Whether to pretty print the output
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector schema -i src/test/resources/data.gpkg -l countries -p
```

```
-----
| name      | type      |
-----
| the_geom  | MultiPolygon |
| featurecla | String    |
| scalerank | Integer   |
| LABELRANK | Integer   |
| SOVEREIGNT | String    |
-----
```


SOV_A3	String	
ADM0_DIF	Integer	
LEVEL	Integer	
TYPE	String	
ADMIN	String	
ADM0_A3	String	
GEOU_DIF	Integer	
GEUNIT	String	
GU_A3	String	
SU_DIF	Integer	
SUBUNIT	String	
SU_A3	String	
BRK_DIFF	Integer	
NAME	String	
NAME_LONG	String	
BRK_A3	String	
BRK_NAME	String	
ABBREV	String	
POSTAL	String	
FORMAL_EN	String	
FORMAL_FR	String	
NAME_CIAWF	String	
NOTE_ADM0	String	
NOTE_BRK	String	
NAME_SORT	String	
NAME_ALT	String	
MAPCOLOR7	Integer	
MAPCOLOR8	Integer	
MAPCOLOR9	Integer	
MAPCOLOR13	Integer	
POP_EST	Double	
POP_RANK	Integer	
POP_YEAR	Integer	
GDP_MD	Integer	
GDP_YEAR	Integer	
ECONOMY	String	
INCOME_GRP	String	
FIPS_10	String	
ISO_A2	String	
ISO_A2_EH	String	
ISO_A3	String	
ISO_A3_EH	String	
ISO_N3	String	
ISO_N3_EH	String	
UN_A3	String	
WB_A2	String	
WB_A3	String	
WOE_ID	Integer	
WOE_ID_EH	Integer	
WOE_NOTE	String	
ADM0_A3_IS	String	

ADM0_A3_US	String	
ADM0_A3_FR	String	
ADM0_A3_RU	String	
ADM0_A3_ES	String	
ADM0_A3_CN	String	
ADM0_A3_TW	String	
ADM0_A3_IN	String	
ADM0_A3_NP	String	
ADM0_A3_PK	String	
ADM0_A3_DE	String	
ADM0_A3_GB	String	
ADM0_A3_BR	String	
ADM0_A3_IL	String	
ADM0_A3_PS	String	
ADM0_A3_SA	String	
ADM0_A3_EG	String	
ADM0_A3_MA	String	
ADM0_A3_PT	String	
ADM0_A3_AR	String	
ADM0_A3_JP	String	
ADM0_A3_KO	String	
ADM0_A3_VN	String	
ADM0_A3_TR	String	
ADM0_A3_ID	String	
ADM0_A3_PL	String	
ADM0_A3_GR	String	
ADM0_A3_IT	String	
ADM0_A3_NL	String	
ADM0_A3_SE	String	
ADM0_A3_BD	String	
ADM0_A3_UA	String	
ADM0_A3_UN	Integer	
ADM0_A3_WB	Integer	
CONTINENT	String	
REGION_UN	String	
SUBREGION	String	
REGION_WB	String	
NAME_LEN	Integer	
LONG_LEN	Integer	
ABBREV_LEN	Integer	
TINY	Integer	
HOMEPART	Integer	
MIN_ZOOM	Double	
MIN_LABEL	Double	
MAX_LABEL	Double	
NE_ID	Long	
WIKIDATAID	String	
NAME_AR	String	
NAME_BN	String	
NAME_DE	String	
NAME_EN	String	

NAME_ES	String	
NAME_FA	String	
NAME_FR	String	
NAME_EL	String	
NAME_HE	String	
NAME_HI	String	
NAME_HU	String	
NAME_ID	String	
NAME_IT	String	
NAME_JA	String	
NAME_KO	String	
NAME_NL	String	
NAME_PL	String	
NAME_PT	String	
NAME_RU	String	
NAME_SV	String	
NAME_TR	String	
NAME_UK	String	
NAME_UR	String	
NAME_VI	String	
NAME_ZH	String	
NAME_ZHT	String	
FCLASS_ISO	String	
FCLASS_US	String	
FCLASS_FR	String	
FCLASS_RU	String	
FCLASS_ES	String	
FCLASS_CN	String	
FCLASS_TW	String	
FCLASS_IN	String	
FCLASS_NP	String	
FCLASS_PK	String	
FCLASS_DE	String	
FCLASS_GB	String	
FCLASS_BR	String	
FCLASS_IL	String	
FCLASS_PS	String	
FCLASS_SA	String	
FCLASS_EG	String	
FCLASS_MA	String	
FCLASS_PT	String	
FCLASS_AR	String	
FCLASS_JP	String	
FCLASS_KO	String	
FCLASS_VN	String	
FCLASS_TR	String	
FCLASS_ID	String	
FCLASS_PL	String	
FCLASS_GR	String	
FCLASS_IT	String	
FCLASS_NL	String	

FCLASS_SE	String	
FCLASS_BD	String	
FCLASS_UA	String	

Unique Values

List the unique values in a Layer's Field.

Short Name	Long Name	Description
-f	--field	The field name
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector uniquevalues -i src/test/resources/data.gpkg -l countries -f ECONOMY
```

1. Developed region: G7
2. Developed region: nonG7
3. Emerging region: BRIC
4. Emerging region: MIKT
5. Emerging region: G20
6. Developing region
7. Least developed region

Unique Values Style

Create an SLD document where each unique value in the Layer is a rule.

Short Name	Long Name	Description
-f	--field	The field name
-c	--colors	The color brewer palette name or a list of colors (space delimited)
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector uniquevaluesstyle -i src/test/resources/data.gpkg -l countries -f ECONOMY  
-c GREENS
```

```
<?xml version="1.0" encoding="UTF-8"?><sld:StyledLayerDescriptor xmlns=  
"http://www.opengis.net/sld" xmlns:sld="http://www.opengis.net/sld" xmlns:gml=  
"http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc" version="1.0.0">  
  <sld:UserLayer>  
    <sld:LayerFeatureConstraints>  
      <sld:FeatureTypeConstraint/>  
    </sld:LayerFeatureConstraints>  
    <sld:UserStyle>  
      <sld:Name>Default Styler</sld:Name>  
      <sld:FeatureTypeStyle>  
        <sld:Name>name</sld:Name>  
        <sld:Rule>  
          <sld:Name>1. Developed region: G7</sld:Name>  
          <ogc:Filter>  
            <ogc:PropertyIsEqualTo>  
              <ogc:PropertyName>ECONOMY</ogc:PropertyName>  
              <ogc:Literal>1. Developed region: G7</ogc:Literal>  
            </ogc:PropertyIsEqualTo>  
          </ogc:Filter>  
          <sld:PolygonSymbolizer>  
            <sld:Fill>  
              <sld:CssParameter name="fill">#f7fcf5</sld:CssParameter>  
            </sld:Fill>  
          </sld:PolygonSymbolizer>  
          <sld:LineSymbolizer>  
            <sld:Stroke>  
              <sld:CssParameter name="stroke">#acb0ab</sld:CssParameter>  
              <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>  
            </sld:Stroke>  
          </sld:LineSymbolizer>  
        </sld:Rule>  
        <sld:Rule>  
          <sld:Name>2. Developed region: nonG7</sld:Name>  
          <ogc:Filter>  
            <ogc:PropertyIsEqualTo>  
              <ogc:PropertyName>ECONOMY</ogc:PropertyName>  
              <ogc:Literal>2. Developed region: nonG7</ogc:Literal>  
            </ogc:PropertyIsEqualTo>  
          </ogc:Filter>  
          <sld:PolygonSymbolizer>  
            <sld:Fill>  
              <sld:CssParameter name="fill">#e5f5e0</sld:CssParameter>  
            </sld:Fill>  
          </sld:PolygonSymbolizer>  
          <sld:LineSymbolizer>  
            <sld:Stroke>
```

```

        <sld:CssParameter name="stroke">#a0ab9c</sld:CssParameter>
        <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>
    </sld:Stroke>
</sld:LineSymbolizer>
</sld:Rule>
<sld:Rule>
    <sld:Name>3. Emerging region: BRIC</sld:Name>
    <ogc:Filter>
        <ogc:PropertyIsEqualTo>
            <ogc:PropertyName>ECONOMY</ogc:PropertyName>
            <ogc:Literal>3. Emerging region: BRIC</ogc:Literal>
        </ogc:PropertyIsEqualTo>
    </ogc:Filter>
    <sld:PolygonSymbolizer>
        <sld:Fill>
            <sld:CssParameter name="fill">#c7e9c0</sld:CssParameter>
        </sld:Fill>
    </sld:PolygonSymbolizer>
    <sld:LineSymbolizer>
        <sld:Stroke>
            <sld:CssParameter name="stroke">#8ba386</sld:CssParameter>
            <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>
        </sld:Stroke>
    </sld:LineSymbolizer>
</sld:Rule>
<sld:Rule>
    <sld:Name>4. Emerging region: MIKT</sld:Name>
    <ogc:Filter>
        <ogc:PropertyIsEqualTo>
            <ogc:PropertyName>ECONOMY</ogc:PropertyName>
            <ogc:Literal>4. Emerging region: MIKT</ogc:Literal>
        </ogc:PropertyIsEqualTo>
    </ogc:Filter>
    <sld:PolygonSymbolizer>
        <sld:Fill>
            <sld:CssParameter name="fill">#a1d99b</sld:CssParameter>
        </sld:Fill>
    </sld:PolygonSymbolizer>
    <sld:LineSymbolizer>
        <sld:Stroke>
            <sld:CssParameter name="stroke">#70976c</sld:CssParameter>
            <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>
        </sld:Stroke>
    </sld:LineSymbolizer>
</sld:Rule>
<sld:Rule>
    <sld:Name>5. Emerging region: G20</sld:Name>
    <ogc:Filter>
        <ogc:PropertyIsEqualTo>
            <ogc:PropertyName>ECONOMY</ogc:PropertyName>
            <ogc:Literal>5. Emerging region: G20</ogc:Literal>

```

```


    </ogc:PropertyIsEqualTo>
  </ogc:Filter>
  <sld:PolygonSymbolizer>
    <sld:Fill>
      <sld:CssParameter name="fill">#74c476</sld:CssParameter>
    </sld:Fill>
  </sld:PolygonSymbolizer>
  <sld:LineSymbolizer>
    <sld:Stroke>
      <sld:CssParameter name="stroke">#518952</sld:CssParameter>
      <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>
    </sld:Stroke>
  </sld:LineSymbolizer>
</sld:Rule>
<sld:Rule>
  <sld:Name>6. Developing region</sld:Name>
  <ogc:Filter>
    <ogc:PropertyIsEqualTo>
      <ogc:PropertyName>ECONOMY</ogc:PropertyName>
      <ogc:Literal>6. Developing region</ogc:Literal>
    </ogc:PropertyIsEqualTo>
  </ogc:Filter>
  <sld:PolygonSymbolizer>
    <sld:Fill>
      <sld:CssParameter name="fill">#41ab5d</sld:CssParameter>
    </sld:Fill>
  </sld:PolygonSymbolizer>
  <sld:LineSymbolizer>
    <sld:Stroke>
      <sld:CssParameter name="stroke">#2d7741</sld:CssParameter>
      <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>
    </sld:Stroke>
  </sld:LineSymbolizer>
</sld:Rule>
<sld:Rule>
  <sld:Name>7. Least developed region</sld:Name>
  <ogc:Filter>
    <ogc:PropertyIsEqualTo>
      <ogc:PropertyName>ECONOMY</ogc:PropertyName>
      <ogc:Literal>7. Least developed region</ogc:Literal>
    </ogc:PropertyIsEqualTo>
  </ogc:Filter>
  <sld:PolygonSymbolizer>
    <sld:Fill>
      <sld:CssParameter name="fill">#238b45</sld:CssParameter>
    </sld:Fill>
  </sld:PolygonSymbolizer>
  <sld:LineSymbolizer>
    <sld:Stroke>
      <sld:CssParameter name="stroke">#186130</sld:CssParameter>
      <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>

```

```

        </sld:Stroke>
      </sld:LineSymbolizer>
    </sld:Rule>
  </sld:FeatureTypeStyle>
</sld:UserStyle>
</sld:UserLayer>
</sld:StyledLayerDescriptor>

```

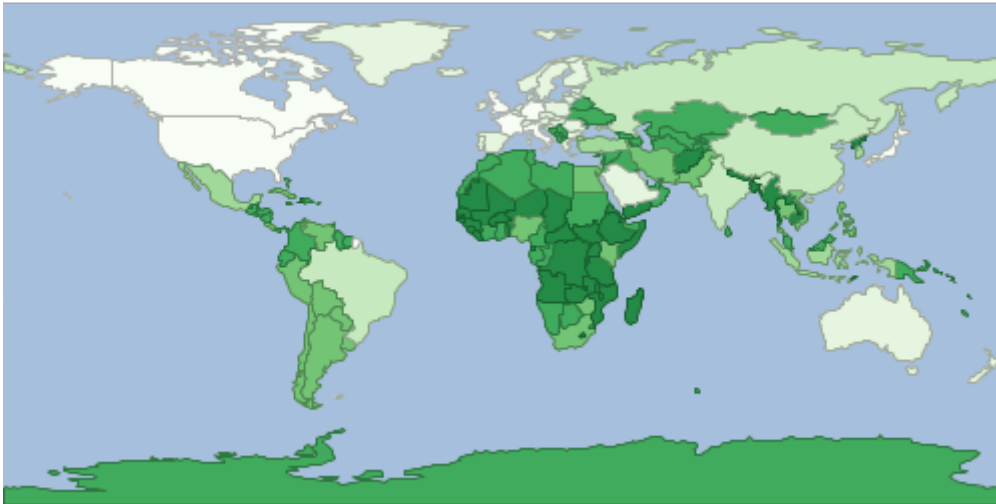

Voronoi

Calculate a voronoi diagram of all the features in a Layer.

Short Name	Long Name	Description
-o	--output-workspace	The output workspace
-r	--output-layer	The output layer
-i	--input-workspace	The input workspace
-l	--input-layer	The input layer
	--help	Print the help message
	--web-help	Open help in a browser

```
geoc vector voronoi -i src/test/resources/data.gpkg -l places -o target/voronoi.shp
```