Table of Contents

Vector Commands	
Add	
Add Fields	
Add Area Field	
Add Length Field	4
Add ID Field	5
Add XY Fields	6
Append	
Buffer	
Centroid	
Convexhull	9
Convexhulls	
Coordinates	
Count	
Create	
Default Style	
Delaunay	
Ellipse	
Envelope	
Envelopes	
From	
Graticule - Hexagon	20
Graticule - Line	20
Graticule - Oval	21
Graticule - Rectangle	
Graticule - Square	23
Info	24
Interior Point	
Layer List	26
Minimum Bounding Circle	26
Minimum Bounding Circles.	27
Minimum Bounding Rectangle	28
Minimum Bounding rects	29
Octangonal Envelope	29
Octangonal Envelopes.	30
Project	
Random Points	
Rectangle	

То	 	 	 	 ٠	 		 			 	 	 	 	 	 		 		 		 	 	 . 3	34
Schema .	 	 	 		 		 	٠		 	 	 	 	 	 		 		 		 	 	 . 3	35
Voronoi.	 	 	 		 		 	٠		 	 	 	 	 	 		 		 	 	 	 	 . :	38

Vector Commands

Add

Add a Feature to a Layer.

Short Name	Long Name	Description
-V	value	A value 'field=value'
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector add -i target/locations.shp -v id=1 -v name=Seattle -v "the_geom=POINT (- $122.334758\ 47.578364$)"

the_geom	name	id
POINT (-122.334758 47.578364)	Seattle	1



Add Fields

Add one or more Fields to a Layer

Short Name	Long Name	Description
-f	field	A Field in the format 'name=type'
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

 ${\tt geoc\ vector\ addfields\ -i\ target/locations.shp\ -o\ target/locations_idname.shp\ -f\ id=int\ -f\ name=string}$

Schema

Name	Туре
the_geom	Point
name	String
id	Integer

Add Area Field

Add an area Field.

Short Name	Long Name	Description
-f	area-fieldname	The name for the area Field
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector addareafield -i src/test/resources/states.shp -o target/states_area.shp

Schema

Name	Туре
the_geom	MultiPolygon
STATE_NAME	String
SUB_REGION	String
STATE_ABBR	String
AREA	Double

Values

STATE_NAME	SUB_REGION	STATE_ABBR	AREA
Illinois	E N Cen	IL	15.396467068063995
District of Columbia	S Atl	DC	0.017769720828999
Delaware	S Atl	DE	0.553317799081003
West Virginia	S Atl	WV	6.493194953114009
Maryland	S Atl	MD	2.625116892757991

Add Length Field

Add an Length Field.

Short Name	Long Name	Description
-f	length-fieldname	The name for the length Field
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector addlengthfield -i src/test/resources/data.gpkg -l rivers -o target/rivers_length.shp -f length

Schema

Name	Туре
the_geom	MultiLineString
name	String
label	String

Name	Туре
length	Double

Values

name	label	length
Brahmaputra	Brahmaputra	25.21241966609205
Mekong	Mekong	34.97738061177052
Ob	Ob	48.39570358268261
Peace	Peace	44.84258394589285
Donau	Donau	26.67902946932429

Add ID Field

Add an ID Field.

Short Name	Long Name	Description
-f	id-fieldname	The name for the ID Field
-S	start	The number of start at
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector addidfield -i src/test/resources/data.gpkg -l places -o
target/places_id.shp

Schema

Name	Туре
the_geom	Point
NAME	String
ID	Integer

Values

NAME	ID
Vatican City	1
San Marino	2
Vaduz	3
Lobamba	4
Luxembourg	5

Add XY Fields

Add XY Fields.

Short Name	Long Name	Description
-X	x-fieldname	The name for the X Field
-у	y-fieldname	The name for the Y Field
-a	algorithm	The XY generation algorithm (centroid or interiorpoint)
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector addxyfields -i src/test/resources/data.gpkg -l places -o
target/places_xy.shp -x x_coord -y y_coord -a centroid

Schema

Name	Туре
the_geom	Point
NAME	String
x_coord	Double
y_coord	Double

Values

NAME	x_coord	y_coord
Vatican City	12.4533865	41.9032822


NAME	x_coord	y_coord
San Marino	12.4417702	43.9360958
Vaduz	9.5166695	47.1337238
Lobamba	31.1999971	-26.4666675
Luxembourg	6.1300028	49.6116604

Append

Add a Features from one layer to another Layer.

Short Name	Long Name	Description
-k	other-workspace	The other workspace
-у	other-layer	The other layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector append -i target/points1.shp -k target/points2.shp

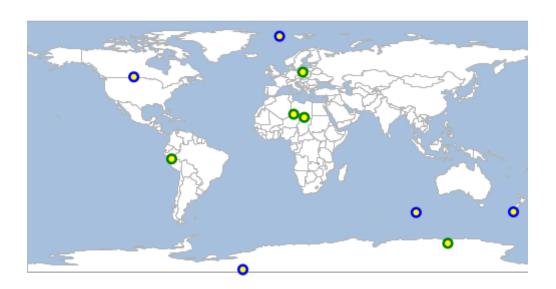

Buffer

Buffer all of the features in a Layer.

Short Name	Long Name	Description
-d	distance	The buffer distance

Short Name	Long Name	Description
-q	quadrantsegments	The number of quadrant segments
-S	singlesided	Whether buffer should be single sided or not
-c	capstyle	The cap style
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector buffer -i src/test/resources/data.gpkg -l places -o target/places_buffer.shp -d 10



Centroid

Calculate the centroid of all the features in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer

Short Name	Long Name	Description
	help	Print the help message
	web-help	Open help in a browser

geoc vector centroid -i src/test/resources/data.gpkg -l countries -o
target/countries_centroids.shp



Convexhull

Calculate the convexhull of all the features in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

 ${\tt geoc\ vector\ convexhull\ -i\ src/test/resources/data.gpkg\ -l\ places\ -o\ target/convexhull.shp}$



Convexhulls

Calculate the convexhulls for each feature in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector convexhulls -i src/test/resources/data.gpkg -l countries -o
target/convexhulls.shp



Coordinates

Extract coordinates from the input Layer and save them to the output Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector coordinates -i src/test/resources/data.gpkg -l states -o target/coordinates.shp



Count

Count the Features in a Layer.

Short Name	Long Name	Description
-t	type	Count features, geometries, or points
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector count -i src/test/resources/data.gpkg -l places

243

Create

Create a new Layer.

Short Name	Long Name	Description
-f	field	A Field in the format 'name=type'
-0	output-workspace	The output workspace
-r	output-layer	The output layer
	help	Print the help message

Short Name	Long Name	Description
	web-help	Open help in a browser

geoc vector create -o target/locations.shp -f "the_geom=POINT EPSG:4326" -f id=integer
-f name=string

Name	Туре
the_geom	Point
name	String
id	Integer

Default Style

Get the default style for a Layer.

Short Name	Long Name	Description
-g	geometry-type	The geometry type
-c	color	The base color
-0	opacity	The opacity (defaults to 1.0)
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector defaultstyle -i src/test/resources/data.gpkg -l places -c cornflowerblue

```
<?xml version="1.0" encoding="UTF-8"?><sld:StyledLayerDescriptor xmlns=</pre>
"http://www.opengis.net/sld" xmlns:sld="http://www.opengis.net/sld" xmlns:gml=
"http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc" version="1.0.0">
 <sld:UserLayer>
    <sld:LayerFeatureConstraints>
      <sld:FeatureTypeConstraint/>
    </sld:LayerFeatureConstraints>
   <sld:UserStyle>
      <sld:Name>Default Styler</sld:Name>
      <sld:FeatureTypeStyle>
        <sld:Name>name</sld:Name>
        <sld:Rule>
          <sld:PointSymbolizer>
            <sld:Graphic>
              <sld:Mark>
                <sld:WellKnownName>circle</sld:WellKnownName>
                <sld:Fill>
                  <sld:CssParameter name="fill">#6495ed</sld:CssParameter>
                </sld:Fill>
                <sld:Stroke>
                  <sld:CssParameter name="stroke">#4668a5</sld:CssParameter>
                  <sld:CssParameter name="stroke-width">0.1</sld:CssParameter>
                </sld:Stroke>
              </sld:Mark>
              <sld:Size>6</sld:Size>
            </sld:Graphic>
          </sld:PointSymbolizer>
        </sld:Rule>
      </sld:FeatureTypeStyle>
    </sld:UserStyle>
 </sld:UserLayer>
</sld:StyledLayerDescriptor>
```



Delaunay

Calculate a delaunay diagram of all the features in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector delaunay -i src/test/resources/data.gpkg -l places -o target/delaunay.shp




Ellipse

Calculate the ellipse around each feature in a Layer.

Short Name	Long Name	Description
-g	geometry	The geometry expression
-W	width	The width of the bounds
-h	height	The height of the bounds
-р	num-points	The number of points
-a	rotation	The angle of rotation

Short Name	Long Name	Description
-u	unit	The unit can either be degrees(d) or radians(r). The default is degrees.
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector ellipse -i src/test/resources/data.gpkg -l countries -o target/ellipse.shp

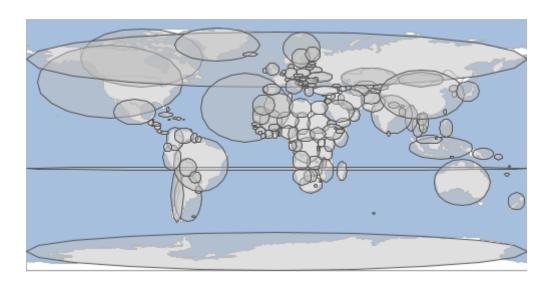


Envelope

Calculate the envelope of all the features in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector envelope -i src/test/resources/data.gpkg -l places -o target/envelope.shp

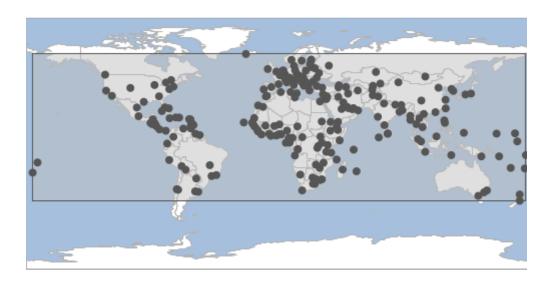


Envelopes

Calculate the envelopes for each feature in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector envelopes -i src/test/resources/data.gpkg -l countries -o
target/envelopes.shp

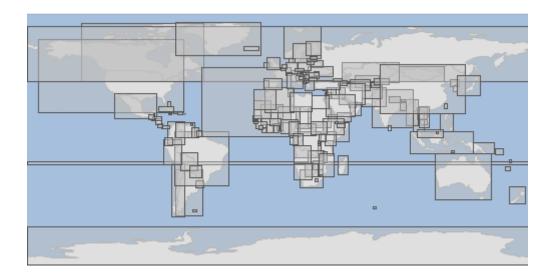

From

Create a Layer from a string of KML, CSV, GML, GEORSS, GEOBUF, GPX or GeoJSON.


Short Name	Long Name	Description
-t	text	The text
-f	format	The string format (CSV, GeoJSON, KML, GML)
-g	geometry-type	The geometry type
-р	format-options	A format options 'key=value'
-0	output-workspace	The output workspace
-r	output-layer	The output layer
	help	Print the help message
	web-help	Open help in a browser

GeoJSON

points.json

```
{"type":"FeatureCollection", "features":[{"type":"Feature", "geometry":{"type":"Point", "coordinates":[-9.8925,-74.2434]}, "properties":{"id":0}, "id":"randompoints.1"}, {"type":"Feature", "geometry":{"type":"Point", "coordinates":[176.0873,68.7298]}, "properties":{"id":1}, "id":"randompoints.2"}, {"type":"Feature", "geometry":{"type":"Point", "coordinates":[-97.5867,-5.3965]}, "properties":{"id":2}, "id":"randompoints.3"}, {"type":"Feature", "geometry":{"type":"Feature", "geometry":{"type":"Feature", "geometry":{"type":"Point", "coordinates":[129.8566,-40.9534]}, "properties":{"id":4}, "id":"randompoints.5"}]}
```

cat points.json | geoc vector from -f csv

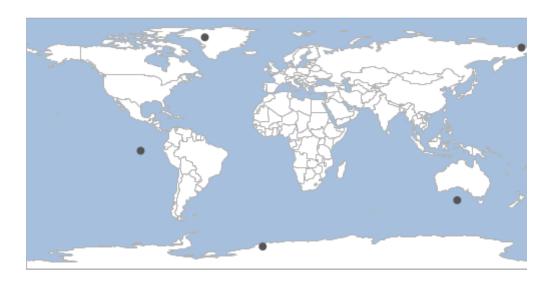

CSV

points.csv

```
"the_geom:Point:EPSG:4326","id:Integer"

"POINT (10.801736549432292 -26.472658420632975)","0"

"POINT (-151.64080036516918 -9.825637465635069)","1"

"POINT (-128.0609320910562 -67.55183762806348)","2"

"POINT (131.8658153924066 33.13518431045456)","3"

"POINT (-116.61674198670654 -31.435674558995885)","4"
```

cat points.csv | geoc vector from -f csv




Graticule - Hexagon

Create hexagon graticules.

Short Name	Long Name	Description
-g	geometry	The geometry
-1	length	The length
-S	spacing	The spacing (defaults to -1)
-t	orientation	The orientation (flat or angled).
-0	output-workspace	The output workspace
-r	output-layer	The output layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector graticule hexagon -g -180,-90,180,90 -l 10 -o target/hexagons.shp

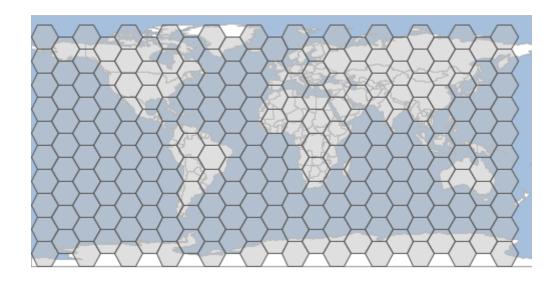


Graticule - Line

Create line graticules.

Short Name	Long Name	Description
-g	geometry	The geometry
-S	spacing	The spacing (defaults to -1)

Short Name	Long Name	Description
-1	line-definition	Each line definition has comma delimited orientation (vertical or horizontal), level, and spacing)
-0	output-workspace	The output workspace
-r	output-layer	The output layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector graticule line -g -180,-90,180,90 -l vertical,2,10 -l horizontal,1,2 -o target/lines.shp

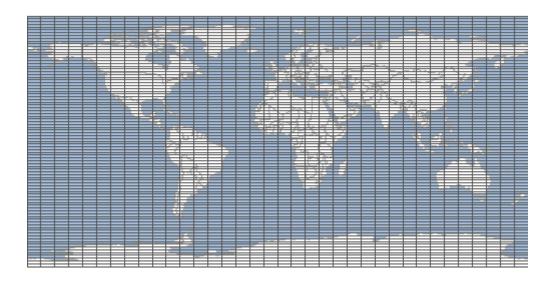


Graticule - Oval

Create oval graticules.

Short Name	Long Name	Description
-g	geometry	The geometry
-1	length	The length
-0	output-workspace	The output workspace
-r	output-layer	The output layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector graticule oval -g -180,-90,180,90 -l 20 -o target/ovals.shp

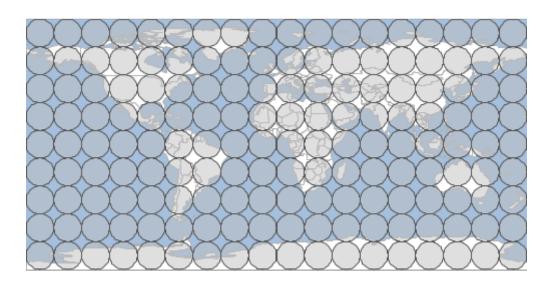


Graticule - Rectangle

Create rectangle graticules.

Short Name	Long Name	Description
-g	geometry	The geometry
-W	width	The width
-h	height	The height
-S	spacing	The spacing (defaults to -1)
-0	output-workspace	The output workspace
-r	output-layer	The output layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector graticule rectangle -g -180,-90,180,90 -w 10 -h 20 -o target/rectangles.shp

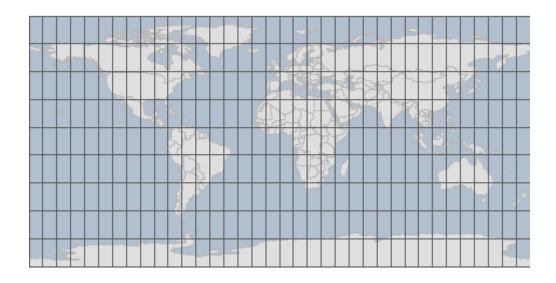


Graticule - Square

Create square graticules.

Short Name	Long Name	Description
-g	geometry	The geometry
-1	length	The length
-S	spacing	The spacing (defaults to -1)
-0	output-workspace	The output workspace
-r	output-layer	The output layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector graticule square -g -180,-90,180,90 -l 20 -o target/squares.shp

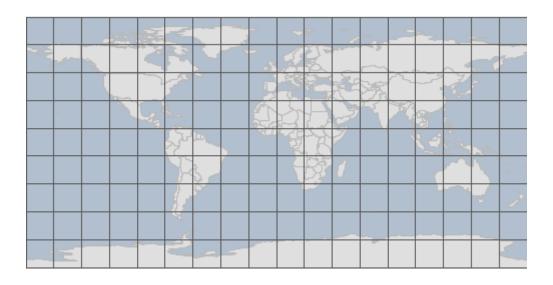

Info

Get information about a Layer.

Short Name	Long Name	Description
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector info -i src/test/resources/data.gpkg -l countries

```
Name: countries
Geometry: MultiPolygon
Extent: -180.0, -90.0, 180.0000000000006, 83.64513000000001
Projection ID: EPSG:4326
Projection WKT: GEOGCS["WGS 84",
  DATUM["World Geodetic System 1984",
    SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG","7030"]],
    AUTHORITY["EPSG", "6326"]],
  PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG", "8901"]],
  UNIT["degree", 0.017453292519943295],
  AXIS["Geodetic longitude", EAST],
  AXIS["Geodetic latitude", NORTH],
  AUTHORITY["EPSG","4326"]]
Feature Count: 177
Fields:
the_geom: MultiPolygon
featurecla: String
scalerank: Integer
LABELRANK: Integer
SOVEREIGNT: String
SOV_A3: String
ADM0_DIF: Integer
```

Interior Point

Calculate the interior point of all the features in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector interiorPoint -i src/test/resources/data.gpkg -l countries -o
target/countries_interiorpoints.shp



Layer List

List the Layers in a Workspace.

Short Name	Long Name	Description
-i	input-workspace	The input workspace
	help	Print the help message
	web-help	Open help in a browser

geoc vector list layers -i src/test/resources/data.gpkg

countries
graticules
ocean
places
rivers
states

Minimum Bounding Circle

Calculate the minimum bounding circle of all the features in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer

Short Name	Long Name	Description
	help	Print the help message
	web-help	Open help in a browser

geoc vector mincircle -i src/test/resources/data.gpkg -l places -o
target/mincircle.shp



Minimum Bounding Circles

Calculate the minimum bounding circle for each feature in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector mincircles -i src/test/resources/data.gpkg -l countries -o
target/mincircles.shp



Minimum Bounding Rectangle

Calculate the minimum bounding rectangle of all the features in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector minrect -i src/test/resources/data.gpkg -l places -o target/minrect.shp



Minimum Bounding rects

Calculate the minimum bounding rectangle for each feature in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector minrects -i src/test/resources/data.gpkg -l countries -o
target/minrects.shp



Octangonal Envelope

Calculate the octagonal envelope of the input Layer and save it to the output Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-l	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector octagonalenvelope -i src/test/resources/data.gpkg -l places -o
target/octagonalenvelope.shp



Octangonal Envelopes

Calculate the octagonal envelope for each Feature of the input Layer and save it to the output Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector octagonalenvelopes -i src/test/resources/data.gpkg -l countries -o
target/octagonalenvelopes.shp



Project

Project the input Layer to another Projection and save it as the output Layer.

Short Name	Long Name	Description
-S	source-projection	The source projection
-t	target-projection	The target projection
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector project -i src/test/resources/data.gpkg -l places -o target/mercator.gpkg
-r places -s EPSG:4326 -t EPSG:3857




Random Points

Generate random points.

Short Name	Long Name	Description
-n	number	The number of points
-р	projection	The projection
-g	geometry	The geometry
-d	grid	Whether to create random points in grid
-c	constrained-to-circle	Whether the points should be constrained to a circle or not
-f	gutter-fraction	The size of the gutter between cells
-е	geom-fieldname	The geometry field name
-u	id-fieldname	The id field name
-0	output-workspace	The output workspace
-r	output-layer	The output layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector randompoints -n 100 -g -180,-90,180,90 -o target/randompoints.shp

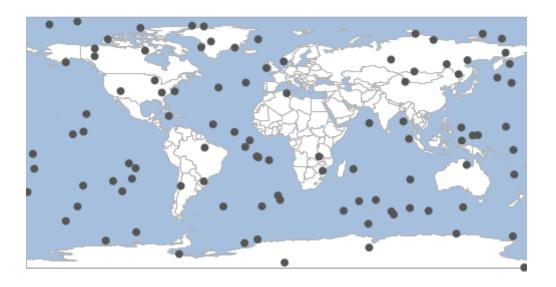


Rectangle

Create a rectangle shape around each feature of the input Layer.

Short Name	Long Name	Description
-g	geometry	The geometry expression
-W	width	The width of the bounds
-h	height	The height of the bounds
-р	num-points	The number of points
-a	rotation	The angle of rotation
-u	unit	The unit can either be degrees(d) or radians(r). The default is degrees.
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector rectangle -i src/test/resources/data.gpkg -l countries -o
target/rectangle.shp

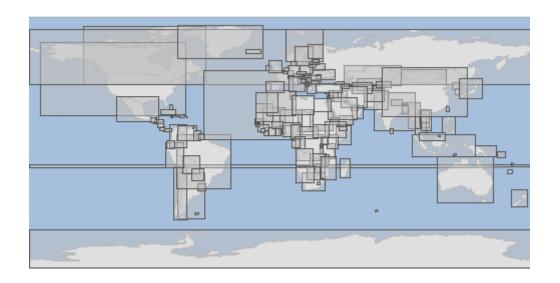

ToWrite a Layer to a String format (CSV, GeoJSON, KML, GML, GEORSS, GPX).

Short Name	Long Name	Description
-f	format	The string format (CSV, GeoJSON, KML, GML, GEORSS, GPX)
-p	format-options	A format options 'key=value'
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

GeoJSON

```
geoc vector to -i target/randompoints.shp -f geojson
```

```
{"type":"FeatureCollection", "features":[{"type":"Feature", "geometry":{"type":"Point", "coordinates":[97.7884,-15.451]}, "properties":{"id":0}, "id":"randompoints.1"}, {"type": "Feature", "geometry":{"type":"Point", "coordinates":[-27.5405,18.0492]}, "properties":{"id":1}, "id":"randompoints.2"}, {"type":"Feature", "geometry":{"type":"Point", "coordinates":[161.0269,78.4824]}, "properties":{"id":2}, "id":"randompoints.3"}, {"type":"Feature", "geometry":{"type":"Point", "coordinates":[-23.8103,75.9303]}, "properties":{"id":3}, "id":"randompoints.4"}, {"type":"Feature", "geometry":{"type":"Point", "coordinates":[-163.1361,14.8517]}, "properties":{"id":4}, "id":"randompoints.5"}]}
```

CSV

geoc vector to -i target/randompoints.shp -f csv

```
"the_geom:Point:EPSG:4326","id:Integer"
"POINT (-15.275140825456418 -88.93534863714038)","0"
"POINT (70.74942672577481 -23.343008394007256)","1"
"POINT (162.63277426642924 -30.278702488201247)","2"
"POINT (-88.01758877549928 1.9524955041704857)","3"
"POINT (-69.68749085422156 13.125132055584444)","4"
```

Schema

Get a Layer's Schema.

Short Name	Long Name	Description
-p	pretty-print	Whether to pretty print the output
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector schema -i src/test/resources/data.gpkg -l countries -p

```
name
            | type
| the_geom | MultiPolygon |
| featurecla | String
scalerank | Integer
 LABELRANK | Integer
 SOVEREIGNT | String
 SOV_A3 | String
 ADM0_DIF
            | Integer
 LEVEL
            | Integer
 TYPE
            | String
 ADMIN
           | String
ADM0_A3
           | String
 GEOU_DIF | Integer
| GEOUNIT
          | String
GU_A3
            | String
            Integer
 SU DIF
SUBUNIT
            | String
SU_A3
            | String
```

	BRK_DIFF	Integer	
l i	NAME	String	
Ιi	NAME_LONG	String	
Ιi	BRK_A3	String	
Ιi	BRK_NAME	String	
li	ABBREV	String	
li	POSTAL	String	
li	FORMAL_EN	String	
li	FORMAL_FR	String	
li	NAME_CIAWF	String	
Ιi	NOTE_ADM0	String	
li	NOTE_BRK	String	
li	NAME_SORT	String	
li	NAME_ALT	String	
li	MAPCOLOR7	Integer	
	MAPCOLOR8	Integer	
li	MAPCOLOR9	Integer	
	MAPCOLOR13	Integer	
	POP_EST	Double	
	POP_RANK	Integer	
	POP_YEAR	Integer	
	GDP_MD	Integer	
	GDP_YEAR	Integer	
	ECONOMY	String	
	INCOME_GRP	String	
	FIPS_10	String	
	ISO_A2	String	
	ISO_A2_EH	String	
	ISO_A2_LII	String	
	ISO_A3_EH	String	
	ISO_N3	-	
	ISO_N3_EH	String String	
	UN_A3	String	
	WB_A2	String	
	WB_A2	String	
	WOE_ID	Integer	
		-	
	WOE_ID_EH WOE_NOTE	Integer String	
	ADMO_A3_IS	String	
	ADMO_A3_IS	String	
	ADMO_A3_U3 ADMO_A3_FR	String	
		-	
	ADM0_A3_RU ADM0_A3_ES	String String	
	ADMO_A3_CN	String	
		-	
	ADM0_A3_TW ADM0_A3_IN	String String	
		-	
	ADMO_A3_NP	String	
	ADMO_A3_PK	String	
	ADMO_A3_DE	String	
	ADMO_A3_GB	String	
	ADM0_A3_BR	String	

ADMO_A3_IL	String	
· ·		
ADMO_A3_PS	String	
ADM0_A3_SA	String	
ADMO_A3_EG	String	
ADMO_A3_MA	String	
ADMO_A3_PT	String	
ADMO_A3_AR	String	
ADMO_A3_JP	String	
ADM0_A3_K0	String	
ADMO_A3_VN	String	
ADMO_A3_TR	String	
ADMO_A3_ID	String	
ADMO_A3_PL	String	
ADMO_A3_GR	String	
ADMO_A3_IT	String	
ADMO_A3_NL	String	
ADMO_A3_SE	String	
ADMO_A3_BD	String	
ADMO_A3_UA	String	
ADMO_A3_UN	Integer	
ADMO_A3_WB	Integer	
CONTINENT	String	
REGION_UN	String	
SUBREGION	String	
REGION_WB	String	
NAME_LEN	Integer	
LONG_LEN	Integer	
ABBREV_LEN	Integer	
TINY	Integer	
HOMEPART	Integer	
MIN_ZOOM	Double	
MIN_LABEL	Double	
MAX_LABEL	Double	
NE_ID	Long	
WIKIDATAID	String	
NAME_AR	String	
NAME_BN	String	
NAME_DE	String	
NAME_EN	String	
NAME_ES	String	
NAME_FA	String	
NAME_FR	String	
NAME_EL	String	
NAME_HE	String	
NAME_HI	String	
NAME_HU	String	
NAME_ID	String	
NAME_IT	String	
NAME_JA	String	
NAME_KO	String	
NAME_NL	String	

```
NAME_PL
            | String
NAME_PT
             String
NAME_RU
             String
NAME_SV
            | String
NAME_TR
             String
NAME_UK
             String
            | String
NAME_UR
NAME_VI
             String
NAME ZH
             String
NAME_ZHT
             String
FCLASS_ISO |
             String
FCLASS US
             String
FCLASS_FR
             String
FCLASS_RU
           | String
FCLASS_ES
             String
FCLASS_CN
             String
FCLASS_TW
           | String
FCLASS_IN
             String
             String
FCLASS_NP
FCLASS_PK
           | String
FCLASS DE
             String
FCLASS_GB
             String
FCLASS_BR
           | String
FCLASS IL
             String
FCLASS_PS
             String
FCLASS_SA
             String
FCLASS_EG
           | String
FCLASS_MA
             String
FCLASS PT
             String
FCLASS_AR
           | String
FCLASS_JP
             String
FCLASS KO
             String
FCLASS_VN
           | String
FCLASS_TR
             String
FCLASS_ID
           | String
FCLASS_PL
           | String
FCLASS_GR
             String
FCLASS_IT
             String
FCLASS_NL
           | String
FCLASS_SE
             String
FCLASS_BD
           | String
FCLASS_UA
           | String
```

Voronoi

Calculate a voronoi diagram of all the features in a Layer.

Short Name	Long Name	Description
-0	output-workspace	The output workspace
-r	output-layer	The output layer
-i	input-workspace	The input workspace
-1	input-layer	The input layer
	help	Print the help message
	web-help	Open help in a browser

geoc vector voronoi -i src/test/resources/data.gpkg -l places -o target/voronoi.shp

