

# Geoscript Groovy Cookbook

Jared Erickson

Version 1.13-SNAPSHOT

# Table of Contents

Introduction .....	1
Using GeoScript .....	1
geoscript-groovy .....	3
Geometry Recipes .....	4
Creating Geometries .....	4
Points .....	12
LineStrings .....	14
Polygons .....	26
MultiLineStrings .....	32
MultiPolygons .....	34
Geometry Collections .....	36
Circular Strings .....	39
Circular Rings .....	42
Compound Curves .....	47
Compound Rings .....	52
Processing Geometries .....	58
Prepared Geometry .....	111
Reading and Writing Geometries .....	123
Bounds Recipes .....	137
Creating Bounds .....	137
Getting Bounds Properties .....	139
Processing Bounds .....	141
Projection Recipes .....	152
Creating Projections .....	152
Getting Projection Properties .....	154
Using Projections .....	155
Using Geodetic .....	156
Using Decimal Degrees .....	157
Spatial Index Recipes .....	161
Using STRtree .....	161
Using Quadtree .....	161
Using GeoHash .....	163
Viewer Recipes .....	167
Drawing geometries .....	167
Plotting geometries .....	170
Plot Recipes .....	173
Processing Charts .....	173
Creating Bar Charts .....	177

Creating Pie Charts .....	179
Creating Box Charts .....	180
Creating Curve Charts .....	180
Creating Regression Charts .....	182
Creating Scatter Plot Charts .....	183
Feature Recipes .....	184
Creating Fields .....	185
Creating Schemas .....	186
Getting Schema Properties .....	187
Getting Schema Fields .....	188
Modifying Schemas .....	189
Combining Schemas .....	192
Creating Features from a Schema .....	194
Reading and Writing Schemas .....	195
Creating Features .....	200
Getting Feature Properties .....	202
Getting Feature Attributes .....	203
Reading and Writing Features .....	204
Filter Recipes .....	216
Creating Filters .....	216
Using Filters .....	219
Evaluating Filters .....	221
Creating Literals .....	222
Creating Properties .....	223
Evaluating Properties .....	223
Creating Functions .....	224
Evaluating Functions .....	225
Creating Colors .....	226
Getting Color Formats .....	227
Displaying Colors .....	228
Using Color Palettes .....	229
Creating Expressions from CQL .....	234
Process Recipes .....	234
Execute a built-in Process .....	234
Listing built-in Processes .....	236
Executing a new Process .....	238
Render Recipes .....	240
Creating Maps .....	240
Rendering Maps .....	241
Displaying Maps .....	257
Drawing .....	259

Plotting .....	267
Style Recipes .....	275
Creating Basic Styles .....	275
Creating Strokes .....	278
Creating Fills .....	282
Creating Shapes .....	285
Creating Icons .....	287
Creating Labels .....	288
Creating Transforms .....	292
Creating Gradients .....	293
Creating Unique Values .....	295
Creating Color Maps .....	297
Creating Channel Selection and Contrast Enhancement .....	299
Reading and Writing Styles .....	301
Workspace Recipes .....	310
Using Workspaces .....	310
Using a Directory Workspace .....	312
Investigating Workspaces .....	313
Creating Workspaces .....	314
Layer Recipes .....	319
Getting a Layer's Properties .....	319
Getting a Layer's Features .....	320
Adding, Updating, and Deleting .....	327
Shapefiles .....	334
Property .....	337
Geoprocessing .....	340
Layer Algebra .....	347
Reading and Writing Layers .....	354
Graticules .....	378
Format Recipes .....	383
Get a Format .....	383
Get Names .....	383
Read a Raster .....	384
Write a Raster .....	384
Check for a Raster .....	385
GeoTIFF .....	385
WorldImage .....	386
Raster Recipes .....	387
Raster Properties .....	387
Raster Values .....	391
Raster Processing .....	393

Tile Recipes .....	404
Tile .....	404
Grid .....	405
Pyramid .....	405
Generating Tiles .....	418
Tile Layer .....	421
TileCursor .....	433
OSM .....	440

# Introduction

The GeoScript Groovy Cookbook contains short recipes on how to use the GeoScript Groovy library.


GeoScript is a geospatial library written in Groovy. It provides modules for working with geometries, projections, features, layers, rasters, styles, rendering, and tiles. It is built on top of the Java Topology Suite (JTS) and GeoTools libraries. GeoScript Groovy is open source and licensed under the MIT license.

## Using GeoScript

To use GeoScript Groovy you need Java and Groovy installed and on your PATH. Next, download the latest stable release, the latest in development build, or build the code yourself. Then put the GeoScript Groovy bin directory on your PATH. You are now ready to use GeoScript Groovy!

GeoScript Groovy has three commands:

1. `geoscript-groovy` (which can run Groovy files)

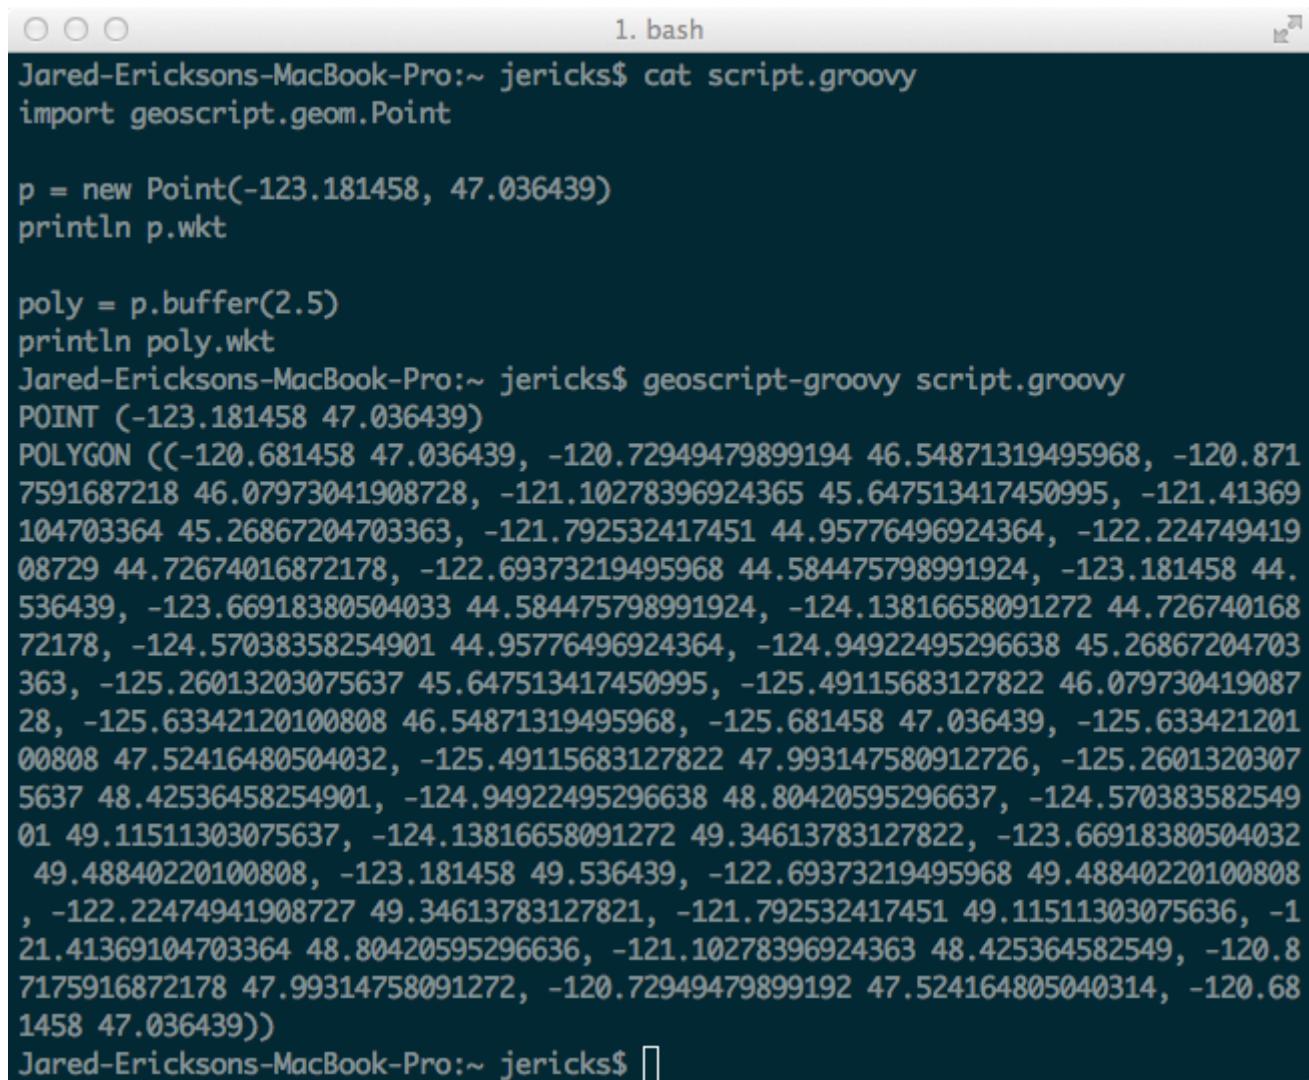

```
○ ○ ○                               1. bash
Jared-Ericksons-MacBook-Pro:~ jericks$ cat script.groovy
import geoscript.geom.Point

p = new Point(-123.181458, 47.036439)
println p.wkt

poly = p.buffer(2.5)
println poly.wkt
Jared-Ericksons-MacBook-Pro:~ jericks$ geoscript-groovy script.groovy
POINT (-123.181458 47.036439)
POLYGON ((-120.681458 47.036439, -120.72949479899194 46.54871319495968, -120.871
7591687218 46.07973041908728, -121.10278396924365 45.647513417450995, -121.41369
104703364 45.26867204703363, -121.792532417451 44.95776496924364, -122.224749419
08729 44.72674016872178, -122.69373219495968 44.584475798991924, -123.181458 44.
536439, -123.66918380504033 44.584475798991924, -124.13816658091272 44.726740168
72178, -124.57038358254901 44.95776496924364, -124.94922495296638 45.26867204703
363, -125.26013203075637 45.647513417450995, -125.49115683127822 46.079730419087
28, -125.63342120100808 46.54871319495968, -125.681458 47.036439, -125.633421201
00808 47.52416480504032, -125.49115683127822 47.993147580912726, -125.2601320307
5637 48.42536458254901, -124.94922495296638 48.80420595296637, -124.570383582549
01 49.11511303075637, -124.13816658091272 49.34613783127822, -123.66918380504032
49.48840220100808, -123.181458 49.536439, -122.69373219495968 49.48840220100808
, -122.22474941908727 49.34613783127821, -121.792532417451 49.11511303075636, -1
21.41369104703364 48.80420595296636, -121.10278396924363 48.425364582549, -120.8
7175916872178 47.99314758091272, -120.72949479899192 47.524164805040314, -120.68
1458 47.036439))
Jared-Ericksons-MacBook-Pro:~ jericks$ []
```

1. `geoscript-groovysh` (which starts a REPL shell)

```
Jared-Ericksons-MacBook-Pro:~ jericks$ geoscript-groovysh
Groovy Shell (2.4.10, JVM: 1.8.0_31)
Type ':help' or ':h' for help.

-----
groovy:000> import geoscript.geom.Point
==> geoscript.geom.Point
groovy:000> p = new Point(-123.181458,47.036439)
==> POINT (-123.181458 47.036439)
groovy:000> p.buffer(2.5)
==> POLYGON ((-120.681458 47.036439, -120.72949479899194 46.54871319495968, -120.8717591687218 46.07973041908728, -121.10278396924365 45.647513417450995, -121.41369104703364 45.26867204703363, -121.792532417451 44.95776496924364, -122.22474941908729 44.72674016872178, -122.69373219495968 44.584475798991924, -123.181458 44.536439, -123.66918380504033 44.584475798991924, -124.13816658091272 44.72674016872178, -124.57038358254901 44.95776496924364, -124.94922495296638 45.26867204703363, -125.26013203075637 45.647513417450995, -125.49115683127822 46.07973041908728, -125.63342120100808 46.54871319495968, -125.681458 47.036439, -125.63342120100808 47.52416480504032, -125.49115683127822 47.993147580912726, -125.26013203075637 48.42536458254901, -124.94922495296638 48.80420595296637, -124.57038358254901 49.11511303075637, -124.13816658091272 49.34613783127822, -123.66918380504032 49.48840220100808, -123.181458 49.536439, -122.69373219495968 49.48840220100808, -122.22474941908727 49.34613783127821, -121.792532417451 49.11511303075636, -121.41369104703364 48.80420595296636, -120.87175916872178 47.99314758091272, -120.72949479899192 47.524164805040314, -120.681458 47.036439))
groovy:000> []
```

1. geoscript-groovyConsole (which starts a graphical editor/mini IDE)



```
script.groovy – GroovyConsole
```

```
1 import geoscript.geom.Point
2 import geoscript.viewer.Viewer
3
4 p = new Point(-123.181458, 47.036439)
5 poly = p.buffer(2.5)
6 Viewer.drawToImage([poly,p])
```

Result:

Execution complete. | 6:29

## geoscript-groovy

The geoscript-groovy command can run scripts file but it can also run inline scripts.

*Convert a shapefile to geojson*

```
geoscript-groovy -e "println new  
geoscript.layer.Shapefile('states.shp').toJSONString()"
```

*Get the Bounds of a Shapefile as a Geometry*

```
geoscript-groovy -e "println new  
geoscript.layer.Shapefile('states.shp').bounds.geometry"
```

*Count the number of Features in a Shapefile*

```
geoscript-groovy -e "println new geoscript.layer.Shapefile('states.shp').count"
```

*Render a Shapefile to an image*

```
geoscript-groovy -e "geoscript.render.Draw.draw(new  
geoscript.layer.Shapefile('states.shp'), out: 'image.png')"
```

*Pipe a Shapefile's geometry to another command line application that buffers each feature*

```
geoscript-groovy -e "new geoscript.layer.Shapefile('states.shp').eachFeature{ println  
it.geom.centroid}" | geom combine | geom buffer -d 1.5
```

*Pipe the results of buffering a point to convert it to KML*

```
echo "POINT (1 1)" | geom buffer -d 10 | geoscript-groovy -e "println  
geoscript.geom.Geometry.fromWKT(System.in.text).kml"
```

# Geometry Recipes

The Geometry classes are in the [geoscript.geom](#) package.

## Creating Geometries

### Point

*Create a Point with an XY*


```
Point point = new Point(-123,46)
```



### LineString

Create a LineString from Coordinates


```
LineString lineString = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125]  
)
```

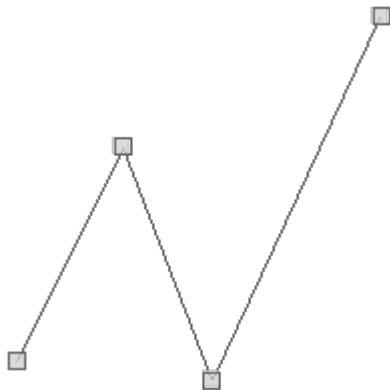

## Polygon


Create a Polygon from a List of Coordinates

```
Polygon polygon = new Polygon([[  
    [-101.35986328125, 47.754097979680026],  
    [-101.5576171875, 46.93526088057719],  
    [-100.12939453125, 46.51351558059737],  
    [-99.77783203125, 47.44294999517949],  
    [-100.45898437499999, 47.88688085106901],  
    [-101.35986328125, 47.754097979680026]  
]])
```

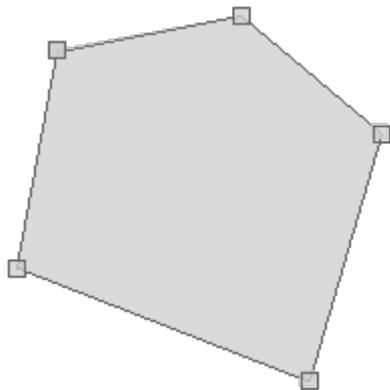

### Create a Polygon with holes

```
Polygon polygonWithHoles = new Polygon(  
    // Exterior Ring  
    new LinearRing(  
        [-122.39138603210449, 47.58659965790016],  
        [-122.41250038146973, 47.57681522195182],  
        [-122.40305900573729, 47.56523364515569],  
        [-122.38117218017578, 47.56621817878201],  
        [-122.3712158203125, 47.57235661809739],  
        [-122.37602233886717, 47.584747123985615],  
        [-122.39138603210449, 47.58659965790016]  
    ),  
    // Holes  
    [  
        new LinearRing(  
            [-122.39859580993652, 47.578957532923376],  
            [-122.40468978881836, 47.57548347095205],  
            [-122.39593505859376, 47.570271945800094],  
            [-122.3920726776123, 47.57606249728773],  
            [-122.39859580993652, 47.578957532923376]  
        ),  
        new LinearRing(  
            [-122.3836612701416, 47.58156292813543],  
            [-122.38829612731934, 47.57114056934196],  
            [-122.37456321716309, 47.57420959047542],  
            [-122.37868309020995, 47.58023129789275],  
            [-122.3836612701416, 47.58156292813543]  
        )  
    ]  
)
```

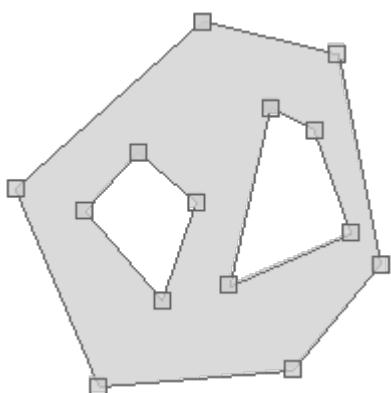

### MultiPoint

Create a MultiPoint with a List of Points


```
MultiPoint multiPoint = new MultiPoint([
    new Point(-122.3876953125, 47.5820839916191),
    new Point(-122.464599609375, 47.25686404408872),
    new Point(-122.48382568359374, 47.431803338643334)
])
```



## MultiLineString

Create a MultiLineString with a List of LineStrings


```
MultiLineString multiLineString = new MultiLineString([
    new LineString (
        [-122.3822021484375, 47.57837853860192],
        [-122.32452392578125, 47.48380086737799]
    ),
    new LineString (
        [-122.32452392578125, 47.48380086737799],
        [-122.29705810546874, 47.303447043862626]
    ),
    new LineString (
        [-122.29705810546874, 47.303447043862626],
        [-122.42889404296875, 47.23262467463881]
    )
])
```

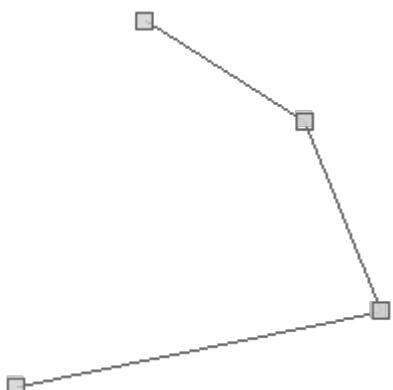

## MultiPolygon

Create a MultiPolygon with a List of Polygons


```
MultiPolygon multiPolygon = new MultiPolygon(  
    new Polygon ([[  
        [-122.2723388671875, 47.818687628247105],  
        [-122.37945556640624, 47.66168780332917],  
        [-121.95373535156249, 47.67093619422418],  
        [-122.2723388671875, 47.818687628247105]  
    ]]),  
    new Polygon ([[  
        [-122.76672363281249, 47.42437092240516],  
        [-122.76672363281249, 47.59505101193038],  
        [-122.52227783203125, 47.59505101193038],  
        [-122.52227783203125, 47.42437092240516],  
        [-122.76672363281249, 47.42437092240516]  
    ]]),  
    new Polygon ([[  
        [-122.20367431640624, 47.543163654317304],  
        [-122.3712158203125, 47.489368981370724],  
        [-122.33276367187499, 47.35371061951363],  
        [-122.11029052734374, 47.3704545156932],  
        [-122.08831787109375, 47.286681888764214],  
        [-122.28332519531249, 47.2270293988673],  
        [-122.2174072265625, 47.154237057576594],  
        [-121.904296875, 47.32579231609051],  
        [-122.06085205078125, 47.47823216312885],  
        [-122.20367431640624, 47.543163654317304]  
    ]])  
)
```

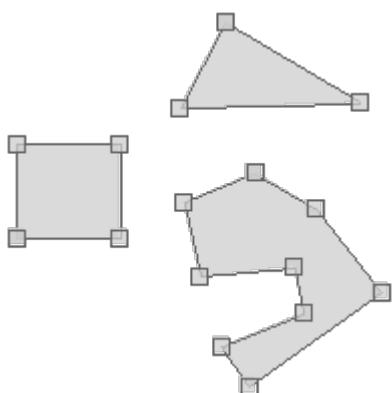

## GeometryCollection

Create a GeometryCollection with a List of Geometries


```
GeometryCollection geometryCollection = new GeometryCollection(  
    new LineString([-157.044, 58.722], [-156.461, 58.676]),  
    new Point(-156.648, 58.739),  
    new Polygon([[  
        [-156.395, 58.7083],  
        [-156.412, 58.6026],  
        [-155.874, 58.5825],  
        [-155.313, 58.4822],  
        [-155.385, 58.6655],  
        [-156.203, 58.7368],  
        [-156.395, 58.7083]  
    ]]),  
    new Point(-156.741, 58.582)  
)
```

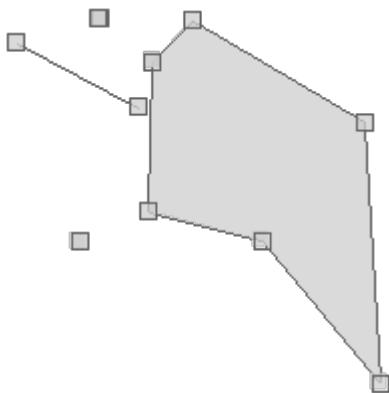

## CircularString

Create a CircularString with a List of Points


```
CircularString circularString = new CircularString([  
    [-122.464599609375, 47.247542522268006],  
    [-122.03613281249999, 47.37789454155521],  
    [-122.37670898437499, 47.58393661978134]  
)
```

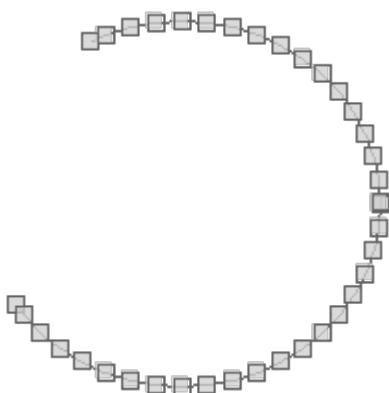

## CircularRing

Create a CircularRing with a List of Points


```
CircularRing circularRing = new CircularRing([
    [-118.4765624999999, 41.508577297439324],
    [-109.6875, 57.51582286553883],
    [-93.8671875, 42.032974332441405],
    [-62.57812500000001, 30.14512718337613],
    [-92.10937499999999, 7.36246686553575],
    [-127.265625, 14.604847155053898],
    [-118.47656249999999, 41.508577297439324]
])
```

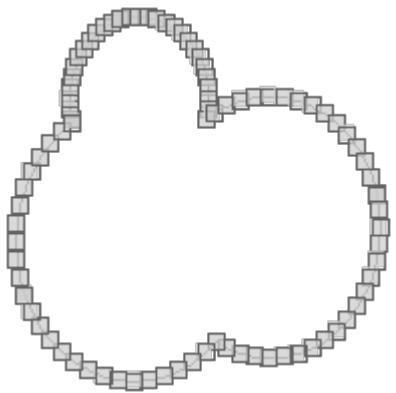

## CompoundCurve

Create a CompoundCurve with a List of CircularStrings and LineStrings


```
CompoundCurve compoundCurve = new CompoundCurve([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ])
])
```

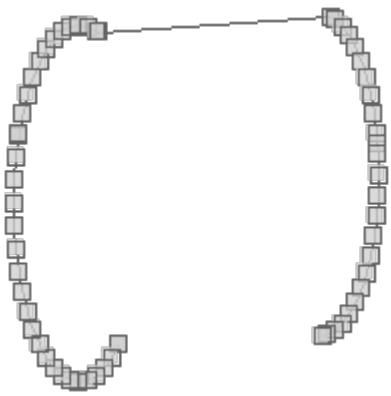

## CompoundRing

Create a *CompoundRing* with a connected List of CircularStrings and LineStrings

```
CompoundRing compoundRing = new CompoundRing([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ]),
    new LineString([
        [69.9609375, 24.5271348225978],
        [27.0703125, 23.885837699862005],
    ])
])
```

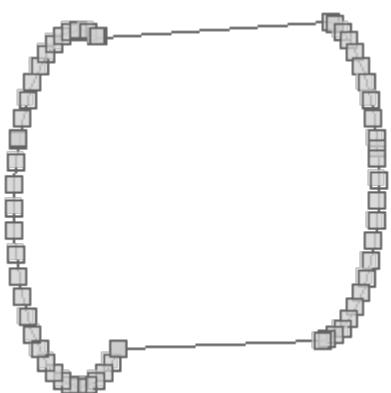

# Points

Get x, y, and z values from a Point

```
Point point = new Point(-122.38632, 47.58208, 101.45)
println "X = ${point.x}"
println "Y = ${point.y}"
println "Z = ${point.z}"
```



```
X = -122.38632
Y = 47.58208
Z = 101.45
```

Add two Points together to create a MultiPoint

```
Point point1 = new Point(-122.38632, 47.58208)
Point point2 = new Point(-122.37001, 47.55868)
MultiPoint points = point1 + point2
```



### Add a Point to a MultiPoint

```
MultiPoint multiPoint = new MultiPoint(  
    new Point(-122.83813, 47.05141),  
    new Point(-122.38220, 47.58023)  
)  
println multiPoint.wkt  
MultiPoint newMultiPoint = multiPoint + new Point(-122.48657, 47.271775)  
println newMultiPoint.wkt
```

```
MULTIPOINT ((-122.83813 47.05141), (-122.3822 47.58023))  
MULTIPOINT ((-122.83813 47.05141), (-122.3822 47.58023), (-122.48657 47.271775))
```

### MultiPoint



### MultiPoint with extra Point



### Calculate the angle between two points

```
Point point1 = new Point(-122.29980, 47.65058)  
Point point2 = new Point(-120.54199, 46.64943)  
double angleInDegrees = point1.getAngle(point2, "degrees")  
println "Angle in degrees = ${angleInDegrees}"  
  
double angleInRadians = point1.getAngle(point2, "radians")  
println "Angle in radians = ${angleInRadians}"
```

□

□

```
Angle in degrees = -29.663413013476646  
Angle in radians = -0.5177242244641005
```

*Calculate the azimuth between two points*

```
Point point1 = new Point(-122.29980, 47.65058)  
Point point2 = new Point(-120.54199, 46.64943)  
double azimuth = point1.getAzimuth(point2)  
println "Azimuth = ${azimuth}"
```

□


□

```
Azimuth = 129.21026122904846
```

## LineStrings


*Get the start Point from a LineString*

```
LineString lineString = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125])  
Point startPoint = lineString.startPoint
```

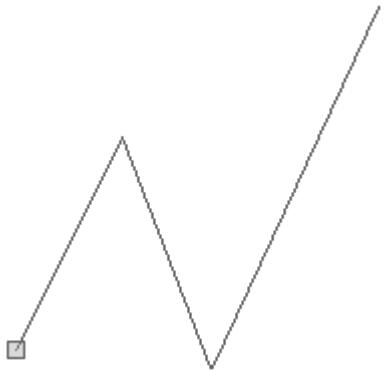

Get the end Point from a LineString


```
LineString lineString = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125]  
)  
Point endPoint = lineString.endPoint
```

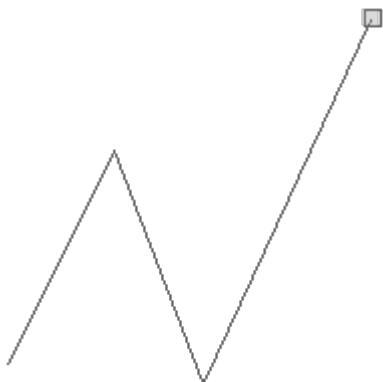


Reverse a LineString

```
LineString lineString = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125]  
)  
Point startPoint = lineString.startPoint  
  
LineString reversedLineString = lineString.reverse()  
Point reversedStartPoint = reversedLineString.startPoint
```

Original LineString showing start point

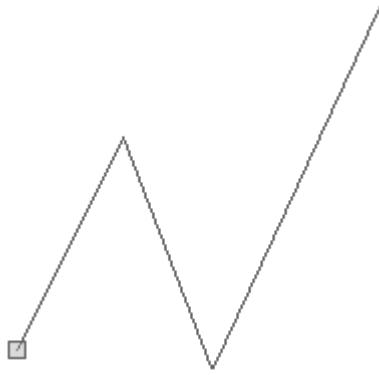


Reversed LineString showing start point

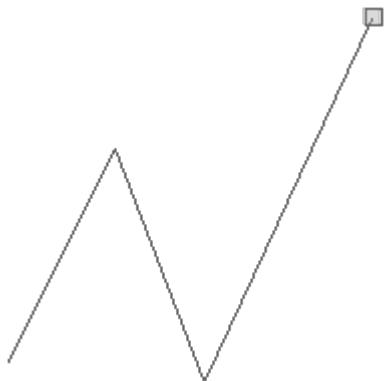


Determine if a LineString is closed or not

```
LineString lineString1 = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125]  
)  
boolean isClosed1 = lineString1.closed  
println "Is ${lineString1.wkt} closed? ${isClosed1}"  
  
LineString lineString2 = new LineString(  
    [3.1982421875, 43.1640625],  
    [6.7138671875, 49.755859375],  
    [9.7021484375, 42.5927734375],  
    [15.3271484375, 53.798828125],  
    [3.1982421875, 43.1640625]  
)  
boolean isClosed2 = lineString2.closed  
println "Is ${lineString2.wkt} closed? ${isClosed2}"
```

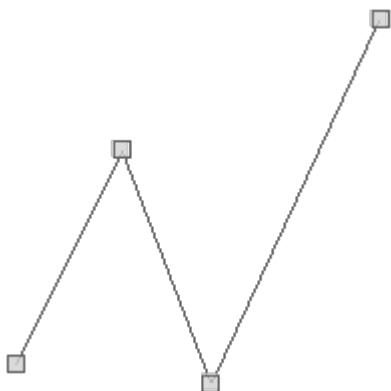


```
Is LINESTRING (3.1982421875 43.1640625, 6.7138671875 49.755859375, 9.7021484375  
42.5927734375, 15.3271484375 53.798828125) closed? false
```

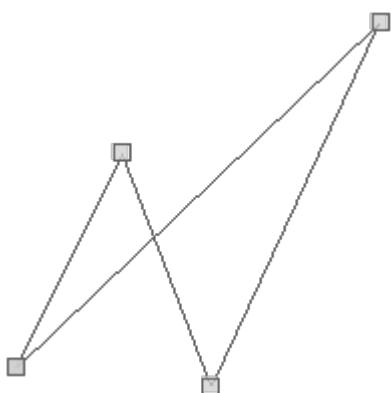


```
Is LINESTRING (3.1982421875 43.1640625, 6.7138671875 49.755859375, 9.7021484375  
42.5927734375, 15.3271484375 53.798828125, 3.1982421875 43.1640625) closed? true
```

Determine if a LineString is a Ring or not

```
LineString lineString1 = new LineString(  
    [-122.391428, 47.563300],  
    [-122.391836, 47.562793],  
    [-122.391010, 47.562417],  
    [-122.390516, 47.563126]  
)  
boolean isRing1 = lineString1.ring  
println "Is ${lineString1.wkt} a ring? ${isRing1}"  
  
LineString lineString2 = new LineString(  
    [-122.391428, 47.563300],  
    [-122.391836, 47.562793],  
    [-122.391010, 47.562417],  
    [-122.390516, 47.563126],  
    [-122.391428, 47.563300]  
)  
boolean isRing2 = lineString2.ring  
println "Is ${lineString2.wkt} a ring? ${isRing2}"
```

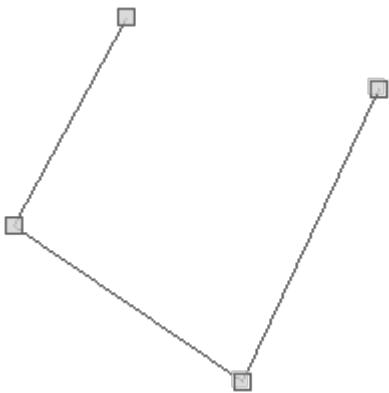

Is LINESTRING (-122.391428 47.5633, -122.391836 47.562793, -122.39101 47.562417, -122.390516 47.563126) a ring? false

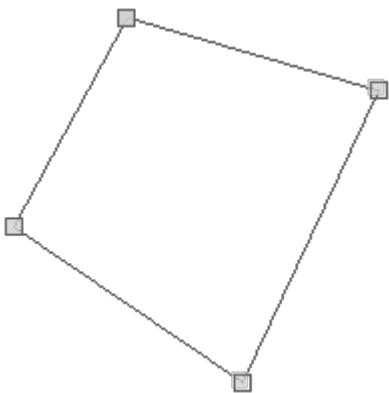


Is LINESTRING (-122.391428 47.5633, -122.391836 47.562793, -122.39101 47.562417, -122.390516 47.563126, -122.391428 47.5633) a ring? true


*Close an open LineString to create a LinearRing*

```
LineString lineString = new LineString(  
    [-122.391428, 47.563300],  
    [-122.391836, 47.562793],  
    [-122.391010, 47.562417],  
    [-122.390516, 47.563126])  
  
LinearRing linearRing = lineString.close()
```

Open LineString

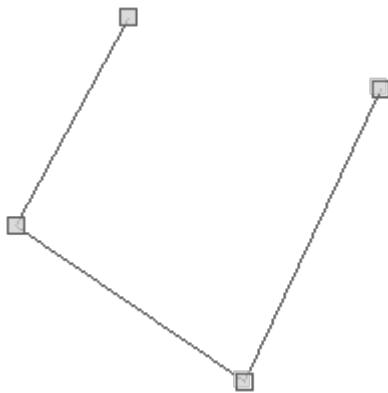

Closed LinearRing

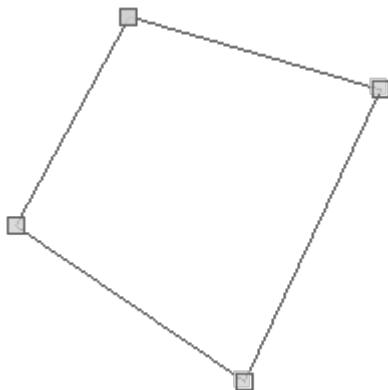


Add a LineString to another LineString to create a MultiLineString

```
LineString lineString1 = new LineString([
    [-122.39142894744873, 47.5812734461813],
    [-122.38237380981445, 47.58121554959838]
])

LineString lineString2 = new LineString([
    [-122.38640785217285, 47.58552866972616],
    [-122.38670825958253, 47.57837853860192]
])

MultiLineString multiLineString = lineString1 + lineString2
```

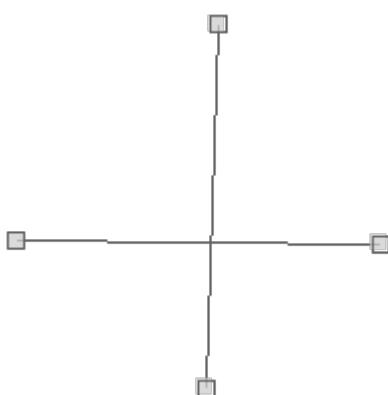


### Add a Point to a LineString

```
LineString lineString = new LineString([
    [-122.39142894744873, 47.5812734461813],
    [-122.38237380981445, 47.58121554959838]
])

Point point = new Point(-122.38640785217285, 47.58552866972616)

LineString lineStringWithPoint = lineString + point
```

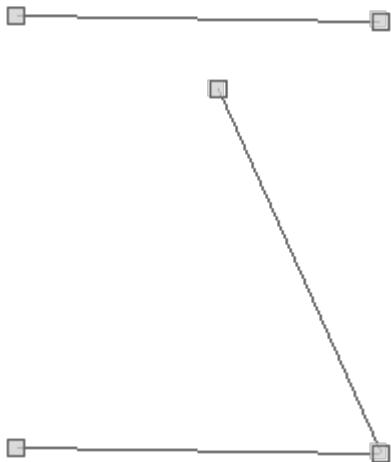


### Add a Point to a LineString at a specific index

```
LineString lineString = new LineString([
    [-122.39142894744873, 47.5812734461813],
    [-122.38237380981445, 47.58121554959838]
])


Point point = new Point(-122.38640785217285, 47.58552866972616)


LineString lineStringWithPoint = lineString.addPoint(1, point)
```

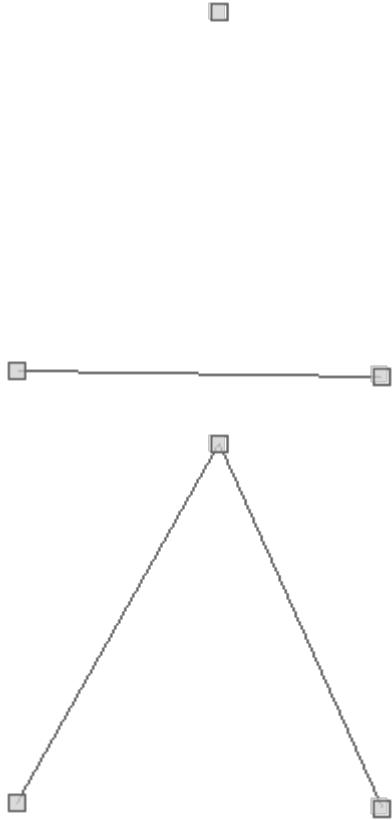

*Set a Point on a LineString at a specific index*

```
LineString lineString = new LineString([
    [-122.39142894744873, 47.5812734461813],
    [-122.38237380981445, 47.58121554959838]
])
Point point = new Point(-122.38640785217285, 47.58552866972616)
LineString.newLineString = lineString.setPoint(1, point)
```




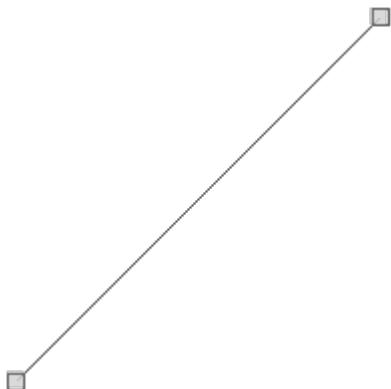

*Remove a Point on a LineString at a specific index*


```
LineString lineString = new LineString([
    [-122.39142894744873, 47.5812734461813],
    [-122.38237380981445, 47.58121554959838],
    [-122.38640785217285, 47.58552866972616]
])
```

```
LineString newLineString = lineString.removePoint(2)
```

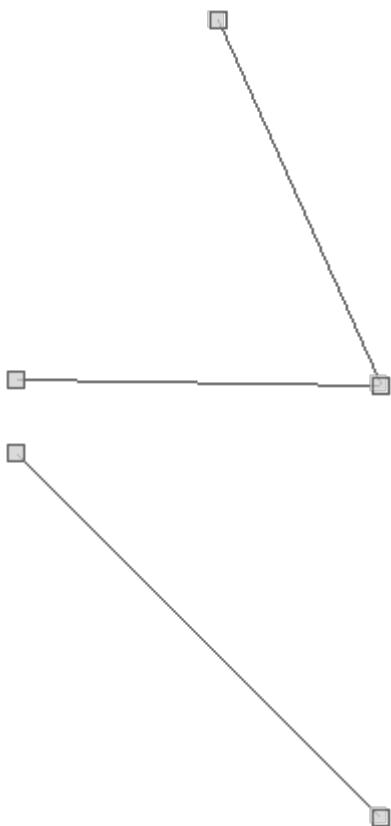


*Remove a Point from the end of a LineString.*


```
LineString lineString1 = new LineString([
    [-122.39423990249632, 47.57926150237904],
    [-122.3918581008911, 47.58121554959838],
    [-122.38657951354979, 47.58121554959838],
    [-122.38638639450075, 47.58535499390333],
    [-122.38374710083008, 47.58535499390333]
])
```

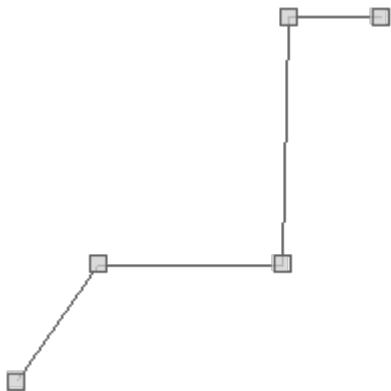

```
LineString lineString2 = -lineString1
```

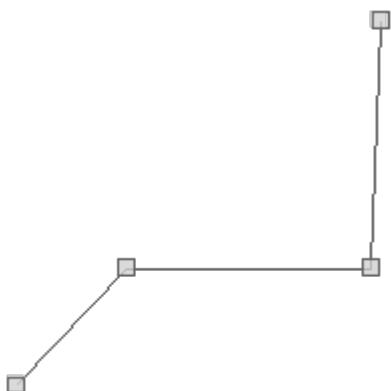


```
LineString lineString3 = -lineString2
```

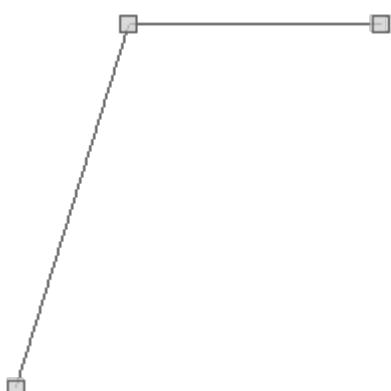

### Interpolate Points on a LineString

```
LineString lineString = new LineString([
    [-122.39423990249632, 47.57926150237904],
    [-122.3918581008911, 47.58121554959838],
    [-122.38657951354979, 47.58121554959838],
    [-122.38638639450075, 47.58535499390333],
    [-122.38374710083008, 47.58535499390333]
])
Point startPoint = lineString.interpolatePoint(0.0)
Point midPoint = lineString.interpolatePoint(0.5)
Point endPoint = lineString.interpolatePoint(1.0)
```

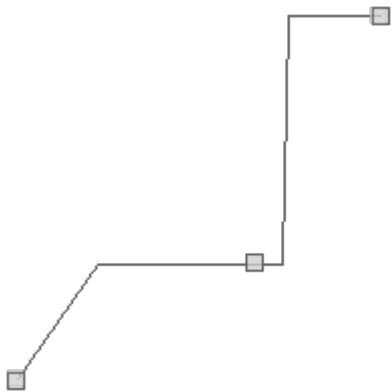


### Locate the position of Points on a LineString

```
LineString lineString = new LineString([
    [-122.39423990249632, 47.57926150237904],
    [-122.3918581008911, 47.58121554959838],
    [-122.38657951354979, 47.58121554959838],
    [-122.38638639450075, 47.58535499390333],
    [-122.38374710083008, 47.58535499390333]
])

Point point1 = new Point(-122.39423990249632, 47.57926150237904)
Double position1 = lineString.locatePoint(point1)
println "Position of ${point1} is ${position1}"

Point point2 = new Point(-122.38736758304911, 47.58121554959838)
Double position2 = lineString.locatePoint(point2)
println "Position of ${point2} is ${position2}"

Point point3 = new Point(-122.38374710083008, 47.58535499390333)
Double position3 = lineString.locatePoint(point3)
println "Position of ${point3} is ${position3}"
```

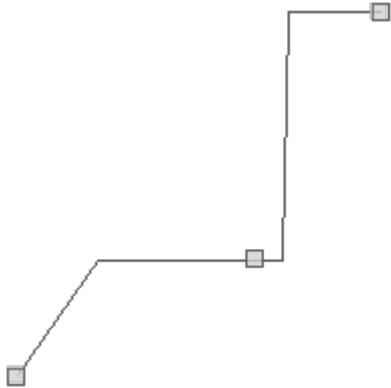


```
Position of POINT (-122.39423990249632 47.57926150237904) is 0.0  
Position of POINT (-122.38736758304911 47.58121554959838) is 0.5000000000004425  
Position of POINT (-122.38374710083008 47.58535499390333) is 1.0
```

#### Place Points on a LineString

```
LineString lineString = new LineString ([  
    [-122.37155914306639, 47.5716617365518],  
    [-122.32160568237306, 47.5714301073211]  
)  
  
Point point1 = new Point(-122.358341217041, 47.57432539907205)  
Point pointOnLine1 = lineString.placePoint(point1)  
  
Point point2 = new Point(-122.33860015869139, 47.56830301243495)  
Point pointOnLine2 = lineString.placePoint(point2)
```

#### Points near LineString




#### Point on LineString



*Extract part of a LineString*


```
LineString lineString = new LineString([
    [-122.39423990249632, 47.57926150237904],
    [-122.3918581008911, 47.58121554959838],
    [-122.38657951354979, 47.58121554959838],
    [-122.38638639450075, 47.58535499390333],
    [-122.38374710083008, 47.58535499390333]
])
LineString subLine = lineString.subLine(0.33, 0.66)
```

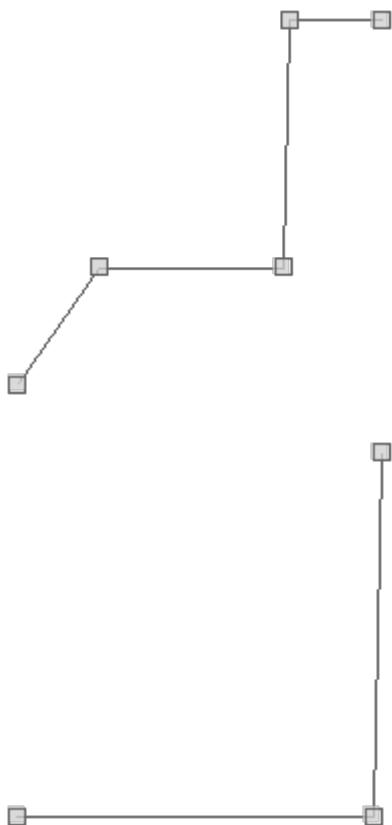


## Polygons

### Get a Polygon's exterior LinearRing

```
Polygon polygon = new Polygon(  
    // Exterior Ring  
    new LinearRing(  
        [-122.39138603210449, 47.58659965790016],  
        [-122.41250038146973, 47.57681522195182],  
        [-122.40305900573729, 47.56523364515569],  
        [-122.38117218017578, 47.56621817878201],  
        [-122.3712158203125, 47.57235661809739],  
        [-122.37602233886717, 47.584747123985615],  
        [-122.39138603210449, 47.58659965790016]  
    ),  
    // Holes  
    [  
        new LinearRing(  
            [-122.39859580993652, 47.578957532923376],  
            [-122.40468978881836, 47.57548347095205],  
            [-122.39593505859376, 47.570271945800094],  
            [-122.3920726776123, 47.57606249728773],  
            [-122.39859580993652, 47.578957532923376]  
        ),  
        new LinearRing(  
            [-122.3836612701416, 47.58156292813543],  
            [-122.38829612731934, 47.57114056934196],  
            [-122.37456321716309, 47.57420959047542],  
            [-122.37868309020995, 47.58023129789275],  
            [-122.3836612701416, 47.58156292813543]  
        )  
    ]  
)  
LinearRing exteriorRing = polygon.getExteriorRing()
```

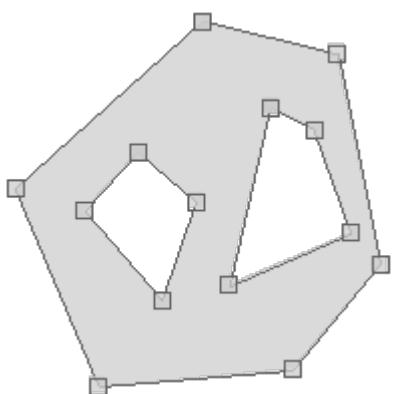

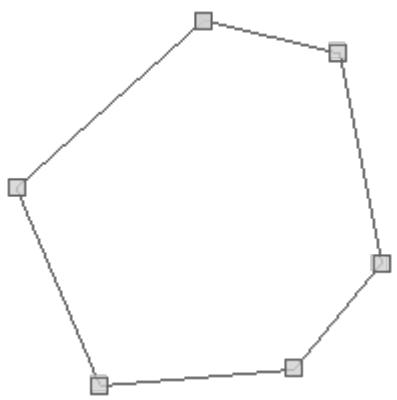

## Get a Polygon's interior LinearRings

```
Polygon polygon = new Polygon(
    // Exterior Ring
    new LinearRing(
        [-122.39138603210449, 47.58659965790016],
        [-122.41250038146973, 47.57681522195182],
        [-122.40305900573729, 47.56523364515569],
        [-122.38117218017578, 47.56621817878201],
        [-122.3712158203125, 47.57235661809739],
        [-122.37602233886717, 47.584747123985615],
        [-122.39138603210449, 47.58659965790016]
    ),
    // Holes
    [
        new LinearRing(
            [-122.39859580993652, 47.578957532923376],
            [-122.40468978881836, 47.57548347095205],
            [-122.39593505859376, 47.570271945800094],
            [-122.3920726776123, 47.57606249728773],
            [-122.39859580993652, 47.578957532923376]
        ),
        new LinearRing(
            [-122.3836612701416, 47.58156292813543],
            [-122.38829612731934, 47.57114056934196],
            [-122.37456321716309, 47.57420959047542],
            [-122.37868309020995, 47.58023129789275],
            [-122.3836612701416, 47.58156292813543]
        )
    ]
)




println "# Interior Rings = ${polygon.numInteriorRing}"
(0..<polygon.numInteriorRing).each { int i ->
    println " ${polygon.getInteriorRingN(i)}"
}

println "Interior Rings"
polygon.interiorRings.each { LinearRing ring ->
    println " ${ring}"
}
```

```
# Interior Rings = 2
LINEARRING (-122.39859580993652 47.578957532923376, -122.40468978881836
47.57548347095205, -122.39593505859376 47.570271945800094, -122.3920726776123
47.57606249728773, -122.39859580993652 47.578957532923376)
LINEARRING (-122.3836612701416 47.58156292813543, -122.38829612731934
47.57114056934196, -122.37456321716309 47.57420959047542, -122.37868309020995
47.58023129789275, -122.3836612701416 47.58156292813543)
```



Interior Rings

```
LINEARRING (-122.39859580993652 47.578957532923376, -122.40468978881836
47.57548347095205, -122.39593505859376 47.570271945800094, -122.3920726776123
47.57606249728773, -122.39859580993652 47.578957532923376)
LINEARRING (-122.3836612701416 47.58156292813543, -122.38829612731934
47.57114056934196, -122.37456321716309 47.57420959047542, -122.37868309020995
47.58023129789275, -122.3836612701416 47.58156292813543)
```

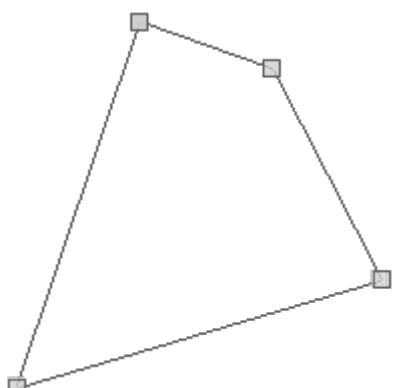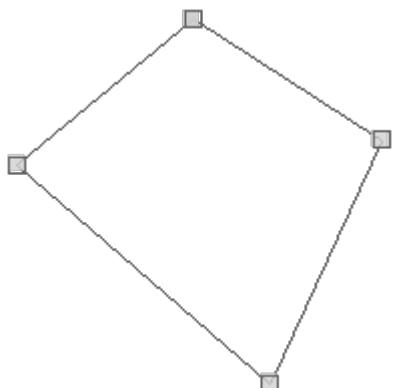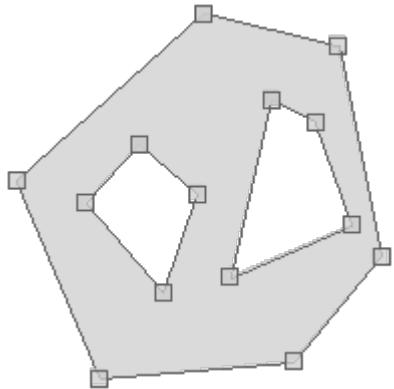



Add a Polygon to another Polygon to create a MultiPolygon

```
Polygon polygon1 = new Polygon ([[  
    [-122.2723388671875, 47.818687628247105],  
    [-122.37945556640624, 47.66168780332917],  
    [-121.95373535156249, 47.67093619422418],  
    [-122.2723388671875, 47.818687628247105]  
])  
Polygon polygon2 = new Polygon ([[  
    [-122.76672363281249, 47.42437092240516],  
    [-122.76672363281249, 47.59505101193038],  
    [-122.52227783203125, 47.59505101193038],  
    [-122.52227783203125, 47.42437092240516],  
    [-122.76672363281249, 47.42437092240516]  
])  
MultiPolygon multiPolygon = polygon1 + polygon2
```



Split a Polygon with a LineString

```
Polygon polygon = new Polygon(  
    new LinearRing(  
        [-122.39138603210449, 47.58659965790016],  
        [-122.41250038146973, 47.57681522195182],  
        [-122.40305900573729, 47.56523364515569],  
        [-122.38117218017578, 47.56621817878201],  
        [-122.3712158203125, 47.57235661809739],  
        [-122.37602233886717, 47.584747123985615],  
        [-122.39138603210449, 47.58659965790016]  
    )  
)  
  
LineString lineString = new LineString([  
    [-122.3924160003662, 47.56395951534652],  
    [-122.38649368286131, 47.58729434121508]  
)  
  
MultiPolygon multiPolygon = polygon.split(lineString)
```

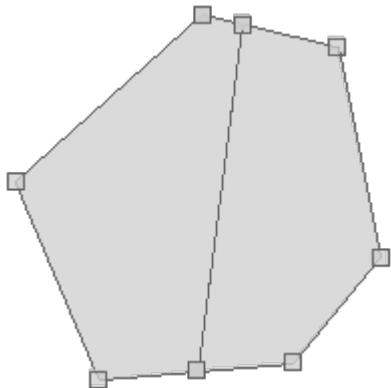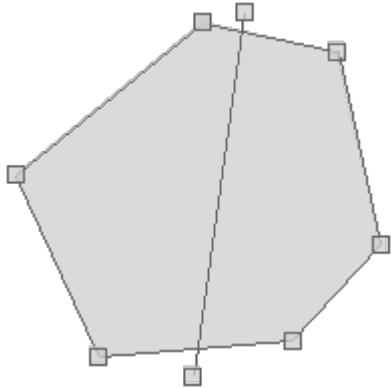


## MultiLineStrings

Add a LineString to a MultiLineString to get a new MultiLineString

```
MultiLineString multiLineString = new MultiLineString([
    new LineString (
        [-122.3822021484375, 47.57837853860192],
        [-122.32452392578125, 47.48380086737799]
    ),
    new LineString (
        [-122.32452392578125, 47.48380086737799],
        [-122.29705810546874, 47.303447043862626]
    )
])

LineString lineString = new LineString (
    [-122.29705810546874, 47.303447043862626],
    [-122.42889404296875, 47.23262467463881]
)

MultiLineString newMultiLineString = multiLineString + lineString
```

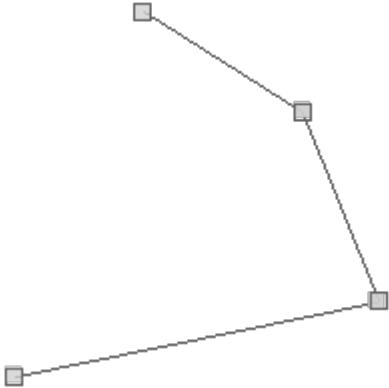


Merge the LineStrings in a MultiLineString

```
MultiLineString multiLineString = new MultiLineString([
    new LineString (
        [-122.3822021484375, 47.57837853860192],
        [-122.32452392578125, 47.48380086737799]
    ),
    new LineString (
        [-122.32452392578125, 47.48380086737799],
        [-122.29705810546874, 47.303447043862626]
    ),
    new LineString (
        [-122.29705810546874, 47.303447043862626],
        [-122.42889404296875, 47.23262467463881]
    )
])
MultiLineString mergedMultiLineString = multiLineString.merge()

println "Original MultiLineString = ${multiLineString}"
println "Merged MultiLineString = ${mergedMultiLineString}"
```

```
Original MultiLineString = MULTILINESTRING ((-122.3822021484375 47.57837853860192,
-122.32452392578125 47.48380086737799), (-122.32452392578125 47.48380086737799,
-122.29705810546874 47.303447043862626), (-122.29705810546874 47.303447043862626,
-122.42889404296875 47.23262467463881))
```


```
Merged MultiLineString = MULTILINESTRING ((-122.3822021484375 47.57837853860192,
-122.32452392578125 47.48380086737799, -122.29705810546874 47.303447043862626,
-122.42889404296875 47.23262467463881))
```

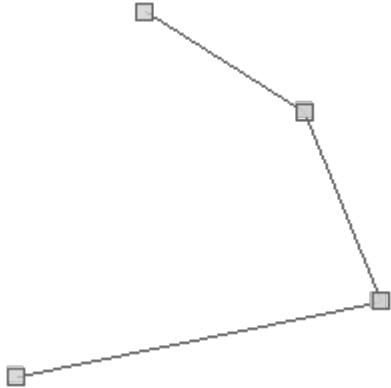

## MultiPolygons

Add a Polygon to a MultiPolygon to get a new MultiPolygon

```
MultiPolygon multiPolygon = new MultiPolygon (
    new Polygon ([[
        [-122.2723388671875, 47.818687628247105],
        [-122.37945556640624, 47.66168780332917],
        [-121.95373535156249, 47.67093619422418],
        [-122.2723388671875, 47.818687628247105]
    ]]),
    new Polygon ([[
        [-122.76672363281249, 47.42437092240516],
        [-122.76672363281249, 47.59505101193038],
        [-122.52227783203125, 47.59505101193038],
        [-122.52227783203125, 47.42437092240516],
        [-122.76672363281249, 47.42437092240516]
    ]])
)
Polygon polygon = new Polygon ([[[
    [-122.32177734375, 47.54501765940571],
    [-122.27645874023438, 47.36673410912714],
    [-122.03887939453125, 47.44480754169437],
    [-122.15972900390624, 47.55150616084034],
    [-122.32177734375, 47.54501765940571]
]])
MultiPolygon newMultiPolygon = multiPolygon + polygon
```

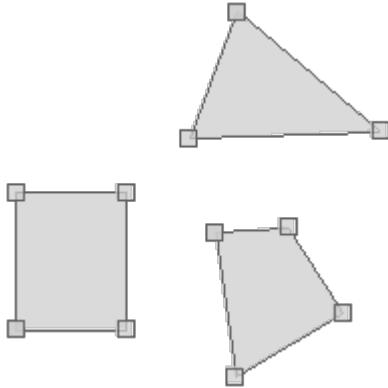


*Split a MultiPolygon with a LineString*

```


MultiPolygon multiPolygon = new MultiPolygon (
    new Polygon ([[[
        [-122.2723388671875, 47.818687628247105],
        [-122.37945556640624, 47.66168780332917],
        [-121.95373535156249, 47.67093619422418],
        [-122.2723388671875, 47.818687628247105]
    ]]),
    new Polygon ([[[
        [-122.76672363281249, 47.42437092240516],
        [-122.76672363281249, 47.59505101193038],
        [-122.52227783203125, 47.59505101193038],
        [-122.52227783203125, 47.42437092240516],
        [-122.76672363281249, 47.42437092240516]
    ]]),
    new Polygon ([[[
        [-122.32177734375, 47.54501765940571],
        [-122.27645874023438, 47.36673410912714],
        [-122.03887939453125, 47.44480754169437],
        [-122.15972900390624, 47.55150616084034],
        [-122.32177734375, 47.54501765940571]
    ]])
)
LineString lineString = new LineString([
    [-122.84362792968749, 47.484728927366504],
    [-122.05810546875, 47.50421439972969],
    [-122.35748291015625, 47.85832433461554]
])
Geometry splitGeometry = multiPolygon.split(lineString)

```

Before

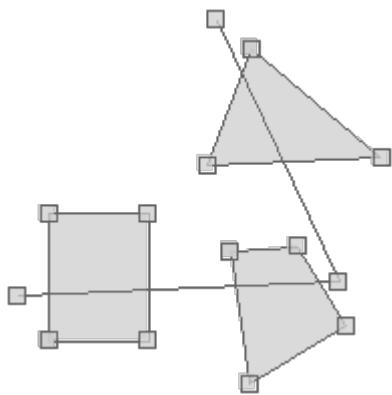

After

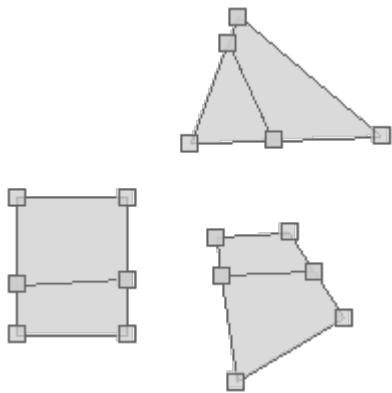


## Geometry Collections


Add a Geometry to a Geometry Collection

```
GeometryCollection geometryCollection = new GeometryCollection([
    new Point(-122.38654196262358, 47.581211931059826),
    new LineString([
        [-122.3865446448326, 47.58118841055313],
        [-122.38657146692276, 47.58067638459562]
    ]),
    new Polygon(new LinearRing([
        [-122.38693356513977, 47.58088445228483],
        [-122.38672703504562, 47.58088445228483],
        [-122.38672703504562, 47.58096225129535],
        [-122.38693356513977, 47.58096225129535],
        [-122.38693356513977, 47.58088445228483]
    ]))
])
GeometryCollection newGeometryCollection = geometryCollection + new Point(-
122.38718032836913, 47.58121374032914)
```

Original Geometry Collection

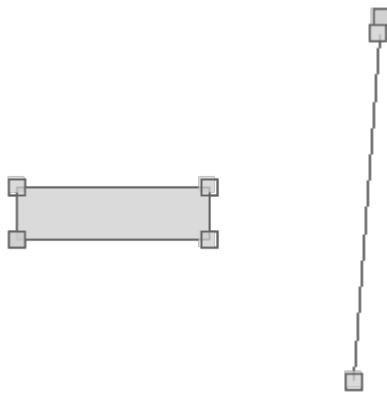


New Geometry Collection

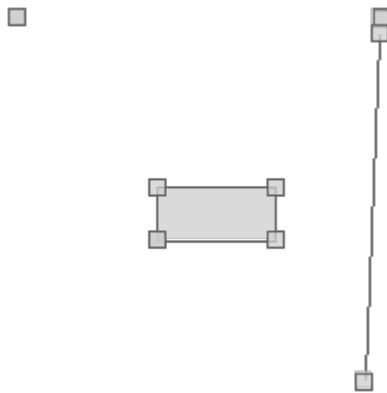


*Get a subset of Geometries from a Geometry Collection*


```
GeometryCollection geometryCollection = new GeometryCollection([
    new Point(-122.38654196262358, 47.581211931059826),
    new LineString([
        [-122.3865446448326, 47.58118841055313],
        [-122.38657146692276, 47.58067638459562]
    ]),
    new Polygon(new LinearRing([
        [-122.38693356513977, 47.58088445228483],
        [-122.38672703504562, 47.58088445228483],
        [-122.38672703504562, 47.58096225129535],
        [-122.38693356513977, 47.58096225129535],
        [-122.38693356513977, 47.58088445228483]
    ]))
])
```

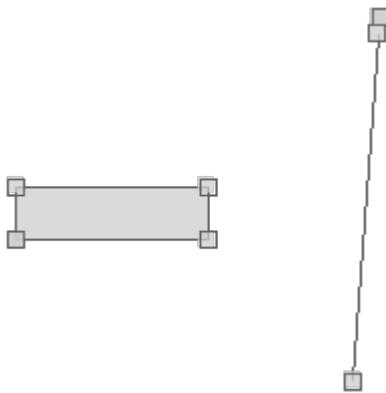

```
Polygon slicedGeometryCollection1 = geometryCollection.slice(2)
```

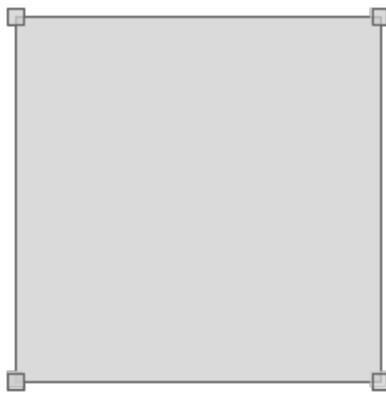

```
GeometryCollection slicedGeometryCollection2 = geometryCollection.slice(0,2)
```

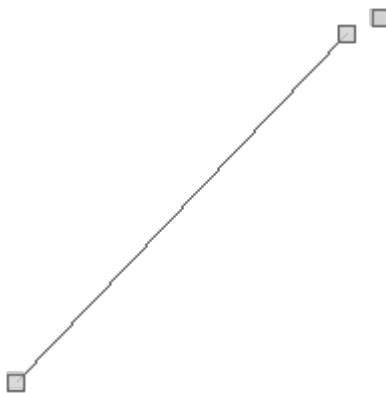

*Get a Geometry from a GeometryCollection that is the most type specific as possible.*

```
GeometryCollection geometryCollection1 = new GeometryCollection([
    new Point(-122.38654196262358, 47.581211931059826),
    new Point(-122.38718032836913, 47.58121374032914),
])
Geometry narrowedGeometry1 = geometryCollection1.narrow()
println "Narrow Geometry #1 = ${narrowedGeometry1.wkt}"
```

Narrow Geometry #1 = MULTIPOINT ((-122.38654196262358 47.581211931059826), (-122.38718032836913 47.58121374032914))

```
GeometryCollection geometryCollection2 = new GeometryCollection([
    new Point(-122.38654196262358, 47.581211931059826),
    new Polygon(new LinearRing([
        [-122.38693356513977, 47.58088445228483],
        [-122.38672703504562, 47.58088445228483],
        [-122.38672703504562, 47.58096225129535],
        [-122.38693356513977, 47.58096225129535],
        [-122.38693356513977, 47.58088445228483]
    ]))
])
Geometry narrowedGeometry2 = geometryCollection2.narrow()
println "Narrow Geometry #2 = ${narrowedGeometry2.wkt}"
```




Narrow Geometry #2 = GEOMETRYCOLLECTION (POINT (-122.38654196262358 47.581211931059826), POLYGON ((-122.38693356513977 47.58088445228483, -122.38672703504562 47.58088445228483, -122.38672703504562 47.58096225129535, -122.38693356513977 47.58096225129535, -122.38693356513977 47.58088445228483)))

## Circular Strings

## Get Curved WKT from a Circular Strings

```
CircularString circularString = new CircularString([
    [-122.464599609375, 47.247542522268006],
    [-122.03613281249999, 47.37789454155521],
    [-122.37670898437499, 47.58393661978134]
])
println "WKT = ${circularString.wkt}"
println "Curved WKT = ${circularString.curvedWkt}"
```

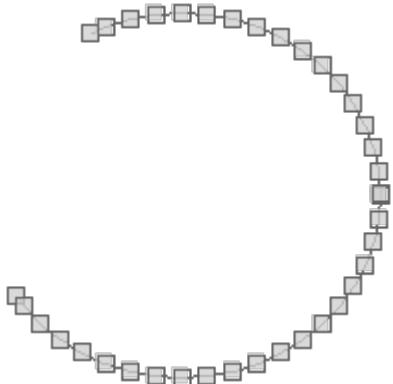


```
WKT = LINESTRING (-122.464599609375 47.247542522268006, -122.4550237920096
47.23410579860605, -122.4348780833765 47.21113402059009, -122.41190630536055
47.19098831195699, -122.38650151145254 47.17401337136692, -122.3590983847198
47.16049964475972, -122.33016580025833 47.15067835574435, -122.30019880260986
47.144717549298825, -122.26971013541258 47.1427192164741, -122.2392214682153
47.144717549298825, -122.20925447056683 47.15067835574435, -122.18032188610536
47.16049964475972, -122.15291875937262 47.17401337136692, -122.12751396546462
47.19098831195699, -122.10454218744866 47.21113402059009, -122.08439647881556
47.23410579860605, -122.06742153822549 47.259510592514054, -122.05390781161829
47.28691371924678, -122.04408652260291 47.31584630370827, -122.0381257161574
47.34581330135674, -122.03612738333267 47.37630196855401, -122.03613281249999
47.37789454155521, -122.0381257161574 47.40679063575128, -122.04408652260291
47.43675763339975, -122.05390781161829 47.46569021786124, -122.06742153822549
47.493093344593966, -122.08439647881556 47.51849813850197, -122.10454218744866
47.54146991651793, -122.12751396546462 47.56161562515103, -122.15291875937262
47.5785905657411, -122.18032188610536 47.5921042923483, -122.20925447056683
47.60192558136367, -122.2392214682153 47.607886387809195, -122.26971013541258
47.60988472063392, -122.30019880260986 47.607886387809195, -122.33016580025833
47.60192558136367, -122.3590983847198 47.5921042923483, -122.37670898437499
47.58393661978134)

Curved WKT = CIRCULARSTRING (-122.464599609375 47.247542522268006,
-122.03613281249999 47.37789454155521, -122.37670898437499 47.58393661978134)
```

### *Get control points from a Circular Strings*


```
CircularString circularString = new CircularString([
    [-122.464599609375, 47.247542522268006],
    [-122.03613281249999, 47.37789454155521],
    [-122.37670898437499, 47.58393661978134]
])
List<Point> points = circularString.controlPoints
points.each { Point point ->
    println point
}
```

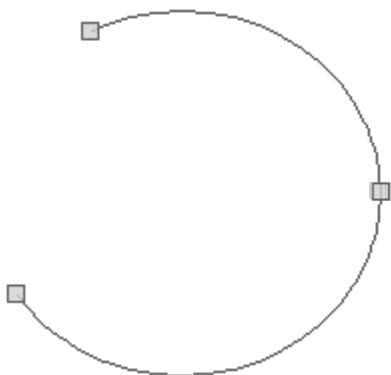

```
POINT (-122.464599609375 47.247542522268006)
POINT (-122.03613281249999 47.37789454155521)
POINT (-122.37670898437499 47.58393661978134)
```

### *Convert a Circural Strings to a Linear Geometry*

```
CircularString circularString = new CircularString([
    [-122.464599609375, 47.247542522268006],
    [-122.03613281249999, 47.37789454155521],
    [-122.37670898437499, 47.58393661978134]
])
Geometry linear = circularString.linear
println linear.wkt
```

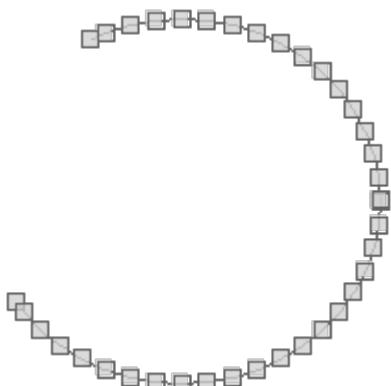

```

LINESTRING (-122.464599609375 47.247542522268006, -122.4550237920096
47.23410579860605, -122.4348780833765 47.21113402059009, -122.41190630536055
47.19098831195699, -122.38650151145254 47.17401337136692, -122.3590983847198
47.16049964475972, -122.33016580025833 47.15067835574435, -122.30019880260986
47.144717549298825, -122.26971013541258 47.1427192164741, -122.2392214682153
47.144717549298825, -122.20925447056683 47.15067835574435, -122.18032188610536
47.16049964475972, -122.15291875937262 47.17401337136692, -122.12751396546462
47.19098831195699, -122.10454218744866 47.21113402059009, -122.08439647881556
47.23410579860605, -122.06742153822549 47.259510592514054, -122.05390781161829
47.28691371924678, -122.04408652260291 47.31584630370827, -122.0381257161574
47.34581330135674, -122.03612738333267 47.37630196855401, -122.03613281249999
47.37789454155521, -122.0381257161574 47.40679063575128, -122.04408652260291
47.43675763339975, -122.05390781161829 47.46569021786124, -122.06742153822549
47.493093344593966, -122.08439647881556 47.51849813850197, -122.10454218744866
47.54146991651793, -122.12751396546462 47.56161562515103, -122.15291875937262
47.5785905657411, -122.18032188610536 47.5921042923483, -122.20925447056683
47.60192558136367, -122.2392214682153 47.607886387809195, -122.26971013541258
47.60988472063392, -122.30019880260986 47.607886387809195, -122.33016580025833
47.60192558136367, -122.3590983847198 47.5921042923483, -122.37670898437499
47.58393661978134)

```


## Circular Rings

*Get Curved WKT from a Circular Ring*

```

CircularRing circularRing = new CircularRing([
    [-118.47656249999999, 41.508577297439324],
    [-109.6875, 57.51582286553883],
    [-93.8671875, 42.032974332441405],
    [-62.57812500000001, 30.14512718337613],
    [-92.10937499999999, 7.36246686553575],
    [-127.265625, 14.604847155053898],
    [-118.47656249999999, 41.508577297439324]
])
println "WKT = ${circularRing.wkt}"
println "Curved WKT = ${circularRing.curvedWkt}"


```

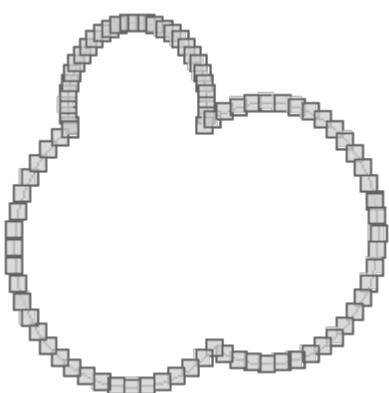

WKT = LINEARRING (-118.47656249999999 41.508577297439324, -118.58869123015452  
 41.901774579059115, -118.91479847512254 43.54122641035517, -119.02412442253558  
 45.209218040904574, -118.91479847512252 46.877209671453976, -118.58869123015451  
 48.516661502750026, -118.05138247300694 50.09952205941734, -117.31206570548474  
 51.59870815847947, -116.38339084245754 52.98856831012856, -115.28124776830906  
 54.245321621827856, -114.02449445660976 55.347464695976335, -112.63463430496067  
 56.27613955900354, -111.13544820589854 57.01545632652574, -109.6875 57.51582286553883,  
 -109.55258764923123 57.552765083673314, -107.91313581793517 57.87887232864133,  
 -106.24514418738576 57.98819827605437, -104.57715255683635 57.87887232864133,  
 -102.9377007255403 57.552765083673314, -101.35484016887298 57.01545632652574,  
 -99.85565406981085 56.27613955900354, -98.46579391816176 55.347464695976335,  
 -97.20904060646247 54.245321621827856, -96.10689753231398 52.98856831012856,  
 -95.17822266928678 51.59870815847947, -94.43890590176458 50.09952205941733,  
 -93.901597144617 48.51666150275002, -93.575489899649 46.87720967145396,  
 -93.46616395223595 45.20921804090456, -93.575489899649 43.54122641035516, -93.8671875  
 42.032974332441405, -92.52944589377746 42.87620255408929, -90.13998424943787  
 44.0545546346726, -87.61715897053445 44.91093841996455, -85.00413629704853  
 45.43070094596436, -82.34562577139025 45.60494893174677, -79.68711524573196  
 45.43070094596437, -77.07409257224604 44.910938419964566, -74.55126729334262  
 44.05455463467261, -72.16180564900301 42.876202554089296, -69.94659199044581  
 41.396044109014326, -67.9435292375422 39.639405220820365, -66.18689034934823  
 37.63634246791675, -64.70673190427325 35.42112880935955, -63.528379823689946  
 33.03166716501995, -62.67199603839799 30.50884188611652, -62.57812500000001  
 30.14512718337613, -62.15223351239818 27.895819212630613, -61.97798552661578  
 25.237308686972327, -62.15223351239818 22.578798161314037, -62.671996038397985  
 19.965775487828132, -63.52837982368993 17.442950208924703, -64.70673190427325  
 15.0534885645851, -66.18689034934822 12.838274906027902, -67.94352923754218  
 10.835212153124278, -69.9465919904458 9.078573264930323, -72.16180564900299  
 7.598414819855346, -74.55126729334259 6.42006273927203, -77.07409257224602  
 5.563678953980077, -79.68711524573193 5.0439164279802675, -82.34562577139022  
 4.869668442197863, -85.00413629704852 5.043916427980264, -87.61715897053442  
 5.5636789539800695, -90.13998424943784 6.420062739272023, -92.10937499999999  
 7.36246686553575, -94.00832592648507 5.722586433241059, -96.3693387982898  
 4.1450080684486466, -98.91606817456314 2.88910012519991, -101.60493880959022  
 1.9763515366073037, -104.38994338130999 1.4223796840833636, -107.22342968935115  
 1.2366631796147907, -110.05691599739232 1.4223796840833813, -112.84192056911208  
 1.9763515366073356, -115.53079120413916 2.8891001251999597, -118.07752058041248  
 4.1450080684487105, -120.43853345221721 5.722586433241133, -122.57343223472037  
 7.594842416368293, -124.4456882178475 9.729741198871439, -126.02326658263992  
 12.09075407067618, -127.265625 14.604847155053898, -127.27917452588866  
 14.637483446949503, -128.19192311448128 17.326354081976593, -128.7458949670052  
 20.111358653696357, -128.9316114714738 22.944844961737523, -128.7458949670052  
 25.77833126977869, -128.19192311448126 28.56333584149845, -127.27917452588864  
 31.252206476525537, -126.02326658263989 33.798935852798856, -124.44568821784746  
 36.159948724603595, -122.57343223472031 38.29484750710673, -120.43853345221717  
 40.16710349023388, -118.47656249999999 41.508577297439324)  
 Curved WKT = CIRCULARSTRING (-118.47656249999999 41.508577297439324, -109.6875  
 57.51582286553883, -93.8671875 42.032974332441405, -62.57812500000001  
 30.14512718337613, -92.10937499999999 7.36246686553575, -127.265625  
 14.604847155053898, -118.47656249999999 41.508577297439324)

### Get control points from a Circular Ring


```
CircularRing circularRing = new CircularRing([
    [-118.4765624999999, 41.508577297439324],
    [-109.6875, 57.51582286553883],
    [-93.8671875, 42.032974332441405],
    [-62.57812500000001, 30.14512718337613],
    [-92.10937499999999, 7.36246686553575],
    [-127.265625, 14.604847155053898],
    [-118.47656249999999, 41.508577297439324]
])
List<Point> points = circularRing.controlPoints
points.each { Point point ->
    println point
}
```

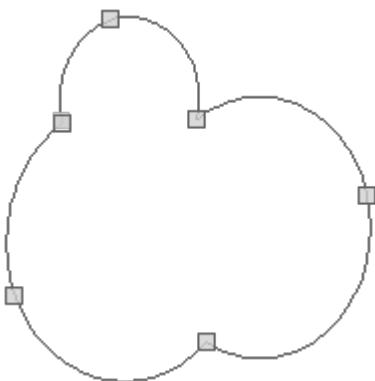

```
POINT (-118.4765624999999 41.508577297439324)
POINT (-109.6875 57.51582286553883)
POINT (-93.8671875 42.032974332441405)
POINT (-62.57812500000001 30.14512718337613)
POINT (-92.10937499999999 7.36246686553575)
POINT (-127.265625 14.604847155053898)
POINT (-118.47656249999999 41.508577297439324)
```

### Convert a Circular Ring to a Linear Geometry

```
CircularRing circularRing = new CircularRing([
    [-118.4765624999999, 41.508577297439324],
    [-109.6875, 57.51582286553883],
    [-93.8671875, 42.032974332441405],
    [-62.57812500000001, 30.14512718337613],
    [-92.10937499999999, 7.36246686553575],
    [-127.265625, 14.604847155053898],
    [-118.47656249999999, 41.508577297439324]
])
Geometry linear = circularRing.linear
println linear.wkt
```

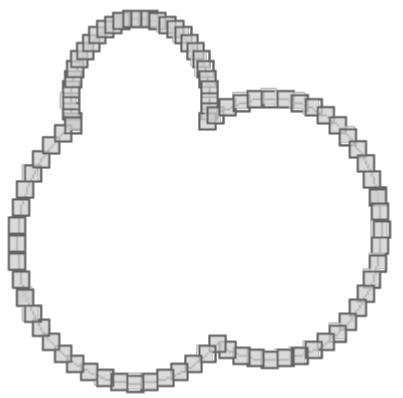


LINEARRING (-118.47656249999999 41.508577297439324, -118.58869123015452  
41.901774579059115, -118.91479847512254 43.54122641035517, -119.02412442253558  
45.209218040904574, -118.91479847512252 46.877209671453976, -118.58869123015451  
48.516661502750026, -118.05138247300694 50.09952205941734, -117.31206570548474  
51.59870815847947, -116.38339084245754 52.98856831012856, -115.28124776830906  
54.245321621827856, -114.02449445660976 55.347464695976335, -112.63463430496067  
56.27613955900354, -111.13544820589854 57.01545632652574, -109.6875 57.51582286553883,  
-109.55258764923123 57.552765083673314, -107.91313581793517 57.87887232864133,  
-106.24514418738576 57.98819827605437, -104.57715255683635 57.87887232864133,  
-102.9377007255403 57.552765083673314, -101.35484016887298 57.01545632652574,  
-99.85565406981085 56.27613955900354, -98.46579391816176 55.347464695976335,  
-97.20904060646247 54.245321621827856, -96.10689753231398 52.98856831012856,  
-95.17822266928678 51.59870815847947, -94.43890590176458 50.09952205941733,  
-93.901597144617 48.51666150275002, -93.575489899649 46.87720967145396,  
-93.46616395223595 45.20921804090456, -93.575489899649 43.54122641035516, -93.8671875  
42.032974332441405, -92.52944589377746 42.87620255408929, -90.13998424943787  
44.0545546346726, -87.61715897053445 44.91093841996455, -85.00413629704853  
45.43070094596436, -82.34562577139025 45.60494893174677, -79.68711524573196  
45.43070094596437, -77.07409257224604 44.910938419964566, -74.55126729334262  
44.05455463467261, -72.16180564900301 42.876202554089296, -69.94659199044581  
41.396044109014326, -67.9435292375422 39.639405220820365, -66.18689034934823  
37.63634246791675, -64.70673190427325 35.42112880935955, -63.528379823689946  
33.03166716501995, -62.67199603839799 30.50884188611652, -62.57812500000001  
30.14512718337613, -62.15223351239818 27.895819212630613, -61.97798552661578  
25.237308686972327, -62.15223351239818 22.578798161314037, -62.671996038397985  
19.965775487828132, -63.52837982368993 17.442950208924703, -64.70673190427325  
15.0534885645851, -66.18689034934822 12.838274906027902, -67.94352923754218  
10.835212153124278, -69.9465919904458 9.078573264930323, -72.16180564900299  
7.598414819855346, -74.55126729334259 6.42006273927203, -77.07409257224602  
5.563678953980077, -79.68711524573193 5.0439164279802675, -82.34562577139022  
4.869668442197863, -85.00413629704852 5.043916427980264, -87.61715897053442  
5.5636789539800695, -90.13998424943784 6.420062739272023, -92.10937499999999  
7.36246686553575, -94.00832592648507 5.722586433241059, -96.3693387982898  
4.1450080684486466, -98.91606817456314 2.88910012519991, -101.60493880959022  
1.9763515366073037, -104.38994338130999 1.4223796840833636, -107.22342968935115  
1.2366631796147907, -110.05691599739232 1.4223796840833813, -112.84192056911208  
1.9763515366073356, -115.53079120413916 2.8891001251999597, -118.07752058041248  
4.1450080684487105, -120.43853345221721 5.722586433241133, -122.57343223472037  
7.594842416368293, -124.4456882178475 9.729741198871439, -126.02326658263992  
12.09075407067618, -127.265625 14.604847155053898, -127.27917452588866  
14.637483446949503, -128.19192311448128 17.326354081976593, -128.7458949670052  
20.111358653696357, -128.9316114714738 22.944844961737523, -128.7458949670052  
25.77833126977869, -128.19192311448126 28.56333584149845, -127.27917452588864  
31.252206476525537, -126.02326658263989 33.798935852798856, -124.44568821784746  
36.159948724603595, -122.57343223472031 38.29484750710673, -120.43853345221717  
40.16710349023388, -118.47656249999999 41.508577297439324)

# Compound Curves

*Get Curved WKT from a Compound Curves*

```
CompoundCurve compoundCurve = new CompoundCurve([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ])
])
println "WKT = ${compoundCurve.wkt}"
println "Curved WKT = ${compoundCurve.curvedWkt}"
```

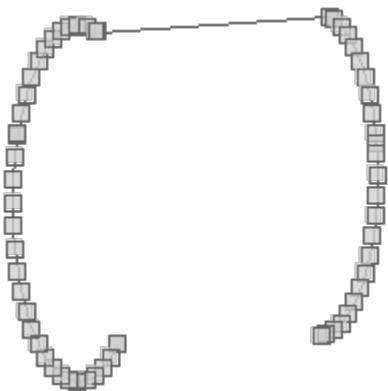


```

WKT = LINESTRING (27.0703125 23.885837699862005, 27.022331449414295 23.8488525605847,
25.524767337284196 22.84821221194479, 23.909405319245263 22.051603821364203,
22.203884687289108 21.472657579267334, 20.43738737228815 21.12127941637069,
18.64013863306764 21.00348151046186, 16.842889893847133 21.1212794163707,
15.076392578846175 21.472657579267356, 13.370871946890022 22.051603821364232,
11.755509928851094 22.848212211944833, 10.257945816720998 23.848852560584746,
8.903803347661494 25.036403633488835, 7.716252274757412 26.390546102548342,
6.715611926117504 27.88811021467844, 5.919003535536911 29.50347223271737,
5.340057293440038 31.20899286467353, 4.988679130543391 32.97549017967449,
4.8708812246345605 34.772738918894994, 4.988679130543396 36.5699876581155,
5.340057293440047 38.336484973116455, 5.9190035355369215 40.04200560507262, 5.9765625
40.17887331434696, 6.715611926117516 41.65736762311154, 7.71625227475743
43.15493173524164, 8.903803347661514 44.50907420430114, 10.257945816721021
45.69662527720523, 11.755509928851117 46.69726562584515, 13.37087194689005
47.49387401642574, 15.076392578846209 48.07282025852261, 16.84288989384717
48.42419842141926, 18.64013863306768 48.5419963273281, 20.437387372288192
48.42419842141926, 22.20388468728915 48.07282025852261, 22.5 47.98992166741417,
71.71875 49.15296965617039, 72.58658076138724 48.953451060440116, 74.12646468490568
48.43073090444654, 75.58494601643167 47.71148750685245, 76.93706973601537
46.80802732160263, 78.15970063193521 45.735808802953194, 79.23191915058464
44.513177907033366, 80.13537933583446 43.16105418744966, 80.85462273342854
41.70257285592367, 81.37734288942212 40.162688932405224, 81.5625 39.36827914916011,
81.69459591702075 38.567750257762206, 81.80095352896302 36.9450466749183,
81.69459591702075 35.3223430920744, 81.37734288942212 33.72740441743138,
80.85462273342854 32.187520493912935, 80.13537933583446 30.729039162386947,
79.23191915058464 29.376915442803238, 78.15970063193521 28.15428454688341,
76.93706973601537 27.082066028233974, 75.58494601643167 26.178605842984155,
74.12646468490568 25.459362445390067, 72.58658076138724 24.936642289396488,
70.99164208674422 24.61938926179787, 69.9609375 24.5271348225978)
Curved WKT = COMPOUNDCURVE (CIRCULARSTRING (27.0703125 23.885837699862005, 5.9765625
40.17887331434696, 22.5 47.98992166741417), (22.5 47.98992166741417, 71.71875
49.15296965617039), CIRCULARSTRING (71.71875 49.15296965617039, 81.5625
39.36827914916011, 69.9609375 24.5271348225978))

```

## Get component LineStrings from a Compound Curves


```
CompoundCurve compoundCurve = new CompoundCurve([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ])
])
List<LineString> lineStrings = compoundCurve.components
lineStrings.each { LineString lineString ->
    println lineString
}
```

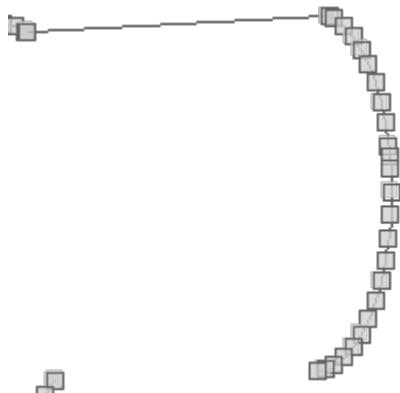

LINestring (27.0703125 23.885837699862005, 27.022331449414295 23.8488525605847, 25.524767337284196 22.84821221194479, 23.909405319245263 22.051603821364203, 22.203884687289108 21.472657579267334, 20.43738737228815 21.12127941637069, 18.64013863306764 21.00348151046186, 16.842889893847133 21.1212794163707, 15.076392578846175 21.472657579267356, 13.370871946890022 22.051603821364232, 11.755509928851094 22.848212211944833, 10.257945816720998 23.848852560584746, 8.903803347661494 25.036403633488835, 7.716252274757412 26.390546102548342, 6.715611926117504 27.88811021467844, 5.919003535536911 29.50347223271737, 5.340057293440038 31.20899286467353, 4.988679130543391 32.97549017967449, 4.8708812246345605 34.772738918894994, 4.988679130543396 36.5699876581155, 5.340057293440047 38.336484973116455, 5.9190035355369215 40.04200560507262, 5.9765625 40.17887331434696, 6.715611926117516 41.65736762311154, 7.71625227475743 43.15493173524164, 8.903803347661514 44.50907420430114, 10.257945816721021 45.69662527720523, 11.755509928851117 46.69726562584515, 13.37087194689005 47.49387401642574, 15.076392578846209 48.07282025852261, 16.84288989384717 48.42419842141926, 18.64013863306768 48.5419963273281, 20.437387372288192 48.42419842141926, 22.20388468728915 48.07282025852261, 22.5 47.98992166741417) LINestring (22.5 47.98992166741417, 71.71875 49.15296965617039) LINestring (71.71875 49.15296965617039, 72.58658076138724 48.953451060440116, 74.12646468490568 48.43073090444654, 75.58494601643167 47.71148750685245, 76.93706973601537 46.80802732160263, 78.15970063193521 45.735808802953194, 79.23191915058464 44.513177907033366, 80.13537933583446 43.16105418744966, 80.85462273342854 41.70257285592367, 81.37734288942212 40.162688932405224, 81.5625 39.36827914916011, 81.69459591702075 38.567750257762206, 81.80095352896302 36.9450466749183, 81.69459591702075 35.3223430920744, 81.37734288942212 33.72740441743138, 80.85462273342854 32.187520493912935, 80.13537933583446 30.729039162386947, 79.23191915058464 29.376915442803238, 78.15970063193521 28.15428454688341, 76.93706973601537 27.082066028233974, 75.58494601643167 26.178605842984155, 74.12646468490568 25.459362445390067, 72.58658076138724 24.936642289396488, 70.99164208674422 24.61938926179787, 69.9609375 24.5271348225978)

## Convert a Compound Curves to a Linear Geometry

```
CompoundCurve compoundCurve = new CompoundCurve([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ])
])
Geometry linear = compoundCurve.linear
println linear.wkt
```

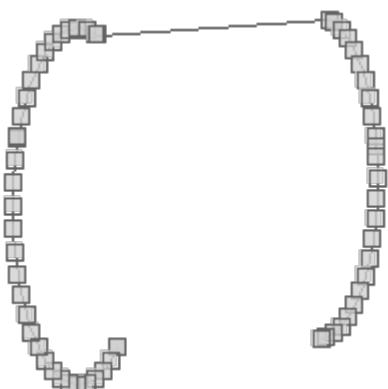


LINestring (27.0703125 23.885837699862005, 27.022331449414295 23.8488525605847, 25.524767337284196 22.84821221194479, 23.909405319245263 22.051603821364203, 22.203884687289108 21.472657579267334, 20.43738737228815 21.12127941637069, 18.64013863306764 21.00348151046186, 16.842889893847133 21.1212794163707, 15.076392578846175 21.472657579267356, 13.370871946890022 22.051603821364232, 11.755509928851094 22.848212211944833, 10.257945816720998 23.848852560584746, 8.903803347661494 25.036403633488835, 7.716252274757412 26.390546102548342, 6.715611926117504 27.88811021467844, 5.919003535536911 29.50347223271737, 5.340057293440038 31.20899286467353, 4.988679130543391 32.97549017967449, 4.8708812246345605 34.772738918894994, 4.988679130543396 36.5699876581155, 5.340057293440047 38.336484973116455, 5.9190035355369215 40.04200560507262, 5.9765625 40.17887331434696, 6.715611926117516 41.65736762311154, 7.71625227475743 43.15493173524164, 8.903803347661514 44.50907420430114, 10.257945816721021 45.69662527720523, 11.755509928851117 46.69726562584515, 13.37087194689005 47.49387401642574, 15.076392578846209 48.07282025852261, 16.84288989384717 48.42419842141926, 18.64013863306768 48.5419963273281, 20.437387372288192 48.42419842141926, 22.20388468728915 48.07282025852261, 22.5 47.98992166741417, 71.71875 49.15296965617039, 72.58658076138724 48.953451060440116, 74.12646468490568 48.43073090444654, 75.58494601643167 47.71148750685245, 76.93706973601537 46.80802732160263, 78.15970063193521 45.735808802953194, 79.23191915058464 44.513177907033366, 80.13537933583446 43.16105418744966, 80.85462273342854 41.70257285592367, 81.37734288942212 40.162688932405224, 81.5625 39.36827914916011, 81.69459591702075 38.567750257762206, 81.80095352896302 36.9450466749183, 81.69459591702075 35.3223430920744, 81.37734288942212 33.72740441743138, 80.85462273342854 32.187520493912935, 80.13537933583446 30.729039162386947, 79.23191915058464 29.376915442803238, 78.15970063193521 28.15428454688341, 76.93706973601537 27.082066028233974, 75.58494601643167 26.178605842984155, 74.12646468490568 25.459362445390067, 72.58658076138724 24.936642289396488, 70.99164208674422 24.61938926179787, 69.9609375 24.5271348225978)

## Compound Rings

## Get Curved WKT from a Compound Rings

```
CompoundRing compoundRing = new CompoundRing([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ]),
    new LineString([
        [69.9609375, 24.5271348225978],
        [27.0703125, 23.885837699862005],
    ])
])
println "WKT = ${compoundRing.wkt}"
println "Curved WKT = ${compoundRing.curvedWkt}"
```

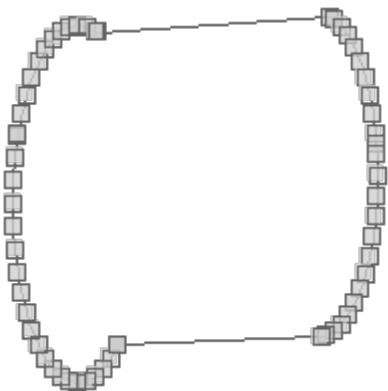

```


WKT = LINEARRING (27.0703125 23.885837699862005, 27.022331449414295 23.8488525605847,
25.524767337284196 22.84821221194479, 23.909405319245263 22.051603821364203,
22.203884687289108 21.472657579267334, 20.43738737228815 21.12127941637069,
18.64013863306764 21.00348151046186, 16.842889893847133 21.1212794163707,
15.076392578846175 21.472657579267356, 13.370871946890022 22.051603821364232,
11.755509928851094 22.848212211944833, 10.257945816720998 23.848852560584746,
8.903803347661494 25.036403633488835, 7.716252274757412 26.390546102548342,
6.715611926117504 27.88811021467844, 5.919003535536911 29.50347223271737,
5.340057293440038 31.20899286467353, 4.988679130543391 32.97549017967449,
4.8708812246345605 34.772738918894994, 4.988679130543396 36.5699876581155,
5.340057293440047 38.336484973116455, 5.9190035355369215 40.04200560507262, 5.9765625
40.17887331434696, 6.715611926117516 41.65736762311154, 7.71625227475743
43.15493173524164, 8.903803347661514 44.50907420430114, 10.257945816721021
45.69662527720523, 11.755509928851117 46.69726562584515, 13.37087194689005
47.49387401642574, 15.076392578846209 48.07282025852261, 16.84288989384717
48.42419842141926, 18.64013863306768 48.5419963273281, 20.437387372288192
48.42419842141926, 22.20388468728915 48.07282025852261, 22.5 47.98992166741417,
71.71875 49.15296965617039, 72.58658076138724 48.953451060440116, 74.12646468490568
48.43073090444654, 75.58494601643167 47.71148750685245, 76.93706973601537
46.80802732160263, 78.15970063193521 45.735808802953194, 79.23191915058464
44.513177907033366, 80.13537933583446 43.16105418744966, 80.85462273342854
41.70257285592367, 81.37734288942212 40.162688932405224, 81.5625 39.36827914916011,
81.69459591702075 38.567750257762206, 81.80095352896302 36.9450466749183,
81.69459591702075 35.3223430920744, 81.37734288942212 33.72740441743138,
80.85462273342854 32.187520493912935, 80.13537933583446 30.729039162386947,
79.23191915058464 29.376915442803238, 78.15970063193521 28.15428454688341,
76.93706973601537 27.082066028233974, 75.58494601643167 26.178605842984155,
74.12646468490568 25.459362445390067, 72.58658076138724 24.936642289396488,
70.99164208674422 24.61938926179787, 69.9609375 24.5271348225978, 27.0703125
23.885837699862005)

Curved WKT = COMPOUNDCURVE (CIRCULARSTRING (27.0703125 23.885837699862005, 5.9765625
40.17887331434696, 22.5 47.98992166741417), (22.5 47.98992166741417, 71.71875
49.15296965617039), CIRCULARSTRING (71.71875 49.15296965617039, 81.5625
39.36827914916011, 69.9609375 24.5271348225978), (69.9609375 24.5271348225978,
27.0703125 23.885837699862005))

```

## Get component LineStrings from a Compound Rings


```
CompoundRing compoundRing = new CompoundRing([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ]),
    new LineString([
        [69.9609375, 24.5271348225978],
        [27.0703125, 23.885837699862005],
    ])
])
List<LineString> lineStrings = compoundRing.components
lineStrings.each { LineString lineString ->
    println lineString
}
```

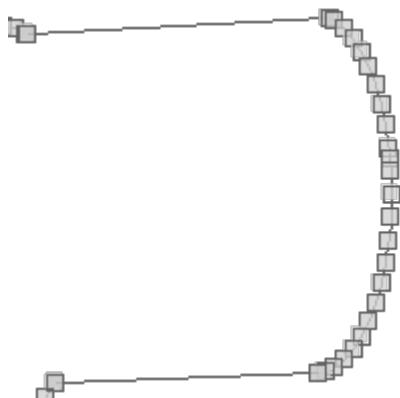

LINESTRING (27.0703125 23.885837699862005, 27.022331449414295 23.8488525605847, 25.524767337284196 22.84821221194479, 23.909405319245263 22.051603821364203, 22.203884687289108 21.472657579267334, 20.43738737228815 21.12127941637069, 18.64013863306764 21.00348151046186, 16.842889893847133 21.1212794163707, 15.076392578846175 21.472657579267356, 13.370871946890022 22.051603821364232, 11.755509928851094 22.848212211944833, 10.257945816720998 23.848852560584746, 8.903803347661494 25.036403633488835, 7.716252274757412 26.390546102548342, 6.715611926117504 27.88811021467844, 5.919003535536911 29.50347223271737, 5.340057293440038 31.20899286467353, 4.988679130543391 32.97549017967449, 4.8708812246345605 34.772738918894994, 4.988679130543396 36.5699876581155, 5.340057293440047 38.336484973116455, 5.9190035355369215 40.04200560507262, 5.9765625 40.17887331434696, 6.715611926117516 41.65736762311154, 7.71625227475743 43.15493173524164, 8.903803347661514 44.50907420430114, 10.257945816721021 45.69662527720523, 11.755509928851117 46.69726562584515, 13.37087194689005 47.49387401642574, 15.076392578846209 48.07282025852261, 16.84288989384717 48.42419842141926, 18.64013863306768 48.5419963273281, 20.437387372288192 48.42419842141926, 22.20388468728915 48.07282025852261, 22.5 47.98992166741417) LINESTRING (22.5 47.98992166741417, 71.71875 49.15296965617039) LINESTRING (71.71875 49.15296965617039, 72.58658076138724 48.953451060440116, 74.12646468490568 48.43073090444654, 75.58494601643167 47.71148750685245, 76.93706973601537 46.80802732160263, 78.15970063193521 45.735808802953194, 79.23191915058464 44.513177907033366, 80.13537933583446 43.16105418744966, 80.85462273342854 41.70257285592367, 81.37734288942212 40.162688932405224, 81.5625 39.36827914916011, 81.69459591702075 38.567750257762206, 81.80095352896302 36.9450466749183, 81.69459591702075 35.3223430920744, 81.37734288942212 33.72740441743138, 80.85462273342854 32.187520493912935, 80.13537933583446 30.729039162386947, 79.23191915058464 29.376915442803238, 78.15970063193521 28.15428454688341, 76.93706973601537 27.082066028233974, 75.58494601643167 26.178605842984155, 74.12646468490568 25.459362445390067, 72.58658076138724 24.936642289396488, 70.99164208674422 24.61938926179787, 69.9609375 24.5271348225978) LINESTRING (69.9609375 24.5271348225978, 27.0703125 23.885837699862005)

## Convert a Compound Rings to a Linear Geometry

```
CompoundRing compoundRing = new CompoundRing([
    new CircularString([
        [27.0703125, 23.885837699862005],
        [5.9765625, 40.17887331434696],
        [22.5, 47.98992166741417],
    ]),
    new LineString([
        [22.5, 47.98992166741417],
        [71.71875, 49.15296965617039],
    ]),
    new CircularString([
        [71.71875, 49.15296965617039],
        [81.5625, 39.36827914916011],
        [69.9609375, 24.5271348225978]
    ]),
    new LineString([
        [69.9609375, 24.5271348225978],
        [27.0703125, 23.885837699862005],
    ])
])
Geometry linear = compoundRing.linear
println linear.wkt
```

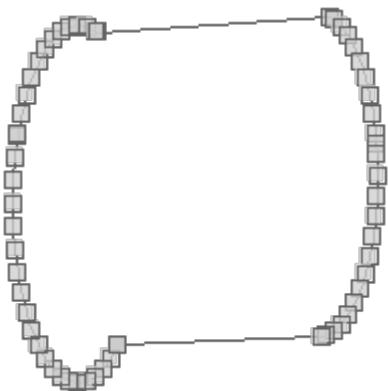

```

LINEARRING (27.0703125 23.885837699862005, 27.022331449414295 23.8488525605847,
25.524767337284196 22.84821221194479, 23.909405319245263 22.051603821364203,
22.203884687289108 21.472657579267334, 20.43738737228815 21.12127941637069,
18.64013863306764 21.00348151046186, 16.842889893847133 21.1212794163707,
15.076392578846175 21.472657579267356, 13.370871946890022 22.051603821364232,
11.755509928851094 22.848212211944833, 10.257945816720998 23.848852560584746,
8.903803347661494 25.036403633488835, 7.716252274757412 26.390546102548342,
6.715611926117504 27.88811021467844, 5.919003535536911 29.50347223271737,
5.340057293440038 31.20899286467353, 4.988679130543391 32.97549017967449,
4.8708812246345605 34.772738918894994, 4.988679130543396 36.5699876581155,
5.340057293440047 38.336484973116455, 5.9190035355369215 40.04200560507262, 5.9765625
40.17887331434696, 6.715611926117516 41.65736762311154, 7.71625227475743
43.15493173524164, 8.903803347661514 44.50907420430114, 10.257945816721021
45.69662527720523, 11.755509928851117 46.69726562584515, 13.37087194689005
47.49387401642574, 15.076392578846209 48.07282025852261, 16.84288989384717
48.42419842141926, 18.64013863306768 48.5419963273281, 20.437387372288192
48.42419842141926, 22.20388468728915 48.07282025852261, 22.5 47.98992166741417,
71.71875 49.15296965617039, 72.58658076138724 48.953451060440116, 74.12646468490568
48.43073090444654, 75.58494601643167 47.71148750685245, 76.93706973601537
46.80802732160263, 78.15970063193521 45.735808802953194, 79.23191915058464
44.513177907033366, 80.13537933583446 43.16105418744966, 80.85462273342854
41.70257285592367, 81.37734288942212 40.162688932405224, 81.5625 39.36827914916011,
81.69459591702075 38.567750257762206, 81.80095352896302 36.9450466749183,
81.69459591702075 35.3223430920744, 81.37734288942212 33.72740441743138,
80.85462273342854 32.187520493912935, 80.13537933583446 30.729039162386947,
79.23191915058464 29.376915442803238, 78.15970063193521 28.15428454688341,
76.93706973601537 27.082066028233974, 75.58494601643167 26.178605842984155,
74.12646468490568 25.459362445390067, 72.58658076138724 24.936642289396488,
70.99164208674422 24.61938926179787, 69.9609375 24.5271348225978, 27.0703125
23.885837699862005)

```

## Processing Geometries

Get the geometry type (*Point*, *LineString*, *Polygon*, ect...) from a Geometry

```

Geometry geom = Geometry.fromString("POINT (-124.80 48.92)")
String type = geom.geometryType
println type

```

Point

Determine if one Geometry exactly equal another Geometry.

```
Point point1 = new Point(-121.915, 47.390)
Point point2 = new Point(-121.915, 47.390)
Point point3 = new Point(-121.409, 47.413)

boolean does1equal2 = point1.equals(point2)
println "Does ${point1} equal ${point2}? ${does1equal2 ? 'Yes' : 'No'}"

boolean does1equal3 = point1.equals(point3)
println "Does ${point1} equal ${point3}? ${does1equal3 ? 'Yes' : 'No'}"

boolean does2equal3 = point2.equals(point3)
println "Does ${point2} equal ${point3}? ${does2equal3 ? 'Yes' : 'No'}"
```

```
Does POINT (-121.915 47.39) equal POINT (-121.915 47.39)? Yes
Does POINT (-121.915 47.39) equal POINT (-121.409 47.413)? No
Does POINT (-121.915 47.39) equal POINT (-121.409 47.413)? No
```

Determine if one Geometry equals another Geometry topologically.

```
Point point1 = new Point(-121.915, 47.390)
Point point2 = new Point(-121.915, 47.390)
Point point3 = new Point(-121.409, 47.413)

boolean does1equal2 = point1.equalsTopo(point2)
println "Does ${point1} equal ${point2}? ${does1equal2 ? 'Yes' : 'No'}"

boolean does1equal3 = point1.equalsTopo(point3)
println "Does ${point1} equal ${point3}? ${does1equal3 ? 'Yes' : 'No'}"

boolean does2equal3 = point2.equalsTopo(point3)
println "Does ${point2} equal ${point3}? ${does2equal3 ? 'Yes' : 'No'}"
```

```
Does POINT (-121.915 47.39) equal POINT (-121.915 47.39)? Yes
Does POINT (-121.915 47.39) equal POINT (-121.409 47.413)? No
Does POINT (-121.915 47.39) equal POINT (-121.409 47.413)? No
```

Determine if one Geometry equals another Geometry when both are normalized.

```
Geometry geom1 = Geometry.fromWKT("POLYGON ((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4))")
Geometry geom2 = Geometry.fromWKT("POLYGON ((1 3, 2 4, 4 4, 6 3, 6 1, 2 1, 1 3))")
Geometry geom3 = Geometry.fromWKT("POLYGON ((1 1, 1 4, 4 4, 4 1, 1 1))")

boolean does1equal2 = geom1.equalsNorm(geom2)
println "Does ${geom1} equal ${geom2}? ${does1equal2} ? 'Yes' : 'No'"

boolean does1equal3 = geom1.equalsNorm(geom3)
println "Does ${geom1} equal ${geom3}? ${does1equal3} ? 'Yes' : 'No'"

boolean does2equal3 = geom2.equalsNorm(geom3)
println "Does ${geom2} equal ${geom3}? ${does2equal3} ? 'Yes' : 'No'"
```

```
Does POLYGON ((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4)) equal POLYGON ((1 3, 2 4, 4 4, 6 3, 6 1, 2 1, 1 3))? Yes
Does POLYGON ((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4)) equal POLYGON ((1 1, 1 4, 4 4, 4 1, 1 1))? No
Does POLYGON ((1 3, 2 4, 4 4, 6 3, 6 1, 2 1, 1 3)) equal POLYGON ((1 1, 1 4, 4 4, 4 1, 1 1))? No
```

Get a Geometry by index in a GeometryCollection

```
MultiPoint multiPoint = new MultiPoint([
    new Point(-122.3876953125, 47.5820839916191),
    new Point(-122.464599609375, 47.25686404408872),
    new Point(-122.48382568359374, 47.431803338643334)
])
Point p1 = multiPoint[0]
println p1

Point p2 = multiPoint[1]
println p2

Point p3 = multiPoint[2]
println p3
```

```
POINT (-122.3876953125 47.5820839916191)
POINT (-122.464599609375 47.25686404408872)
POINT (-122.48382568359374 47.431803338643334)
```


### Cast a Geometry to a Bounds or to a Point

```
Geometry geometry = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])
```

```
Bounds bounds = geometry as Bounds  
println bounds
```

```
Point point = geometry as Point  
println point
```

```
(-122.64,46.308,-120.981,47.413)  
POINT (-121.73789467295867 46.95085967283822)
```

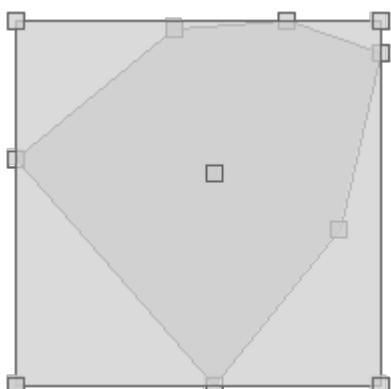

### Get the area of a Geometry

```
Polygon polygon = new Polygon([[  
    [-124.80, 48.92],  
    [-126.21, 45.33],  
    [-114.60, 45.08],  
    [-115.31, 51.17],  
    [-121.99, 52.05],  
    [-124.80, 48.92]  
]])  
double area = polygon.area  
println area
```

```
62.4026
```


*Get the length of a Geometry*

```
LineString lineString = new LineString([-122.69, 49.61], [-99.84, 45.33])
double length = lineString.length
println length
```

```
23.24738479915536
```


*Buffer a Point*

```
Point point = new Point(-123, 46)
Geometry bufferedPoint = point.buffer(2)
```

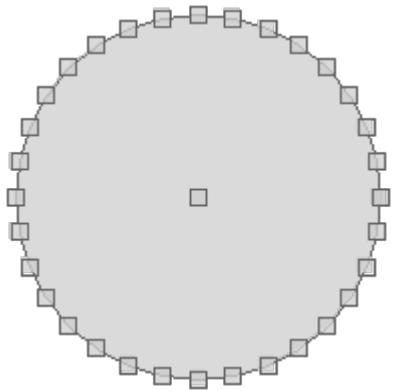


*Buffer a LineString with a butt cap*

```
LineString line = new LineString([
    [-122.563, 47.576],
    [-112.0166, 46.589],
    [-101.337, 47.606]
])
Geometry bufferedLine1 = line.buffer(2.1, 10, Geometry.CAP_BUTT)
```

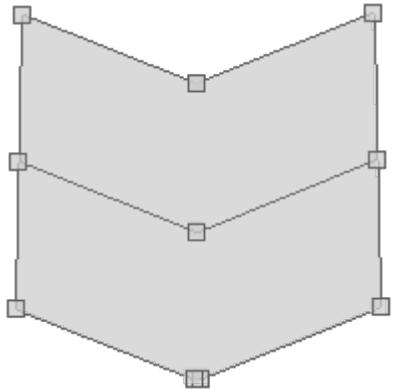


*Buffer a LineString with a round cap*

```
Geometry bufferedLine2 = line.buffer(2.1, 10, Geometry.CAP_ROUND)
```

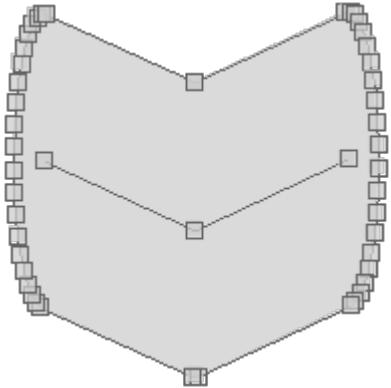


Buffer a LineString with a square cap

```
Geometry bufferedLine3 = line.buffer(2.1, 10, Geometry.CAP_SQUARE)
```

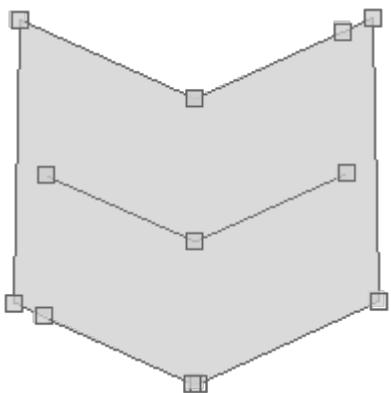


Buffer a LineString on the right side only

```
LineString line = new LineString([
    [-122.563, 47.576],
    [-112.0166, 46.589],
    [-101.337, 47.606]
])
Geometry rightBufferedLine = line.singleSidedBuffer(1.5)
```

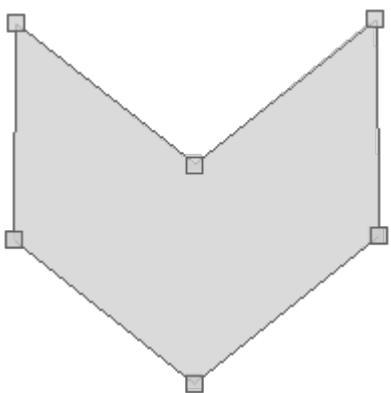


Buffer a LineString on the left side only

```
Geometry leftBufferedLine = line.singleSidedBuffer(-1.5)
```

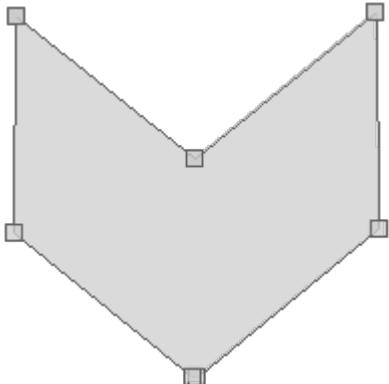

Check whether a Geometry contains another Geometry


```
Polygon polygon1 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
])  
  
boolean contains = polygon1.contains(polygon2)  
println contains
```

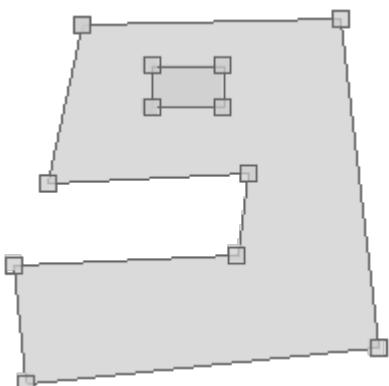

```
true
```

Check whether a Geometry is within another Geometry

```
Polygon polygon1 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
])  
  
boolean within = polygon1.within(polygon2)  
println within
```

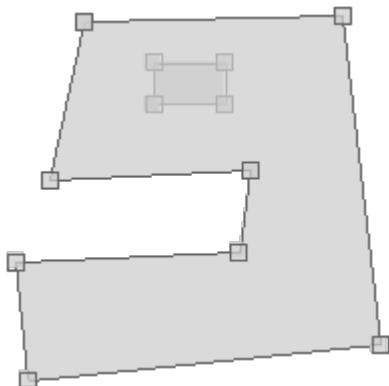

```
true
```

```
Polygon polygon3 = new Polygon([[  
    [-120.563, 46.739],  
    [-119.948, 46.739],  
    [-119.948, 46.965],  
    [-120.563, 46.965],  
    [-120.563, 46.739]  
])  
  
within = polygon1.within(polygon3)  
println within
```




```
false
```

Check whether a Geometry touches another Geometry

```
LineString line1 = new LineString([
    [-122.38651514053345, 47.58219978280006],
    [-122.38651514053345, 47.58020234903306]
])

LineString line2 = new LineString([
    [-122.38651514053345, 47.58124449789785],
    [-122.38333940505981, 47.58124449789785]
])


boolean touches = line1.touches(line2)
```

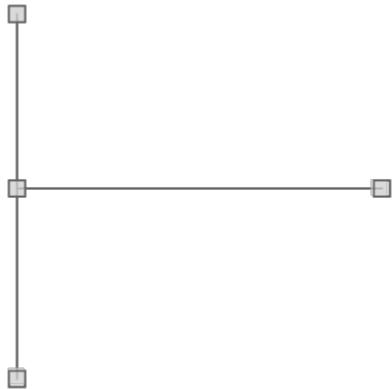

```
true
```

```
LineString line3 = new LineString([
    [-122.386257648468, 47.58183793450921],
    [-122.38348960876465, 47.5818668824645]
])


touches = line1.touches(line3)
```

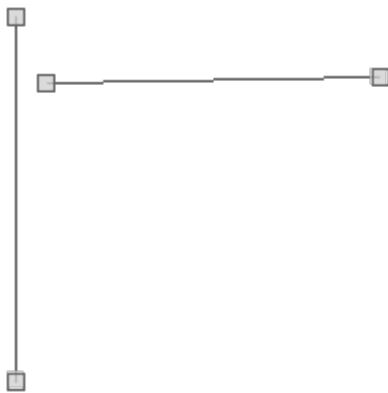

```
false
```


Create a convexhull Geometry around a Geometry

```
Geometry geometry = new MultiPoint(  
    new Point(-119.882, 47.279),  
    new Point(-100.195, 46.316),  
    new Point(-111.796, 42.553),  
    new Point(-90.7031, 34.016)  
)  
Geometry convexHull = geometry.convexHull
```

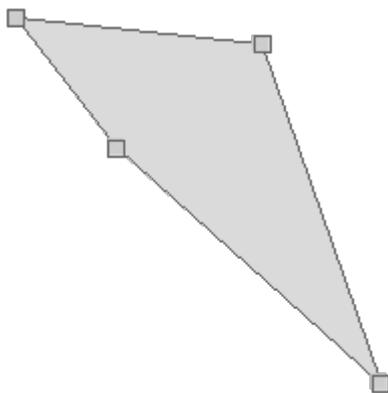


Check whether a Geometry covers another Geometry

```
Polygon polygon1 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
])  
  
boolean isCovered = polygon1.covers(polygon2)  
println isCovered
```

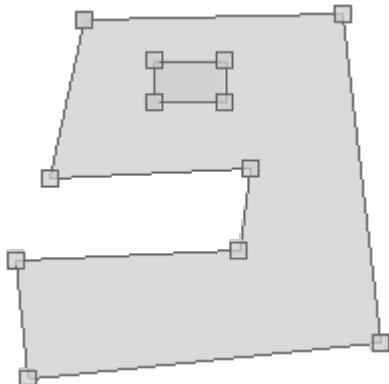

true


```
Polygon polygon3 = new Polygon([[  
    [-120.563, 46.739],  
    [-119.948, 46.739],  
    [-119.948, 46.965],  
    [-120.563, 46.965],  
    [-120.563, 46.739]  
])  
  
isCovered = polygon1.covers(polygon3)  
println isCovered
```

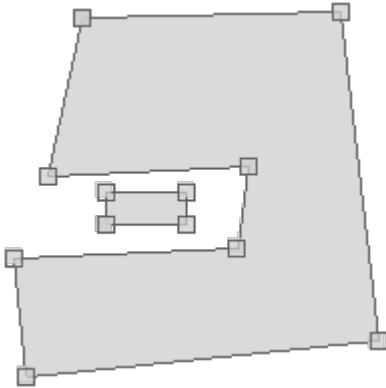

```
false
```


Check whether a Geometry is covered by another Geometry

```
Polygon polygon1 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
])  
  
boolean isCoveredBy = polygon2.coveredBy(polygon1)  
println isCoveredBy
```

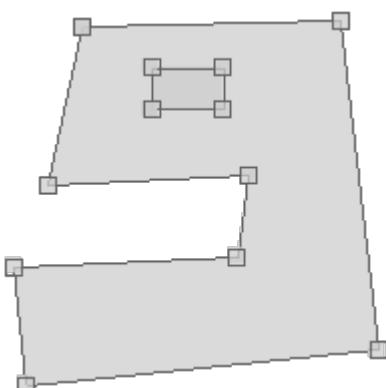

```
true
```


```
Polygon polygon3 = new Polygon([[  
    [-120.563, 46.739],  
    [-119.948, 46.739],  
    [-119.948, 46.965],  
    [-120.563, 46.965],  
    [-120.563, 46.739]  
])  
  
isCoveredBy = polygon3.coveredBy(polygon1)  
println isCoveredBy
```

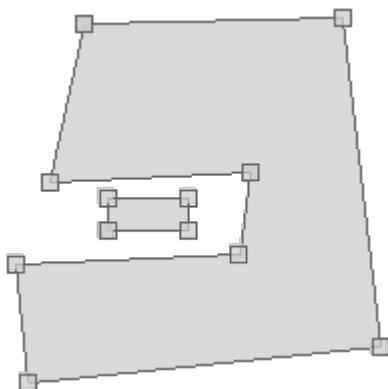

```
false
```

*Check whether one Geometry crosses another Geometry*


```
LineString line1 = new LineString([-122.486, 47.256], [-121.695, 46.822])  
LineString line2 = new LineString([-122.387, 47.613], [-121.750, 47.353])  
LineString line3 = new LineString([-122.255, 47.368], [-121.882, 47.746])  
  
boolean doesCross12 = line1.crosses(line2)  
println doesCross12  
  
boolean doesCross13 = line1.crosses(line3)  
println doesCross13  
  
boolean doesCross23 = line2.crosses(line3)  
println doesCross23
```

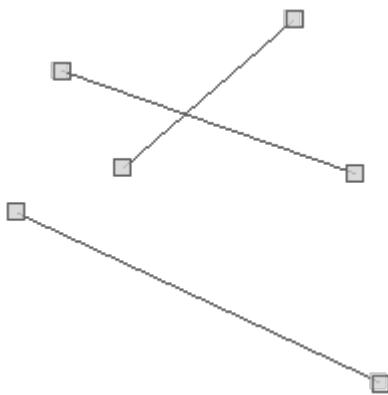

```
false  
false  
true
```


Calculate the difference between two Geometries

```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Geometry difference = polygon1.difference(polygon2)
```

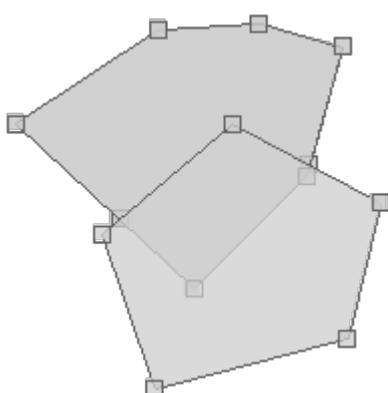


Calculate the symmetric difference between two Geometries

```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]))  
  
Geometry symDifference = polygon1.symDifference(polygon2)
```

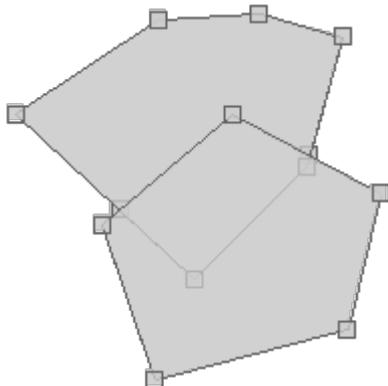

Check whether one Geometry is disjoint from another Geometry

```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
]])  
  
boolean isDisjoint12 = polygon1.disjoint(polygon2)  
println isDisjoint12  
  
boolean isDisjoint13 = polygon1.disjoint(polygon3)  
println isDisjoint13  
  
boolean isDisjoint23 = polygon2.disjoint(polygon3)  
println isDisjoint23
```

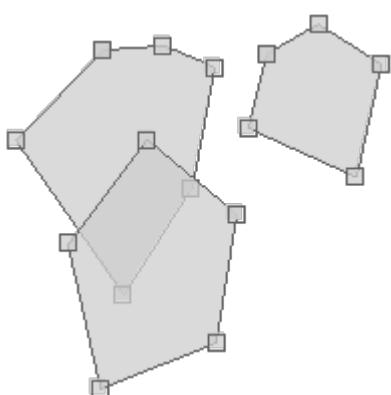

```
false  
true  
true
```

Calculate the distance bewteen two Geometries


```
Point point1 = new Point(-122.442, 47.256)  
Point point2 = new Point(-122.321, 47.613)  
double distance = point1.distance(point2)  
println distance
```



```
0.37694827231332195
```


Get Bounds from a Geometry

```
Point point = new Point(-123,46)  
Polygon polygon = point.buffer(2)  
Bounds bounds = polygon.bounds
```

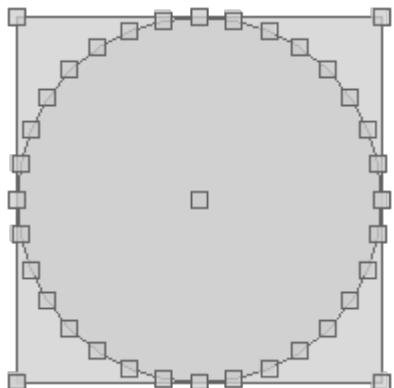


## Get the Boundary from a Geometry

```
Polygon polygon = new Polygon([
  [
    [-121.915, 47.390],
    [-122.640, 46.995],
    [-121.739, 46.308],
    [-121.168, 46.777],
    [-120.981, 47.316],
    [-121.409, 47.413],
    [-121.915, 47.390]
  ],
  [
    [-122.255, 46.935],
    [-121.992, 46.935],
    [-121.992, 47.100],
    [-122.255, 47.100],
    [-122.255, 46.935]
  ],
  [
    [-121.717, 46.777],
    [-121.398, 46.777],
    [-121.398, 47.002],
    [-121.717, 47.002],
    [-121.717, 46.777]
  ]
])
Geometry boundary = polygon.boundary
```

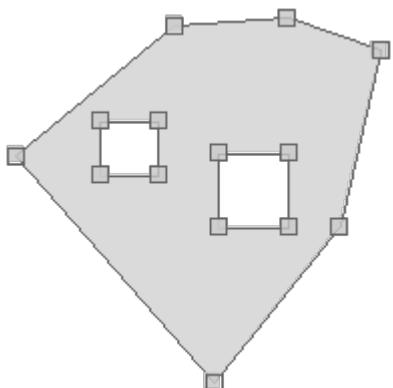


*Get the Centroid from a Geometry*

```
Polygon polygon = new Polygon([[  
    [-118.937, 48.327],  
    [-121.157, 48.356],  
    [-121.684, 46.331],  
    [-119.355, 46.498],  
    [-119.355, 47.219],  
    [-120.629, 47.219],  
    [-120.607, 47.783],  
    [-119.201, 47.739],  
    [-118.937, 48.327]  
])  
Geometry centroid = polygon.centroid
```

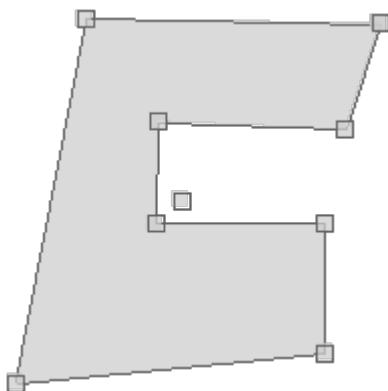

*Get the Interior Point from a Geometry*

```
Polygon polygon = new Polygon([[  
    [-118.937, 48.327],  
    [-121.157, 48.356],  
    [-121.684, 46.331],  
    [-119.355, 46.498],  
    [-119.355, 47.219],  
    [-120.629, 47.219],  
    [-120.607, 47.783],  
    [-119.201, 47.739],  
    [-118.937, 48.327]  
])  
Geometry interiorPoint = polygon.interiorPoint
```

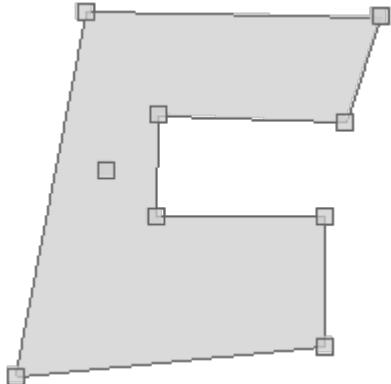

Get the number of Geometries

```
MultiPoint multiPoint = new MultiPoint([
    new Point(-122.3876953125, 47.5820839916191),
    new Point(-122.464599609375, 47.25686404408872),
    new Point(-122.48382568359374, 47.431803338643334)
])
int number = multiPoint.numGeometries
println number
```



3

Get a Geometry by index

```
MultiPoint multiPoint = new MultiPoint([
    new Point(-122.3876953125, 47.5820839916191),
    new Point(-122.464599609375, 47.25686404408872),
    new Point(-122.48382568359374, 47.431803338643334)
])
(0..<multiPoint.getNumGeometries()).each { int i ->
    Geometry geometry = multiPoint.getGeometryN(i)
    println geometry.wkt
}
```

```
POINT (-122.3876953125 47.5820839916191)
POINT (-122.464599609375 47.25686404408872)
POINT (-122.48382568359374 47.431803338643334)
```


#### *Get a List of Geometries*

```
MultiPoint multiPoint = new MultiPoint([
    new Point(-122.3876953125, 47.5820839916191),
    new Point(-122.464599609375, 47.25686404408872),
    new Point(-122.48382568359374, 47.431803338643334)
])
List<Geometry> geometries = multiPoint.geometries
geometries.each { Geometry geometry ->
    println geometry.wkt
}
```

```
POINT (-122.3876953125 47.5820839916191)
POINT (-122.464599609375 47.25686404408872)
POINT (-122.48382568359374 47.431803338643334)
```

*Get the number of Points in a Geometry*

```
Polygon polygon = new Polygon([[  
    [-120.563, 46.739],  
    [-119.948, 46.739],  
    [-119.948, 46.965],  
    [-120.563, 46.965],  
    [-120.563, 46.739]  
])  
int number = polygon.numPoints  
println number
```

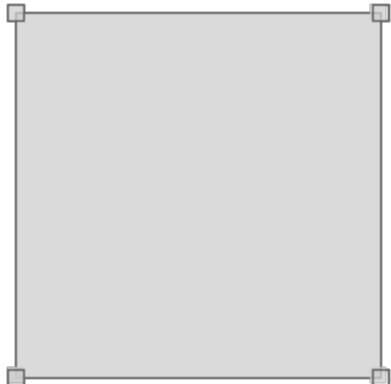

5


*Create a Geometry of a String*

```
Geometry geometry = Geometry.createFromText("Geo")
```




Create a Sierpinski Carpet in a given Bounds and with a number of points

```
Bounds bounds = new Bounds(21.645,36.957,21.676,36.970, "EPSG:4326")
Geometry geometry = Geometry.createSierpinskiCarpet(bounds, 50)
```

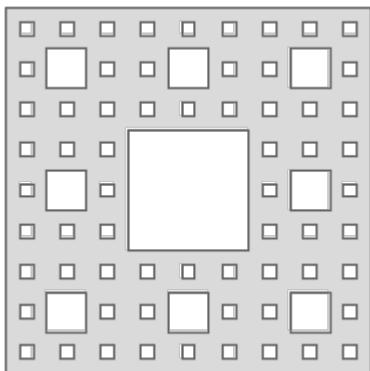


Create a Kock Snowflake in a given Bounds and with a number of points

```
Bounds bounds = new Bounds(21.645,36.957,21.676,36.970, "EPSG:4326")
Geometry geometry = Geometry.createKochSnowflake(bounds, 50)
```

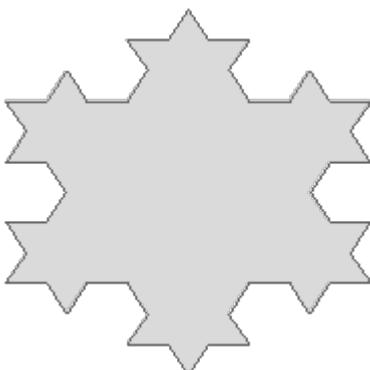


Create a number of random points within a given Geometry

```
Geometry geometry = new Bounds(-180, -90, 180, 90).geometry
MultiPoint randomPoints = Geometry.createRandomPoints(geometry, 100)
```

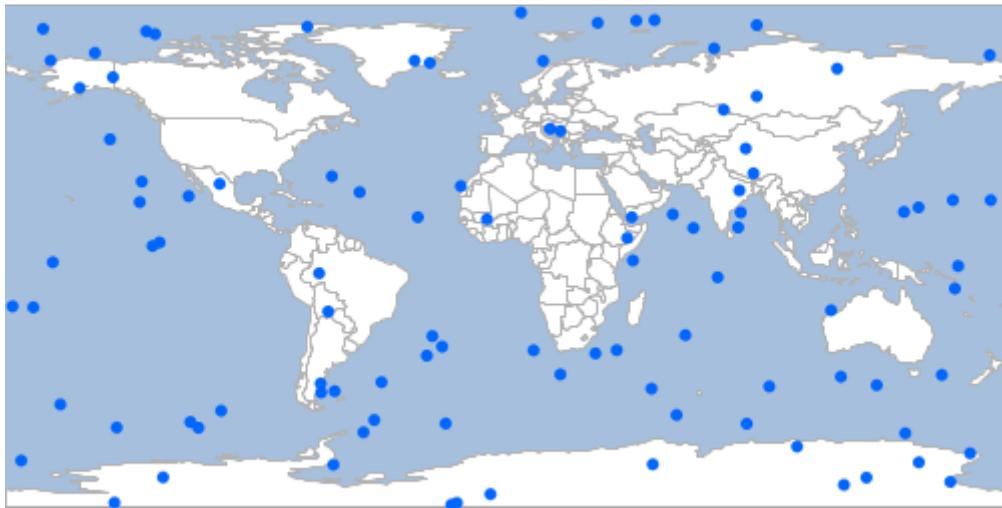


Create a number of random points within a given Geometry where the points are constrained to the cells of a grid

```
Bounds bounds = new Bounds(-180, -90, 180, 90)
MultiPoint randomPoints = Geometry.createRandomPointsInGrid(bounds, 100, true, 0.5)
```

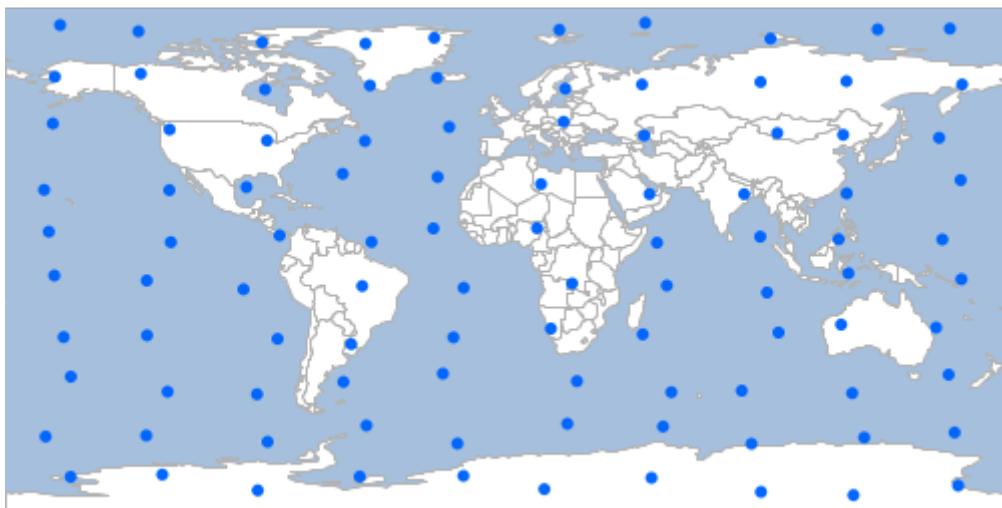


Create a delaunay triangle diagram around a Geometry

```
Geometry points = Geometry.createRandomPoints(new Bounds(-180, -90, 180, 90).geometry,
100)
Geometry delaunayTriangle = points.delaunayTriangleDiagram
```

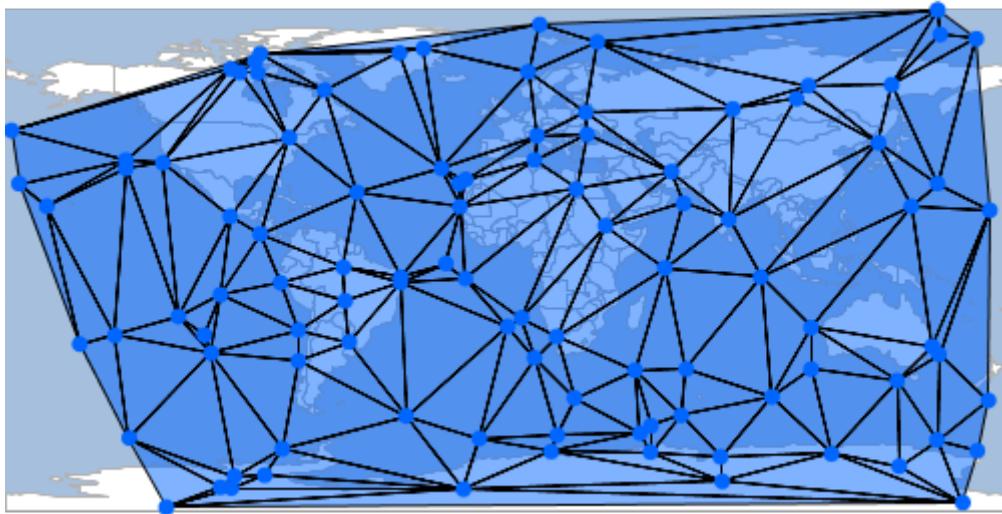

Create a voronoi diagram around a Geometry

```
Geometry points = Geometry.createRandomPoints(new Bounds(-180, -90, 180, 90).geometry,  
100)  
Geometry voronoiDiagram = points.voronoiDiagram
```

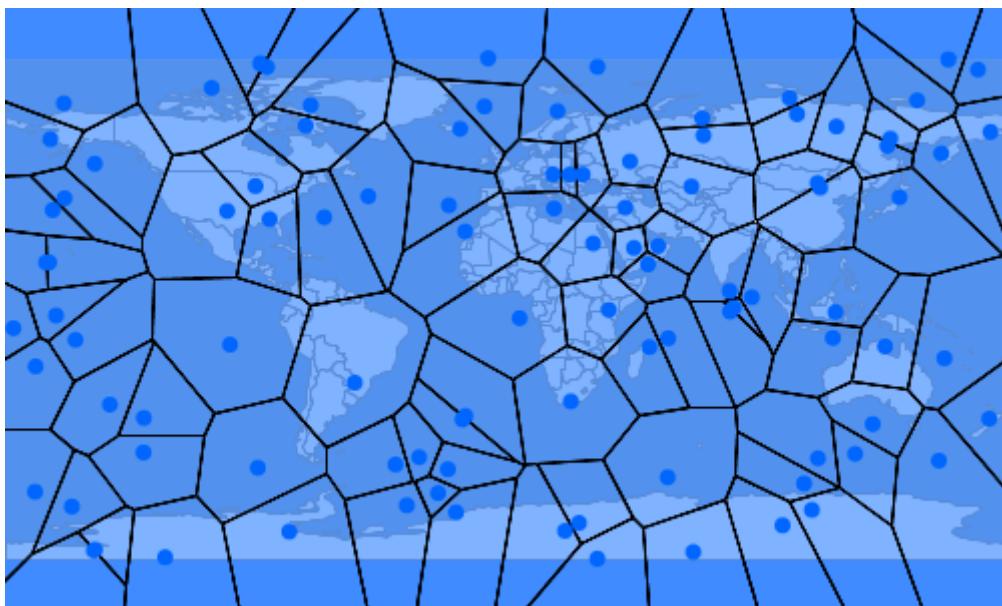


Calculate the union of two Geometries

```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])
```


```
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])
```

```
Geometry union = polygon1.union(polygon2)
```

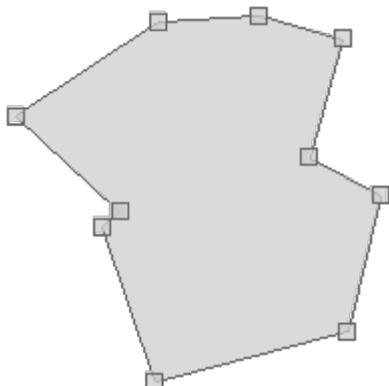


Calculate the intersection between two Geometries

```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Geometry intersection = polygon1.intersection(polygon2)
```

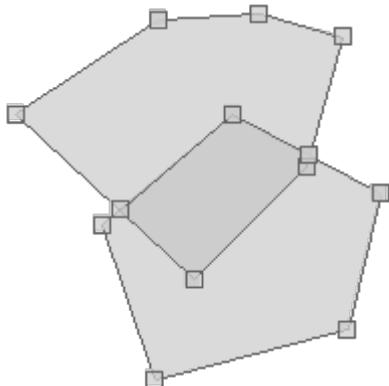

Check whether one Geometry intersects from another Geometry


```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
])  
  
boolean does1intersect2 = polygon1.intersects(polygon2)  
println does1intersect2  
  
boolean does1intersect3 = polygon1.intersects(polygon3)  
println does1intersect3  
  
boolean does2intersect3 = polygon2.intersects(polygon3)  
println does2intersect3
```

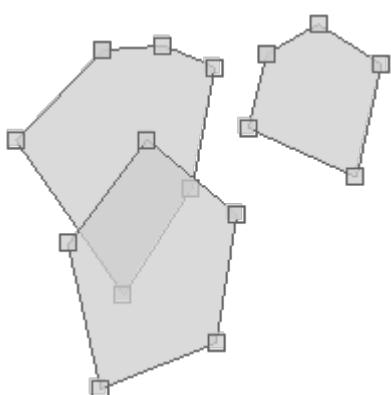

```
true  
false  
false
```

*Check whether one Geometry overlaps from another Geometry*


```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
]])  
  
boolean does1overlap2 = polygon1.overlaps(polygon2)  
println does1overlap2  
  
boolean does1overlap3 = polygon1.overlaps(polygon3)  
println does1overlap3  
  
boolean does2overlap3 = polygon2.overlaps(polygon3)  
println does2overlap3
```

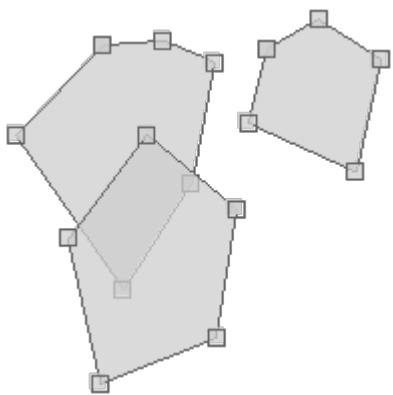

```
true  
false  
false
```


Calculate the octagonal envelope of a Geometry

```
Geometry geometry = new Polygon ([[  
    [-122.20367431640624, 47.543163654317304],  
    [-122.3712158203125, 47.489368981370724],  
    [-122.33276367187499, 47.35371061951363],  
    [-122.11029052734374, 47.3704545156932],  
    [-122.08831787109375, 47.286681888764214],  
    [-122.28332519531249, 47.2270293988673],  
    [-122.2174072265625, 47.154237057576594],  
    [-121.904296875, 47.32579231609051],  
    [-122.06085205078125, 47.47823216312885],  
    [-122.20367431640624, 47.543163654317304]  
]])  
Geometry octagonalEnvelope = geometry.octagonalEnvelope
```

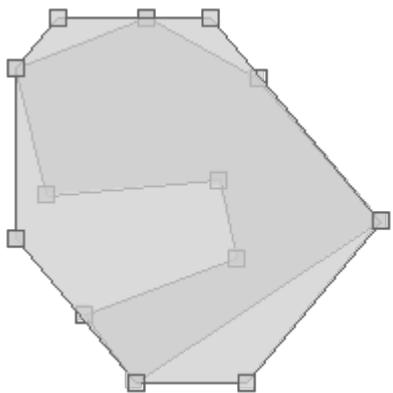


*Calculate the minimum rectangle of a Geometry*

```
Geometry geometry = new Polygon ([[  
    [-122.20367431640624, 47.543163654317304],  
    [-122.3712158203125, 47.489368981370724],  
    [-122.33276367187499, 47.35371061951363],  
    [-122.11029052734374, 47.3704545156932],  
    [-122.08831787109375, 47.286681888764214],  
    [-122.28332519531249, 47.2270293988673],  
    [-122.2174072265625, 47.154237057576594],  
    [-121.904296875, 47.32579231609051],  
    [-122.06085205078125, 47.47823216312885],  
    [-122.20367431640624, 47.543163654317304]  
])  
Geometry minimumRectangle = geometry.minimumRectangle
```

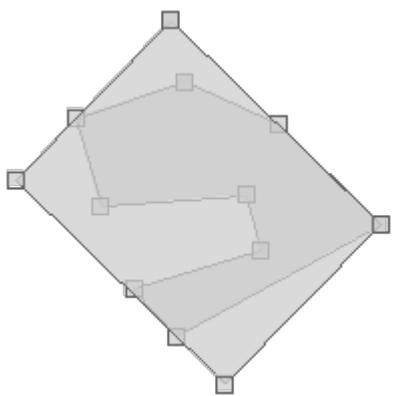


*Calculate the minimum circle of a Geometry*

```
Geometry geometry = new Polygon ([[  
    [-122.20367431640624, 47.543163654317304],  
    [-122.3712158203125, 47.489368981370724],  
    [-122.33276367187499, 47.35371061951363],  
    [-122.11029052734374, 47.3704545156932],  
    [-122.08831787109375, 47.286681888764214],  
    [-122.28332519531249, 47.2270293988673],  
    [-122.2174072265625, 47.154237057576594],  
    [-121.904296875, 47.32579231609051],  
    [-122.06085205078125, 47.47823216312885],  
    [-122.20367431640624, 47.543163654317304]  
])  
Geometry minimumBoundingCircle = geometry.minimumBoundingCircle
```

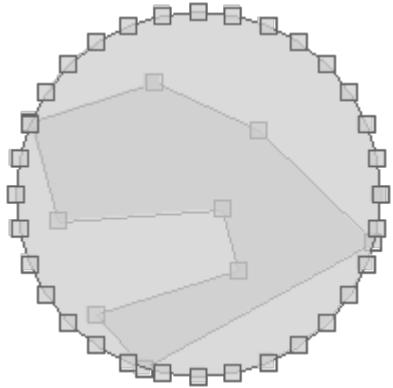


Calculate the minimum diameter of a Geometry

```
Geometry geometry = new Polygon ([[  
    [-122.20367431640624, 47.543163654317304],  
    [-122.3712158203125, 47.489368981370724],  
    [-122.33276367187499, 47.35371061951363],  
    [-122.11029052734374, 47.3704545156932],  
    [-122.08831787109375, 47.286681888764214],  
    [-122.28332519531249, 47.2270293988673],  
    [-122.2174072265625, 47.154237057576594],  
    [-121.904296875, 47.32579231609051],  
    [-122.06085205078125, 47.47823216312885],  
    [-122.20367431640624, 47.543163654317304]  
]])  
Geometry minimumDiameter = geometry.minimumDiameter
```

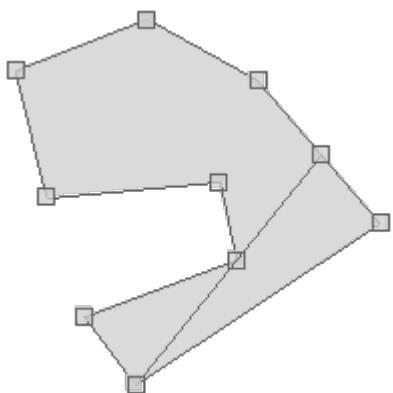


Calculate the minimum clearance of a Geometry

```
Geometry geometry = new Polygon ([[  
    [-122.20367431640624, 47.543163654317304],  
    [-122.3712158203125, 47.489368981370724],  
    [-122.33276367187499, 47.35371061951363],  
    [-122.11029052734374, 47.3704545156932],  
    [-122.08831787109375, 47.286681888764214],  
    [-122.28332519531249, 47.2270293988673],  
    [-122.2174072265625, 47.154237057576594],  
    [-121.904296875, 47.32579231609051],  
    [-122.06085205078125, 47.47823216312885],  
    [-122.20367431640624, 47.543163654317304]  
])  
Geometry minimumClearance = geometry.minimumClearance
```

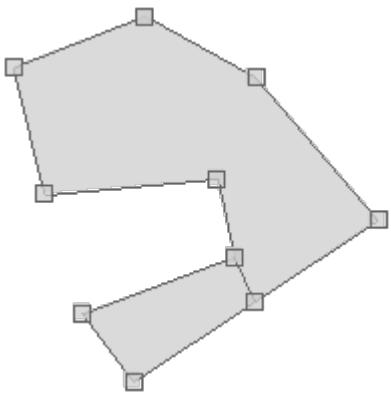

Offset a LineString by a given distance. Positive distances will offset to the right. Negative distance will offset to the left.

```
LineString line = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798])  
LineString positive = line.offset(1.2)  
LineString negative = line.offset(-2.4)
```

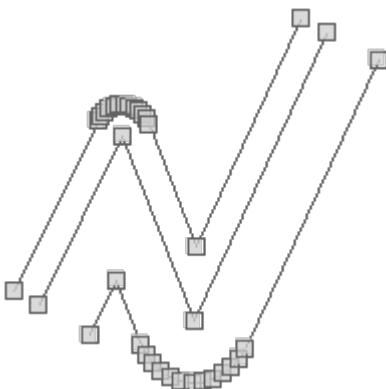

*Get the dimension of a Geometry*

```
Point point = Geometry.fromWKT("POINT (-122.3437 47.7540)")  
println "Point Dimension = ${point.dimension}"  
  
LineString lineString = Geometry.fromWKT("LINESTRING (-122.525 47.256, -122.376  
47.595)")  
println "LineString Dimension = ${lineString.dimension}"  
  
Polygon polygon = Geometry.fromWKT("POLYGON ((-122.590 47.204, -122.365 47.204,  
-122.365 47.312, -122.590 47.312, -122.590 47.204))")  
println "Polygon Dimension = ${polygon.dimension}"
```

```
Point Dimension = 0  
LineString Dimension = 1  
Polygon Dimension = 2
```


*Determine if a Geometry is empty or not*

```
Geometry geom1 = Geometry.fromWKT("POINT EMPTY")  
boolean isGeom1Empty = geom1.empty  
println "Is ${geom1.wkt} empty? ${isGeom1Empty ? 'Yes' : 'No'}"  
  
Geometry geom2 = Geometry.fromWKT("POINT (-122.3437 47.7540)")  
boolean isGeom2Empty = geom2.empty  
println "Is ${geom2.wkt} empty? ${isGeom2Empty ? 'Yes' : 'No'}"
```

```
Is POINT EMPTY empty? Yes  
Is POINT (-122.3437 47.754) empty? No
```


*Determine if a Geometry is rectangular*

```
Geometry geom1 = Geometry.fromWKT("POLYGON ((-122.590 47.204, -122.365 47.204,  
-122.365 47.312, -122.590 47.312, -122.590 47.204))")  
boolean isGeom1Rect = geom1.isRectangle()  
println "Is the geometry a rectangle? ${isGeom1Rect ? 'Yes' : 'No'}"
```

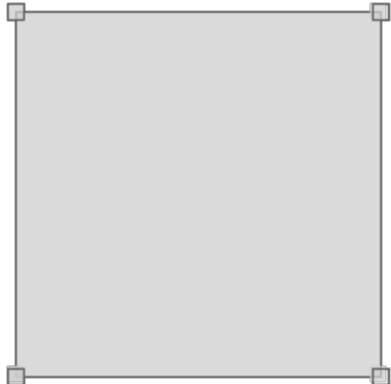

Is the geometry a rectangle? Yes


```
Geometry geom2 = Geometry.fromWKT("POLYGON ((-122.360 47.215, -122.656 46.912,  
-121.838 46.931, -122.360 47.215))")  
boolean isGeom2Rect = geom2.isRectangle()  
println "Is the geometry a rectangle? ${isGeom2Rect ? 'Yes' : 'No'}"
```

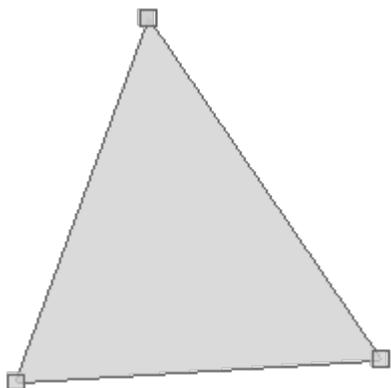

Is the geometry a rectangle? No


Determine if a Geometry is simple

```
Geometry geom1 = new LineString(  
    [-122.323, 47.599],  
    [-122.385, 47.581]  
)  
boolean isGeom1Simple = geom1.simple  
println "Is the Geometry simple? ${isGeom1Simple}"
```

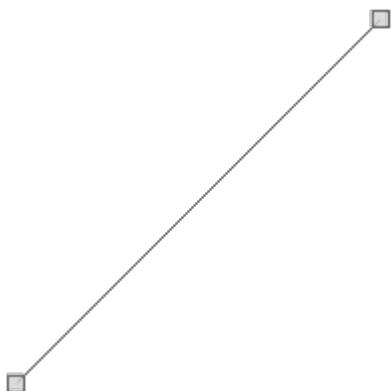

Is the Geometry simple? true


```
Geometry geom2 = new LineString(  
    [-122.356, 47.537],  
    [-122.295, 47.580],  
    [-122.284, 47.532],  
    [-122.353, 47.574]  
)  
boolean isGeom2Simple = geom2.simple  
println "Is the Geometry simple? ${isGeom2Simple}"
```

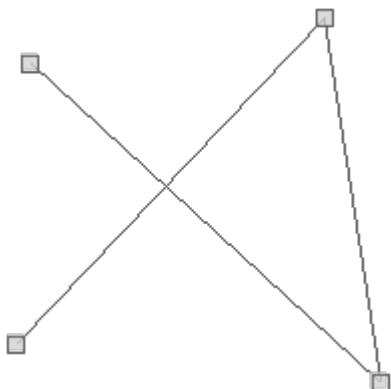

Is the Geometry simple? false


Determine if a Geometry is valid

```
Geometry geom1 = new LineString(  
    [-122.323, 47.599],  
    [-122.385, 47.581]  
)  
boolean isGeom1Valid = geom1.valid  
println "Is the Geometry valid? ${isGeom1Valid}"
```

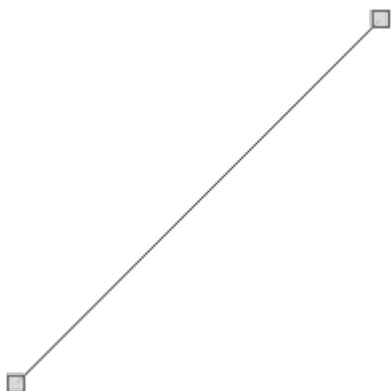

Is the Geometry valid? true

```
Geometry geom2 = new Polygon(new LinearRing([
    [48.16406, 42.29356],
    [35.15625, 25.79989],
    [64.33593, 24.52713],
    [26.71875, 39.09596],
    [48.16406, 42.29356],
]))
boolean isGeom2Valid = geom2.valid
println "Is the Geometry valid? ${isGeom2Valid}"
println geom2.validReason
```

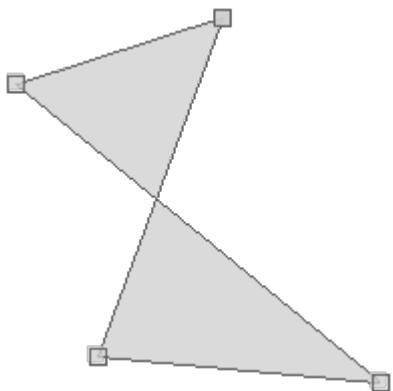


Is the Geometry valid? false  
Self-intersection

Determine if a Geometry is curved


```
Geometry geom1 = new CircularString([
    [-122.464599609375, 47.247542522268006],
    [-122.03613281249999, 47.37789454155521],
    [-122.37670898437499, 47.58393661978134]
])

boolean isGeom1Curved = geom1.curved
println "Is the Geometry valid? ${isGeom1Curved}"
```

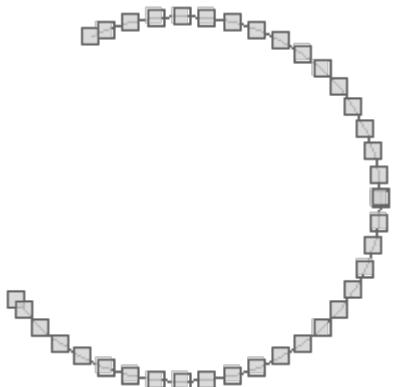

Is the Geometry curved? true

```
Geometry geom2 = new LineString(
    [-122.323, 47.599],
    [-122.385, 47.581]
)
boolean isGeom2Curved = geom2.curved
println "Is the Geometry valid? ${isGeom2Curved}"
```

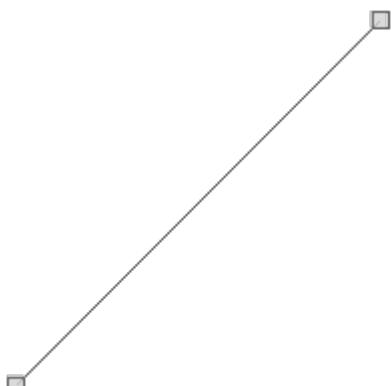

Is the Geometry curved? false

Determine if a Geometry is within a given distance of another Geometry

```
Geometry geom1 = new Point(-88.945, 41.771)
Geometry geom2 = new Point(-113.906, 37.160)

double distance1 = 26.0
boolean isWithin1 = geom1.isWithinDistance(geom2, distance1)
println "Is ${geom1} within ${distance1} of ${geom2}? ${isWithin1 ? 'Yes' : 'No'}"
```


Is POINT (-88.945 41.771) within 26.0 of POINT (-113.906 37.16)? Yes

```
double distance2 = 15.5
boolean isWithin2 = geom1.isWithinDistance(geom2, distance2)
println "Is ${geom1} within ${distance2} of ${geom2}? ${isWithin2 ? 'Yes' : 'No'}"
```

Is POINT (-88.945 41.771) within 15.5 of POINT (-113.906 37.16)? No

Normalizing a Geometry changes the Geometry in place.


```
Geometry geometry = Geometry.fromWKT("POLYGON((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4))")
geometry.normalize()
println "Normalized Geometry = ${geometry}"
```

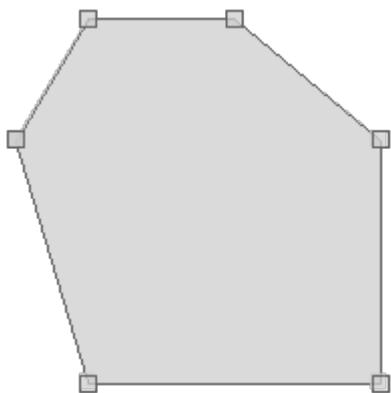

Normalized Geometry = POLYGON ((1 3, 2 4, 4 4, 6 3, 6 1, 2 1, 1 3))

Calculating a normalized Geometry from a Geometry does not change the original Geometry.

```
Geometry geometry = Geometry.fromWKT("POLYGON((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4))")
Geometry normalizedGeometry = geometry.norm
println "Un-normalized Geometry = ${geometry}"
println "Normalized Geometry      = ${normalizedGeometry}"
```

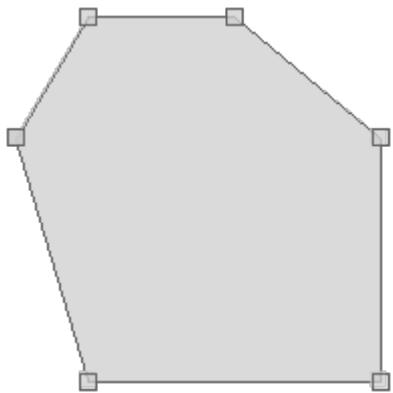


```
Un-normalized Geometry = POLYGON ((2 4, 1 3, 2 1, 6 1, 6 3, 4 4, 2 4))
```

```
Normalized Geometry = POLYGON ((1 3, 2 4, 4 4, 6 3, 6 1, 2 1, 1 3))
```

### *Smooth a Geometry*


```
Geometry geometry = Geometry.fromWKT("POLYGON((10 0, 10 20, 0 20, 0 30, 30 30, 30 20,  
20 20, 20 0, 10 0))")
```

```
Geometry smoothed = geometry.smooth(0.75)
```

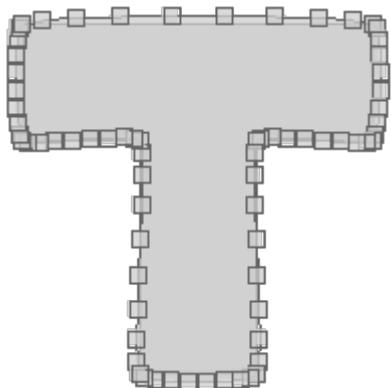

Calculate the DE-9IM Intersection Matrix between two geometries.


```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
IntersectionMatrix matrix = polygon1.relate(polygon2)  
println "Intersection Matrix = ${matrix}"  
println "Contains = ${matrix.contains}"  
println "Covered By = ${matrix.coveredBy}"  
println "Covers = ${matrix.covers}"  
println "Disjoint = ${matrix.disjoint}"  
println "Intersects = ${matrix.intersects}"  
println "Within = ${matrix.within}"
```

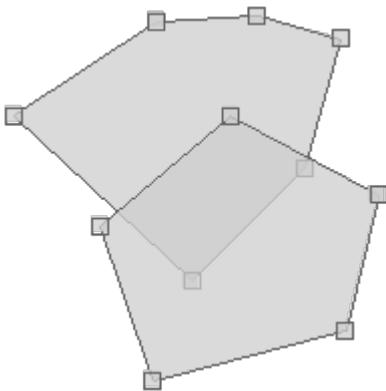

```
Intersection Matrix = 212101212  
Contains = false  
Covered By = false  
Covers = false  
Disjoint = false  
Intersects = true  
Within = false
```

Determine if a Geometry relates to another Geometry according to the given DE-9IM Intersection Matrix string



```
Polygon polygon1 = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
println polygon1.relate(polygon2, "212101212")  
println polygon1.relate(polygon2, "111111111")  
println polygon1.relate(polygon2, "222222222")
```

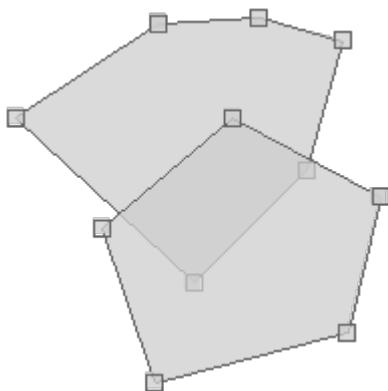

```
true  
false  
false
```

Densify a Geometry by adding points at a given interval.


```
Geometry geometry = new LineString([
    [-122.28062152862547, 47.12986316579223],
    [-122.2809863090515, 47.12935221617075],
    [-122.2809863090515, 47.12786313499169],
    [-122.28111505508421, 47.127731743474406],
    [-122.28137254714966, 47.127673347140345],
    [-122.28178024291992, 47.12768794622986],
    [-122.28227376937865, 47.128067521151195],
    [-122.28227376937865, 47.12906024275466]
])
Geometry densified = geometry.densify(0.001)
println "# of points in original geometry = ${geometry.numPoints}"
println "# of points in densified geometry = ${densified.numPoints}"
```

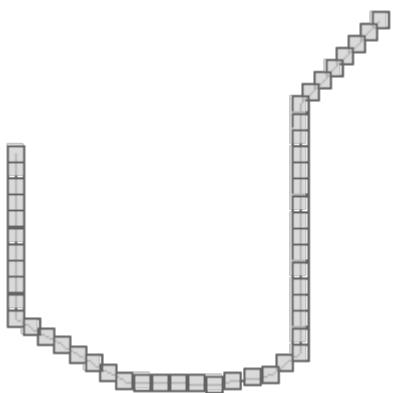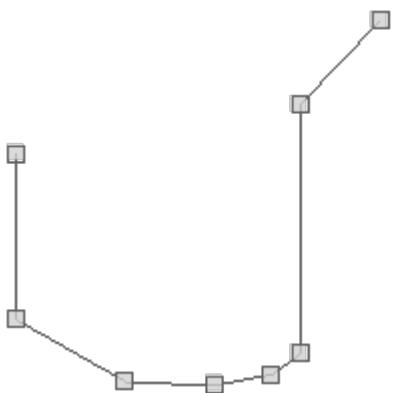

```
# of points in original geometry = 8
# of points in densified geometry = 50
```

Simplify a Geometry by removing points at a given interval.


```
Geometry geometry = new LineString([
    [-123.59619140625001, 47.338822694822],
    [-123.04687499999999, 47.010225655683485],
    [-122.2119140625, 46.965259400349275],
    [-121.201171875, 47.17477833929903],
    [-120.87158203125, 47.487513008956554],
    [-120.62988281249999, 48.31242790407178],
    [-120.84960937499999, 48.647427805533546],
    [-121.59667968749999, 48.850258199721495],
    [-122.36572265625, 48.980216985374994],
    [-123.134765625, 48.83579746243093],
    [-123.3984375, 48.44377831058802],
    [-123.59619140625001, 48.10743118848039],
    [-123.85986328124999, 47.62097541515849]
])
Geometry simplified = geometry.simplify(0.5)
println "# of points in original geometry = ${geometry.numPoints}"
println "# of points in simplified geometry = ${simplified.numPoints}"
```

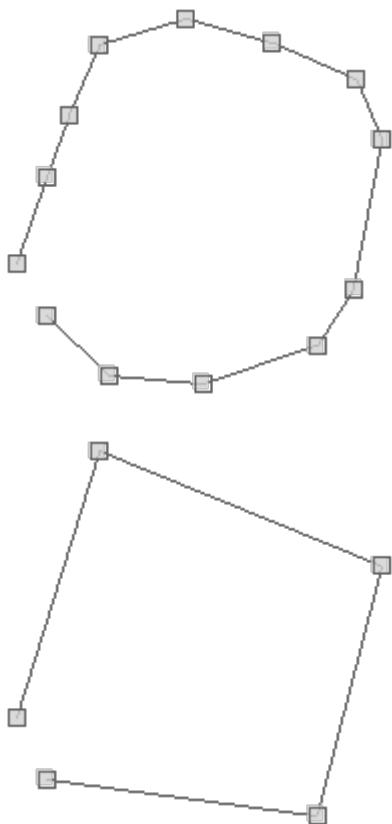

```
# of points in original geometry = 13
# of points in simplified geometry = 5
```

*Simplify a Geometry by removing points at a given interval but preserve the topological structure.*



```
Geometry geometry = new LineString([
    [-123.59619140625001, 47.338822694822],
    [-123.04687499999999, 47.010225655683485],
    [-122.2119140625, 46.965259400349275],
    [-121.201171875, 47.17477833929903],
    [-120.87158203125, 47.487513008956554],
    [-120.62988281249999, 48.31242790407178],
    [-120.84960937499999, 48.647427805533546],
    [-121.59667968749999, 48.850258199721495],
    [-122.36572265625, 48.980216985374994],
    [-123.134765625, 48.83579746243093],
    [-123.3984375, 48.44377831058802],
    [-123.59619140625001, 48.10743118848039],
    [-123.85986328124999, 47.62097541515849]
])
Geometry simplified = geometry.simplifyPreservingTopology(0.1)
println "# of points in original geometry = ${geometry.numPoints}"
println "# of points in simplified geometry = ${simplified.numPoints}"
```

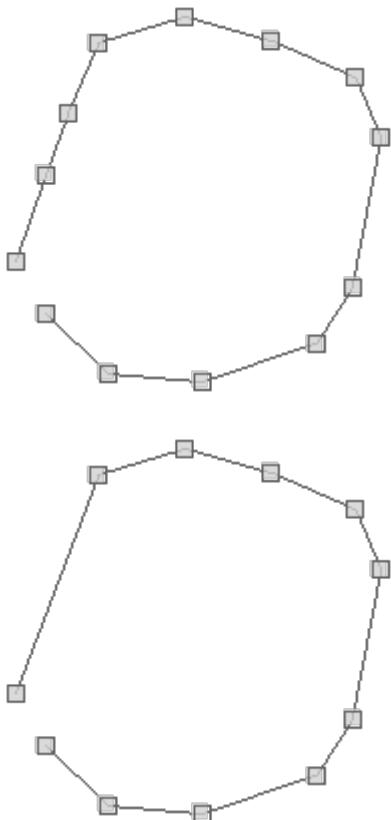

```
# of points in original geometry = 13
# of points in simplified geometry = 11
```

*Translate or move a geometry a given distance along the x and y axis.*

```
Geometry geometry = new Polygon(new LinearRing([
    [-121.83837890625, 47.5913464767971],
    [-122.76123046875, 46.9802523552188],
    [-122.67333984374, 46.3014061543733],
    [-121.00341796874, 46.3772542051002],
    [-121.22314453124, 47.1448974855539],
    [-121.83837890625, 47.5913464767971]
]))
Geometry translatedGeometry = geometry.translate(2.1, 3.2)
```




*Scale a geometry a given amount in an x and y direction around the origin*

```
Geometry geometry = new Polygon(new LinearRing([
    [-121.83837890625, 47.5913464767971],
    [-122.76123046875, 46.9802523552188],
    [-122.67333984374, 46.3014061543733],
    [-121.00341796874, 46.3772542051002],
    [-121.22314453124, 47.1448974855539],
    [-121.83837890625, 47.5913464767971]
])
)
Geometry scaledGeometry = geometry.scale(1.1,1.2)
println scaledGeometry
```




Scale a geometry a given amount in an x and y direction around a point


```
Geometry geometry = new Polygon(new LinearRing([
    [-121.83837890625, 47.5913464767971],
    [-122.76123046875, 46.9802523552188],
    [-122.67333984374, 46.3014061543733],
    [-121.00341796874, 46.3772542051002],
    [-121.22314453124, 47.1448974855539],
    [-121.83837890625, 47.5913464767971]
]))
Point centroid = geometry.centroid
Geometry scaledGeometry = geometry.scale(1.1, 1.1, centroid.x, centroid.y)
```

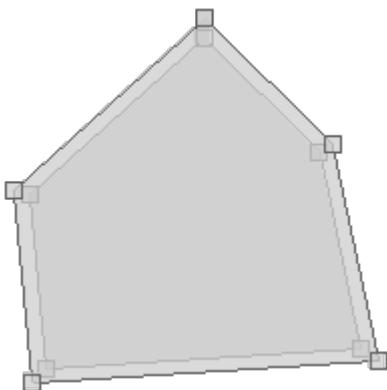

Rotate a Geometry around it's origin by a given angle theta (in radians).


```
Geometry geometry = new Polygon(new LinearRing([
    [-121.83837890625, 47.5913464767971],
    [-122.76123046875, 46.9802523552188],
    [-122.67333984374, 46.3014061543733],
    [-121.00341796874, 46.3772542051002],
    [-121.22314453124, 47.1448974855539],
    [-121.83837890625, 47.5913464767971]
]))
Geometry theta = geometry.rotate(Math.toRadians(45))
```

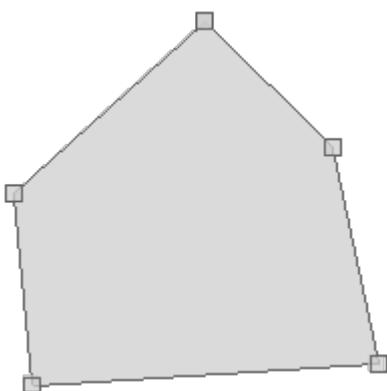

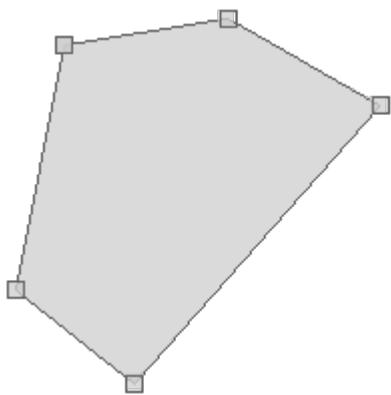


Rotate a Geometry around an XY coordinate by a given angle theta (in radians).


```
Geometry thetaXY = geometry.rotate(Math.toRadians(90), geometry.centroid.x, geometry.centroid.y)
```

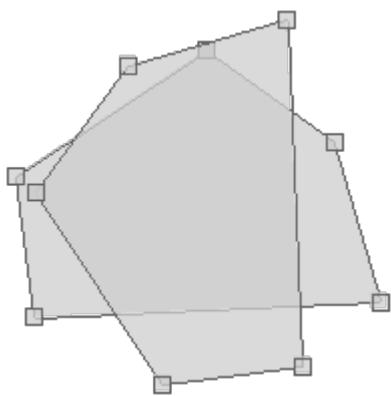

Rotate a Geometry around it's origin by a given angle sine and cosine (in radians).


```
Geometry sinCos = geometry.rotate(Math.toRadians(15), Math.toRadians(35))
```

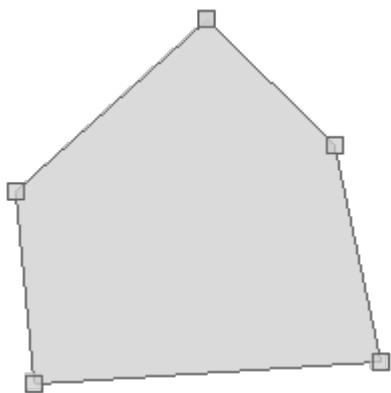

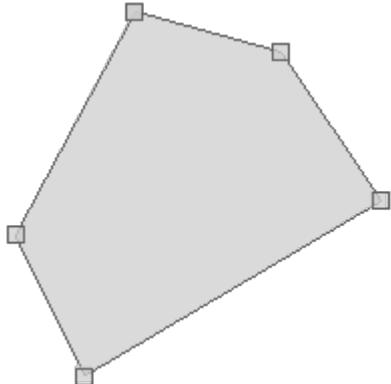


Rotate a Geometry around an XY coordinate by a given angle sine and cosine (in radians).


```
Geometry sinCosXY = geometry.rotate(Math.toRadians(15), Math.toRadians(35), geometry.centroid.x, geometry.centroid.y)
```

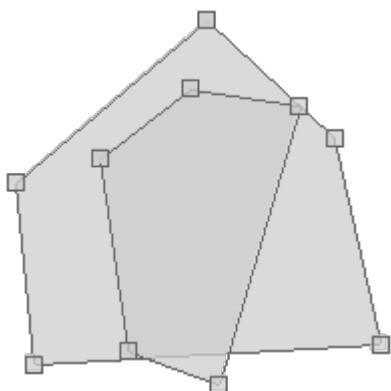

Shear a Geometry around it's origin by a given distance along the x and y axis.


```
Geometry geometry = new Polygon(new LinearRing([
    [-121.83837890625, 47.5913464767971],
    [-122.76123046875, 46.9802523552188],
    [-122.67333984374, 46.3014061543733],
    [-121.00341796874, 46.3772542051002],
    [-121.22314453124, 47.1448974855539],
    [-121.83837890625, 47.5913464767971]
]))
Geometry shearedGeometry = geometry.shear(0.1,0.4)
```

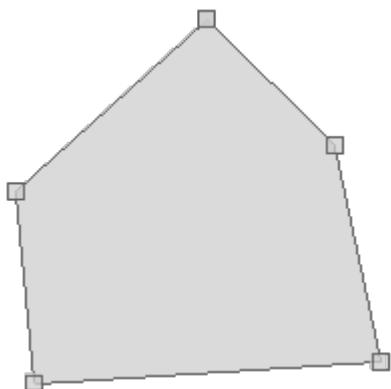

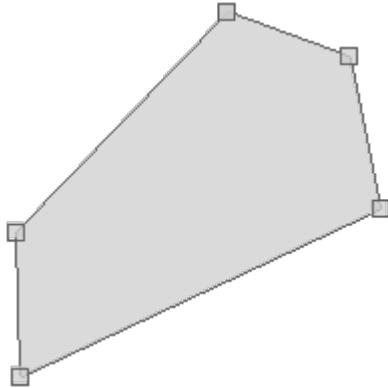


Reflect a Geometry around an XY coordinate for given distance along the x and y axis


```
Geometry geometry = new Polygon(new LinearRing([
    [-121.83837890625, 47.5913464767971],
    [-122.76123046875, 46.9802523552188],
    [-122.67333984374, 46.3014061543733],
    [-121.00341796874, 46.3772542051002],
    [-121.22314453124, 47.1448974855539],
    [-121.83837890625, 47.5913464767971]
]))
Point centroid = geometry.centroid
Geometry reflectedGeometry = geometry.reflect(0.1, 0.4, centroid.x, centroid.y)
```

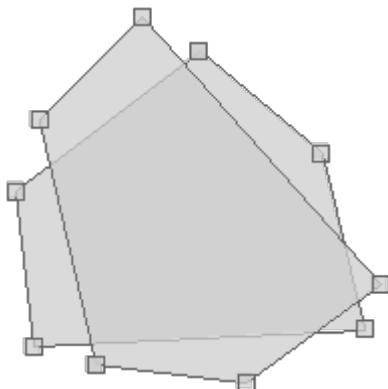

Reflect a Geometry around the origin for given distance along the x and y axis

```
Geometry reflectedAroundOrigin = geometry.reflect(0.5, 0.34)
```

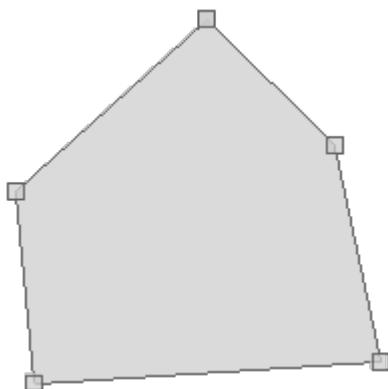

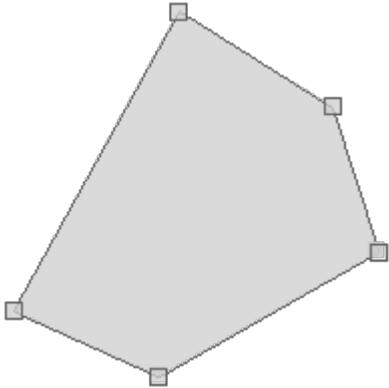

Reduce the precision of a Geometry's coordinates.

```
Geometry g1 = new Point(5.19775390625, 51.07421875)
println "Original Geometry: ${g1.wkt}"

Geometry g2 = g1.reducePrecision()
println "Floating Point Geometry: ${g2.wkt}"


Geometry g3 = g1.reducePrecision("fixed", scale: 100)
println "Fixed Point Geometry: ${g3.wkt}"

Geometry g4 = g1.reducePrecision("floating_single", pointwise: true, removecollapsed:
true)
println "Floating Point Single Geometry: ${g4.wkt}"
```

```
Original Geometry: POINT (5.19775390625 51.07421875)
Floating Point Geometry: POINT (5.19775390625 51.07421875)
Fixed Point Geometry: POINT (5.2 51.07)
Floating Point Single Geometry: POINT (5.19775390625 51.07421875)
```

Find the nearest points in one Geometry to another

```
Geometry point = new Point( -122.3845276236534, 47.58285653105873)
Geometry polygon = Geometry.fromWKT("POLYGON ((-122.3848307132721 47.58285110342092, "
+
    "-122.38484144210814 47.58255620092149, -122.38469392061235
47.582558010144346, " +
    "-122.3846912384033 47.5825797208137, -122.38460808992384 47.58258695770149, "
+
    "-122.38460808992384 47.582628569786834, -122.38458126783371
47.58263037900717, " +
    "-122.38458126783371 47.58277330721735, -122.38460540771483 47.58277149800195,
" +
    "-122.38460540771483 47.582805873084084, -122.38467246294022 47.5828131099406,
" +
    "-122.38467246294022 47.58285110342092, -122.3848307132721
47.58285110342092))")
List<Point> nearestPoints = polygon.getNearestPoints(point)
```

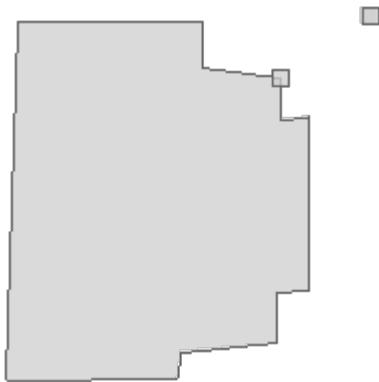

Convert a Geometry to a PreparedGeometry for more efficient spatial queries.

```
Geometry geometry = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
PreparedGeometry preparedGeometry = geometry.prepare()  
  
Closure timer = { Closure action ->  
    long start = System.nanoTime()  
    action.call()  
    long end = System.nanoTime()  
    end - start  
}  
  
MultiPoint points = Geometry.createRandomPoints(new Bounds(-180, -90, 180, 90)  
).geometry, 100000)  
  
long timeWithGeometry = timer({ ->  
    points.geometries.each { Point point ->  
        geometry.contains(point)  
    }  
})  
println "Time with Geometry      = ${timeWithGeometry} nanoseconds"  
  
long timeWithPreparedGeometry = timer({ ->  
    points.geometries.each { Point point ->  
        preparedGeometry.contains(point)  
    }  
})  
println "Time with PreparedGeometry = ${timeWithPreparedGeometry} nanoseconds"
```

```
Time with Geometry      = 261011538 nanoseconds  
Time with PreparedGeometry = 182613148 nanoseconds
```

Convert a Geometry to a PreparedGeometry using a static method for more efficient spatial queries.

```
Geometry geometry = new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]])  
PreparedGeometry preparedGeometry = Geometry.prepare(geometry)  
  
Closure timer = { Closure action ->  
    long start = System.nanoTime()  
    action.call()  
    long end = System.nanoTime()  
    end - start  
}  
  
MultiPoint points = Geometry.createRandomPoints(new Bounds(-180, -90, 180, 90  
).geometry, 100000)  
  
long timeWithGeometry = timer({ ->  
    points.geometries.each { Point point ->  
        geometry.contains(point)  
    }  
})  
println "Time with Geometry      = ${timeWithGeometry} nanoseconds"  
  
long timeWithPreparedGeometry = timer({ ->  
    points.geometries.each { Point point ->  
        preparedGeometry.contains(point)  
    }  
})  
println "Time with PreparedGeometry = ${timeWithPreparedGeometry} nanoseconds"
```

```
Time with Geometry      = 169443048 nanoseconds  
Time with PreparedGeometry = 96687515 nanoseconds
```

## Prepared Geometry


PreparedGeometry are more efficient for spatial queries.

You can create a `PreparedGeometry` by wrapping an existing `Geometry`. You can then get the original `Geometry` with the `geometry` property.

```
Polygon polygon = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
]])
```


```
PreparedGeometry preparedGeometry = new PreparedGeometry(polygon)
```

```
Geometry geometry = preparedGeometry.geometry
```

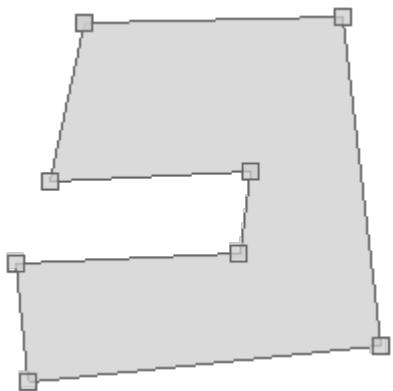


Check whether a PreparedGeometry contains another Geometry

```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
]])  
  
boolean contains = polygon1.contains(polygon2)  
println contains
```

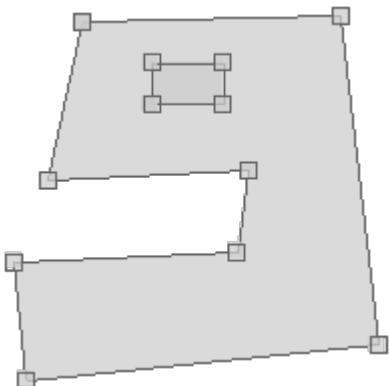


true

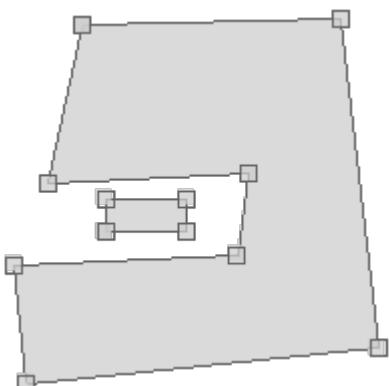


```
false
```

Check whether a `PreparedGeometry` properly contains another `Geometry`. This means that every point in the other geometry doesn't intersect with the first.

```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-122.50064849853516, 47.22096718353454],  
    [-122.41928100585938, 47.22096718353454],  
    [-122.41928100585938, 47.277365616965646],  
    [-122.50064849853516, 47.277365616965646],  
    [-122.50064849853516, 47.22096718353454]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-122.44571685791014, 47.24031721435104],  
    [-122.42958068847656, 47.24031721435104],  
    [-122.42958068847656, 47.253135632244216],  
    [-122.44571685791014, 47.253135632244216],  
    [-122.44571685791014, 47.24031721435104]  
]])  
  
boolean contains = polygon1.containsProperly(polygon2)  
println contains
```

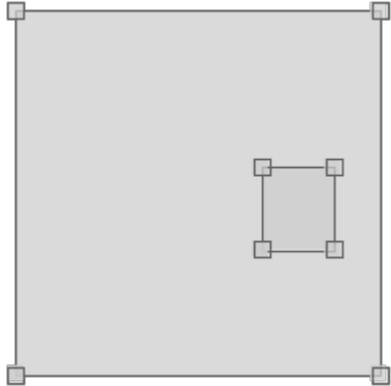


```
true
```

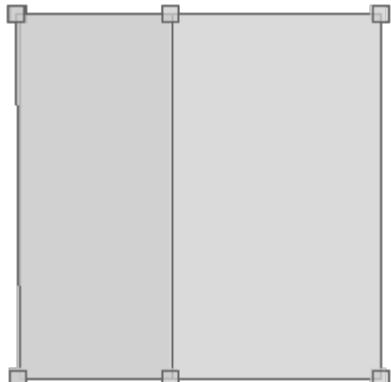


```
false
```

Check whether a `PreparedGeometry` is covered by another `Geometry`.

```
Polygon polygon1 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
]]);  
  
PreparedGeometry polygon2 = new PreparedGeometry(new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
]]));  
  
boolean isCoveredBy = polygon2.coveredBy(polygon1)  
println isCoveredBy
```

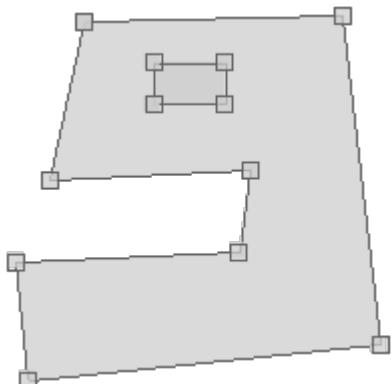


```
true
```

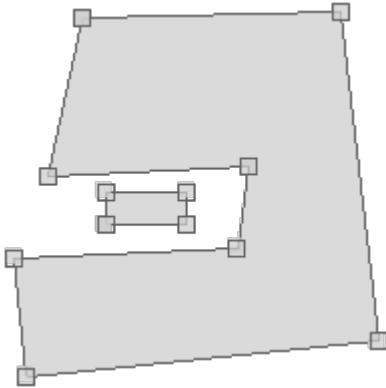


```
false
```

Check whether a PreparedGeometry covers another Geometry.

```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
]])  
  
boolean isCovered = polygon1.covers(polygon2)  
println isCovered
```

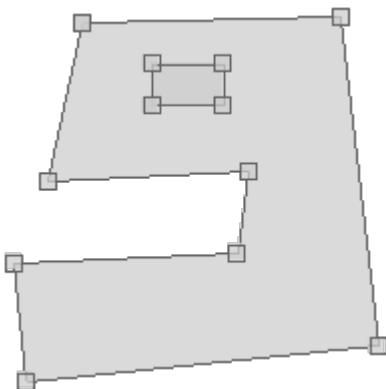


true

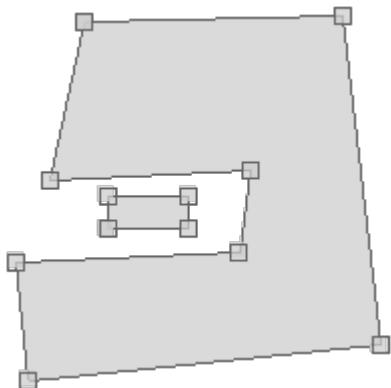

false

Check whether a `PreparedGeometry` crosses another `Geometry`.


```
PreparedGeometry line1 = new PreparedGeometry(new LineString([-122.387, 47.613], [-121.750, 47.353]))  
LineString line2 = new LineString([-122.255, 47.368], [-121.882, 47.746])  
LineString line3 = new LineString([-122.486, 47.256], [-121.695, 46.822])  
  
boolean doesCross12 = line1.crosses(line2)  
println doesCross12  
  
boolean doesCross13 = line1.crosses(line3)  
println doesCross13
```

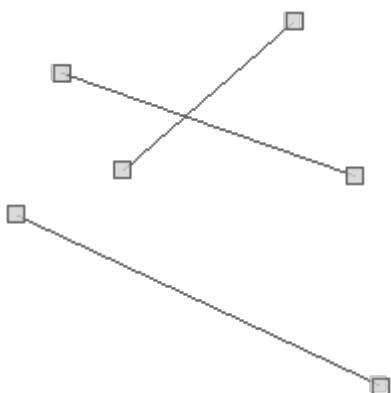

true  
false

Check whether a PreparedGeometry is disjoint from another Geometry.


```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
]])  
  
boolean isDisjoint12 = polygon1.disjoint(polygon2)  
println isDisjoint12  
  
boolean isDisjoint13 = polygon1.disjoint(polygon3)  
println isDisjoint13
```

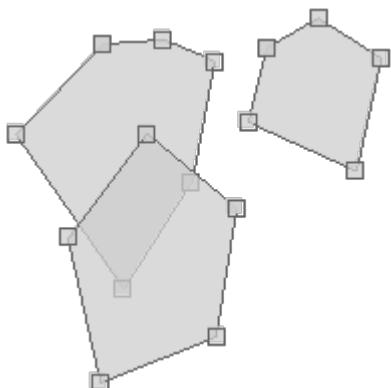

```
false  
true
```

Check whether a PreparedGeometry intersects another Geometry.


```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
]])  
  
boolean does1intersect2 = polygon1.intersects(polygon2)  
println does1intersect2  
  
boolean does1intersect3 = polygon1.intersects(polygon3)  
println does1intersect3
```

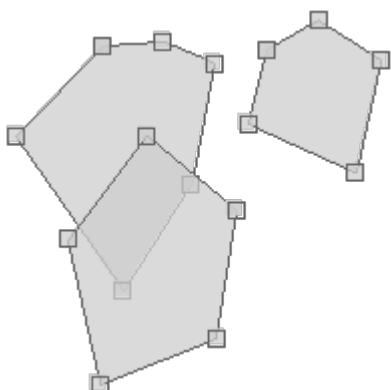

```
true  
false
```

Check whether a PreparedGeometry overlaps another Geometry.


```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-121.915, 47.390],  
    [-122.640, 46.995],  
    [-121.739, 46.308],  
    [-121.168, 46.777],  
    [-120.981, 47.316],  
    [-121.409, 47.413],  
    [-121.915, 47.390]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.794, 46.664],  
    [-121.541, 46.995],  
    [-122.200, 46.536],  
    [-121.937, 45.890],  
    [-120.959, 46.096],  
    [-120.794, 46.664]  
]])  
  
Polygon polygon3 = new Polygon([[  
    [-120.541, 47.376],  
    [-120.695, 47.047],  
    [-119.794, 46.830],  
    [-119.586, 47.331],  
    [-120.102, 47.509],  
    [-120.541, 47.376]  
]])  
  
boolean does1overlap2 = polygon1.overlaps(polygon2)  
println does1overlap2  
  
boolean does1overlap3 = polygon1.overlaps(polygon3)  
println does1overlap3
```

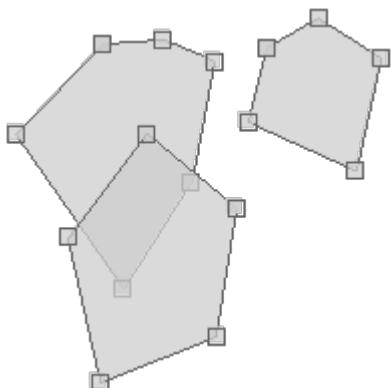

```
true  
false
```


Check whether a PreparedGeometry touches another Geometry.

```
PreparedGeometry line1 = new PreparedGeometry(new LineString([
    [-122.38651514053345, 47.58219978280006],
    [-122.38651514053345, 47.58020234903306]
]))  
  
LineString line2 = new LineString([
    [-122.38651514053345, 47.58124449789785],
    [-122.38333940505981, 47.58124449789785]
])  
  
boolean touches = line1.touches(line2)
```

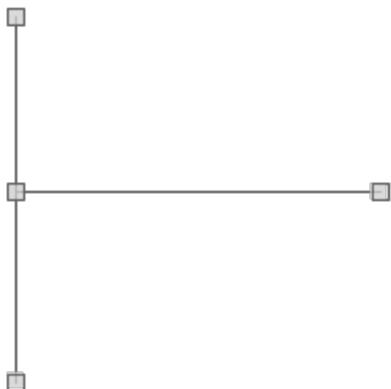

true


```
LineString line3 = new LineString([
    [-122.386257648468, 47.58183793450921],
    [-122.38348960876465, 47.5818668824645]
])  
  
touches = line1.touches(line3)
```

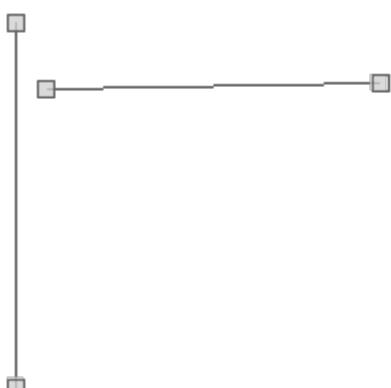

false

Check whether a `PreparedGeometry` is within another `Geometry`.

```
PreparedGeometry polygon1 = new PreparedGeometry(new Polygon([[  
    [-120.212, 47.591],  
    [-119.663, 47.591],  
    [-119.663, 47.872],  
    [-120.212, 47.872],  
    [-120.212, 47.591]  
]]))  
  
Polygon polygon2 = new Polygon([[  
    [-120.739, 48.151],  
    [-121.003, 47.070],  
    [-119.465, 47.137],  
    [-119.553, 46.581],  
    [-121.267, 46.513],  
    [-121.168, 45.706],  
    [-118.476, 45.951],  
    [-118.762, 48.195],  
    [-120.739, 48.151]  
]])  
  
boolean within = polygon1.within(polygon2)  
println within
```

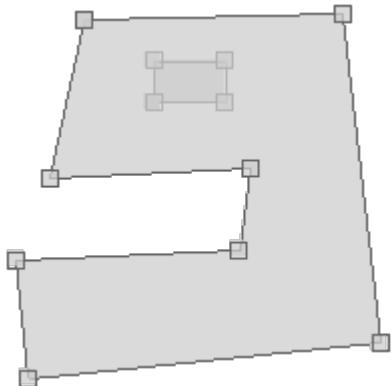

```
true
```

```
Polygon polygon3 = new Polygon([[  
    [-120.563, 46.739],  
    [-119.948, 46.739],  
    [-119.948, 46.965],  
    [-120.563, 46.965],  
    [-120.563, 46.739]  
]])
```

```
within = polygon1.within(polygon3)  
println within
```



```
false
```

## Reading and Writing Geometries

The [geoscript.geom.io](#) package has several Readers and Writers for converting geoscript.geom.Geometry to and from strings.

### Readers and Writers

*Find all Geometry Readers*

```
List<Reader> readers = Readers.list()
readers.each { Reader reader ->
    println reader.className
}
```

```
GeobufReader
GeoJSONReader
GeoRSSReader
Gml2Reader
Gml3Reader
GpxReader
KmlReader
WkbReader
WktReader
GeoPackageReader
GooglePolylineEncoder
```

*Find a Geometry Reader*

```
String wkt = "POINT (-123.15 46.237)"
Reader reader = Readers.find("wkt")
Geometry geometry = reader.read(wkt)
```



### Find all Geometry Writers

```
List<Writer> writers = Writers.list()
writers.each { Writer writer ->
    println writer.class.getSimpleName
}
```

```
GeobufWriter
GeoJSONWriter
GeoRSSWriter
Gml2Writer
Gml3Writer
GpxWriter
KmlWriter
WkbWriter
WktWriter
GeoPackageWriter
GooglePolylineEncoder
```

### Find a Geometry Writer

```
Geometry geometry = new Point(-122.45, 43.21)
Writer writer = Writers.find("geojson")
String geojson = writer.write(geometry)
println geojson
```

```
{"type": "Point", "coordinates": [-122.45, 43.21]}
```

Create a Geometry from a String. The string will be parse by each Geometry Reader.

```
Geometry geom1 = Geometry.fromString('POINT (-123.15 46.237)')
println geom1

Geometry geom2 = Geometry.fromString
('{"type":"LineString","coordinates":[[3.198,43.164],[6.713,49.755],[9.702,42.592],[15
.32,53.798]]}')
println geom2

Geometry geom3 = Geometry.fromString('<Point><coordinates>-
123.15,46.237</coordinates></Point>')
println geom3
```

```
POINT (-123.15 46.237)
LINESTRING (3.198 43.164, 6.713 49.755, 9.702 42.592, 15.32 53.798)
POINT (-123.15 46.237)
```

## WKB


Read a Geometry from WKB using the WkbReader

```
String wkb = "000000001C05EC999999999A40471E5604189375"
WkbReader reader = new WkbReader()
Geometry geometry = reader.read(wkb)
```



Read a Geometry from WKB using the Geometry.fromWKB() static method

```
String wkb =
"0000000020000004400995810624DD2F404594FDF3B645A2401ADA1CAC0831274048E0A3D70A3D71402
3676C8B43958140454BC6A7EF9DB2402EA3D70A3D70A4404AE624DD2F1AA0"
Geometry geometry = Geometry.fromWKB(wkb)
```

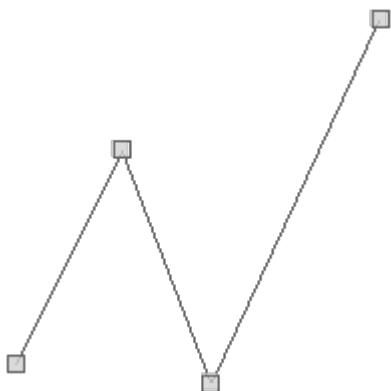

Get the WKB of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)
String wkb = geometry.wkb
println wkb
```

```
000000001C05EC999999999A40471E5604189375
```

Write a Geometry to WKB using the WkbWriter

```
Geometry geometry = new LineString(
    [3.198, 43.164],
    [6.713, 49.755],
    [9.702, 42.592],
    [15.32, 53.798]
)
WkbWriter writer = new WkbWriter()
String wkb = writer.write(geometry)
println wkb
```

```
00000000200000004400995810624DD2F404594FDF3B645A2401ADA1CAC0831274048E0A3D70A3D714023
676C8B43958140454BC6A7EF9DB2402EA3D70A3D70A4404AE624DD2F1AA0
```

## WKT


Read a Geometry from WKT using the WktReader

```
String wkt = "POINT (-123.15 46.237)"
WktReader reader = new WktReader()
Geometry geometry = reader.read(wkt)
```

□

Read a Geometry from WKT using the `Geometry.fromWKT()` static method

```
String wkt = "LINESTRING (3.198 43.164, 6.7138 49.755, 9.702 42.592, 15.327 53.798)"  
Geometry geometry = Geometry.fromWKT(wkt)
```

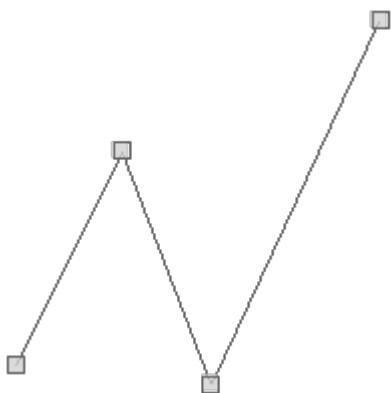

Get the WKT of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)  
String wkt = geometry.wkt  
println wkt
```

```
POINT (-123.15 46.237)
```

Write a Geometry to WKT using the `WktWriter`

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798]  
)  
WktWriter writer = new WktWriter()  
String wkt = writer.write(geometry)  
println wkt
```

```
LINestring (3.198 43.164, 6.713 49.755, 9.702 42.592, 15.32 53.798)
```

## GeoJSON


Read a Geometry from GeoJSON using the `GeoJSONReader`

```
String json = '{"type": "Point", "coordinates": [-123.15, 46.237]}'  
GeoJSONReader reader = new GeoJSONReader()  
Geometry geometry = reader.read(json)
```



Read a Geometry from GeoJSON using the `Geometry.fromGeoJSON()` static method

```
String json =  
'{"type": "LineString", "coordinates": [[3.198, 43.164], [6.713, 49.755], [9.702, 42.592], [15.  
32, 53.798]]}'  
Geometry geometry = Geometry.fromGeoJSON(json)
```

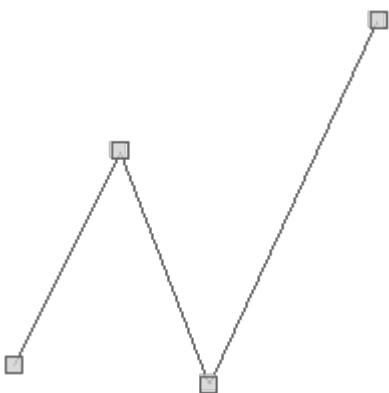

Get the GeoJSON of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)  
String json = geometry.geoJSON  
println json
```

```
{"type": "Point", "coordinates": [-123.15, 46.237]}
```

*Write a Geometry to GeoJSON using the GeoJSONWriter*

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798]  
)  
GeoJSONWriter writer = new GeoJSONWriter()  
String json = writer.write(geometry)  
println json
```

```
{"type": "LineString", "coordinates": [[3.198, 43.164], [6.713, 49.755], [9.702, 42.592], [15.32, 53.798]]}
```

## KML


*Read a Geometry from KML using the KmlReader*

```
String kml = "<Point><coordinates>-123.15,46.237</coordinates></Point>"  
KmlReader reader = new KmlReader()  
Geometry geometry = reader.read(kml)
```



*Read a Geometry from KML using the Geometry.fromKml() static method*

```
String kml = "<LineString><coordinates>3.198,43.164 6.713,49.755 9.702,42.592  
15.32,53.798</coordinates></LineString>"  
Geometry geometry = Geometry.fromKml(kml)
```

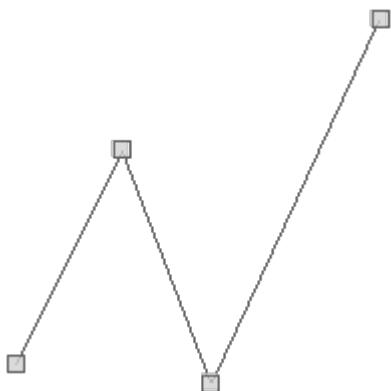

*Get the KML of a Geometry*

```
Geometry geometry = new Point(-123.15, 46.237)
String kml = geometry.kml
println kml
```

```
<Point><coordinates>-123.15,46.237</coordinates></Point>
```

*Write a Geometry to KML using the KmlWriter*

```
Geometry geometry = new LineString(
    [3.198, 43.164],
    [6.713, 49.755],
    [9.702, 42.592],
    [15.32, 53.798]
)
KmlWriter writer = new KmlWriter()
String kml = writer.write(geometry)
println kml
```

```
<LineString><coordinates>3.198,43.164 6.713,49.755 9.702,42.592
15.32,53.798</coordinates></LineString>
```

## Geobuf


*Read a Geometry from Geobuf using the GeobufReader*

```
String geobuf = "10021806320c08001a08dffab87590958c2c"
GeobufReader reader = new GeobufReader()
Geometry geometry = reader.read(geobuf)
```

□

Read a Geometry from Geobuf using the `Geometry.fromGeobuf()` static method

```
String geobuf =  
"10021806322408021a20e0b08603c0859529f089ad03b0c8a40690efec02efb1ea06a0e5ad05e0f5d70a"  
Geometry geometry = Geometry.fromGeobuf(geobuf)
```

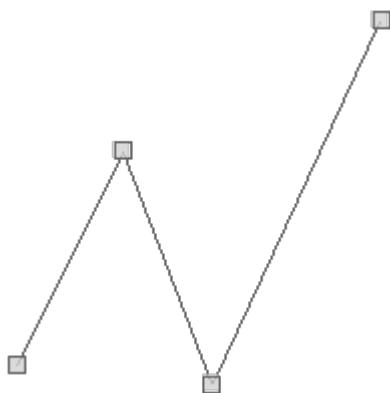

Get the Geobuf of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)  
String geobuf = geometry.geobuf  
println geobuf
```

```
10021806320c08001a08dffab87590958c2c
```

Write a Geometry to Geobuf using the `GeobufWriter`

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798])  
GeobufWriter writer = new GeobufWriter()  
String geobuf = writer.write(geometry)  
println geobuf
```

```
10021806322408021a20e0b08603c0859529f089ad03b0c8a40690efec02efb1ea06a0e5ad05e0f5d70a
```

## GML 2


Read a Geometry from GML2 using the Gml2Reader

```
String gml2 = "<gml:Point><gml:coordinates>-123.15,46.237</gml:coordinates></gml:Point>"  
Gml2Reader reader = new Gml2Reader()  
Geometry geometry = reader.read(gml2)
```



Read a Geometry from GML2 using the Geometry.fromGML2() static method

```
String gml2 = "<gml:LineString><gml:coordinates>3.198,43.164 6.713,49.755 9.702,42.592  
15.32,53.798</gml:coordinates></gml:LineString>"  
Geometry geometry = Geometry.fromGML2(gml2)
```

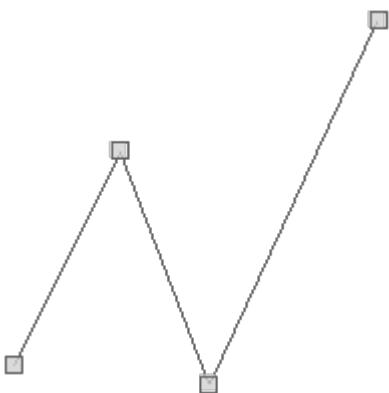

Get the GML2 of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)  
String gml2 = geometry.gml2  
println gml2
```

```
<gml:Point><gml:coordinates>-123.15,46.237</gml:coordinates></gml:Point>
```

*Write a Geometry to GML2 using the Gml2Writer*

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798]  
)  
Gml2Writer writer = new Gml2Writer()  
String gml2 = writer.write(geometry)  
println gml2
```

```
<gml:LineString><gml:coordinates>3.198,43.164 6.713,49.755 9.702,42.592  
15.32,53.798</gml:coordinates></gml:LineString>
```

## GML 3

*Read a Geometry from GML3 using the Gml3Reader*

```
String gml3 = "<gml:Point><gml:pos>-123.15 46.237</gml:pos></gml:Point>"  
Gml3Reader reader = new Gml3Reader()  
Geometry geometry = reader.read(gml3)
```



*Read a Geometry from GML3 using the Geometry.fromGML3() static method*

```
String gml3 = "<gml:LineString><gml:posList>3.198 43.164 6.713 49.755 9.702 42.592  
15.32 53.798</gml:posList></gml:LineString>"  
Geometry geometry = Geometry.fromGML3(gml3)
```



*Get the GML3 of a Geometry*

```
Geometry geometry = new Point(-123.15, 46.237)
String gml3 = geometry.gml3
println gml3
```

```
<gml:Point><gml:pos>-123.15 46.237</gml:pos></gml:Point>
```

*Write a Geometry to GML3 using the Gml3Writer*

```
Geometry geometry = new LineString(
    [3.198, 43.164],
    [6.713, 49.755],
    [9.702, 42.592],
    [15.32, 53.798]
)
Gml3Writer writer = new Gml3Writer()
String gml3 = writer.write(geometry)
println gml3
```

```
<gml:LineString><gml:posList>3.198 43.164 6.713 49.755 9.702 42.592 15.32
53.798</gml:posList></gml:LineString>
```

## GPX


*Read a Geometry from GPX using the GpxReader*

```
String gpx = "<wpt lat='46.237' lon='-123.15' />"
GpxReader reader = new GpxReader()
Geometry geometry = reader.read(gpx)
```



Read a Geometry from GPX using the `Geometry.fromGPX()` static method

```
String gpx = "<rte><rtept lat='43.164' lon='3.198' /><rtept lat='49.755' lon='6.713' /><rtept lat='42.592' lon='9.702' /><rtept lat='53.798' lon='15.32' /></rte>"  
Geometry geometry = Geometry.fromGpx(gpx)
```

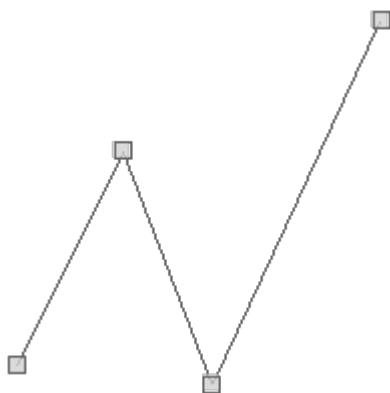

Get the GPX of a Geometry

```
Geometry geometry = new Point(-123.15, 46.237)  
String gpx = geometry.gpx  
println gpx
```

```
<wpt lat='46.237' lon='-123.15' />
```

Write a Geometry to GPX using the `GpxWriter`

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798])  
GpxWriter writer = new GpxWriter()  
String gpx = writer.write(geometry)  
println gpx
```

```
<rte><rtept lat='43.164' lon='3.198' /><rtept lat='49.755' lon='6.713' /><rtept  
lat='42.592' lon='9.702' /><rtept lat='53.798' lon='15.32' /></rte>
```

## GeoRSS

*Read a Geometry from GeoRSS using the GeoRSSReader*

```
String georss = "<georss:point>46.237 -123.15</georss:point>"  
GeoRSSReader reader = new GeoRSSReader()  
Geometry geometry = reader.read(georss)
```



*Write a Geometry to GeoRSS using the GeoRSSWriter*


```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798])  
GeoRSSWriter writer = new GeoRSSWriter()  
String georss = writer.write(geometry)  
println georss
```

```
<georss:line>43.164 3.198 49.755 6.713 42.592 9.702 53.798 15.32</georss:line>
```

## Google Polyline

*Read a Geometry from a Google Polyline Encoded String using the GeoRSSReader*

```
String str = "_p~iF~ps|U_ullnnqC_mqNvxq`@"  
GooglePolylineEncoder encoder = new GooglePolylineEncoder()  
Geometry geometry = encoder.read(str)
```

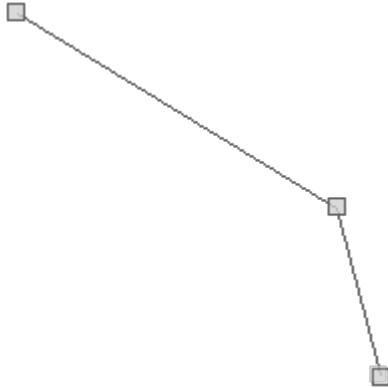

*Write a Geometry to a Google Polyline Encoded String using the GeoRSSWriter*

```
Geometry geometry = new LineString(  
    [3.198, 43.164],  
    [6.713, 49.755],  
    [9.702, 42.592],  
    [15.32, 53.798]  
)  
GooglePolylineEncoder encoder = new GooglePolylineEncoder()  
String str = encoder.write(geometry)  
println str
```

```
_nmfGoroRwhfg@womTv_vj@gxfQotkcAogha@
```


## Bounds Recipes

The Bounds class is in the [geoscript.geom](#) package.

### Creating Bounds


*Create a Bounds from four coordinates (`minx`, `miny`, `maxx`, `maxy`) and a projection.*

```
Bounds bounds = new Bounds(-127.265, 43.068, -113.554, 50.289, "EPSG:4326")
```

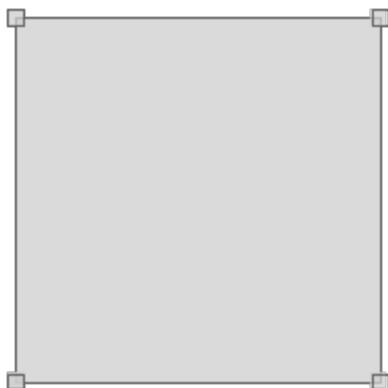


Create a *Bounds* from four coordinates (*minx*, *miny*, *maxx*, *maxy*) without a projection. The projection can be set later.

```
Bounds bounds = new Bounds(-127.265, 43.068, -113.554, 50.289)  
bounds.proj = new Projection("EPSG:4326")
```

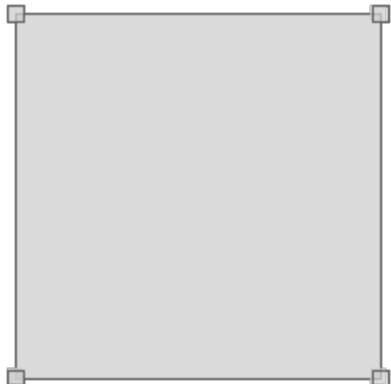


Create a *Bounds* from a string with commas delimiting *minx*, *miny*, *maxx*, *maxy* and projection values.

```
Bounds bounds = Bounds.fromString("-127.265,43.068,-113.554,50.289,EPGS:4326")
```

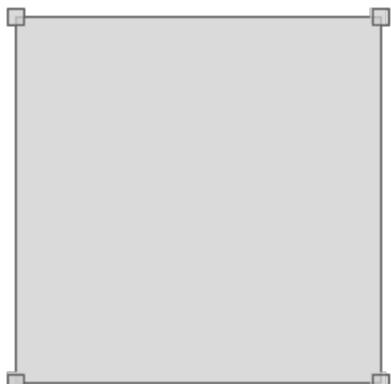

Create a *Bounds* from a string with spaces delimiting *minx*, *miny*, *maxx*, *maxy* and projection values.

```
Bounds bounds = Bounds.fromString("12.919921874999998 40.84706035607122 15.99609375  
41.77131167976407 EPSG:4326")
```

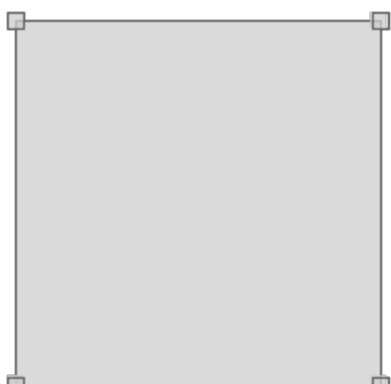

# Getting Bounds Properties

Create a `Bounds` and view it's string representation

```
Bounds bounds = new Bounds(-127.265, 43.068, -113.554, 50.289, "EPSG:4326")
String boundsStr = bounds.toString()
println boundsStr
```

```
(-127.265,43.068,-113.554,50.289,EPSG:4326)
```

Get the minimum x coordinate

```
double minX = bounds.minX
println minX
```

```
-127.265
```

Get the minimum y coordinate

```
double minY = bounds.minY
println minY
```

```
43.068
```

Get the maximum x coordinate

```
double maxX = bounds.maxX
println maxX
```

```
-113.554
```

Get the maximum y coordinate

```
double maxY = bounds.maxY
println maxY
```

```
50.289
```

### *Get the Projection*

```
Projection proj = bounds.proj  
println proj.id
```

EPSG:4326

### *Get the area*

```
double area = bounds.area  
println area
```

99.00713100000004

### *Get the width*

```
double width = bounds.width  
println width
```

13.71099999999999

### *Get the height*

```
double height = bounds.height  
println height
```

7.221000000000004


### *Get the aspect ratio*

```
double aspect = bounds.aspect  
println aspect
```

1.8987674837280144


### *A Bounds is not a Geometry but you can get a Geometry from a Bounds*

```
Bounds bounds = new Bounds(-122.485, 47.246, -122.452, 47.267, "EPSG:4326")  
Geometry geometry = bounds.geometry
```

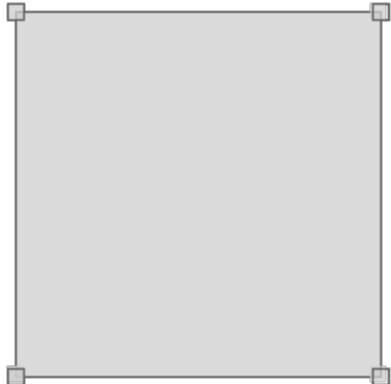

You can also get a Polygon from a Bounds

```
Bounds bounds = new Bounds(-122.485, 47.246, -122.452, 47.267, "EPSG:4326")
Polygon polygon = bounds.polygon
```

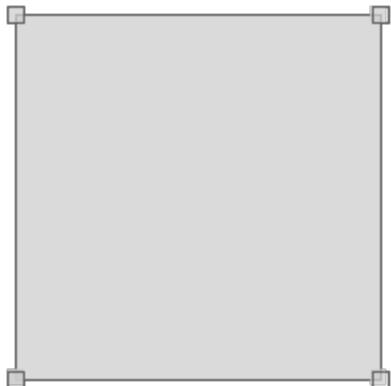

Get the four corners from a Bounds as a List of Points

```
Bounds bounds = new Bounds(-122.485, 47.246, -122.452, 47.267, "EPSG:4326")
List<Point> points = bounds.corners
```



## Processing Bounds

*Reproject a Bounds from one Projection to another.*

```
Bounds bounds = new Bounds(-122.485, 47.246, -122.452, 47.267, "EPSG:4326")
println bounds
```


```
(-122.485,47.246,-122.452,47.267,EPSG:4326)
```

```
Bounds reprojectedBounds = bounds.reproject("EPSG:2927")
println reprojectedBounds
```

```
(1147444.7684517875,703506.2231641772,1155828.1202425088,711367.9403610165,EPSG:2927)
```


*Expand a Bounds by a given distance*

```
Bounds bounds1 = new Bounds(-127.265, 43.068, -113.554, 50.289, "EPSG:4326")
Bounds bounds2 = new Bounds(-127.265, 43.068, -113.554, 50.289, "EPSG:4326")
bounds2.expandBy(10.1)
```

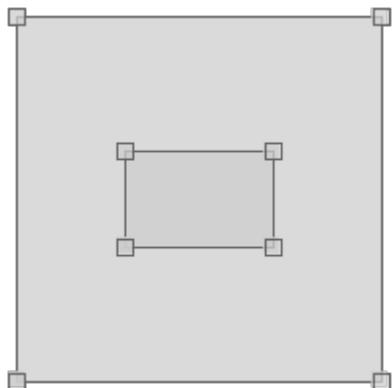


*Expand a Bounds to include another Bounds*

```
Bounds bounds1 = new Bounds(8.4375, 37.996162679728116, 19.6875, 46.07323062540835,
"EPSG:4326")
Bounds bounds2 = new Bounds(22.5, 31.952162238024975, 30.937499999999996,
37.43997405227057, "EPSG:4326")
bounds1.expand(bounds2)
```

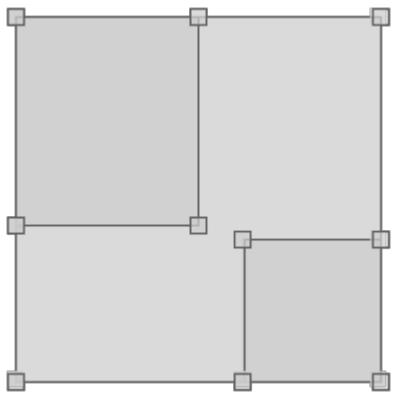


*Scale an existing Bounds some distance to create a new Bounds*

```
Bounds bounds1 = new Bounds(-127.265, 43.068, -113.554, 50.289, "EPSG:4326")
Bounds bounds2 = bounds1.scale(2)
```

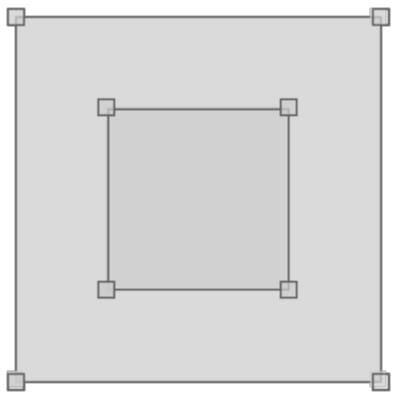

*Divide a Bounds into smaller tiles or Bounds*

```
Bounds bounds = new Bounds(-122.485, 47.246, -122.452, 47.267, "EPSG:4326")
List<Bounds> subBounds = bounds.tile(0.25)
```

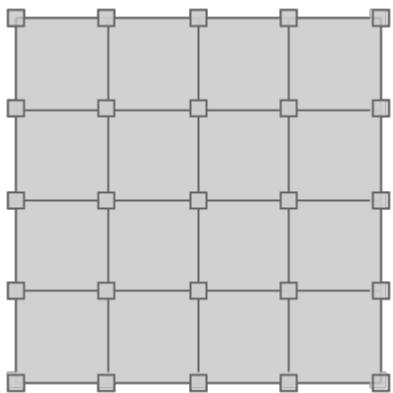

Calculate a quad tree for this Bounds between the start and stop levels. A Closure is called for each new Bounds generated.

```
Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326")
bounds.quadTree(0,2) { Bounds b ->
    println b
}
```

```
(-180.0,-90.0,180.0,90.0,EPSG:4326)
(-180.0,-90.0,0.0,0.0,EPSG:4326)
(-180.0,0.0,0.0,90.0,EPSG:4326)
(0.0,-90.0,180.0,0.0,EPSG:4326)
(0.0,0.0,180.0,90.0,EPSG:4326)
```

Determine whether a Bounds is empty or not. A Bounds is empty if it is null or it's area is 0.

```
Bounds bounds = new Bounds(0,10,10,20)
println bounds.isEmpty()
```


```
false
```

```
Bounds emptyBounds = new Bounds(0,10,10,10)
println emptyBounds.isEmpty()
```

```
true
```


Determine if a Bounds contains another Bounds

```
Bounds bounds1 = new Bounds(-107.226, 34.597, -92.812, 43.068)
Bounds bounds2 = new Bounds(-104.326, 37.857, -98.349, 40.913)
println bounds1.contains(bounds2)
```

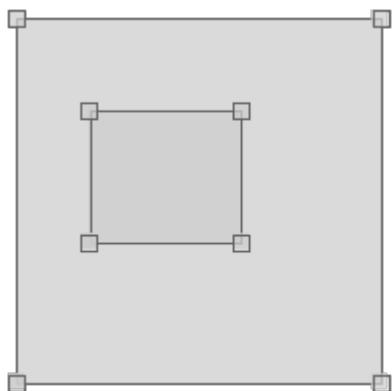

true


```
Bounds bounds3 = new Bounds(-112.412, 36.809, -99.316, 44.777)
println bounds1.contains(bounds3)
```

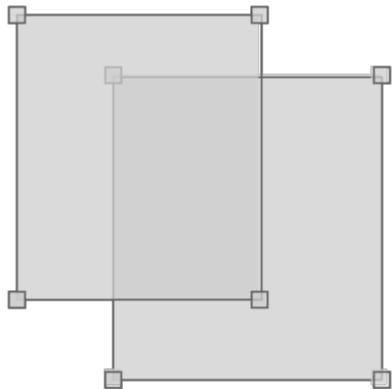

false


Determine if a Bounds contains a Point

```
Bounds bounds = new Bounds(-107.226, 34.597, -92.812, 43.068)
Point point1 = new Point(-95.976, 39.639)
println bounds.contains(point1)
```

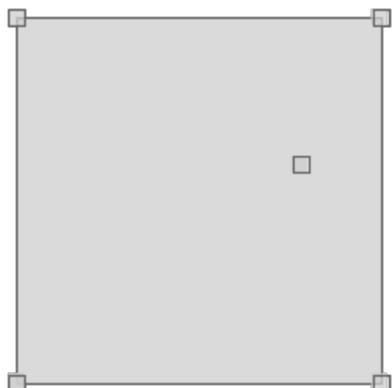

true


```
Point point2 = new Point(-89.384, 38.959)
println bounds.contains(point2)
```

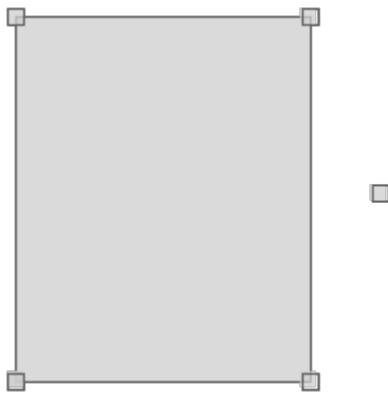

true


Determine if two Bounds intersect

```
Bounds bounds1 = new Bounds(-95.885, 46.765, -95.788, 46.811)
Bounds bounds2 = new Bounds(-95.847, 46.818, -95.810, 46.839)
println bounds1.intersects(bounds2)
```

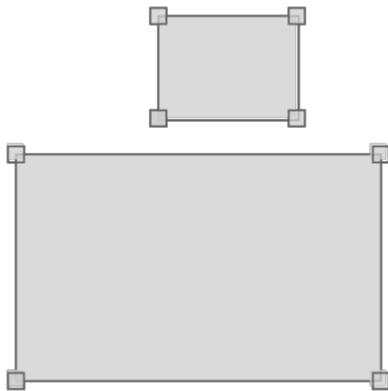

false


```
Bounds bounds3 = new Bounds(-95.904, 46.747, -95.839, 46.792)
println bounds1.intersects(bounds3)
```

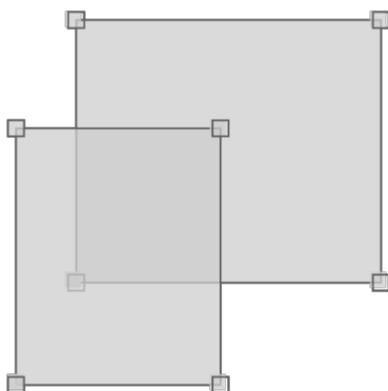

```
true
```


Calculate the intersection between two Bounds

```
Bounds bounds1 = new Bounds(-95.885, 46.765, -95.788, 46.811)
Bounds bounds2 = new Bounds(-95.904, 46.747, -95.839, 46.792)
Bounds bounds3 = bounds1.intersection(bounds2)
```

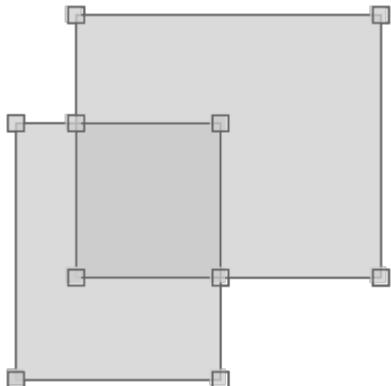


Generate a grid from a Bounds with a given number of columns and rows and the polygon shape. Other shapes include: polygon, point, circle/ellipse, hexagon, hexagon-inv).

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
Geometry geometry = bounds.getGrid(5,4,"polygon")
```

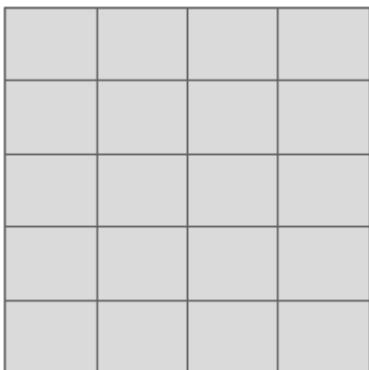


Generate a grid from a Bounds with a given number of columns and rows and a point shape. A Closure that is called with a geometry, column, and row for each grid cell that is created.

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
List geometries = []
Geometry geometry = bounds.generateGrid(10,8,"point") { Geometry g, int col, int row
->
    geometries.add(g)
}
```

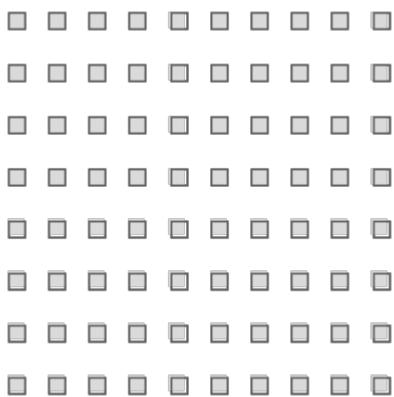


Generate a grid from a Bounds with a given cell width and height and a circle/ellipse shape.

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
Geometry geometry = bounds.getGrid(72.0,72.0,"circle")
```

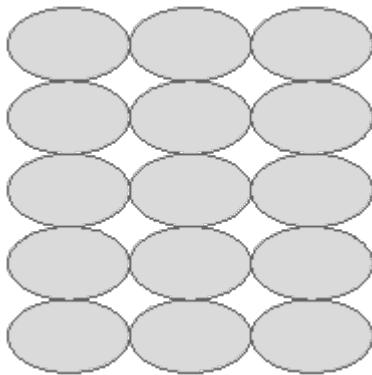


Generate a grid from a Bounds with a given cell width and height and a hexagon shape. A Closure is called with a geometry, column, and row for each grid cell generated.

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
List geometries = []
Geometry geometry = bounds.generateGrid(72.0,72.0,"hexagon") { Geometry g, int col,
int row ->
    geometries.add(g)
}
```

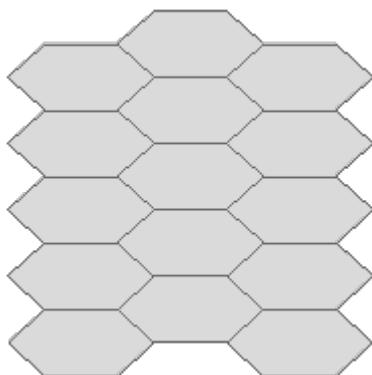


Generate a grid from a Bounds with a given cell width and height and an inverted hexagon shape.

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
Geometry geometry = bounds.getGrid(5,5,"hexagon-inv")
```

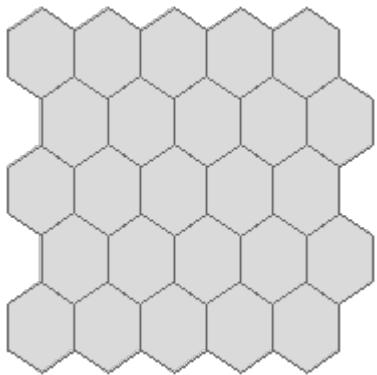


Create a rectangle from a Bounds with a given number of Points and a rotation angle in radians.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createRectangle(20,Math.toRadians(45))
```

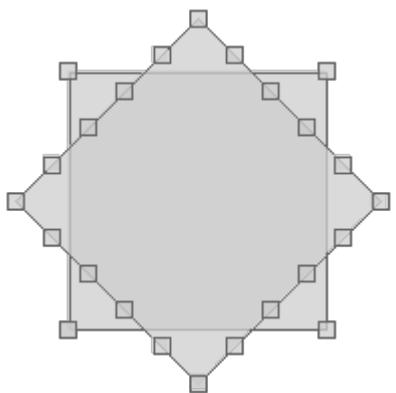


Create an ellipse from a Bounds. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createEllipse()
```

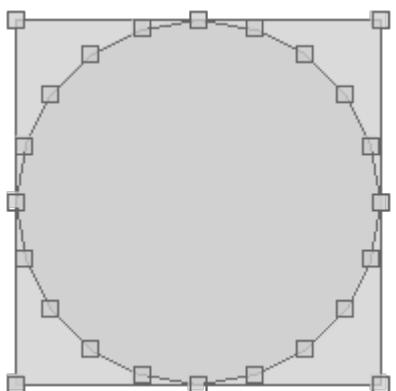


Create a squircle from a Bounds. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createSquircle()
```

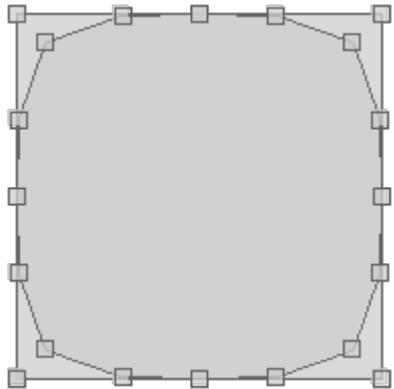


Create a super circle from a Bounds with a given power. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createSuperCircle(1.75)
```

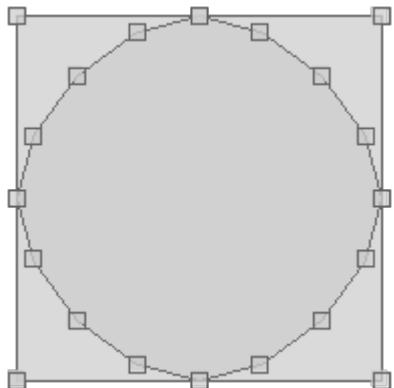


Create an arc from a Bounds with a start angle and angle extent. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
LineString lineString = bounds.createArc(Math.toRadians(45), Math.toRadians(90))
```

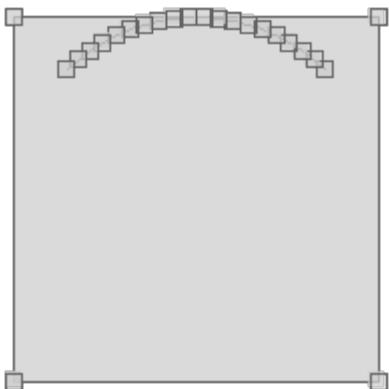


Create an arc polygon from a `Bounds` with a start angle and angle extent. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createArcPolygon(Math.toRadians(45), Math.toRadians(90))
```

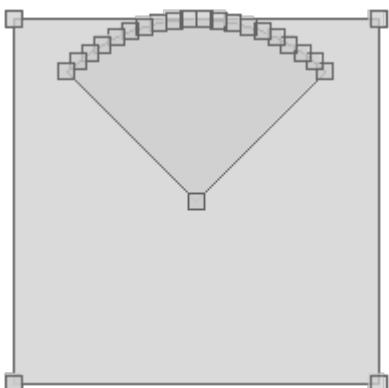


Create a sine star from a `Bounds` with a number of arms and an arm length ratio. The default number of points is 20 and the default rotation angle in radians is 0.

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createSineStar(5, 2.3)
```

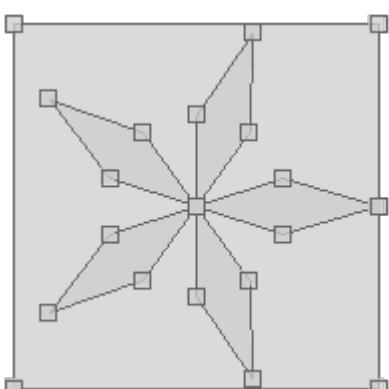

Create a hexagon from a `Bounds` that is either inverted (false) or not (true).

```
Bounds bounds = new Bounds(0,0,20,20)
Polygon polygon = bounds.createHexagon(false)
```

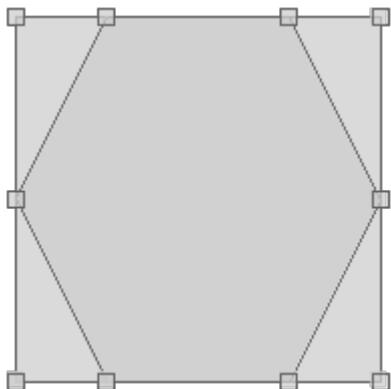

# Projection Recipes

The Projection classes are in the [geoscript.proj](#) package.

## Creating Projections

*Create a Projection from an EPSG Code*

```
Projection proj = new Projection("EPSG:4326")
println proj.wkt
```

```
GEOGCS["WGS 84",
  DATUM["World Geodetic System 1984",
    SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG","7030"]],
    AUTHORITY["EPSG","6326"]],
  PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG","8901"]],
  UNIT["degree", 0.017453292519943295],
  AXIS["Geodetic longitude", EAST],
  AXIS["Geodetic latitude", NORTH],
  AUTHORITY["EPSG","4326"]]
```

*Create a Projection from a WKT Projection String*

```
Projection proj = new Projection("""GEOGCS["WGS 84",
  DATUM["World Geodetic System 1984",
    SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG","7030"]],
    AUTHORITY["EPSG","6326"]],
  PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG","8901"]],
  UNIT["degree", 0.017453292519943295],
  AXIS["Geodetic longitude", EAST],
  AXIS["Geodetic latitude", NORTH],
  AUTHORITY["EPSG","4326"]]""")
```

```
GEOGCS["WGS 84",
    DATUM["World Geodetic System 1984",
        SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG", "7030"]],
        AUTHORITY["EPSG", "6326"]],
    PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG", "8901"]],
    UNIT["degree", 0.017453292519943295],
    AXIS["Geodetic longitude", EAST],
    AXIS["Geodetic latitude", NORTH],
    AUTHORITY["EPSG", "4326"]]
```

Create a Projection from well known name

```
Projection proj = new Projection("Mollweide")
println proj.wkt
```

```
PROJCS["Mollweide",
    GEOGCS["WGS84",
        DATUM["WGS84",
            SPHEROID["WGS84", 6378137.0, 298.257223563]],
        PRIMEM["Greenwich", 0.0],
        UNIT["degree", 0.017453292519943295],
        AXIS["Longitude", EAST],
        AXIS["Latitude", NORTH]],
    PROJECTION["Mollweide"],
    PARAMETER["semi-minor axis", 6378137.0],
    PARAMETER["False easting", 0.0],
    PARAMETER["False northing", 0.0],
    PARAMETER["Longitude of natural origin", 0.0],
    UNIT["m", 1.0],
    AXIS["Easting", EAST],
    AXIS["Northing", NORTH]]
```

Get a List of all supported Projections (this is really slow)

```
List<Projection> projections = Projection.projections()
```

```
EPSG:4326
EPSG:4269
EPSG:26918
EPSG:2263
EPSG:2927
...
```

# Getting Projection Properties

*Get the id*

```
Projection proj = new Projection("EPSG:4326")
String id = proj.id
```

EPSG:4326

*Get the srs*

```
String srs = proj.srs
```

EPSG:4326

*Get the epsg code*

```
int epsg = proj.epsg
```

4326

*Get the WKT*

```
String wkt = proj.wkt
```

```
GEOGCS["WGS 84",
    DATUM["World Geodetic System 1984",
        SPHEROID["WGS 84", 6378137.0, 298.257223563, AUTHORITY["EPSG","7030"]],
        AUTHORITY["EPSG","6326"]],
    PRIMEM["Greenwich", 0.0, AUTHORITY["EPSG","8901"]],
    UNIT["degree", 0.017453292519943295],
    AXIS["Geodetic longitude", EAST],
    AXIS["Geodetic latitude", NORTH],
    AUTHORITY["EPSG","4326"]]
```

*Get the Bounds in the native Projection*

```
Bounds bounds = proj.bounds
```

(-180.0,-90.0,180.0,90.0,EPSG:4326)

*Get the Bounds in the EPSG:4326*

```
Bounds geoBounds = proj.geoBounds
```

```
(-180.0,-90.0,180.0,90.0,EPSC:4326)
```

## Using Projections

*Transform a Geometry from one projection to another using the Projection static method with strings*

```
Geometry epsg4326Geom = new Point(-122.440, 47.245)
Geometry epsg2927Geom = Projection.transform(epsg4326Geom, "EPSG:4326", "EPSG:2927")
println epsg2927Geom
```

```
POINT (1158609.2040371667 703068.0661327888)
```

*Transform a Geometry from one projection to another using the Projection static method with Projections*

```
Projection epsg4326 = new Projection("EPSG:4326")
Projection epsg2927 = new Projection("EPSG:2927")
Geometry epsg4326Geom = new Point(-122.440, 47.245)
Geometry epsg2927Geom = Projection.transform(epsg4326Geom, epsg4326, epsg2927)
println epsg2927Geom
```

```
POINT (1158609.2040371667 703068.0661327888)
```

*Transform a Geometry from one projection to another using two Projections*

```
Projection fromProj = new Projection("EPSG:4326")
Projection toProj = new Projection("EPSG:2927")
Geometry geom = new Point(-122.440, 47.245)
Geometry projectedGeom = fromProj.transform(geom, toProj)
println projectedGeom
```

```
POINT (1158609.2040371667 703068.0661327888)
```

*Transform a Geometry from one projection to another using a Projections and a String*

```
Projection fromProj = new Projection("EPSG:4326")
Geometry geom = new Point(-122.440, 47.245)
Geometry projectedGeom = fromProj.transform(geom, "EPSG:2927")
println projectedGeom
```

```
POINT (1158609.2040371667 703068.0661327888)
```

## Using Geodetic

Create a Geodetic object with an ellipsoid

```
Geodetic geodetic = new Geodetic("wgs84")
println geodetic
```

```
Geodetic [SPHEROID["WGS 84", 6378137.0, 298.257223563]]
```

Calculate the forward and back azimuth and distance between the given two Points.

```
Geodetic geodetic = new Geodetic("clrk66")
Point bostonPoint = new Point(-71.117, 42.25)
Point portlandPoint = new Point(-123.683, 45.52)
Map results = geodetic.inverse(bostonPoint, portlandPoint)
double forwardAzimuth = results.forwardAzimuth
println forwardAzimuth
```

```
-66.52547810974724
```

```
double backAzimuth = results.backAzimuth
println backAzimuth
```

```
75.6581745719509
```

```
double distance = results.distance
println distance
```

```
4164050.459880065
```

Calculate a new Point and back azimuth given the starting Point, azimuth, and distance.

```
Geodetic geodetic = new Geodetic("clrk66")
Point bostonPoint = new Point(-71.117, 42.25)
Map results = geodetic.forward(bostonPoint, -66.531, 4164192.708)
Point point = results.point
println point
```

```
POINT (-123.6835797667373 45.516427795897236)
```

```
double azimuth = results.backAzimuth  
println azimuth
```

```
75.65337425050724
```

Place the given number of points between starting and ending Points

```
Geodetic geodetic = new Geodetic("clk66")  
Point bostonPoint = new Point(-71.117, 42.25)  
Point portlandPoint = new Point(-123.683, 45.52)  
List<Point> points = geodetic.placePoints(bostonPoint, portlandPoint, 10)  
points.each { Point point ->  
    println point.wkt  
}
```

```
POINT (-75.41357382496236 43.52791689304305)  
POINT (-79.8828640042499 44.63747566950249)  
POINT (-84.51118758826816 45.565540142641)  
POINT (-89.27793446221685 46.300124344169255)  
POINT (-94.15564606698499 46.83102721803566)  
POINT (-99.11079892605703 47.15045006457598)  
POINT (-104.10532353179985 47.25351783423774)  
POINT (-109.09873812691619 47.13862709798195)  
POINT (-114.05062990603696 46.80756425557423)  
POINT (-118.92312608779855 46.26537395700513)
```

## Using Decimal Degrees

Create a new `DecimalDegrees` from a longitude and latitude

```
DecimalDegrees decimalDegrees = new DecimalDegrees(-122.525619, 47.212023)  
println decimalDegrees
```

```
-122° 31' 32.2284" W, 47° 12' 43.2828" N
```

Create a new `DecimalDegrees` from a `Point`

```
DecimalDegrees decimalDegrees = new DecimalDegrees(new Point(-122.525619,47.212023))  
println decimalDegrees
```

```
POINT (-122.52561944444444 47.212022222222224)
```

Create a new `DecimalDegrees` from a Longitude and Latitude string

```
DecimalDegrees decimalDegrees = new DecimalDegrees("-122.525619, 47.212023")
println decimalDegrees
```

```
-122° 31' 32.2284" W, 47° 12' 43.2828" N
```

Create a new `DecimalDegrees` from two strings with glyphs

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122\u00B0 31' 32.23\" W",
"47\u00B0 12' 43.28\" N")
println decimalDegrees
```

```
-122° 31' 32.2300" W, 47° 12' 43.2800" N
```

Create a new `DecimalDegrees` from two strings

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m
43.28s N")
println decimalDegrees
```

```
-122° 31' 32.2300" W, 47° 12' 43.2800" N
```

Create a new `DecimalDegrees` from a single Degrees Minutes Seconds formatted string

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W, 47d 12m 43.28s
N")
println decimalDegrees
```

```
-122° 31' 32.2300" W, 47° 12' 43.2800" N
```

Create a new `DecimalDegrees` from a single Decimal Degree Minutes formatted string with glyphs

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122\u00B0 31.5372' W, 47\u00B0
12.7213' N")
println decimalDegrees
```

```
-122° 31' 32.2320" W, 47° 12' 43.2780" N
```

Create a new `DecimalDegrees` from a single `Decimal Degree Minutes` formatted string

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31.5372m W, 47d 12.7213m N")
println decimalDegrees
```

```
-122° 31' 32.2320" W, 47° 12' 43.2780" N
```

Get degrees minutes seconds from a `DecimalDegrees` object

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m
43.28s N")
Map dms = decimalDegrees.dms
println "Degrees: ${dms.longitude.degrees}"
println "Minutes: ${dms.longitude.minutes}"
println "Seconds: ${dms.longitude.seconds}"
```

```
Degrees: -122
Minutes: 31
Seconds: 32.22999999998388
```

```
println "Degrees: ${dms.latitude.degrees}"
println "Minutes: ${dms.latitude.minutes}"
println "Seconds: ${dms.latitude.seconds}"
```

```
Degrees: 47
Minutes: 12
Seconds: 43.28000000006396
```

Convert a `DecimalDegrees` object to a DMS String with glyphs

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m
43.28s N")
println decimalDegrees.toDms(true)
```

```
-122° 31' 32.2300" W, 47° 12' 43.2800" N
```

Convert a `DecimalDegrees` object to a DMS String without glyphs

```
println decimalDegrees.toDms(false)
```

```
-122d 31m 32.2300s W, 47d 12m 43.2800s N
```

Get degrees minutes from a `DecimalDegrees` object

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m  
43.28s N")  
Map dms = decimalDegrees.ddm  
println "Degrees: ${dms.longitude.degrees}"  
println "Minutes: ${dms.longitude.minutes}"
```

```
Degrees: -122  
Minutes: 31.537166666666398
```

```
println "Degrees: ${dms.latitude.degrees}"  
println "Minutes: ${dms.latitude.minutes}"
```

```
Degrees: 47  
Minutes: 12.7213333333344
```

Convert a `DecimalDegrees` object to a DDM String with glyphs

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m  
43.28s N")  
println decimalDegrees.toDdm(true)
```

```
-122° 31.5372' W, 47° 12.7213' N
```

Convert a `DecimalDegrees` object to a DDM String without glyphs

```
println decimalDegrees.toDdm(false)
```

```
-122d 31.5372m W, 47d 12.7213m N
```

Get a `Point` from a `DecimalDegrees` object

```
DecimalDegrees decimalDegrees = new DecimalDegrees("122d 31m 32.23s W", "47d 12m  
43.28s N")  
Point point = decimalDegrees.point
```

```
POINT (-122.52561944444444 47.212022222222224)
```

# Spatial Index Recipes

The Index classes are in the [geoscript.index](#) package.

## Using STRtree

*Create a STRtree spatial index*

```
STRtree index = new STRtree()
```

*Insert Geometries and their Bounds*

```
index.insert(new Bounds(0,0,10,10), new Point(5,5))
index.insert(new Bounds(2,2,6,6), new Point(4,4))
index.insert(new Bounds(20,20,60,60), new Point(30,30))
index.insert(new Bounds(22,22,44,44), new Point(32,32))
```

*Get the size of the index*

```
int size = index.size
println size
```

```
4
```

*Query the index*

```
List results = index.query(new Bounds(1,1,5,5))
results.each { Geometry geometry ->
    println geometry
}
```

```
POINT (4 4)
POINT (5 5)
```

## Using Quadtree

*Create a Quadtree spatial index*

```
Quadtree index = new Quadtree()
```

## Insert Geometries and their Bounds

```
index.insert(new Bounds(0,0,10,10), new Point(5,5))
index.insert(new Bounds(2,2,6,6), new Point(4,4))
index.insert(new Bounds(20,20,60,60), new Point(30,30))
index.insert(new Bounds(22,22,44,44), new Point(32,32))
```

## Get the size of the index

```
int size = index.size
println size
```

4

## Query the index with a Bounds

```
List results = index.query(new Bounds(1,1,5,5))
results.each { Geometry geometry ->
    println geometry
}
```

POINT (30 30)  
POINT (32 32)  
POINT (5 5)  
POINT (4 4)

## Query the entire index

```
List allResults = index.queryAll()
allResults.each { Geometry geometry ->
    println geometry
}
```

POINT (30 30)  
POINT (32 32)  
POINT (5 5)  
POINT (4 4)

## Remove an item from the index

```
Geometry itemToRemove = allResults[0]
boolean removed = index.remove(itemToRemove.bounds, itemToRemove)
println "Removed? ${removed}"
println "Size = ${index.size}"
```

```
Removed = true  
Size = 3
```

## Using GeoHash

*Encode a Point as a String*

```
GeoHash geohash = new GeoHash()  
Point point = new Point(112.5584, 37.8324)  
String hash = geohash.encode(point)  
println hash
```

```
ww8p1r4t8
```

*Decode a Point from a String*

```
GeoHash geohash = new GeoHash()  
Point point = geohash.decode("ww8p1r4t8")  
println point
```

```
POINT (112.55838632583618 37.83238649368286)
```

*Encode a Point as a Long*

```
GeoHash geohash = new GeoHash()  
Point point = new Point(112.5584, 37.8324)  
long hash = geohash.encodeLong(point)  
println long
```

```
4064984913515641
```

*Decode a Point from a Long*

```
GeoHash geohash = new GeoHash()  
Point point = geohash.decode(4064984913515641)  
println point
```

```
POINT (112.55839973688126 37.83240124583244)
```

### Decode a Bounds from a String

```
GeoHash geohash = new GeoHash()
Bounds bounds = geohash.decodeBounds("ww8p1r4t8")
println bounds
```

```
(112.55836486816406,37.83236503601074,112.5584077835083,37.83240795135498)
```

### Decode a Bounds from a Long

```
GeoHash geohash = new GeoHash()
Bounds bounds = geohash.decodeBounds(4064984913515641)
println bounds
```

```
(112.55836486816406,37.83236503601074,112.5584077835083,37.83240795135498)
```

### Find neighboring geohash strings

```
GeoHash geohash = new GeoHash()
String hash = "dqcjq"
String north      = geohash.neighbor(hash, GeoHash.Direction.NORTH)
String northwest = geohash.neighbor(hash, GeoHash.Direction.NORTHWEST)
String west       = geohash.neighbor(hash, GeoHash.Direction.WEST)
String southwest = geohash.neighbor(hash, GeoHash.Direction.SOUTHWEST)
String south      = geohash.neighbor(hash, GeoHash.Direction.SOUTH)
String southeast = geohash.neighbor(hash, GeoHash.Direction.SOUTHEAST)
String east       = geohash.neighbor(hash, GeoHash.Direction.EAST)
String northeast = geohash.neighbor(hash, GeoHash.Direction.NORTHEAST)
String str = """
    | ${northwest} ${north} ${northeast}
    | ${west} ${hash} ${east}
    | ${southwest} ${south} ${southeast}
    | """.stripMargin()
println str
```

```
dqcjt dqcjw dqcjx
dqcjm dqcjq dqcjr
dqcjj dqcjn dqcjp
```

Find neighboring geohash longs

```
GeoHash geohash = new GeoHash()
long hash = 1702789509
long north      = geohash.neighbor(hash, GeoHash.Direction.NORTH)
long northwest = geohash.neighbor(hash, GeoHash.Direction.NORTHWEST)
long west       = geohash.neighbor(hash, GeoHash.Direction.WEST)
long southwest = geohash.neighbor(hash, GeoHash.Direction.SOUTHWEST)
long south      = geohash.neighbor(hash, GeoHash.Direction.SOUTH)
long southeast = geohash.neighbor(hash, GeoHash.Direction.SOUTHEAST)
long east       = geohash.neighbor(hash, GeoHash.Direction.EAST)
long northeast = geohash.neighbor(hash, GeoHash.Direction.NORTHEAST)
String str = """
    | ${northwest} ${north} ${northeast}
    | ${west} ${hash} ${east}
    | ${southwest} ${south} ${southeast}
"""
"".stripMargin()
println str
```

```
1702789434 1702789520 1702789522
1702789423 1702789509 1702789511
1702789422 1702789508 1702789510
```

Find all neighboring geohash strings

```
GeoHash geohash = new GeoHash()
String hash = "dqcjq"
Map neighbors = geohash.neighbors(hash)
String north      = neighbors[GeoHash.Direction.NORTH]
String northwest = neighbors[GeoHash.Direction.NORTHWEST]
String west       = neighbors[GeoHash.Direction.WEST]
String southwest = neighbors[GeoHash.Direction.SOUTHWEST]
String south      = neighbors[GeoHash.Direction.SOUTH]
String southeast = neighbors[GeoHash.Direction.SOUTHEAST]
String east       = neighbors[GeoHash.Direction.EAST]
String northeast = neighbors[GeoHash.Direction.NORTHEAST]
String str = """
    | ${northwest} ${north} ${northeast}
    | ${west} ${hash} ${east}
    | ${southwest} ${south} ${southeast}
"""
"".stripMargin()
println str
```

```
dqcjt dqcjw dqcjx
dqcjm dqcjq dqcjr
dqcjj dqcjn dqcjp
```

Find all neighboring geohash longs

```
GeoHash geohash = new GeoHash()
long hash = 1702789509
Map neighbors = geohash.neighbors(hash)
long north      = neighbors[GeoHash.Direction.NORTH]
long northwest = neighbors[GeoHash.Direction.NORTHWEST]
long west       = neighbors[GeoHash.Direction.WEST]
long southwest = neighbors[GeoHash.Direction.SOUTHWEST]
long south      = neighbors[GeoHash.Direction.SOUTH]
long southeast = neighbors[GeoHash.Direction.SOUTHEAST]
long east       = neighbors[GeoHash.Direction.EAST]
long northeast = neighbors[GeoHash.Direction.NORTHEAST]
String str = """
| ${northwest} ${north} ${northeast}
| ${west} ${hash} ${east}
| ${southwest} ${south} ${southeast}
| """.stripMargin()
println str
```

```
1702789434 1702789520 1702789522
1702789423 1702789509 1702789511
1702789422 1702789508 1702789510
```

Find all geohashes as strings within a Bounds

```
GeoHash geohash = new GeoHash()
List<String> bboxes = geohash.bboxes(new Bounds(120, 30, 120.0001, 30.0001), 8)
bboxes.each { String hash ->
    println hash
}
```

```
wtm6dtm6
wtm6dtm7
```

Find all geohashes as longs within a Bounds

```
GeoHash geohash = new GeoHash()
List<Long> bboxes = geohash.bboxesLong(new Bounds(120, 30, 120.0001, 30.0001), 40)
bboxes.each { long hash ->
    println hash
}
```

```
989560464998
989560464999
```


# Viewer Recipes

The Viewer classes are in the [geoscript.viewer](#) package.

## Drawing geometries


*Draw a geometry in a simple GUI*

```
Polygon polygon = new Polygon([[  
    [-101.35986328125, 47.754097979680026],  
    [-101.5576171875, 46.93526088057719],  
    [-100.12939453125, 46.51351558059737],  
    [-99.77783203125, 47.44294999517949],  
    [-100.45898437499999, 47.88688085106901],  
    [-101.35986328125, 47.754097979680026]  
])  
Viewer.draw(polygon)
```

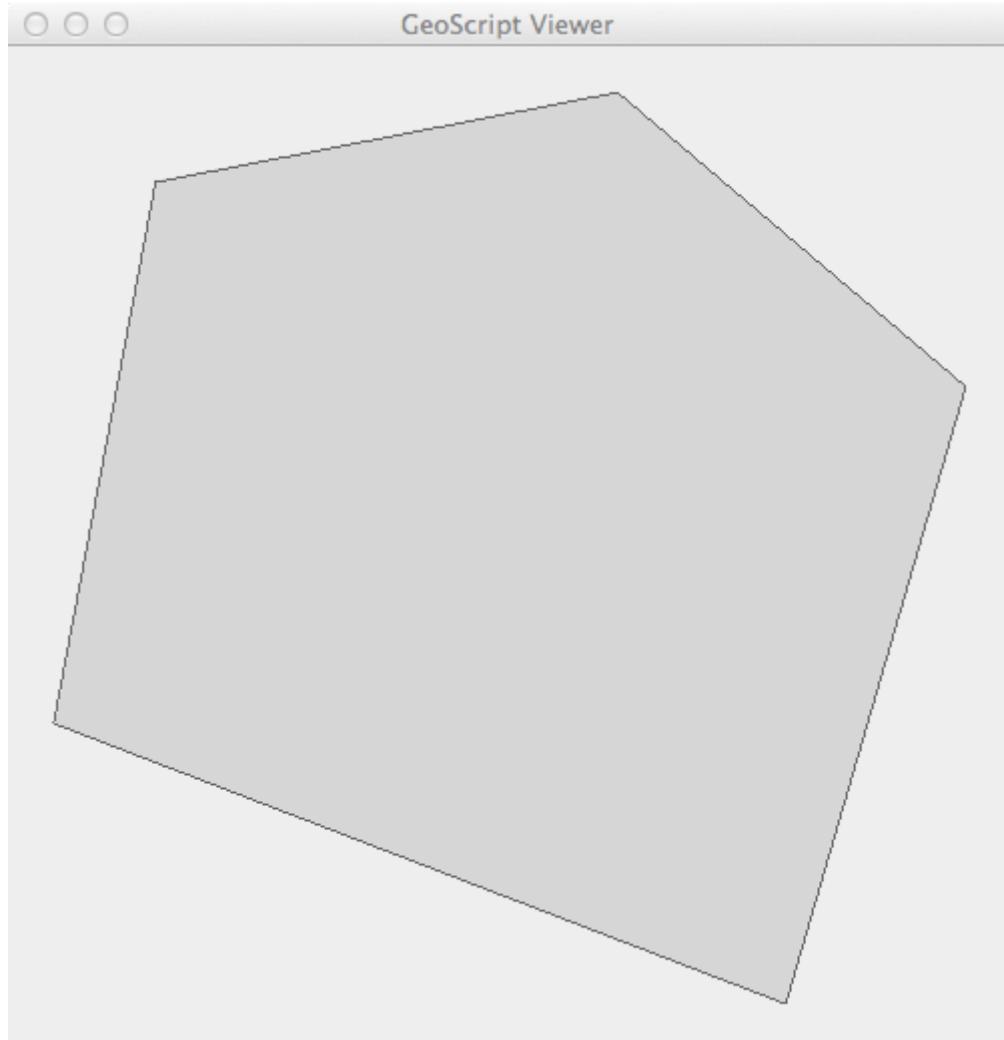


Draw a geometry to an image

```
Polygon polygon = new Polygon([[  
    [-101.35986328125, 47.754097979680026],  
    [-101.5576171875, 46.93526088057719],  
    [-100.12939453125, 46.51351558059737],  
    [-99.77783203125, 47.44294999517949],  
    [-100.45898437499999, 47.88688085106901],  
    [-101.35986328125, 47.754097979680026]  
])  
BufferedImage image = Viewer.drawToImage(polygon)
```

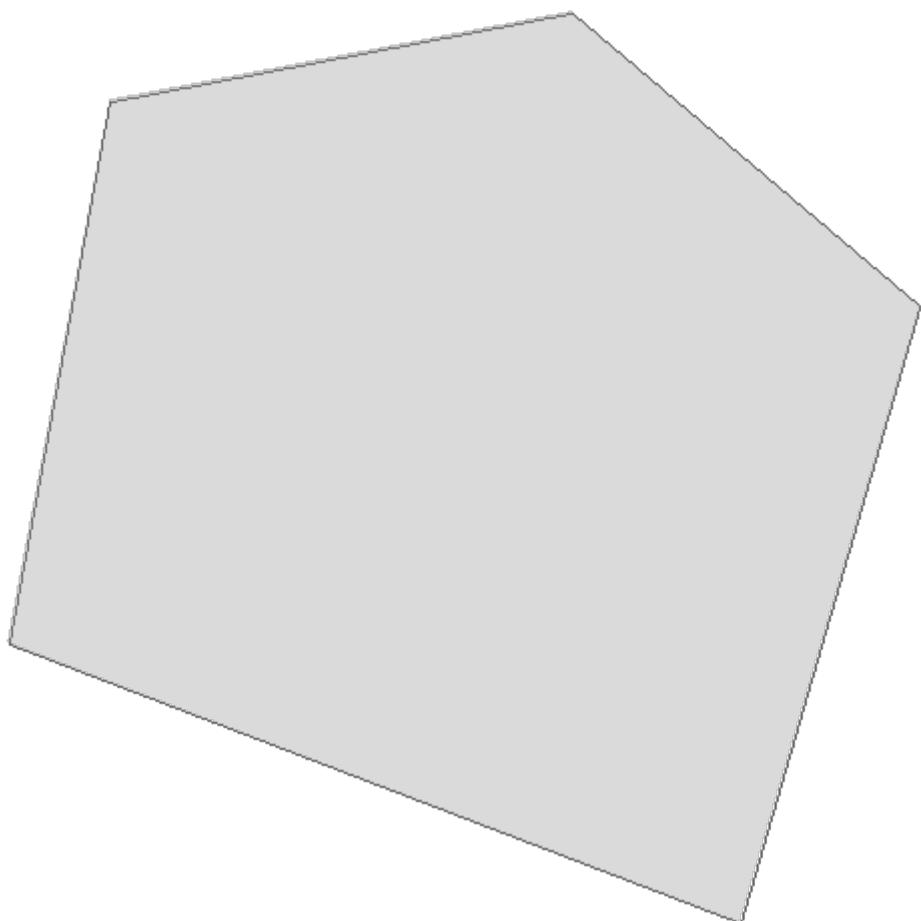


*Draw a geometry to an image with options*

```
Polygon polygon = new Polygon([[  
    [-101.35986328125, 47.754097979680026],  
    [-101.5576171875, 46.93526088057719],  
    [-100.12939453125, 46.51351558059737],  
    [-99.77783203125, 47.44294999517949],  
    [-100.45898437499999, 47.88688085106901],  
    [-101.35986328125, 47.754097979680026]  
])  
BufferedImage image = Viewer.drawToImage(  
    polygon,  
    size: [200,200],  
    drawCoords: true,  
    fillCoords: true,  
    fillPolys: true  
)
```

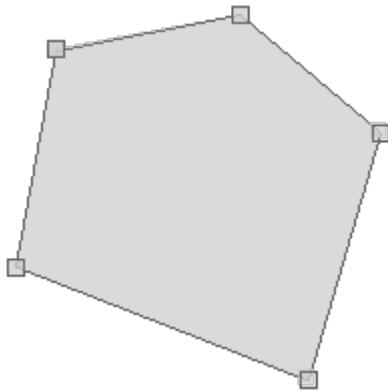


*Draw a List of geometries to an image*

```
Point point = new Point(-123.11, 47.23)  
Geometry buffer = point.buffer(4)  
Geometry bounds = buffer.bounds.geometry  
BufferedImage image = Viewer.drawToImage(  
    [bounds, buffer, point],  
    size: [200,200],  
    drawCoords: true,  
    fillCoords: true,  
    fillPolys: true  
)
```

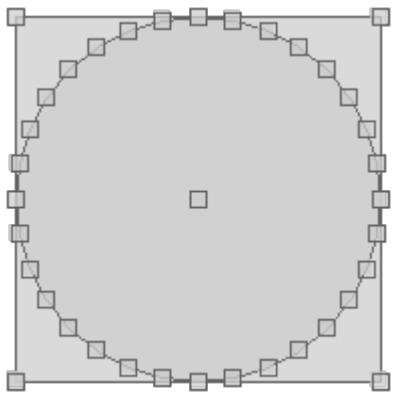

*Draw a List of Geometries to a File*


```
Point point = new Point(-123.11, 47.23)
Geometry buffer = point.buffer(4)
File file = new File("geometry.png")
Viewer.drawToFile([buffer, point], file, size: [200,200])
```

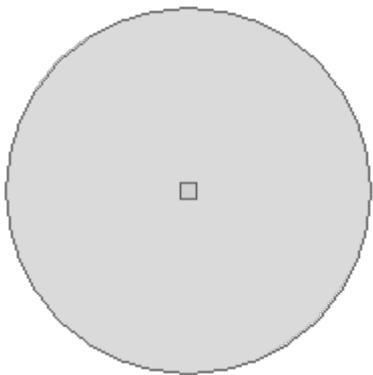

## Plotting geometries


*Plot a geometry in a simple GUI*

```
Polygon polygon = new Polygon([
    [-101.35986328125, 47.754097979680026],
    [-101.5576171875, 46.93526088057719],
    [-100.12939453125, 46.51351558059737],
    [-99.77783203125, 47.44294999517949],
    [-100.45898437499999, 47.88688085106901],
    [-101.35986328125, 47.754097979680026]
])
Viewer.plot(polygon)
```

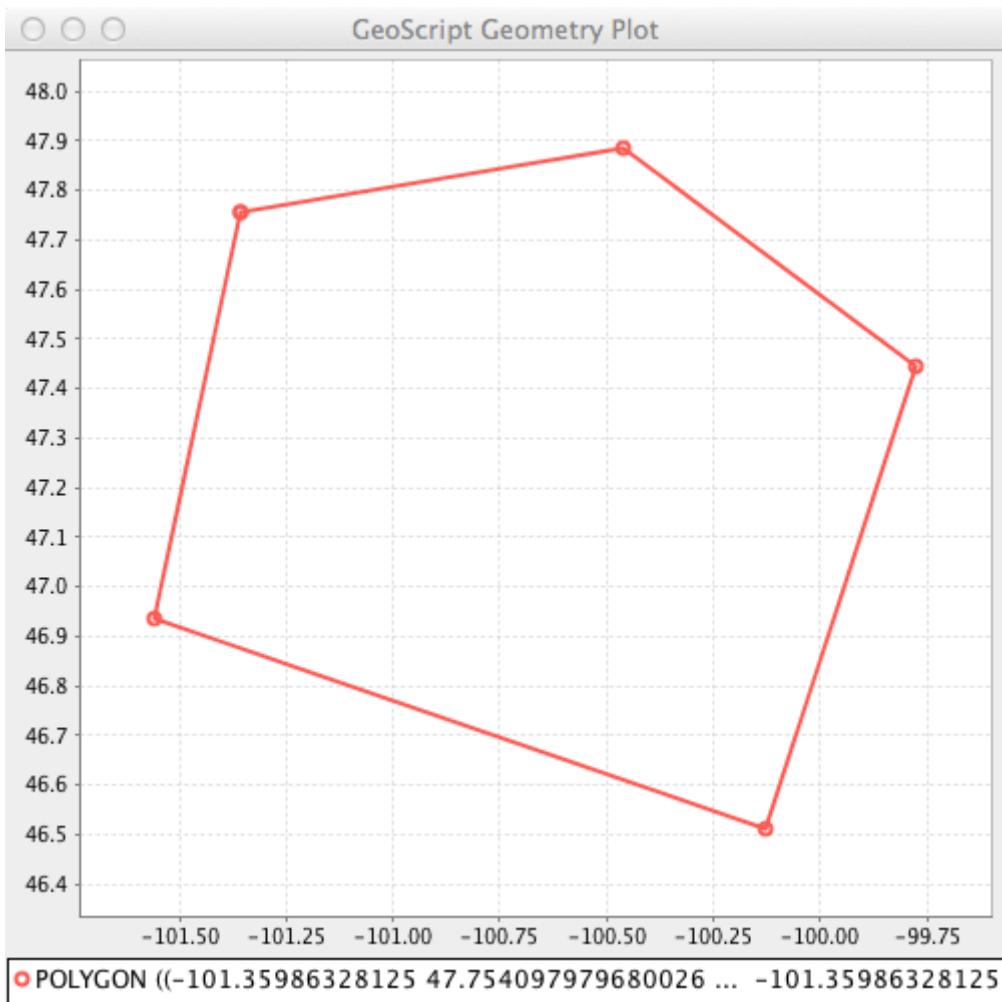


*Plot a Geometry to an image*

```
Polygon polygon = new Polygon([
    [-101.35986328125, 47.754097979680026],
    [-101.5576171875, 46.93526088057719],
    [-100.12939453125, 46.51351558059737],
    [-99.77783203125, 47.44294999517949],
    [-100.45898437499999, 47.88688085106901],
    [-101.35986328125, 47.754097979680026]
])
BufferedImage image = Viewer.plotToImage(polygon)
```

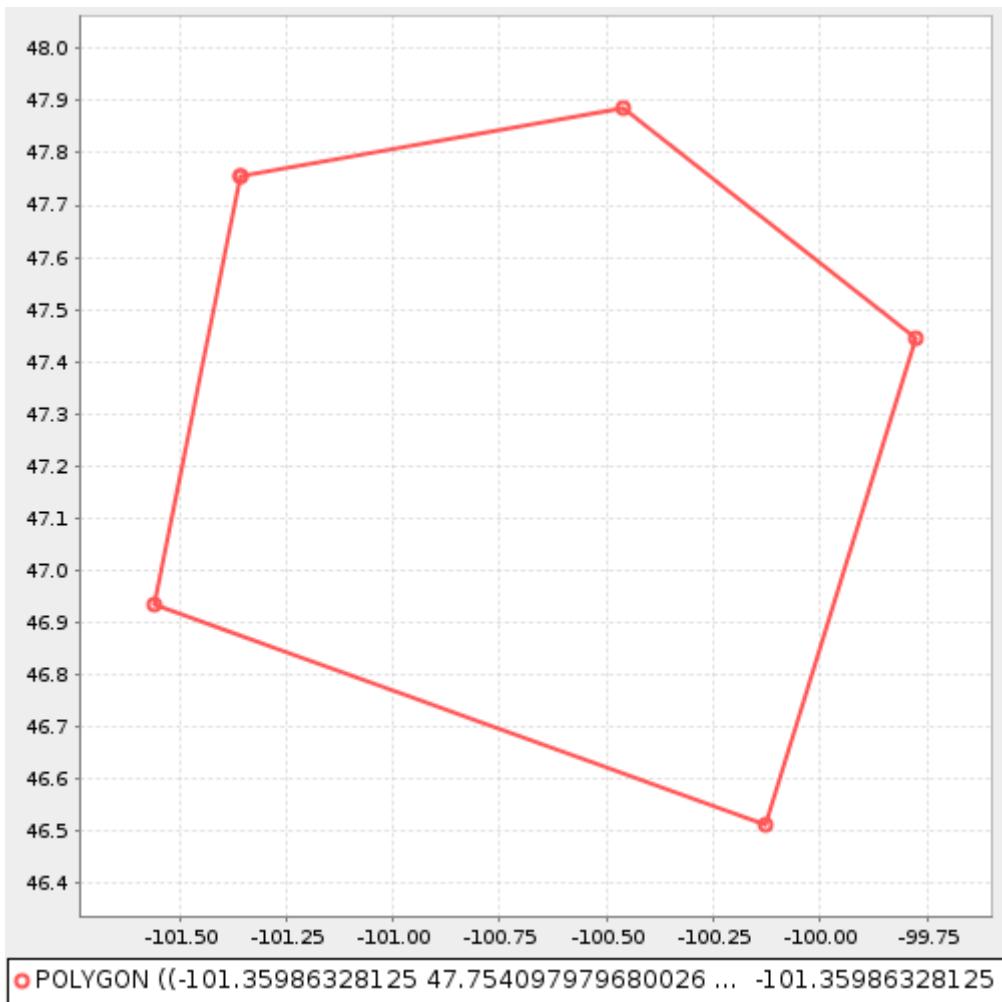


*Plot a List of Geometries to an image*

```
Point point = new Point(-123.11, 47.23)
Geometry buffer = point.buffer(4)
Geometry bounds = buffer.bounds.geometry
BufferedImage image = Viewer.plotToImage(
    [bounds, buffer, point],
    size: [300,300],
    drawCoords: true,
    fillCoords: true,
    fillPolys: true
)
```

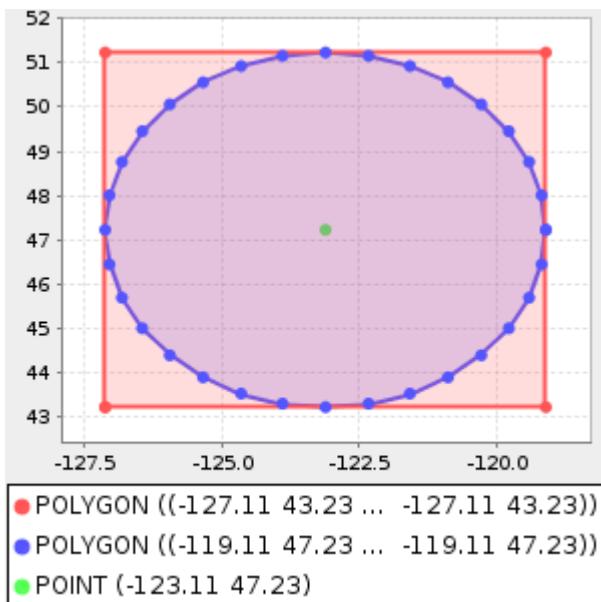

*Plot a Geometry to a File*

```
Point point = new Point(-123.11, 47.23)
Geometry buffer = point.buffer(4)
File file = new File("geometry.png")
Viewer.plotToFile([buffer, point], file, size: [300,300])
```

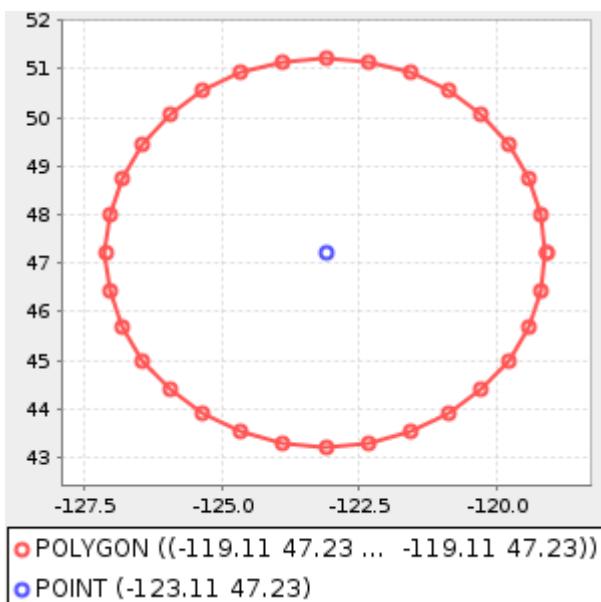


## Plot Recipes

The Plot classes are in the [geoscript.plot](#) package.

## Processing Charts


Show a chart in a GUI

```
List data = [  
    [1,10],[45,12],[23,3],[5,20]  
]  
Chart chart = Bar.xy(data)
```

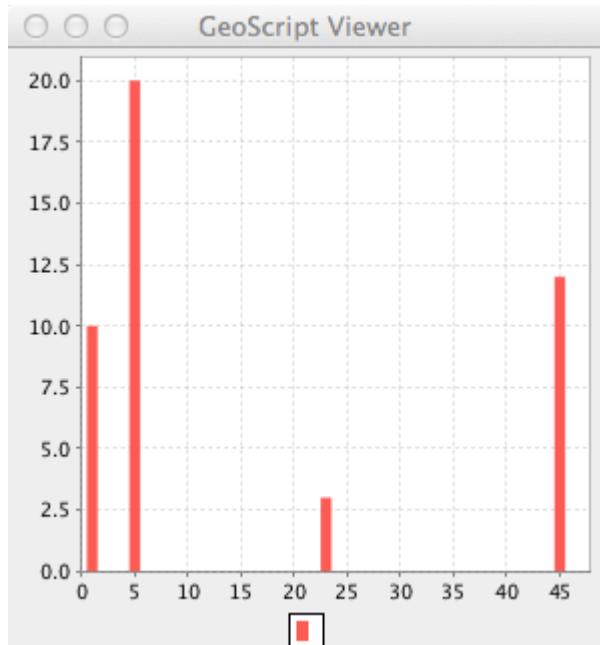


Get an image from a chart

```
Map data = [  
    "A":20,"B":45,"C":2,"D":14  
]  
Chart chart = Pie.pie(data)  
BufferedImage image = chart.image
```

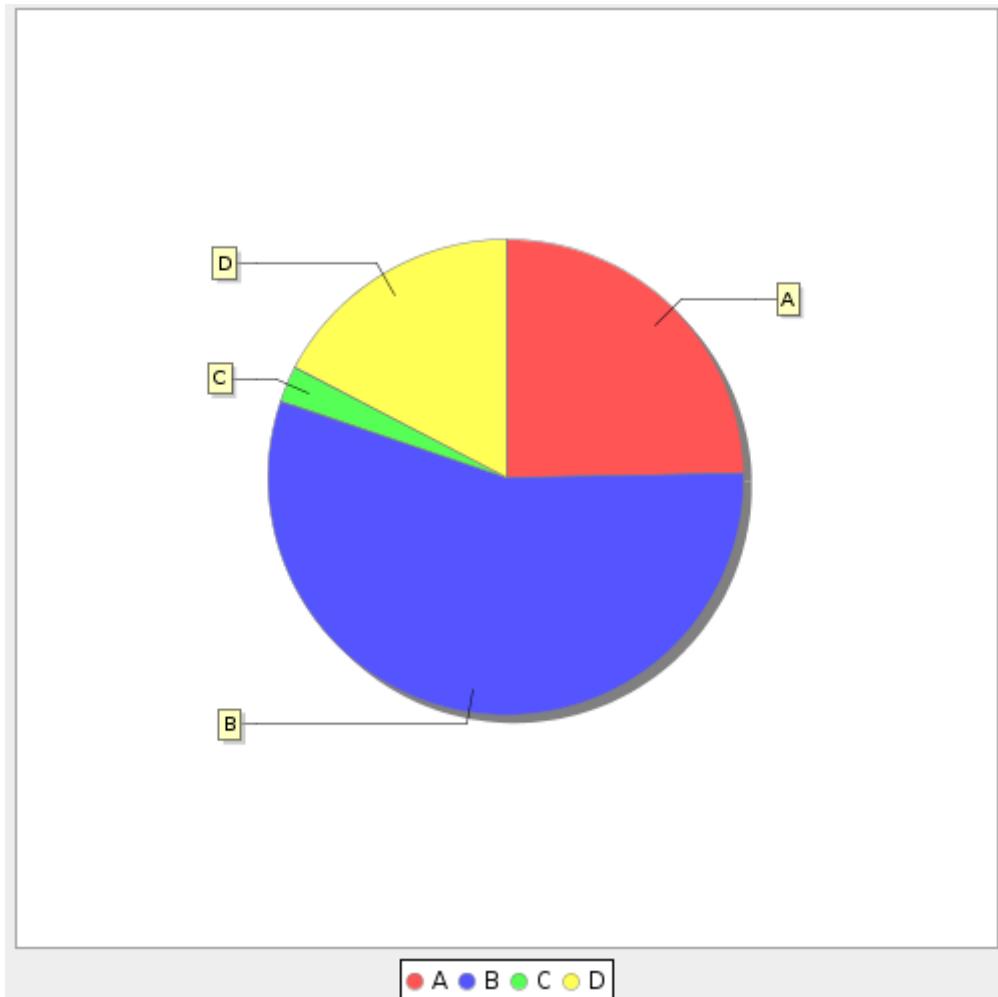


Save a chart to a file

```
Map data = [
    "A": [1, 10, 20],
    "B": [45, 39, 10],
    "C": [40, 30, 20],
    "D": [14, 25, 19]
]
Chart chart = Box.box(data)
File file = new File("chart.png")
chart.save(file)
```

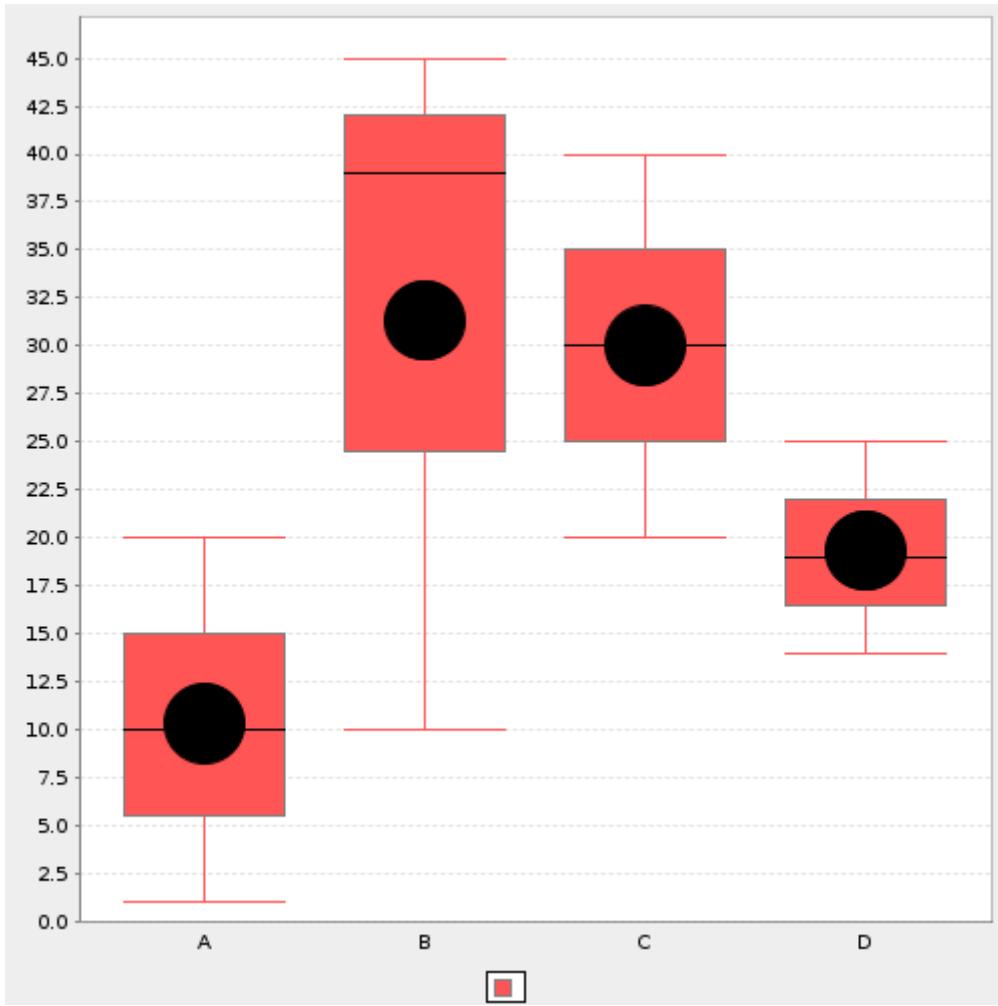

*Overlay multiple charts*


```
List data = [
    [1,10],[45,12],[23,3],[5,20]
]
Chart chart1 = Bar.xy(data)
Chart chart2 = Curve.curve(data)
Chart chart3 = Regression.linear(data)
chart1.overlay([chart2,chart3])
```

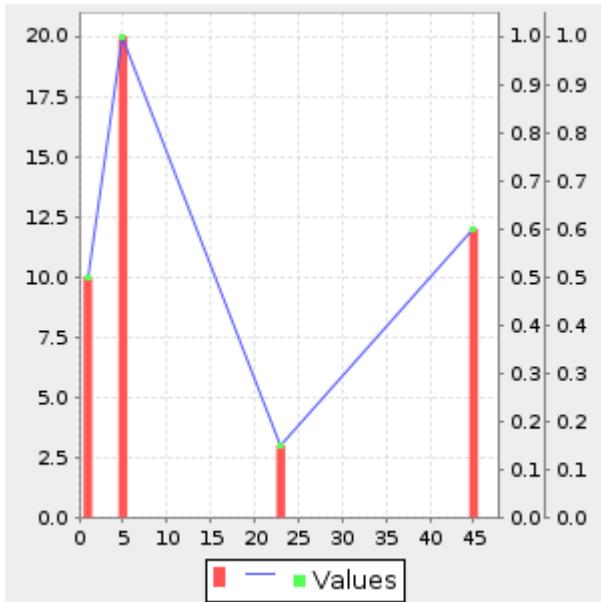

## Creating Bar Charts


Create a basic bar chart

```
List data = [
    [1,10],[45,12],[23,3],[5,20]
]
Chart chart = Bar.xy(data)
```

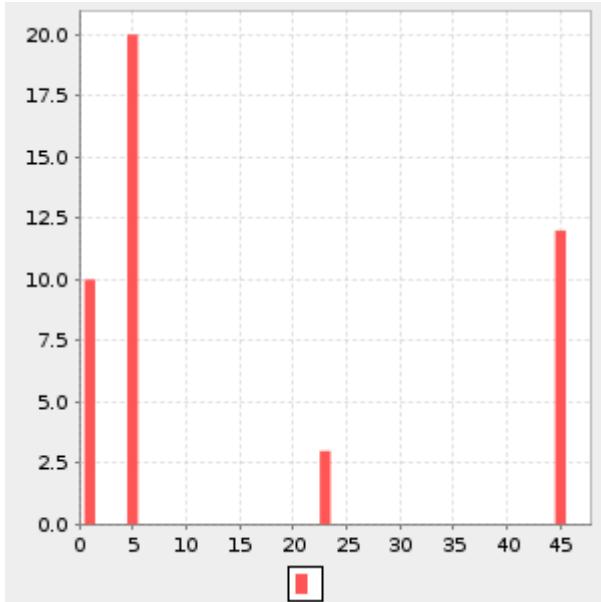


Create a bar chart with categories

```
Map data = [
    "A":20, "B":45, "C":2, "D":14
]
Chart chart = Bar.category(data)
```

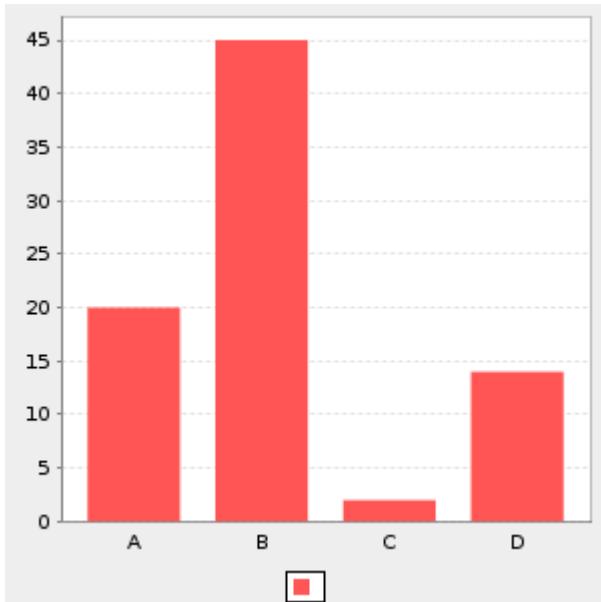


Create a stacked bar chart with two series of data

```
Map data = [
    "A": ["B":50,"C":25,"D":25],
    "F": ["G":75,"H":10,"I":15]
]
Chart chart = Bar.category(data, stacked: true)
```

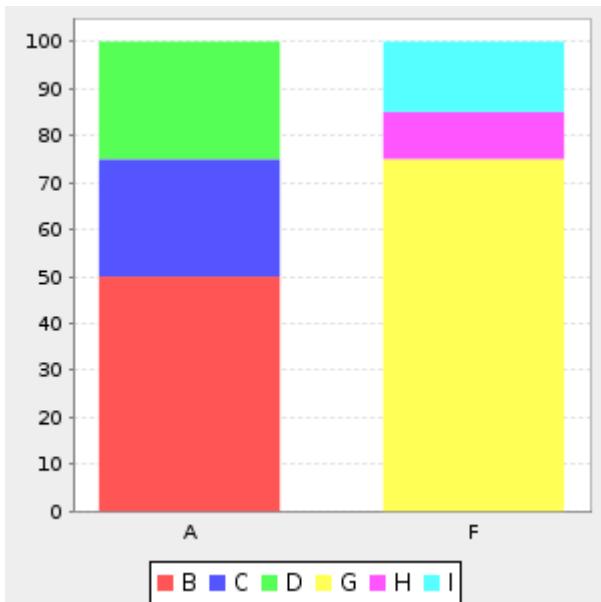

Create a 3D bar chart with categories


```
Map data = [
    "A":20,"B":45,"C":2,"D":14
]
Chart chart = Bar.category(data, trid: true)
```

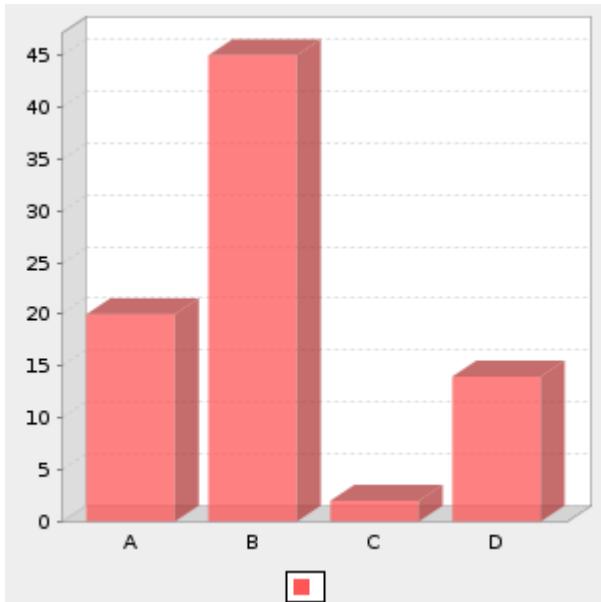

## Creating Pie Charts


Create a pie chart

```
Map data = [
    "A":20, "B":45, "C":2, "D":14
]
Chart chart = Pie.pie(data)
```

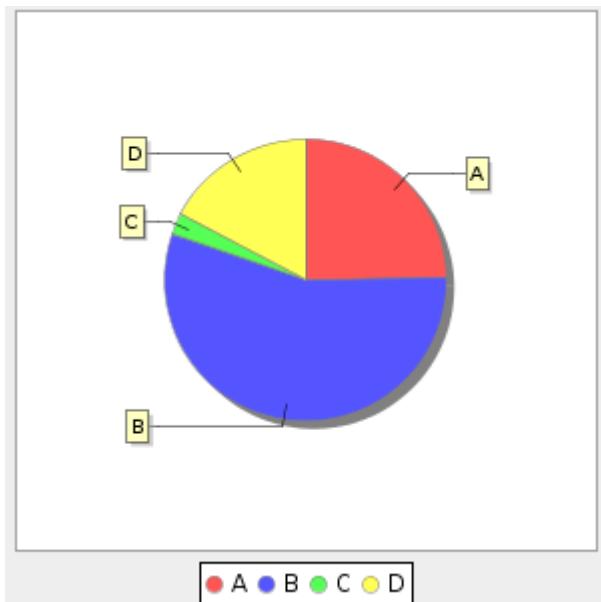

Create a 3D pie chart


```
Map data = [
    "A":20, "B":45, "C":2, "D":14
]
Chart chart = Pie.pie(data, trid: true)
```

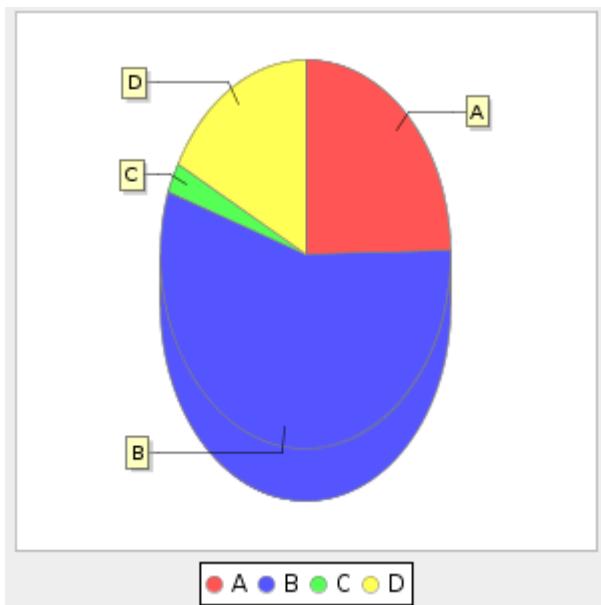

## Creating Box Charts

Create a box chart


```
Map data = [
    "A": [1, 10, 20],
    "B": [45, 39, 10],
    "C": [40, 30, 20],
    "D": [14, 25, 19]
]
Chart chart = Box.box(data)
```

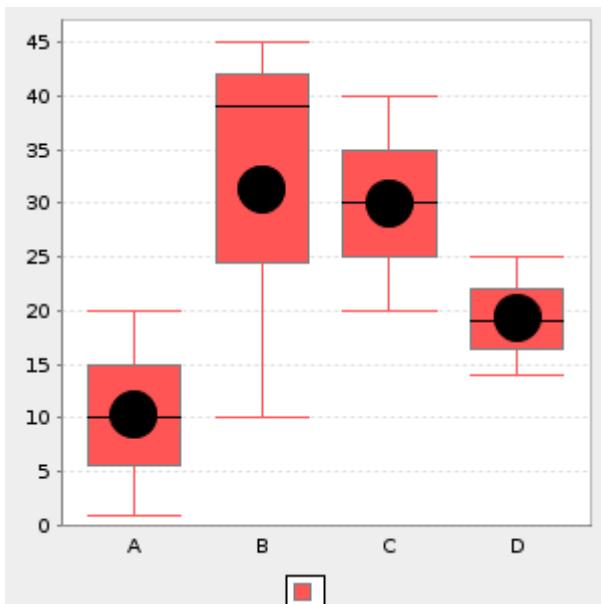

## Creating Curve Charts


Create a curve chart

```
List data = [  
    [1,10],[45,12],[23,3],[5,20]  
]  
Chart chart = Curve.curve(data)
```

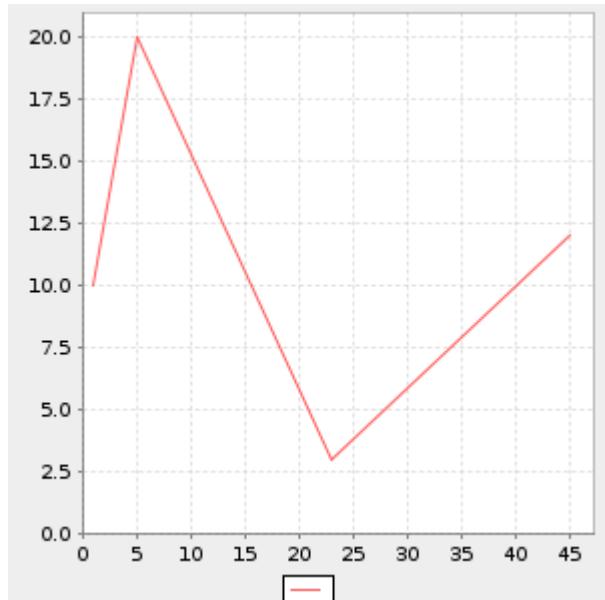


Create a smooth curve chart

```
List data = [  
    [1,10],[45,12],[23,3],[5,20]  
]  
Chart chart = Curve.curve(data, smooth: true)
```

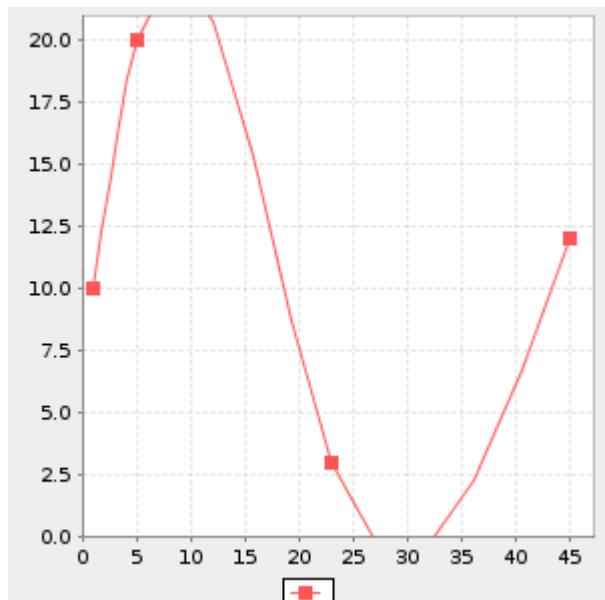

Create a 3D curve chart


```
List data = [
    [1,10],[45,12],[23,3],[5,20]
]
Chart chart = Curve.curve(data, trid: true)
```

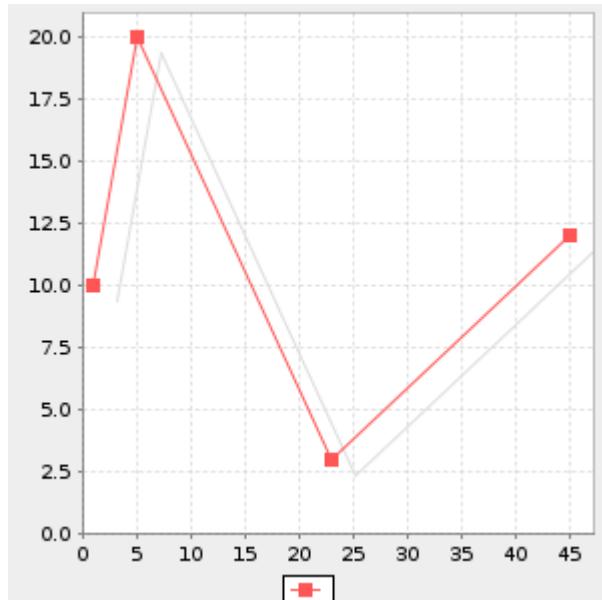

## Creating Regression Charts


Create a linear regression chart

```
MultiPoint mulitPoint = Geometry.createRandomPoints(new Bounds(0,0,100,100).geometry,
10)
List data = mulitPoint.geometries.collect{ Point pt ->
    [pt.x, pt.y]
}
Chart chart = Regression.linear(data)
```

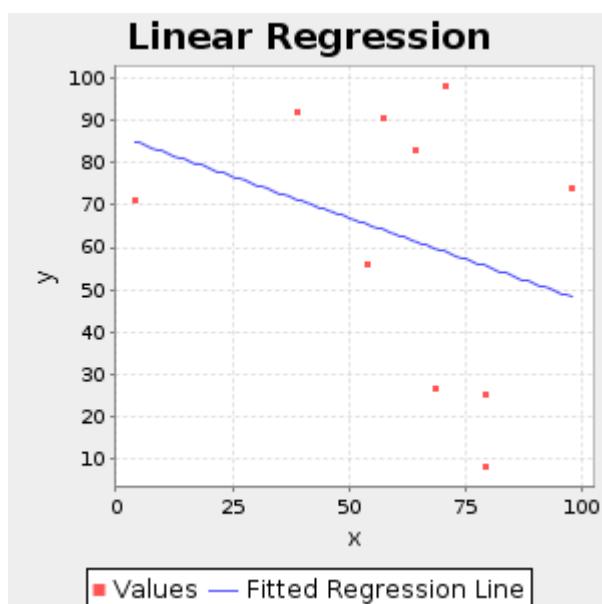

Create a power regression chart


```
MultiPoint multiPoint = Geometry.createRandomPoints(new Bounds(0,0,100,100).geometry,  
10)  
List data = multiPoint.geometries.collect{ Point pt ->  
    [pt.x, pt.y]  
}  
Chart chart = Regression.power(data)
```

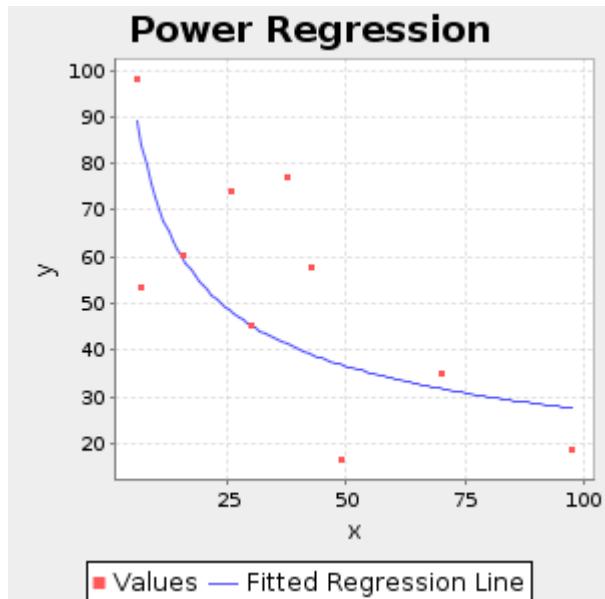

## Creating Scatter Plot Charts


Create a scatter plot chart

```
MultiPoint multiPoint = Geometry.createRandomPoints(new Bounds(0,0,100,100).geometry,  
10)  
List data = multiPoint.geometries.collect{ Point pt ->  
    [pt.x, pt.y]  
}  
Chart chart = Scatter.scatterplot(data)
```

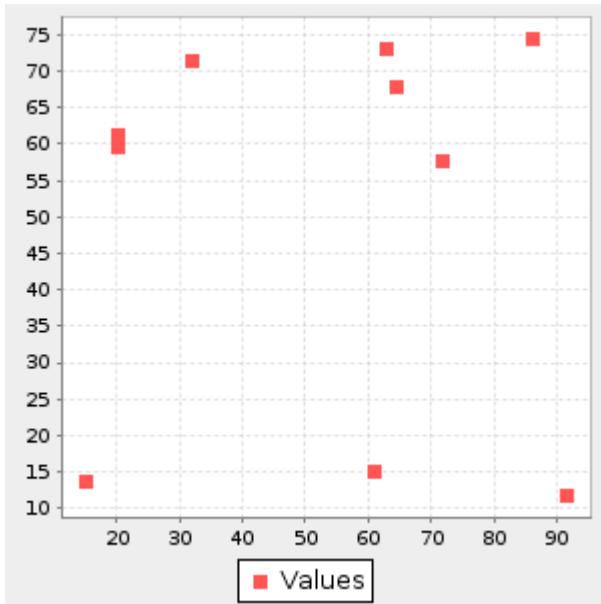

Create a scatter plot chart with options

```
MultiPoint multiPoint = Geometry.createRandomPoints(new Bounds(0,0,100,100).geometry,
10)
List data = multiPoint.geometries.collect{ Point pt ->
[pt.x, pt.y]
}
Chart chart = Scatter.scatterplot(data, legend: false, xLabel: "X Coordinates",
yLabel: "Y Coordinates")
```

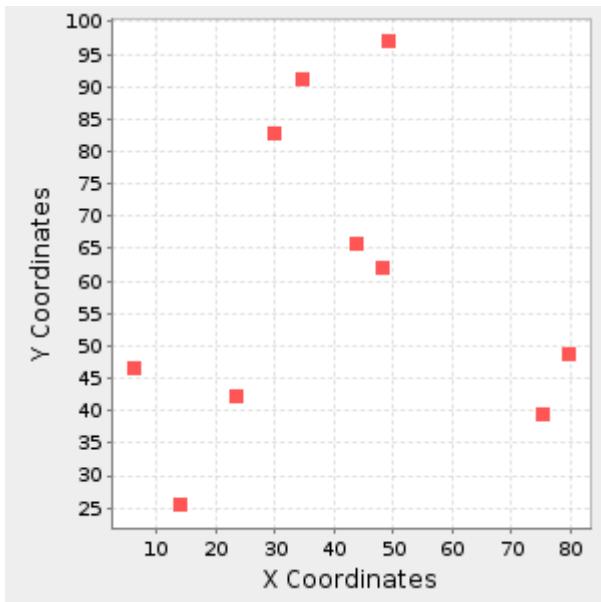

## Feature Recipes

The Feature classes are in the [geoscript.feature](#) package.

# Creating Fields

Create a Field with a name and a type

```
Field field = new Field("name", "String")
println field
```

```
name: String
```

Create a Geometry Field with a name and a geometry type and an optional projection

```
Field field = new Field("geom", "Point", "EPSG:4326")
println field
```

```
geom: Point(EPSG:4326)
```

Create a Field with a List of Strings (name, type, projection)

```
Field field = new Field(["geom", "Polygon", "EPSG:4326"])
println field
```

```
geom: Polygon(EPSG:4326)
```

Create a Field from a Map where keys are name, type, proj

```
Field field = new Field([
    "name": "geom",
    "type": "LineString",
    "proj": new Projection("EPSG:4326")
])
println field
```

```
geom: LineString(EPSG:4326)
```

Access a Field's properties

```
Field field = new Field("geom", "Point", "EPSG:4326")
println "Name = ${field.name}"
println "Type = ${field.type}"
println "Projection = ${field.proj}"
println "Is Geometry = ${field.geometry}"
```

```
Name = geom  
Type = Point  
Projection = "EPSG:4326  
Is Geometry = true
```

## Creating Schemas

Create a Schema from a list of Fields

```
Schema schema = new Schema("cities", [  
    new Field("geom", "Point", "EPSG:4326"),  
    new Field("id", "Integer"),  
    new Field("name", "String")  
])  
println schema
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

Create a Schema from a list of Lists

```
Schema schema = new Schema("cities", [  
    ["geom", "Point", "EPSG:4326"],  
    ["id", "Integer"],  
    ["name", "String"]  
])  
println schema
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

Create a Schema from a list of Maps

```
Schema schema = new Schema("cities", [  
    [name: "geom", type: "Point", proj: "EPSG:4326"],  
    [name: "id", type: "Integer"],  
    [name: "name", type: "String"]  
])  
println schema
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

Create a Schema from a string

```
Schema schema = new Schema("cities", "geom:Point:srid=4326,id:Integer,name:String")
println schema
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

## Getting Schema Properties

Get the Schema's name

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
], "https://github.com/jericks/geoscript-groovy-cookbook")
String name = schema.name
println name
```

```
cities
```

Get the Schema's geometry Field

```
Field geomField = schema.geom
println geomField
```

```
geom: Point(EPSG:4326)
```

Get the Schema's Projection

```
Projection proj = schema.proj
println proj
```

```
EPSG:4326
```

Get the Schema's URI

```
String uri = schema.uri
println uri
```

```
https://github.com/jericks/geoscript-groovy-cookbook
```

*Get the Schema's specification string*

```
String spec = schema.spec  
println spec
```

```
geom:Point:srid=4326,id:Integer,name:String
```

## Getting Schema Fields

*Get the Schema's Fields*

```
Schema schema = new Schema("cities", [  
    new Field("geom", "Point", "EPSG:4326"),  
    new Field("id", "Integer"),  
    new Field("name", "String")  
])  
List<Field> fields = schema.fields  
fields.each { Field field ->  
    println field  
}
```

```
geom: Point(EPSG:4326)  
id: Integer  
name: String
```

*Get a Field*

```
Field nameField = schema.field("name")  
println nameField
```

```
name: String
```

*Get a Field*

```
Field idField = schema.get("id")  
println idField
```

```
id: Integer
```

*Check if a Schema has a Field*

```
boolean hasArea = schema.has("area")
println "Has area Field? ${hasArea}

boolean hasGeom = schema.has("geom")
println "Has geom Field? ${hasGeom}"
```

```
false
true
```

## Modifying Schemas

*Change the projection of a Schema*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema reprojectedSchema = schema.reproject("EPSG:2927", "cities_spws")
```

```
cities_spws geom: Point(EPSG:2927), id: Integer, name: String
```

*Change the geometry type of a Schema*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema polygonSchema = schema.changeGeometryType("Polygon", "cities_buffer")
```

```
cities_buffer geom: Polygon(EPSG:4326), id: Integer, name: String
```

*Change a Field definition of a Schema*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema guidSchema = schema.changeField(schema.field('id'), new Field('guid', 'String'),
'cities_guid')
```

```
cities_guid geom: Point(EPSG:4326), guid: String, name: String
```

#### Change Field definitions of a Schema

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema updatedSchema = schema.changeFields(
    [
        (schema.field('id')) : new Field('guid', 'String'),
        (schema.field('name')) : new Field('description', 'String')
    ], 'cities_updated')
```

```
cities_updated geom: Point(EPSG:4326), guid: String, description: String
```

#### Add a Field to a Schema

```
Schema schema = new Schema("countries", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema updatedSchema = schema.addField(new Field("area", "Double"), "countries_area")
```

```
countries_area geom: Polygon(EPSG:4326), id: Integer, name: String, area: Double
```

#### Add a List of Fields to a Schema

```
Schema schema = new Schema("countries", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Schema updatedSchema = schema.addFields([
    new Field("area", "Double"),
    new Field("perimeter", "Double"),
], "countries_areaperimeter")
```

```
countries_areaperimeter geom: Polygon(EPSG:4326), id: Integer, name: String, area: Double, perimeter: Double
```

### *Remove a Field from a Schema*

```
Schema schema = new Schema("countries", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("area", "Double")
])
Schema updatedSchema = schema.removeField(schema.field("area"), "countries_updated")
```

```
countries_updated geom: Polygon(EPSG:4326), id: Integer, name: String
```

### *Remove a List of Fields from a Schema*

```
Schema schema = new Schema("countries", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("area", "Double")
])
Schema updatedSchema = schema.removeFields([
    schema.field("area"),
    schema.field("name")
], "countries_updated")
```

```
countries_updated geom: Polygon(EPSG:4326), id: Integer
```

### *Create a new Schema from an existing Schema but only including a subset of Fields*

```
Schema schema = new Schema("countries", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("area", "Double")
])
Schema updatedSchema = schema.removeFields([
    schema.field("area"),
    schema.field("name")
], "countries_updated")
```

```
countries_updated geom: Polygon(EPSG:4326), name: String
```

# Combining Schemas

Combining two Schemas results in a Map with two values: schema and fields. The schema property contains the new Schema. The fields property is List of two Maps which both contain a mapping between the fields of the original Schema and the newly created Schema.

Optional arguments to the Schema.addSchema method are:

- postfixAll: Whether to postfix all field names (true) or not (false). If true, all Fields from the this current Schema will have '1' at the end of their name while the other Schema's Fields will have '2'. Defaults to false.
- includeDuplicates: Whether or not to include duplicate fields names. Defaults to false. If a duplicate is found a '2' will be added.
- maxFieldNameLength: The maximum new Field name length (mostly to support shapefiles where Field names can't be longer than 10 characters)
- firstPostfix: The postfix string (default is '1') for Fields from the current Schema. Only applicable when postfixAll or includeDuplicates is true.
- secondPostfix: The postfix string (default is '2') for Fields from the other Schema. Only applicable when postfixAll or includeDuplicates is true.

*Combine two Schemas with no duplicate fields and no postfixes to field names*

```
Schema shopSchema = new Schema("shops", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])

Schema cafeSchema = new Schema("cafes", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("address", "String")
])

Map result = shopSchema.addSchema(cafeSchema, "business")

Schema combinedSchema = result.schema
println combinedSchema
```

```
business geom: Point(EPSG:4326), id: Integer, name: String, address: String
```

```
Map<String, String> shopSchemaFieldMapping = result.fields[0]
println shopSchemaFieldMapping
```

```
[geom:geom, id:id, name:name]
```

```
Map<String, String> cafeSchemaSchemaFieldMapping = result.fields[1]
println cafeSchemaSchemaFieldMapping
```

```
[address:address]
```

Combine two Schemas with no duplicate fields and postfixes

```
Schema shopSchema = new Schema("shops", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
```

```
Schema cafeSchema = new Schema("cafes", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("address", "String")
])
```

```
Map result = shopSchema.addSchema(cafeSchema, "business", postfixAll: true,
includeDuplicates: false)
```

```
Schema combinedSchema = result.schema
println combinedSchema
```

```
business geom: Point(EPSG:4326), id1: Integer, name1: String, id2: Integer, name2: String, address2: String
```

```
Map<String, String> shopSchemaFieldMapping = result.fields[0]
println shopSchemaFieldMapping
```

```
[geom:geom, id:id1, name:name1]
```

```
Map<String, String> cafeSchemaSchemaFieldMapping = result.fields[1]
println cafeSchemaSchemaFieldMapping
```

```
[id:id2, name:name2, address:address2]
```

# Creating Features from a Schema

*Create a Feature from a Schema with a Map of values*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = schema.feature([
    id: 1,
    name: 'Seattle',
    geom: new Point( -122.3204, 47.6024)
], "city.1")
println feature
```

```
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

*Create a Feature from a Schema with a List of values. The order of the values must match the order of the Fields.*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = schema.feature([
    new Point( -122.3204, 47.6024),
    1,
    'Seattle'
], "city.1")
println feature
```

```
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

Create a Feature from a Schema with another Feature.

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature1 = new Feature([
    id: 1,
    name: 'Seattle',
    geom: new Point( -122.3204, 47.6024)
], "city.1", schema)
println feature1
Feature feature2 = schema.feature(feature1)
println feature2
```

```
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

Create an empty Feature from a Schema.

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = schema.feature()
println feature
```

```
cities.fid-69c2ab3c_168a22066ff_-3724 geom: null, id: null, name: null
```

## Reading and Writing Schemas

The Schema IO classes are in the [geoscript.feature.io](#) package.

### Finding Schema Writer and Readers

List all Schema Writers

```
List<SchemaWriter> writers = SchemaWriters.list()
writers.each { SchemaWriter writer ->
    println writer.class.getSimpleName
}
```

```
JsonSchemaWriter  
StringSchemaWriter  
XmlSchemaWriter
```

#### Find a Schema Writer

```
Schema schema = new Schema("cities", [  
    new Field("geom", "Point", "EPSG:4326"),  
    new Field("id", "Integer"),  
    new Field("name", "String")  
])  
  
SchemaWriter writer = SchemaWriters.find("string")  
String schemaStr = writer.write(schema)  
println schemaStr
```

```
geom:Point:srid=4326,id:Integer,name:String
```

#### List all Schema Readers

```
List<SchemaReader> readers = SchemaReaders.list()  
readers.each { SchemaReader reader ->  
    println reader.className  
}
```

```
JsonSchemaReader  
StringSchemaReader  
XmlSchemaReader
```

#### Find a Schema Reader

```
SchemaReader reader = SchemaReaders.find("string")  
Schema schema = reader.read("geom:Point:srid=4326,id:Integer,name:String")  
println schema
```

```
layer geom: Point(EPSG:4326), id: Integer, name: String
```

## String

### *Read a Schema from a String*

```
StringSchemaReader reader = new StringSchemaReader()
Schema schema = reader.read("geom:Point:srid=4326,id:Integer,name:String", name:
"points")
println schema
```

```
points geom: Point(EPSG:4326), id: Integer, name: String
```

### *Write a Schema to a String*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
StringSchemaWriter writer = new StringSchemaWriter()
String schemaStr = writer.write(schema)
println schemaStr
```

```
geom:Point:srid=4326,id:Integer,name:String
```

## JSON

### *Read a Schema from a JSON*

```
JsonSchemaReader reader = new JsonSchemaReader()
Schema schema = reader.read("""
"name": "cities",
"projection": "EPSG:4326",
"geometry": "geom",
"fields": [
{
  "name": "geom",
  "type": "Point",
  "geometry": true,
  "projection": "EPSG:4326"
},
{
  "name": "id",
  "type": "Integer"
},
{
  "name": "name",
  "type": "String"
}
]
""")
println schema
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

### *Write a Schema to a JSON*

```
Schema schema = new Schema("cities", [
  new Field("geom", "Point", "EPSG:4326"),
  new Field("id", "Integer"),
  new Field("name", "String")
])

JsonSchemaWriter writer = new JsonSchemaWriter()
String schemaStr = writer.write(schema)
println schemaStr
```

```
{
  "name": "cities",
  "projection": "EPSG:4326",
  "geometry": "geom",
  "fields": [
    {
      "name": "geom",
      "type": "Point",
      "geometry": true,
      "projection": "EPSG:4326"
    },
    {
      "name": "id",
      "type": "Integer"
    },
    {
      "name": "name",
      "type": "String"
    }
  ]
}
```

## XML

*Read a Schema from a XML*

```
XmlSchemaReader reader = new XmlSchemaReader()
Schema schema = reader.read("""<schema>
<name>cities</name>
<projection>EPSG:4326</projection>
<geometry>geom</geometry>
<fields>
  <field>
    <name>geom</name>
    <type>Point</type>
    <projection>EPSG:4326</projection>
  </field>
  <field>
    <name>id</name>
    <type>Integer</type>
  </field>
  <field>
    <name>name</name>
    <type>String</type>
  </field>
</fields>
</schema>""")
```

```
cities geom: Point(EPSG:4326), id: Integer, name: String
```

*Write a Schema to a XML*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
XmlSchemaWriter writer = new XmlSchemaWriter()
String schemaStr = writer.write(schema)
println schemaStr
```

```
<schema>
  <name>cities</name>
  <projection>EPSG:4326</projection>
  <geometry>geom</geometry>
  <fields>
    <field>
      <name>geom</name>
      <type>Point</type>
      <projection>EPSG:4326</projection>
    </field>
    <field>
      <name>id</name>
      <type>Integer</type>
    </field>
    <field>
      <name>name</name>
      <type>String</type>
    </field>
  </fields>
</schema>
```

## Creating Features

Create an empty Feature from a Map of values and a Schema.

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    id: 1,
    name: "Seattle",
    geom: new Point(-122.3204, 47.6024)
], "city.1", schema)
println feature
```

```
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

Create an empty Feature from a List of values and a Schema.

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)
println feature
```

```
cities.city.1 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

Create an empty Feature from a Map of values. The Schema is inferred from the values.

```
Feature feature = new Feature([
    id: 1,
    name: "Seattle",
    geom: new Point(-122.3204, 47.6024)
], "city.1")
println feature
```

```
feature.city.1 id: 1, name: Seattle, geom: POINT (-122.3204 47.6024)
```

# Getting Feature Properties

*Get a Feature's ID*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String id = feature.id
println id
```

```
city.1
```

*Get a Feature's Geometry*

```
Geometry geometry = feature.geom
println geometry
```

```
POINT (-122.3204 47.6024)
```

*Get a Feature's Bounds*

```
Bounds bounds = feature.bounds
println bounds
```

```
(-122.3204,47.6024,-122.3204,47.6024,EPSG:4326)
```

*Get a Feature's attributes*

```
Map attributes = feature.attributes
println attributes
```

```
[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]
```

# Getting Feature Attributes

*Get an attribute from a Feature using a Field name*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

int id = feature.get("id")
println id
```

1

*Get an attribute from a Feature using a Field*

```
String name = feature.get(schema.field("name"))
println name
```

Seattle

*Set an attribute of a Feature using a Field name and a new value*

```
feature.set("name", "Tacoma")
println feature["name"]
```

Tacoma

*Set an attribute of a Feature using a Field and a new value*

```
feature.set(schema.field("name"), "Mercer Island")
println feature["name"]
```

Mercer Island

*Set attributes of a Feature using a Map of new values*

```
feature.set([id: 2])
println feature["id"]
```

```
2
```

*Set a new Geometry value*

```
feature.geom = new Point(-122.2220, 47.5673)
println feature.geom
```

```
POINT (-122.222 47.5673)
```

## Reading and Writing Features

The Feature IO classes are in the [geoscript.feature.io](#) package.

### Finding Feature Writer and Readers

*List all Feature Writers*

```
List<Writer> writers = Writers.list()
writers.each { Writer writer ->
    println writer.className
}
```

```
GeobufWriter
GeoJSONWriter
GeoRSSWriter
GmlWriter
GpxWriter
KmlWriter
```

*Find a Feature Writer*

```
Writer writer = Writers.find("geojson")
println writer.className
```

```
GeoJSONWriter
```

### List all Feature Readers

```
List<Reader> readers = Readers.list()
readers.each { Reader reader ->
    println reader.class.getSimpleName
}
```

```
GeobufReader
GeoJSONReader
GeoRSSReader
GmlReader
GpxReader
KmlReader
```

### Find a Feature Reader

```
Reader reader = Readers.find("geojson")
println reader.class.getSimpleName
```

```
GeoJSONReader
```

## GeoJSON

### Get a GeoJSON String from a Feature

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String geojson = feature.geoJSON
println geojson
```

```
{"type": "Feature", "geometry": {"type": "Point", "coordinates": [-122.3204, 47.6024]}, "properties": {"id": 1, "name": "Seattle"}, "id": "city.1"}
```

## *Write a Feature to GeoJSON*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

GeoJSONWriter writer = new GeoJSONWriter()
String geojson = writer.write(feature)
println geojson
```

```
{"type": "Feature", "geometry": {"type": "Point", "coordinates": [-122.3204, 47.6024]}, "properties": {"id": 1, "name": "Seattle"}, "id": "city.1"}
```

## *Get a Feature from GeoJSON*

```
String geojson = '{"type": "Feature", "geometry": {"type": "Point", "coordinates": [-122.3204, 47.6024]}, "properties": {"id": 1, "name": "Seattle"}, "id": "city.1"}'
Feature feature = Feature.fromGeoJSON(geojson)
println feature
```

```
feature.city.1 id: 1, name: Seattle, geometry: POINT (-122.3204 47.6024)
```

## *Read a Feature from GeoJSON*

```
GeoJSONReader reader = new GeoJSONReader()
String geojson = '{"type": "Feature", "geometry": {"type": "Point", "coordinates": [-122.3204, 47.6024]}, "properties": {"id": 1, "name": "Seattle"}, "id": "city.1"}'
Feature feature = reader.read(geojson)
println feature
```

```
feature.city.1 id: 1, name: Seattle, geometry: POINT (-122.3204 47.6024)
```

## **GeoBuf**

### *Get a GeoBuf String from a Feature*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String geobuf = feature.geobuf
println geobuf
```

```
0a0269640a046e616d65100218062a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a075365617474
6c65
```

### *Get a Feature from a GeoBuf String*

```
String geobuf =
'0a0269640a046e616d65100218062a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a075365617474
46c65'
Feature feature = Feature.fromGeobuf(geobuf)
println feature
```

```
features.0 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

### *Write a Feature to a GeoBuf String*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

GeobufWriter writer = new GeobufWriter()
String geobuf = writer.write(feature)
println geobuf
```

```
0a0269640a046e616d65100218062a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a075365617474  
6c65
```

*Read a Feature from a GeoBuf String*

```
GeobufReader reader = new GeobufReader()  
String geobuf =  
'0a0269640a046e616d65100218062a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a075365617474  
6c65'  
Feature feature = reader.read(geobuf)  
println feature
```

```
features.0 geom: POINT (-122.3204 47.6024), id: 1, name: Seattle
```

## GeoRSS

*Get a GeoRSS String from a Feature*

```
Schema schema = new Schema("cities", [  
    new Field("geom", "Point", "EPSG:4326"),  
    new Field("id", "Integer"),  
    new Field("name", "String")  
])  
Feature feature = new Feature([  
    new Point(-122.3204, 47.6024),  
    1,  
    "Seattle"  
, "city.1", schema)  
  
String georss = feature.geoRSS  
println georss
```

```
<entry xmlns:georss='http://www.georss.org/georss'  
xmlns='http://www.w3.org/2005/Atom'><title>city.1</title><summary  
xmlns:georss='http://www.georss.org/georss'  
xmlns='http://www.w3.org/2005/Atom'>[geom:POINT (-122.3204 47.6024), id:1,  
name:Seattle]</summary><updated>Thu Jan 31 04:18:55 UTC 2019</updated><georss:point  
xmlns:georss='http://www.georss.org/georss'  
xmlns='http://www.w3.org/2005/Atom'>47.6024 -122.3204</georss:point></entry>
```

## Get a Feature from a GeoRSS String

```
String georss = """<entry xmlns:georss='http://www.georss.org/georss'  
    xmlns='http://www.w3.org/2005/Atom'>  
    <title>city.1</title>  
    <summary>[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]</summary>  
    <updated>Sat Jan 28 15:51:47 PST 2017</updated>  
    <georss:point>47.6024 -122.3204</georss:point>  
</entry>  
""";  
  
Feature feature = Feature.fromGeoRSS(georss)  
println feature
```

```
georss.fid-69c2ab3c_168a22066ff_-3728 title: city.1, summary: [geom:POINT (-122.3204  
47.6024), id:1, name:Seattle], updated: Sat Jan 28 15:51:47 PST 2017, geom: POINT (-  
122.3204 47.6024)
```

## Write a Feature to a GeoRSS String

```
Schema schema = new Schema("cities", [  
    new Field("geom", "Point", "EPSG:4326"),  
    new Field("id", "Integer"),  
    new Field("name", "String")  
])  
Feature feature = new Feature([  
    new Point(-122.3204, 47.6024),  
    1,  
    "Seattle"  
], "city.1", schema)  
  
GeoRSSWriter writer = new GeoRSSWriter()  
String georss = writer.write(feature)  
println georss
```

```
<entry xmlns:georss='http://www.georss.org/georss'  
    xmlns='http://www.w3.org/2005/Atom'><title>city.1</title><summary  
    xmlns:georss='http://www.georss.org/georss'  
    xmlns='http://www.w3.org/2005/Atom'>[geom:POINT (-122.3204 47.6024), id:1,  
    name:Seattle]</summary><updated>Thu Jan 31 04:18:55 UTC 2019</updated><georss:point  
    xmlns:georss='http://www.georss.org/georss'  
    xmlns='http://www.w3.org/2005/Atom'>47.6024 -122.3204</georss:point></entry>
```

### *Read a Feature from a GeoRSS String*

```
GeoRSSReader reader = new GeoRSSReader()
String georss = """<entry xmlns:georss='http://www.georss.org/georss'
      xmlns='http://www.w3.org/2005/Atom'>
  <title>city.1</title>
  <summary>[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]</summary>
  <updated>Sat Jan 28 15:51:47 PST 2017</updated>
  <georss:point>47.6024 -122.3204</georss:point>
</entry>
"""

Feature feature = reader.read(georss)
println feature
```

```
georss.fid-69c2ab3c_168a22066ff_-3726 title: city.1, summary: [geom:POINT (-122.3204
47.6024), id:1, name:Seattle], updated: Sat Jan 28 15:51:47 PST 2017, geom: POINT (-
122.3204 47.6024)
```

## GML

### *Get a GML String from a Feature*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String gml = feature.gml
println gml
```

```

<gsf:cities xmlns:gsf="http://geoscript.org/feature"
  xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:gml="http://www.opengis.net/gml"
  xmlns:xlink="http://www.w3.org/1999/xlink" fid="city.1">
  <gml:name>Seattle</gml:name>
  <gsf:geom>
    <gml:Point>
      <gml:coord>
        <gml:X>-122.3204</gml:X>
        <gml:Y>47.6024</gml:Y>
      </gml:coord>
    </gml:Point>
  </gsf:geom>
  <gsf:id>1</gsf:id>
</gsf:cities>

```

### *Get a Feature from a GML String*

```

String gml = """<gsf:cities xmlns:gsf="http://geoscript.org/feature"
  xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:gml="http://www.opengis.net/gml"
  xmlns:xlink="http://www.w3.org/1999/xlink" fid="city.1">
  <gml:name>Seattle</gml:name>
  <gsf:geom>
    <gml:Point>
      <gml:coord>
        <gml:X>-122.3204</gml:X>
        <gml:Y>47.6024</gml:Y>
      </gml:coord>
    </gml:Point>
  </gsf:geom>
  <gsf:id>1</gsf:id>
</gsf:cities>
"""

Feature feature = Feature.fromGml(gml)
println feature

```

```
feature.city.1 name: Seattle, id: 1, geom: POINT (-122.3204 47.6024)
```

## *Write a Feature to a GML String*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

GmlWriter writer = new GmlWriter()
String gml = writer.write(feature)
println gml
```

```
<gsf:cities xmlns:gsf="http://geoscript.org/feature"
  xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:gml="http://www.opengis.net/gml"
  xmlns:xlink="http://www.w3.org/1999/xlink" fid="city.1">
  <gml:name>Seattle</gml:name>
  <gsf:geom>
    <gml:Point>
      <gml:coord>
        <gml:X>-122.3204</gml:X>
        <gml:Y>47.6024</gml:Y>
      </gml:coord>
    </gml:Point>
  </gsf:geom>
  <gsf:id>1</gsf:id>
</gsf:cities>
```

## Read a Feature from a GML String

```
GmlReader reader = new GmlReader()
String gml = """<gsf:cities xmlns:gsf="http://geoscript.org/feature"
xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:gml="http://www.opengis.net/gml"
xmlns:xlink="http://www.w3.org/1999/xlink" fid="city.1">
<gml:name>Seattle</gml:name>
<gsf:geom>
<gml:Point>
<gml:coord>
<gml:X>-122.3204</gml:X>
<gml:Y>47.6024</gml:Y>
</gml:coord>
</gml:Point>
</gsf:geom>
<gsf:id>1</gsf:id>
</gsf:cities>
"""
Feature feature = reader.read(gml)
println feature
```

```
feature.city.1 name: Seattle, id: 1, geom: POINT (-122.3204 47.6024)
```

## GPX

### Get a GPX String from a Feature

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String gpx = feature.gpx
println gpx
```

```
<wpt lat='47.6024' lon='-122.3204'
xmlns='http://www.topografix.com/GPX/1/1'><name>city.1</name></wpt>
```

### *Get a Feature from a GPX String*

```
String gpx = "<wpt lat='47.6024' lon='-122.3204'  
xmlns='http://www.topografix.com/GPX/1/1'><name>city.1</name></wpt>"  
Feature feature = Feature.fromGpx(gpx)  
println feature
```

```
gpx.fid-69c2ab3c_168a22066ff_-3725 geom: POINT (-122.3204 47.6024), name: city.1
```

### *Write a Feature to a GPX String*

```
Schema schema = new Schema("cities", [  
    new Field("geom", "Point", "EPSG:4326"),  
    new Field("id", "Integer"),  
    new Field("name", "String")  
])  
Feature feature = new Feature([  
    new Point(-122.3204, 47.6024),  
    1,  
    "Seattle"  
], "city.1", schema)  
  
GpxWriter writer = new GpxWriter()  
String gpx = writer.write(feature)  
println gpx
```

```
<wpt lat='47.6024' lon='-122.3204'  
xmlns='http://www.topografix.com/GPX/1/1'><name>city.1</name></wpt>
```

### *Read a Feature from a GPX String*

```
GpxReader reader = new GpxReader()  
String gpx = "<wpt lat='47.6024' lon='-122.3204'  
xmlns='http://www.topografix.com/GPX/1/1'><name>city.1</name></wpt>"  
Feature feature = reader.read(gpx)  
println feature
```

```
gpx.fid-69c2ab3c_168a22066ff_-3727 geom: POINT (-122.3204 47.6024), name: city.1
```

## KML

### *Get a KML String from a Feature*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

String kml = feature.kml
println kml
```

```
<kml:Placemark xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1"
  id="city.1"><kml:name>Seattle</kml:name><kml:Point><kml:coordinates>-122.3204,47.6024</kml:coordinates></kml:Point></kml:Placemark>
```

### *Get a Feature from a KML String*

```
String kml = """<kml:Placemark xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1" id="city.1">
    <kml:name>Seattle</kml:name>
    <kml:Point>
      <kml:coordinates>-122.3204,47.6024</kml:coordinates>
    </kml:Point>
  </kml:Placemark>"""
Feature feature = Feature.fromKml(kml)
println feature
```

```
placemark.city.1 name: Seattle, description: null, Geometry: POINT (-122.3204 47.6024)
```

### *Write a Feature to a KML String*

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Feature feature = new Feature([
    new Point(-122.3204, 47.6024),
    1,
    "Seattle"
], "city.1", schema)

KmlWriter writer = new KmlWriter()
String kml = writer.write(feature)
println kml
```

```
<kml:Placemark xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1"
  id="city.1"><kml:name>Seattle</kml:name><kml:Point><kml:coordinates>-
122.3204,47.6024</kml:coordinates></kml:Point></kml:Placemark>
```

### *Read a Feature from a KML String*

```
KmlReader reader = new KmlReader()
String kml = """<kml:Placemark xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1" id="city.1">
  <kml:name>Seattle</kml:name>
  <kml:Point>
    <kml:coordinates>-122.3204,47.6024</kml:coordinates>
  </kml:Point>
</kml:Placemark>"""
Feature feature = reader.read(kml)
println feature
```

```
placemark.city.1 name: Seattle, description: null, Geometry: POINT (-122.3204 47.6024)
```

## Filter Recipes

The Filter classes are in the [geoscript.filter](#) package.

## Creating Filters

Create a Filter from a CQL string

```
Filter filter = new Filter("name='Seattle'")  
println filter.toString()
```

```
[ name = Seattle ]
```

Create a Filter from a CQL string

```
Filter filter = new Filter  
("<filter><PropertyIsEqualTo><PropertyName>soilType</PropertyName><Literal>Mollisol</L  
iteral></PropertyIsEqualTo></filter>")  
println filter.toString()
```

```
[ soilType = Mollisol ]
```

Create a pass Filter that return true for everything

```
Filter filter = Filter.PASS  
println filter.toString()
```

```
Filter.INCLUDE
```

Create a fail Filter that return false for everything

```
Filter filter = Filter.FAIL  
println filter.toString()
```

```
Filter.EXCLUDE
```

Create a spatial bounding box Filter from a Bounds

```
Filter filter = Filter.bbox(new Bounds(-102, 43.5, -100, 47.5))  
println filter.toString()
```

```
[ the_geom bbox POLYGON ((-102 43.5, -102 47.5, -100 47.5, -100 43.5, -102 43.5)) ]
```

Create a spatial contains Filter from a Geometry

```
Filter filter = Filter.contains(Geometry.fromWKT("POLYGON ((-104 45, -95 45, -95 50,  
-104 50, -104 45))"))  
println filter.toString()
```

```
[ the_geom contains POLYGON ((-104 45, -95 45, -95 50, -104 50, -104 45)) ]
```

Create a spatial distance within Filter from a Geometry and a distance

```
Filter filter = Filter.dwithin("the_geom", Geometry.fromWKT("POINT (-100 47)"), 10.2,  
"feet")  
println filter.toString()
```

```
[ the_geom dwithin POINT (-100 47), distance: 10.2 ]
```

Create a spatial crosses Filter from a Geometry

```
Filter filter = Filter.crosses("the_geom", Geometry.fromWKT("LINESTRING (-104 45, -95  
45)"))  
println filter.toString()
```

```
[ the_geom crosses LINESTRING (-104 45, -95 45) ]
```

Create a spatial intersects Filter from a Geometry

```
Filter filter = Filter.intersects(Geometry.fromWKT("POLYGON ((-104 45, -95 45, -95 50,  
-104 50, -104 45))"))  
println filter.toString()
```

```
[ the_geom intersects POLYGON ((-104 45, -95 45, -95 50, -104 50, -104 45)) ]
```

Create a feature id Filter

```
Filter filter = Filter.id("points.1")  
println filter.toString()
```

```
[ points.1 ]
```

Create a feature ids Filter

```
Filter filter = Filter.ids(["points.1","points.2","points.3"])
println filter.toString()
```

```
[ points.1, points.2, points.3 ]
```

## Using Filters

Get a CQL string from a Filter

```
Filter filter = new Filter("name='Seattle'")
String cql = filter.cql
println cql
```

```
name = 'Seattle'
```

Get an XML string from a Filter

```
String xml = filter.xml
println xml
```

```
<ogc:Filter xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:gml="http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc">
  <ogc:PropertyIsEqualTo>
    <ogc:PropertyName>name</ogc:PropertyName>
    <ogc:Literal>Seattle</ogc:Literal>
  </ogc:PropertyIsEqualTo>
</ogc:Filter>
```

Combine Filters with and

```
Filter cityFilter = new Filter("city = 'Seattle'")
Filter stateFilter = new Filter("state = 'WA'")
Filter andFilter = cityFilter.and(stateFilter)
println andFilter
```

```
[[ city = Seattle ] AND [ state = WA ]]
```

Combine Filters with and using the plus operator

```
Filter cityFilter = new Filter("city = 'Seattle'")  
Filter stateFilter = new Filter("state = 'WA'")  
Filter andFilter = cityFilter + stateFilter  
println andFilter
```

```
[[ city = Seattle ] AND [ state = WA ]]
```

Combine Filters with or

```
Filter seattleFilter = new Filter("city = 'Seattle'")  
Filter tacomaFilter = new Filter("city = 'Tacoma'")  
Filter orFilter = seattleFilter.or(tacomaFilter)  
println orFilter
```

```
[[ city = Seattle ] OR [ city = Tacoma ]]
```

Negate a Filter

```
Filter seattleFilter = new Filter("city = 'Seattle'")  
Filter notSeattleFilter = seattleFilter.not  
println notSeattleFilter
```

```
[ NOT [ city = Seattle ] ]
```

Negate a Filter using the minus operator

```
Filter seattleFilter = new Filter("city = 'Seattle'")  
Filter notSeattleFilter = -seattleFilter  
println notSeattleFilter
```

```
[ NOT [ city = Seattle ] ]
```

Simplify a Filter

```
Filter seattleFilter = new Filter("city = 'Seattle'")  
Filter filter = (seattleFilter + Filter.PASS).simplify()  
println filter
```

```
[ city = Seattle ]
```

# Evaluating Filters

*Test to see if a Filter matches a Feature by attribute*

```
Feature feature = new Feature([
    id: 1,
    name: "Seattle",
    geom: new Point(-122.3204, 47.6024)
], "city.1")

Filter isNameFilter = new Filter("name='Seattle'")
boolean isName = isNameFilter.evaluate(feature)
println isName
```

true

```
Filter isNotNameFilter = new Filter("name='Tacoma'")
boolean isNotName = isNotNameFilter.evaluate(feature)
println isNotName
```

false

*Test to see if a Filter matches a Feature by feature id*

```
Filter isIdFilter = Filter.id("city.1")
boolean isId = isIdFilter.evaluate(feature)
println isId
```

true

```
Filter isNotIdFilter = Filter.id("city.2")
boolean isNotId = isNotIdFilter.evaluate(feature)
println isNotId
```

false

*Test to see if a Filter matches a Feature by a spatial bounding box*

```
Filter isInBboxFilter = Filter.bbox("geom", new Bounds(-132.539, 42.811, -111.796, 52.268))
boolean isInBbox = isInBboxFilter.evaluate(feature)
println isInBbox
```

true

```
Filter isNotInBboxFilter = Filter.bbox("geom", new Bounds(-12.656, 18.979, 5.273, 34.597))
boolean isNotInBbox = isNotInBboxFilter.evaluate(feature)
println isNotInBbox
```

false

## Creating Literals

*Create a literal Expression from a number*

```
Expression expression = new Expression(3.56)
println expression
```

3.56

*Create a literal Expression from a string*

```
Expression expression = new Expression("Seattle")
println expression
```

Seattle

*Evaluating a literal Expression just gives you the value*

```
Expression expression = new Expression(3.56)
double number = expression.evaluate()
println number
```

3.56

# Creating Properties

Create a Property from a string

```
Property property = new Property("name")
println property
```

```
name
```

Create a Property from a Field

```
Field field = new Field("geom", "Polygon")
Property property = new Property(field)
println property
```

```
geom
```

# Evaluating Properties

Evaluate a Property to get values from a Feature. Get the id

```
Feature feature = new Feature([
    id: 1,
    name: "Seattle",
    geom: new Point(-122.3204, 47.6024)
], "city.1")
```

```
Property idProperty = new Property("id")
int id = idProperty.evaluate(feature)
println id
```

```
1
```

Get the name

```
Property nameProperty = new Property("name")
String name = nameProperty.evaluate(feature)
println name
```

```
Seattle
```

*Get the geometry*

```
Property geomProperty = new Property("geom")
Geometry geometry = geomProperty.evaluate(feature)
println geometry
```

```
POINT (-122.3204 47.6024)
```

## Creating Functions

*Create a Function from a CQL string*

```
Function function = new Function("centroid(the_geom)")
println function
```

```
centroid([the_geom])
```

*Create a Function from a name and Expressions*

```
Function function = new Function("centroid", new Property("the_geom"))
println function
```

```
centroid([the_geom])
```

*Create a Function from a name, a Closure, and Expressions*

```
Function function = new Function("my_centroid", {g-> g.centroid}, new Property
("the_geom"))
println function
```

```
my_centroid([the_geom])
```

*Create a Function from a CQL string and a Closure*

```
Function function = new Function("my_centroid(the_geom)", {g-> g.centroid})
println function
```

```
my_centroid([the_geom])
```

You can get a list of built in Functions

```
List<String> functionNames = Function.getFunctionNames()  
println "There are ${functionNames.size()} Functions:"  
functionNames.sort().subList(0,10).each { String name ->  
    println name  
}
```


There are 301 Functions:

Area  
Categorize  
Collection\_Average  
Collection\_Bounds  
Collection\_Count  
Collection\_Max  
Collection\_Median  
Collection\_Min  
Collection\_Nearest  
Collection\_Sum

## Evaluating Functions

Evaluate a geometry Function

```
Feature feature = new Feature([  
    id: 1,  
    name: "Seattle",  
    geom: new Point(-122.3204, 47.6024)  
], "city.1")  
  
Function bufferFunction = new Function("buffer(geom, 10)")  
Geometry polygon = bufferFunction.evaluate(feature)
```

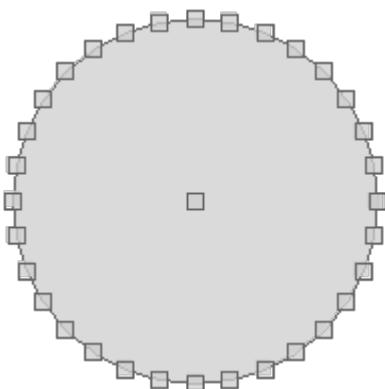

Evaluate a geometry Function


```
Function lowerCaseFunction = new Function("strToLowercase(name)")  
String lowercaseName = lowerCaseFunction.evaluate(feature)  
println lowercaseName
```

```
seattle
```

## Creating Colors


Create a Color from a RGB color string

```
Color color = new Color("0,255,0")
```




Create a Color from a CSS color name

```
Color color = new Color("silver")
```




Create a Color from a hexadecimal string

```
Color color = new Color("#0000ff")
```



Create a Color from a RGB List

```
Color color = new Color([255,0,0])
```




Create a Color from a RGB Map

```
Color color = new Color([r: 5, g: 35, b:45])
```



Create a Color from a HLS Map

```
Color color = new Color([h: 0, s: 1.0, l: 0.5])
```



Get a Random Color

```
Color color = Color.getRandom()
```



Get a Random Pastel Color

```
Color color = Color.getRandomPastel()
```



Get a darker Color

```
Color color = new Color("lightblue")
Color darkerColor = color.darker()
```



Get a brighter Color

```
Color color = new Color("purple")
Color brigtherColor = color.brighter()
```



## Getting Color Formats

### Create a Color

```
Color color = new Color("wheat")
```



### Get Hex

```
String hex = color.hex  
println hex
```

```
#f5deb3
```

### Get RGB

```
List rgb = color.rgb  
println rgb
```

```
[245, 222, 179]
```

### Get HSL

```
List hsl = color.hsl  
println hsl
```

```
[0.10858585256755147, 0.7674419030001307, 0.8313725489999999]
```

### Get the java.awt.Color

```
java.awt.Color awtColor = color.asColor()  
println awtColor
```

```
java.awt.Color[r=245,g=222,b=179]
```

## Displaying Colors


*Draw a List of Colors to a BufferedImage*

```
Color color = new Color("pink")
BufferedImage image = Color.drawToImage(
    [color.brighter(), color, color.darker()],
    "vertical",
    40
)
```



*Draw a List of Colors to a simple GUI*

```
List<Color> colors = Color.getPaletteColors("YlOrBr")
Color.draw(colors, "horizontal", 50)
```

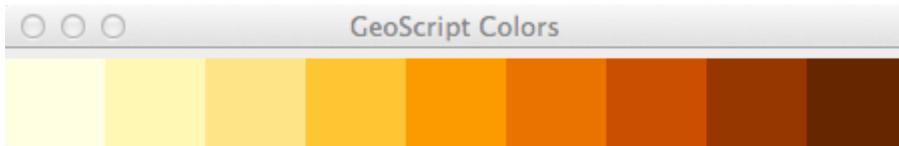

## Using Color Palettes

*Get all color palettes*

```
List<String> allPalettes = Color.getPaletteNames("all")
allPalettes.each { String name ->
    println name
}
```

YlOrRd  
PRGn  
PuOr  
RdGy  
Spectral  
Grays  
PuBuGn  
RdPu  
BuPu  
YlOrBr  
Greens  
BuGn  
Accents  
GnBu  
PuRd  
Purples  
RdYlGn  
Paired  
Blues  
RdBu  
Oranges  
RdYlBu  
PuBu  
OrRd  
Set3  
Set2  
Set1  
Reds  
PiYG  
Dark2  
YlGn  
BrBG  
YlGnBu  
Pastel2  
Pastel1  
BlueToOrange  
GreenToOrange  
BlueToRed  
GreenToRedOrange  
Sunset  
Green  
YellowToRedHeatMap  
BlueToYellowToRedHeatMap  
DarkRedToYellowWhiteHeatMap  
LightPurpleToDarkPurpleHeatMap  
BoldLandUse  
MutedTerrain  
BoldLandUse  
MutedTerrain

### *Get diverging color palettes*

```
List<String> divergingPalettes = Color.getPaletteNames("diverging")
divergingPalettes.each { String name ->
    println name
}
```

```
PRGn
PuOr
RdGy
Spectral
RdYlGn
RdBu
RdYlBu
PiYG
BrBG
BlueToOrange
GreenToOrange
BlueToRed
GreenToRedOrange
```

### *Get sequential color palettes*

```
List<String> sequentialPalettes = Color.getPaletteNames("sequential")
sequentialPalettes.each { String name ->
    println name
}
```

```
YlOrRd
Grays
PuBuGn
RdPu
BuPu
YlOrBr
Greens
BuGn
GnBu
PuRd
Purples
Blues
Oranges
PuBu
OrRd
Reds
YlGn
YlGnBu
Sunset
Green
YellowToRedHeatMap
BlueToYellowToRedHeatMap
DarkRedToYellowWhiteHeatMap
LightPurpleToDarkPurpleHeatMap
BoldLandUse
MutedTerrain
```

*Get qualitative color palettes*

```
List<String> qualitativePalettes = Color.getPaletteNames("qualitative")
qualitativePalettes.each { String name ->
    println name
}
```

```
Accents
Paired
Set3
Set2
Set1
Dark2
Pastel2
Pastel1
BoldLandUse
MutedTerrain
```

*Get a Blue Green Color Palette*

```
List colors = Color.getPaletteColors("BuGn")
```



*Get a Purple Color Palette with only four colors*

```
colors = Color.getPaletteColors("Purples", 4)
```



*Get a Blue Green Color Palette*

```
colors = Color.getPaletteColors("MutedTerrain")
```



*Get a Blue Green Color Palette*

```
colors = Color.getPaletteColors("BlueToYellowToRedHeatMap")
```




*Create a Color palette by interpolating between two colors*

```
Color startColor = new Color("red")
Color endColor = new Color("green")
List<Color> colors = startColor.interpolate(endColor, 10)
```



*Create a Color palette by interpolating between two colors*

```
Color startColor = new Color("wheat")
Color endColor = new Color("lightblue")
List<Color> colors = Color.interpolate(startColor, endColor, 8)
```



# Creating Expressions from CQL

Create a literal number Expression from a CQL String

```
Expression expression = Expression.fromCQL("12")
println expression
```

```
12
```

Create a literal string Expression from a CQL String

```
Expression expression = Expression.fromCQL("'Washington'")
println expression
```

```
Washington
```

Create a Property from a CQL String

```
Property property = Expression.fromCQL("NAME")
println property
```

```
NAME
```

Create a Function from a CQL String

```
Function function = Expression.fromCQL("centroid(the_geom)")
println function
```

```
centroid([the_geom])
```

# Process Recipes

The Process classes are in the [geoscript.process](#) package.

## Execute a built-in Process

*Create a Process from a built-in process by name*

```
Process process = new Process("vec:Bounds")
String name = process.name
println name
```

vec:Bounds

*Get the title*

```
String title = process.title
println title
```

Bounds

*Get the description*

```
String description = process.description
println description
```

Computes the bounding box of the input features.

*Get the version*

```
String version = process.version
println version
```

1.0.0

*Get the input parameters*

```
Map parameters = process.parameters
println parameters
```

[features:class geoscript.layer.Cursor]


*Get the output parameters*

```
Map results = process.results
println results
```

```
[bounds: class geoscript.geom.Bounds]
```

*Execute the Process to calculate the bounding box of all Features in a Layer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("places")
Map executeResults = process.execute([features: layer])
Bounds bounds = executeResults.bounds
```

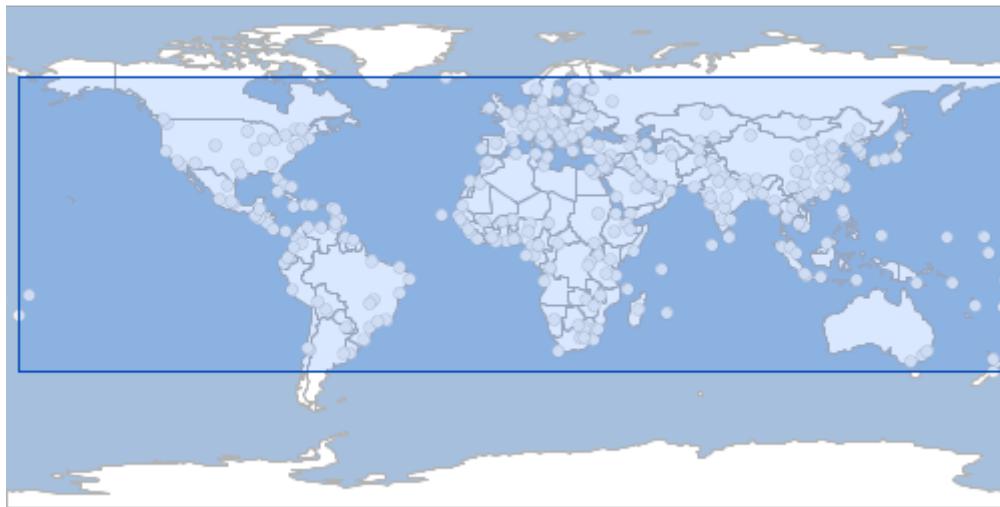

## Listing built-in Processes

*Get the names of all built-in Processes*

```
List<String> processes = Process.processNames
processes.each { String name ->
    println name
}
```

```
vec:Aggregate
vec:BarnesSurface
vec:Bounds
vec:BufferFeatureCollection
vec:Centroid
vec:ClassifyByRange
vec:Clip
vec:CollectGeometries
vec:Count
vec:Feature
vec:FeatureClassStats
vec:Grid
vec:Heatmap
```

```
vec:InclusionFeatureCollection
vec:IntersectionFeatureCollection
vec:LRSGeocode
vec:LRSMeasure
vec:LRSSegment
vec:Nearest
vec:PointBuffers
vec:PointStacker
vec:Query
vec:RectangularClip
vec:Reproject
vec:Simplify
vec:Snap
vec:Transform
vec:UnionFeatureCollection
vec:Unique
vec:VectorToRaster
vec:VectorZonalStatistics
geo:isValid
geo:buffer
geo:union
geo:intersection
geo:getX
geo:getY
geo:difference
geo:reproject
geo:splitPolygon
geo:within
geo:touches
geo:convexHull
geo:area
geo:crosses
geo:symDifference
geo:distance
geo:boundary
geo:centroid
geo:interiorPoint
geo:getGeometryN
geo:overlaps
geo:isSimple
geo:isWithinDistance
geo:relate
geo:densify
geo:simplify
geo:numGeometries
geo:startPoint
geo:numPoints
geo:isClosed
geo:envelope
geo:dimension
geo:exteriorRing
```

```
geo:numInteriorRing
geo:geometryType
geo:isRing
geo:polygonize
geo:endPoint
geo>equalsExact
geo:interiorRingN
geo:pointN
geo:relatePattern
geo>equalsExactTolerance
geo:length
geo:isEmpty
geo:contains
geo:disjoint
geo:intersects
polygonlabelprocess:PolyLabeller
ras:AddCoverages
ras:Affine
ras:AreaGrid
ras:BandMerge
ras:BandSelect
ras:Contour
ras:ConvolveCoverage
ras:CoverageClassStats
ras:CropCoverage
ras:Jiffle
ras:MultiplyCoverages
ras:NormalizeCoverage
ras:PolygonExtraction
ras:RangeLookup
ras:RasterAsPointCollection
ras:RasterZonalStatistics
ras:RasterZonalStatistics2
ras:ScaleCoverage
ras:StyleCoverage
ras:TransparencyFill
geoscript:convexhull
```

## Executing a new Process

### Create a Process using a Groovy Closure

```
Process process = new Process("convexhull",
    "Create a convexhull around the features",
    [features: geoscript.layer.Cursor],
    [result: geoscript.layer.Cursor],
    { inputs ->
        def geoms = new GeometryCollection(inputs.features.collect{f -> f.geom})
        def output = new Layer()
        output.add([geoms.convexHull])
        [result: output]
    }
)
String name = process.name
println name
```

```
geoscript:convexhull
```

### Get the title

```
String title = process.title
println title
```

```
convexhull
```

### Get the description

```
String description = process.description
println description
```

```
Create a convexhull around the features
```

### Get the version

```
String version = process.version
println version
```

```
1.0.0
```

### Get the input parameters

```
Map parameters = process.parameters
println parameters
```

```
[features:class geoscript.layer.Cursor]
```

*Get the output parameters*

```
Map results = process.results  
println results
```

```
[result:class geoscript.layer.Cursor]
```

*Execute the Process created from a Groovy Closure*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')  
Layer layer = workspace.get("places")  
Map executeResults = process.execute([features: layer.cursor])  
Cursor convexHullCursor = executeResults.result
```



## Render Recipes

The Render classes are in the [geoscript.render](#) package.

## Creating Maps

## Create a Map with Layers

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
File file = new File("map.png")
map.render(file)
```



## Rendering Maps

### Finding Renderers

Get all Renderers

```
List<Renderer> renderers = Renderers.list()
renderers.each { Renderer renderer ->
    println renderer.className
}
```

ASCII  
Base64  
GeoTIFF  
GIF  
JPEG  
Pdf  
PNG  
Svg

## Get a Renderer


```
Renderer renderer = Renderers.find("png")
println(renderer.className)
```

PNG

## Image

### Render a Map to an image using an Image Renderer

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Image png = new Image("png")
BufferedImage image = png.render(map)
```

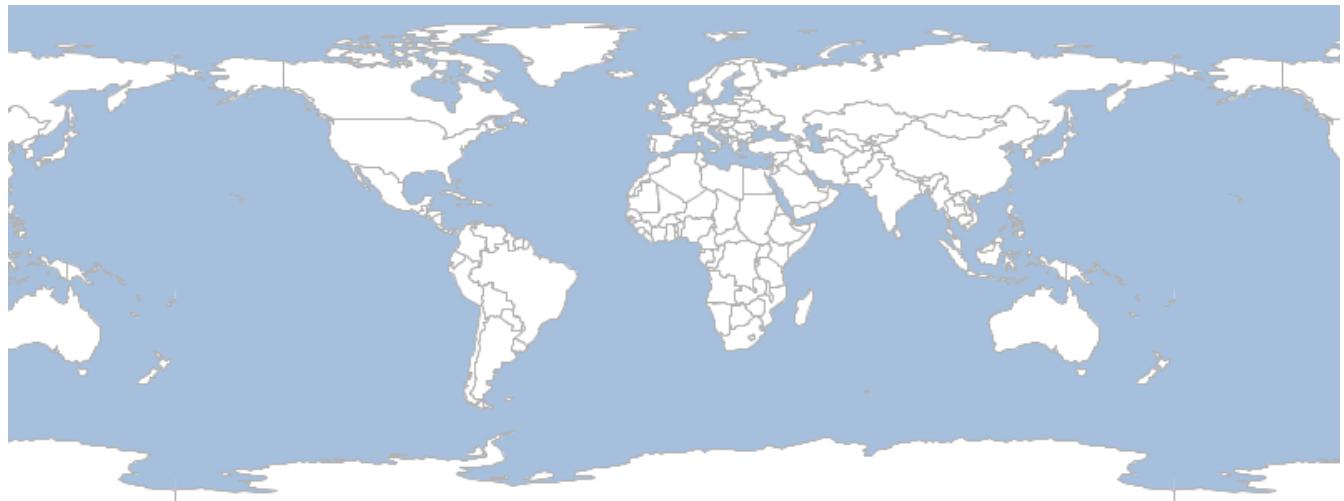

*Render a Map to an OutputStream using the Image Renderer*


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Image jpeg = new Image("jpeg")
File file = new File("map.jpeg")
FileOutputStream out = new FileOutputStream(file)
jpeg.render(map, out)
out.close()
```



## PNG

*Render a Map to an Image using the PNG Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
PNG png = new PNG()
BufferedImage image = png.render(map)
```

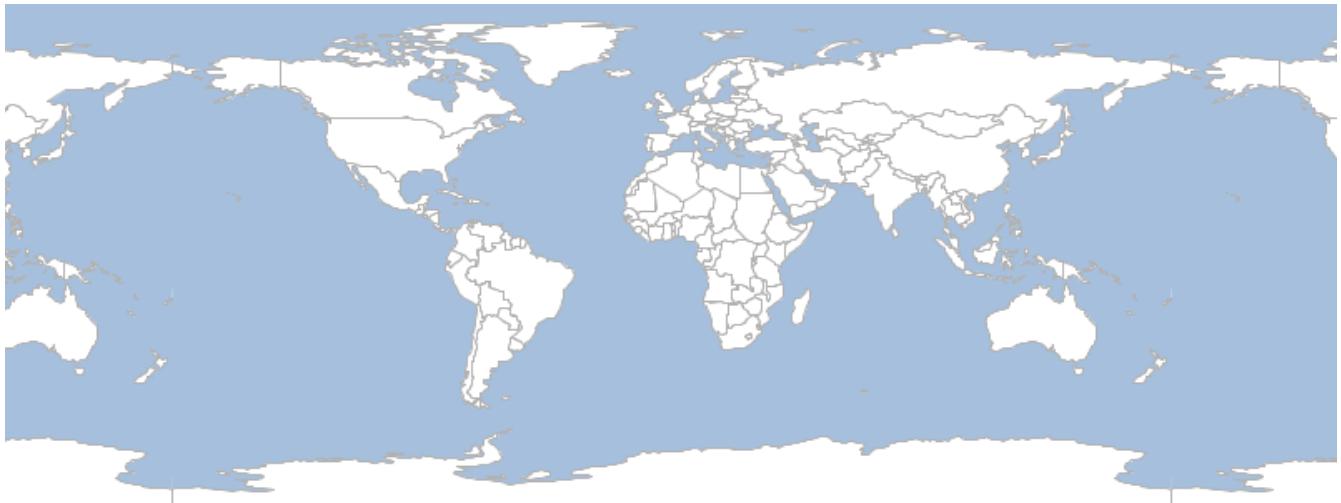

*Render a Map to an OutputStream using the PNG Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
PNG png = new PNG()
File file = new File("map.png")
FileOutputStream out = new FileOutputStream(file)
png.render(map, out)
out.close()
```



**JPEG**


### *Render a Map to an Image using the JPEG Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
JPEG jpeg = new JPEG()
BufferedImage image = jpeg.render(map)
```



### *Render a Map to an OutputStream using the JPEG Renderer*


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
JPEG jpeg = new JPEG()
File file = new File("map.jpeg")
FileOutputStream out = new FileOutputStream(file)
jpeg.render(map, out)
out.close()
```

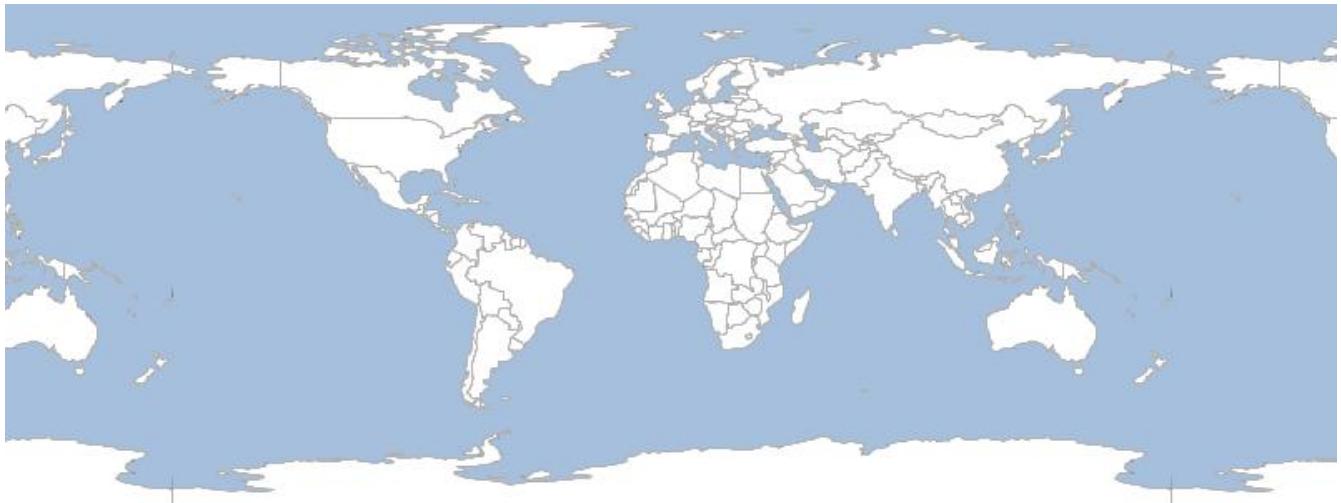

## GIF

*Render a Map to an Image using the GIF Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
GIF gif = new GIF()
BufferedImage image = gif.render(map)
```

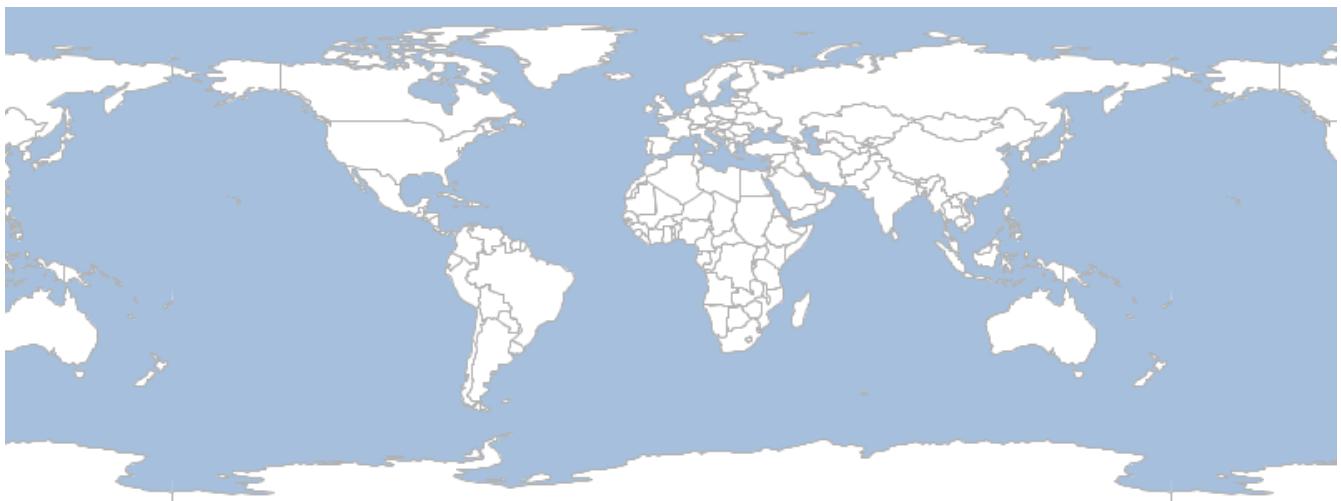

*Render a Map to an OutputStream using the GIF Renderer*


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
GIF gif = new GIF()
File file = new File("map.gif")
gif.render(map, new FileOutputStream(file))
```




*Render a Map to an animated GIF using the GIF Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer states = workspace.get("states")
states.style = new Fill("") + new Stroke("black", 1.0)
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries, states]
)

GIF gif = new GIF()
List images = ["Washington", "Oregon", "California"].collect { String state ->
    map.bounds = states.getFeatures("NAME_1 = '${state}'")[0].bounds
    def image = gif.render(map)
    image
}
File file = new File("states.gif")
gif.renderAnimated(images, file, 500, true)
```

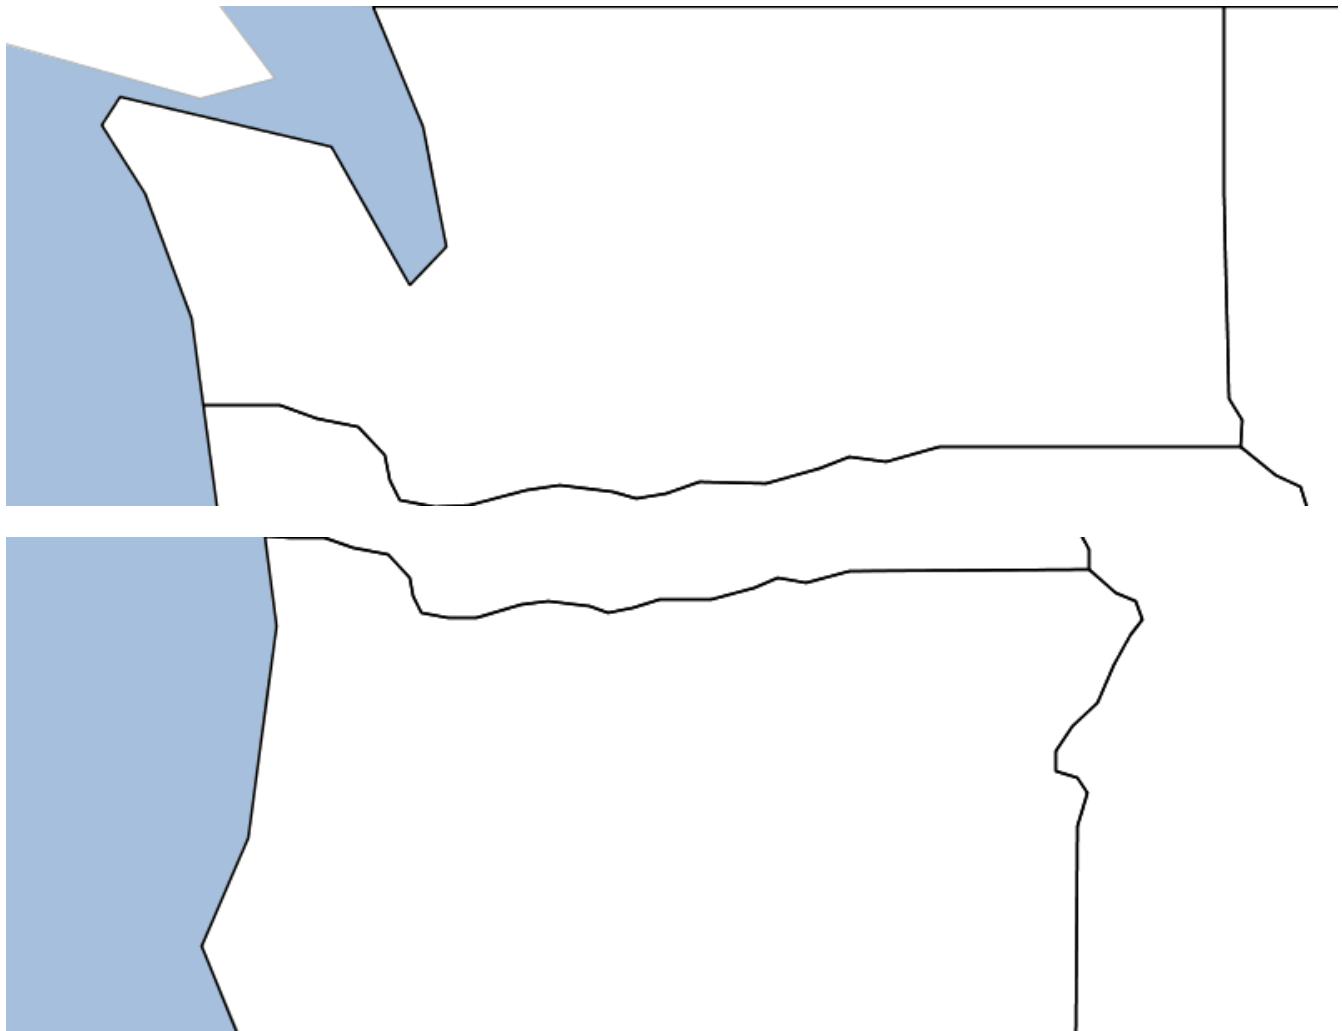


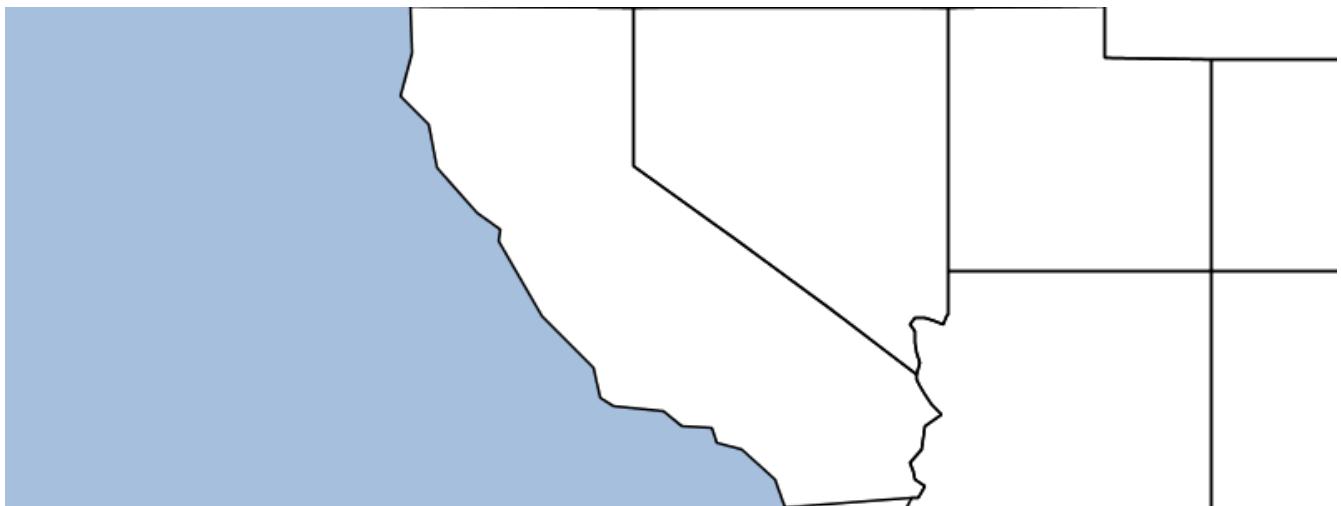

## GeoTIFF


*Render a Map to an Image using the GeoTIFF Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
GeoTIFF geotiff = new GeoTIFF()
BufferedImage image = geotiff.render(map)
```

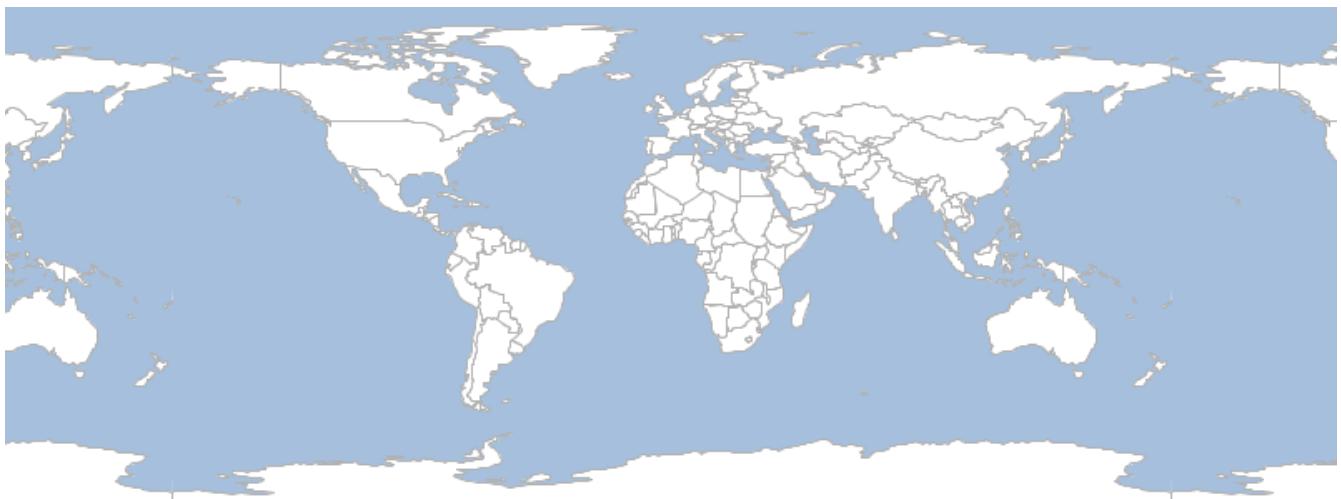

*Render a Map to an OutputStream using the GeoTIFF Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
GeoTIFF geotiff = new GeoTIFF()
File file = new File("map.tif")
geotiff.render(map, new FileOutputStream(file))
```

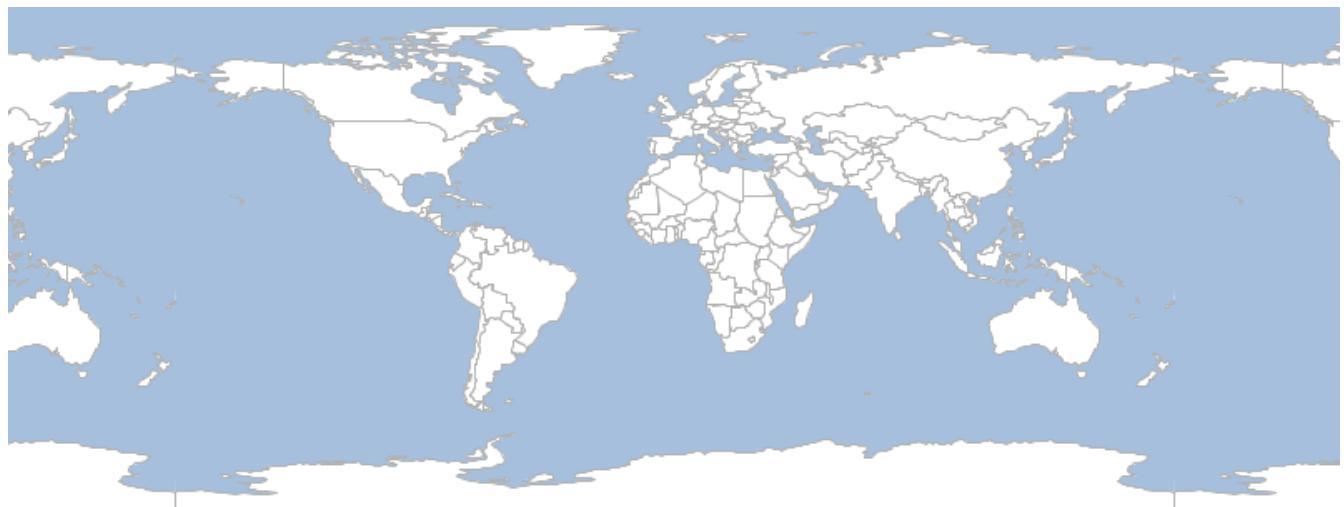

## ASCII

*Render a Map to an string using the ASCII Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
ASCII ascii = new ASCII(width: 60)
String asciiStr = ascii.render(map)
println asciiStr
```

## *Render a Map to an text file using the ASCII Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
ASCII ascii = new ASCII(width: 60)
File file = new File("map.txt")
FileOutputStream out = new FileOutputStream(file)
ascii.render(map, out)
out.close()
```

## Base64

*Render a Map to an string using the Base64 Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Base64 base64 = new Base64()
String base64Str = base64.render(map)
println base64Str
```

image/png;base64,iVBORw0KGgoAAAANSUhEUqAAAYAAAAEsC...

*Render a Map to an text file using the Base64 Renderer*


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Base64 base64 = new Base64()
File file = new File("map.txt")
base64.render(map, new FileOutputStream(file))
```

```
iVBORw0KGgoAAAANSUhEUgAAAYAAAAEsCAYAAAA7Ldc6AACAAE...
```

## PDF


*Render a Map to a PDF Document using the PDF Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Pdf pdf = new Pdf()
com.lowagie.text.Document document = pdf.render(map)
```

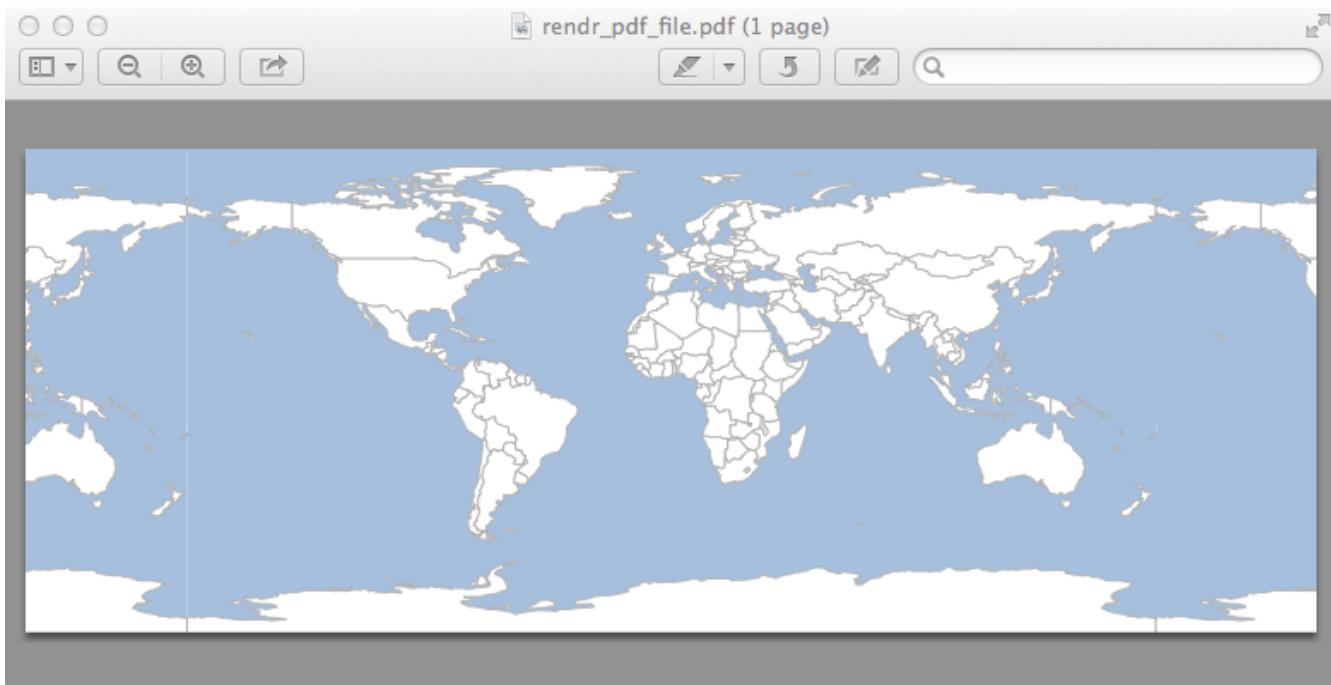

Render a Map to a PDF file using the PDF Renderer


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Pdf pdf = new Pdf()
File file = new File("map.pdf")
pdf.render(map, new FileOutputStream(file))
```

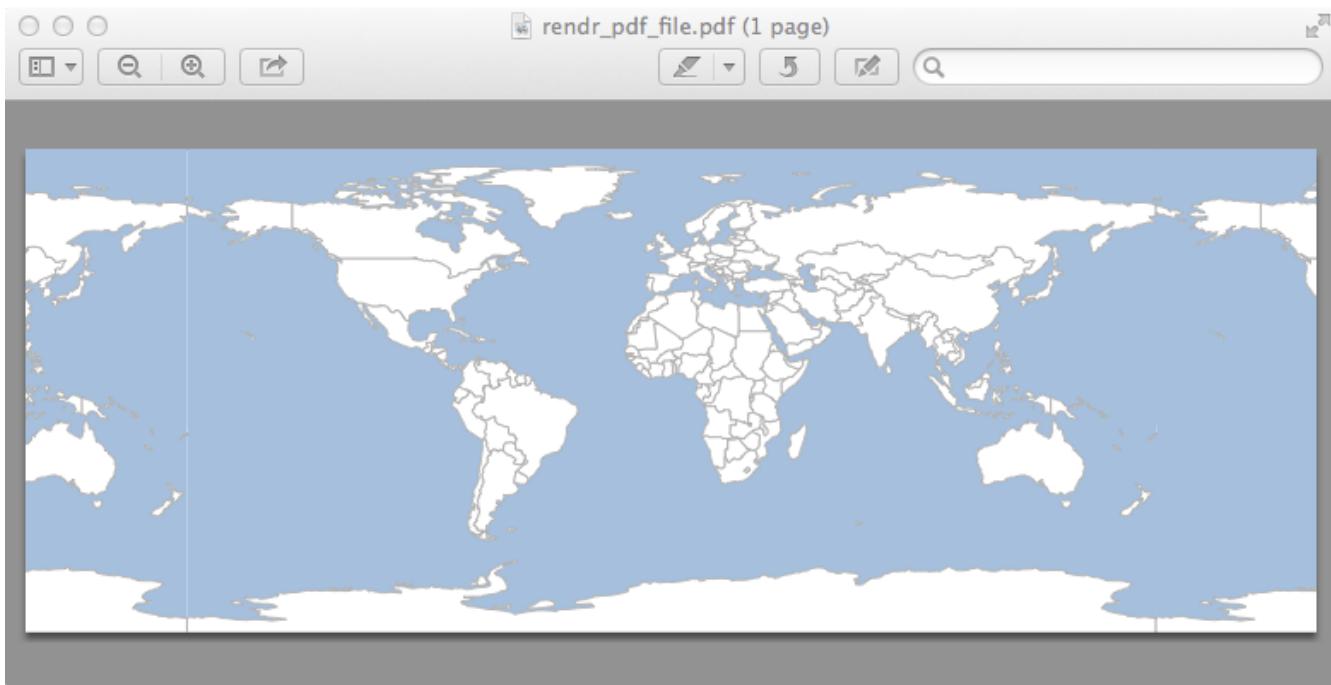

## SVG

*Render a Map to a SVG Document using the SVG Renderer*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Svg svg = new Svg()
org.w3c.dom.Document document = svg.render(map)
```

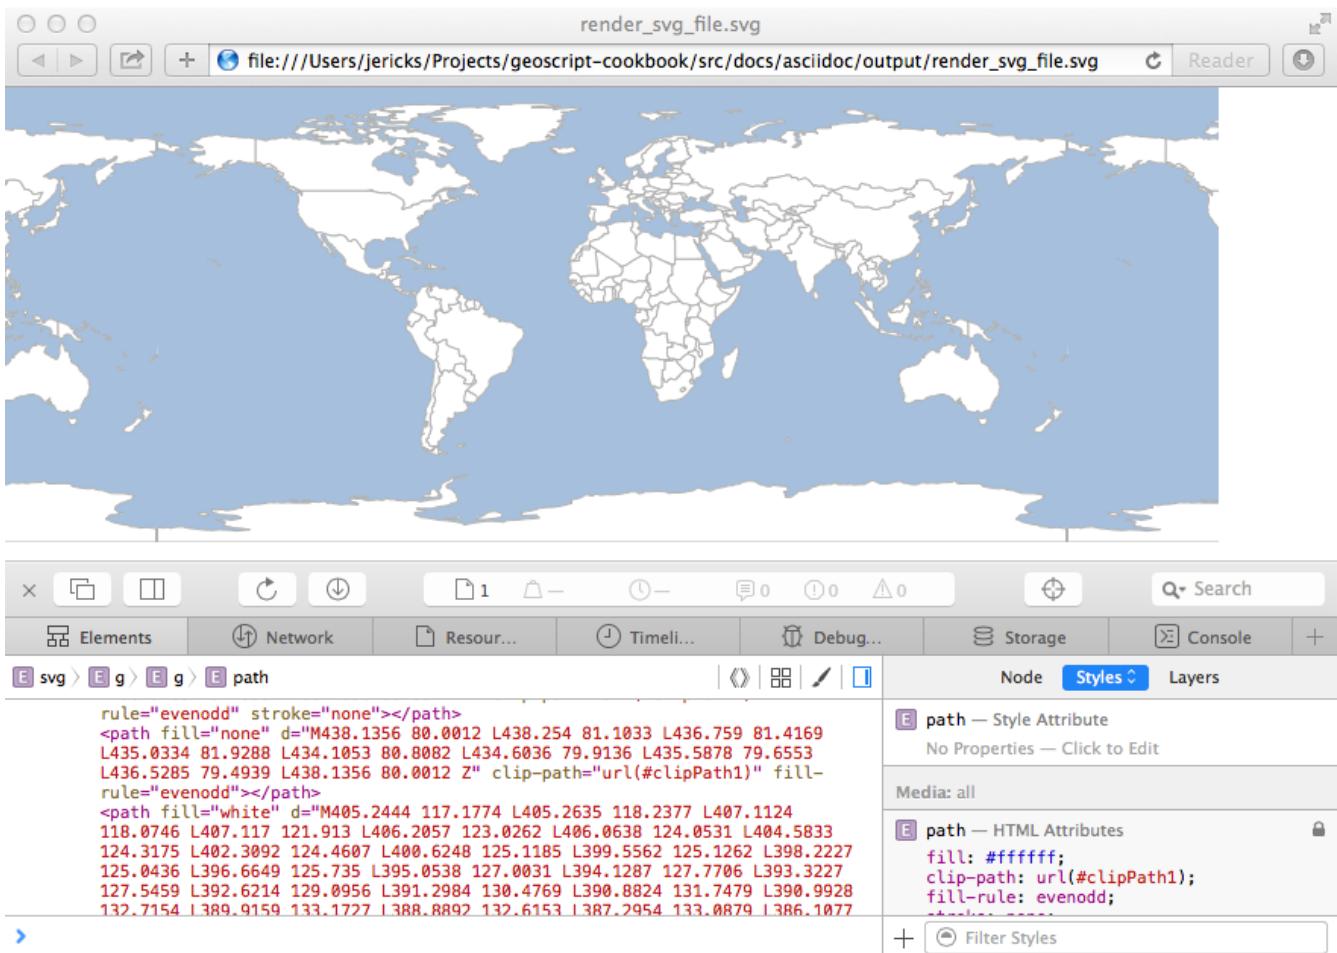


## Render a Map to a SVG file using the SVG Renderer

```

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Svg svg = new Svg()
File file = new File("map.svg")
FileOutputStream out = new FileOutputStream(file)
svg.render(map, out)
out.close()

```

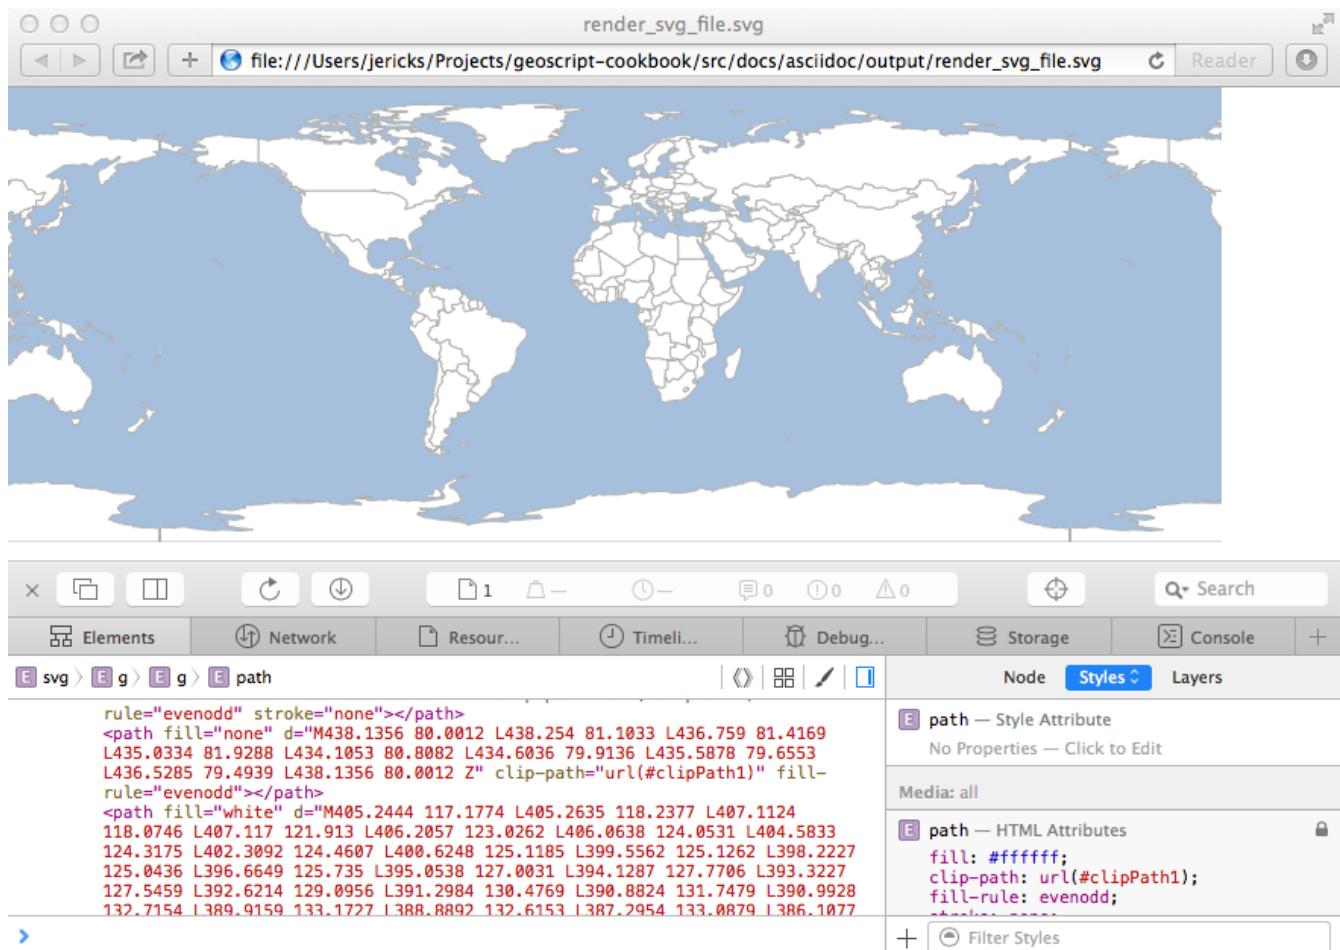

# Displaying Maps

## Finding Displayers

*Get all Displayers*

```
List<Displayer> displayers = Displayers.list()
displayers.each { Displayer displayer -
    println displayer.class.getSimpleName
}
```

MapWindow  
Window

*Get a Displayer*

```
Displayer displayer = Displayers.find("window")
println displayer.class.getSimpleName
```

Window

## Window

Display a Map in a simple GUI


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
Window window = new Window()
window.display(map)
```



## MapWindow

Display a Map in a interactive GUI

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")
Map map = new Map(
    width: 800,
    height: 300,
    layers: [ocean, countries]
)
MapWindow window = new MapWindow()
window.display(map)
```

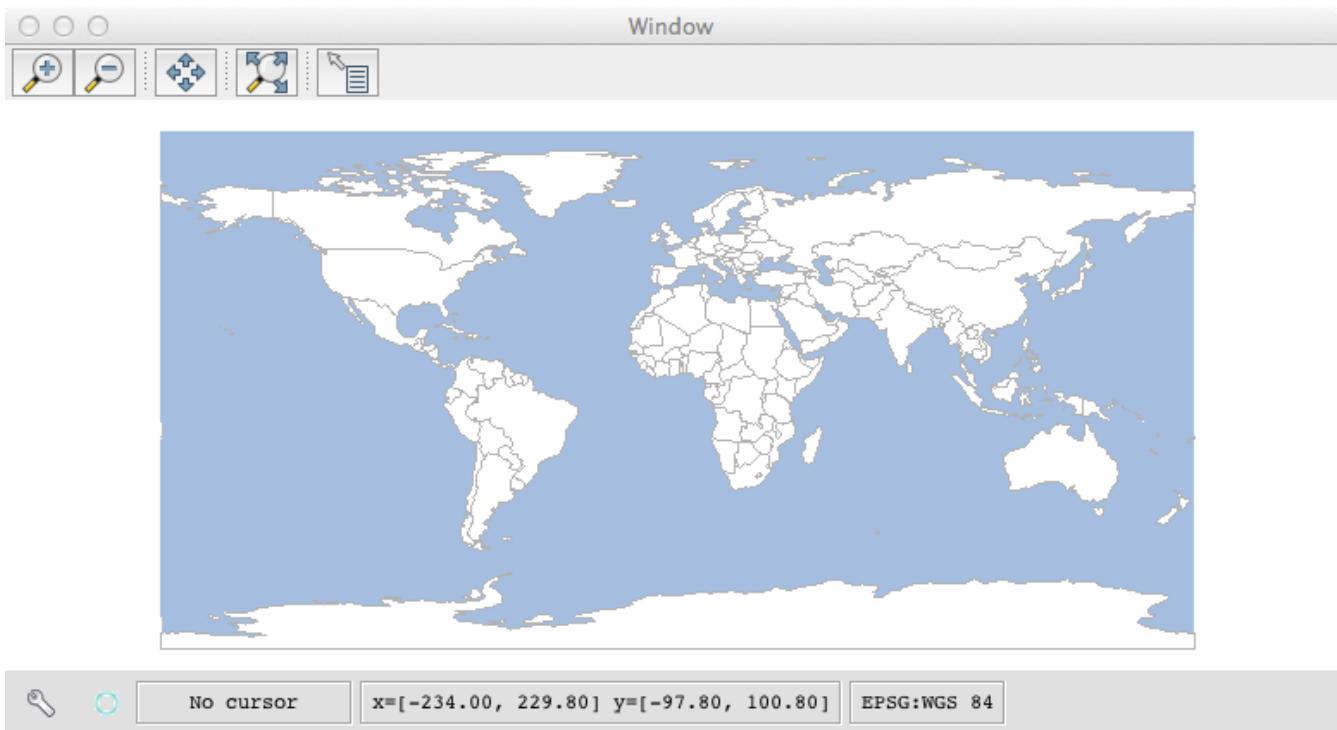

## Drawing

The Draw class is an easy way to quickly render a Geometry, a List of Geometries, a Feature, or a Layer to an Image, a File, an OutputStream, or a GUI.


### Drawing to a File or GUI

All of the draw methods take a single required parameter but can also take the following optional parameters:

- style = A Style
- bounds = The Bounds
- size = The size of the canvas ([400,350])
- out = The OutputStream, File, or File name. If null (which is the default) a GUI will be opened.
- format = The format ("jpeg", "png", "gif")
- proj = The Projection


### *Draw a Geometry to a File*

```
File file = new File("geometry.png")
Geometry geometry = new Point(-122.376, 47.587).buffer(0.5)
Draw.draw(geometry,
    style: new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5),
    bounds: new Bounds(-122.876, 47.087, -121.876, 48.087),
    size: [400, 400],
    format: "png",
    proj: "EPSG:4326",
    backgroundColor: "#a5bfdd",
    out: file
)
```

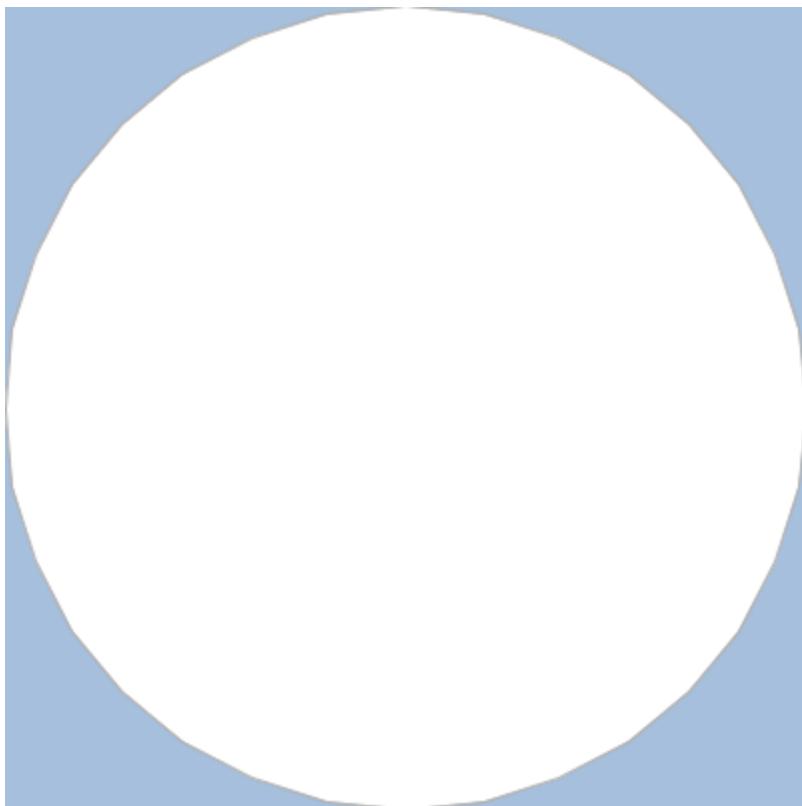

### *Draw a List of Geometries to an OutputStream*

```
Point point = new Point(-122.376, 47.587)
List geometries = [1.5, 1.0, 0.5].collect { double distance ->
    point.buffer(distance)
}
File file = new File("geometries.png")
OutputStream outputStream = new FileOutputStream(file)
Draw.draw(geometries, out: outputStream, format: "png")
outputStream.flush()
outputStream.close()
```

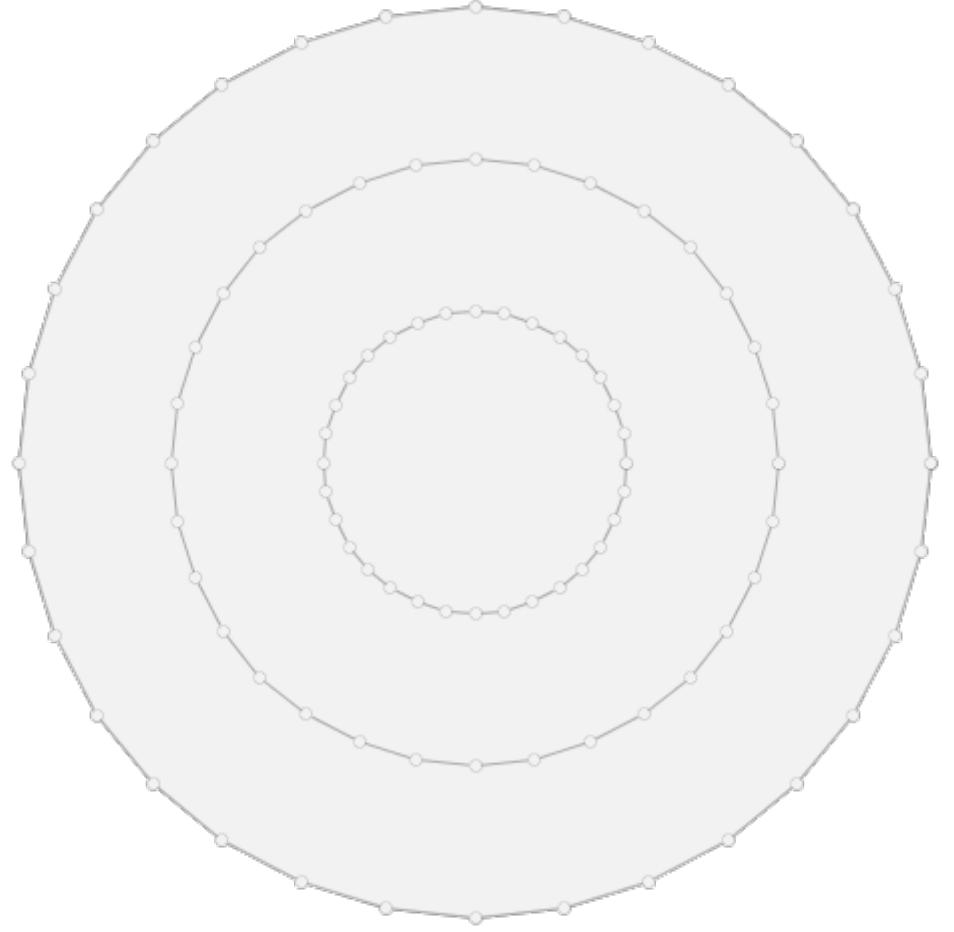


*Draw a Feature to a file name*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
Feature feature = layer.first(filter: "NAME_1='Washington'")
Draw.draw(feature, bounds: feature.bounds, out: "feature.png")
```




*Draw a Layer to a GUI*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
layer.style = new Fill("LightSteelBlue") + new Stroke("LightSlateGrey", 0.25)
Draw.draw(layer, bounds: layer.bounds)
```

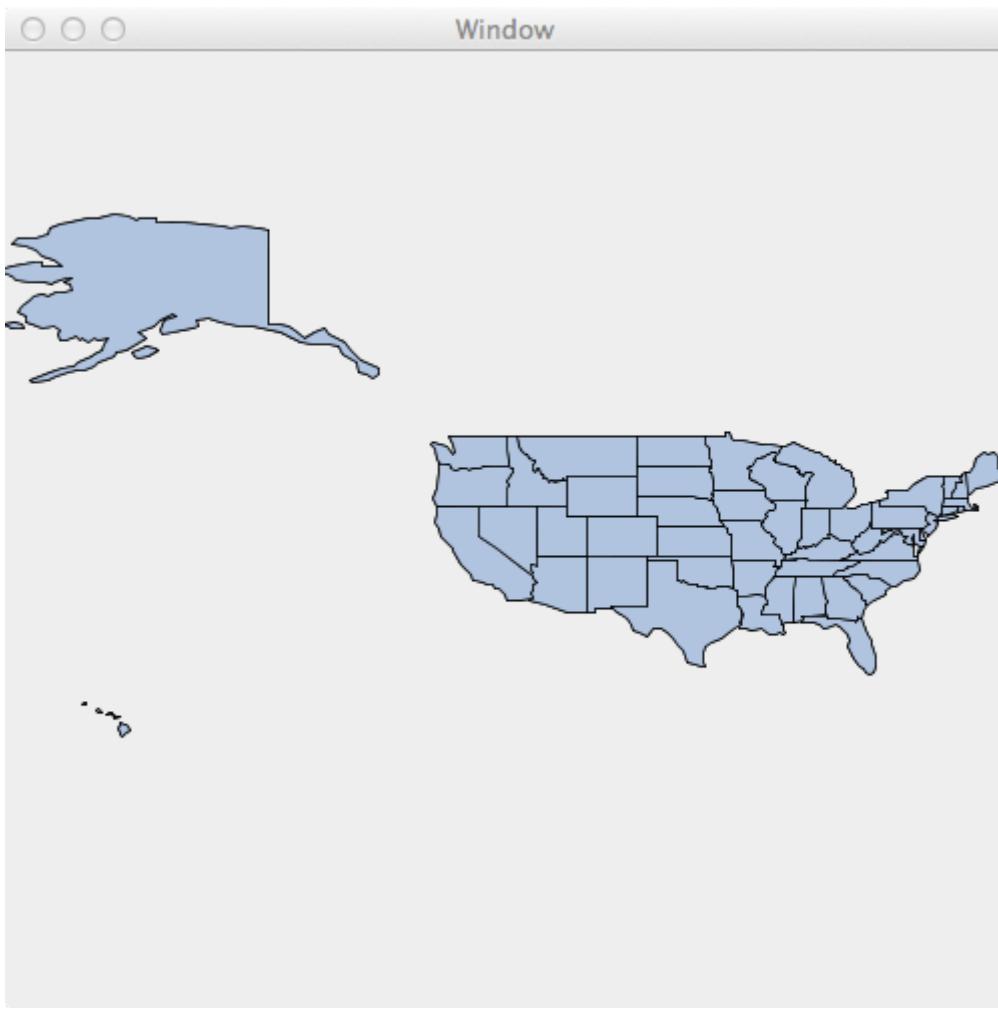

#### Draw a Raster to a File

```
File file = new File("earth.png")
Raster raster = new geoscript.layer.GeoTIFF(new File('src/main/resources/earth.tif')
)).read()
Draw.draw(raster, bounds: raster.bounds, size: [400,200], out: file)
```

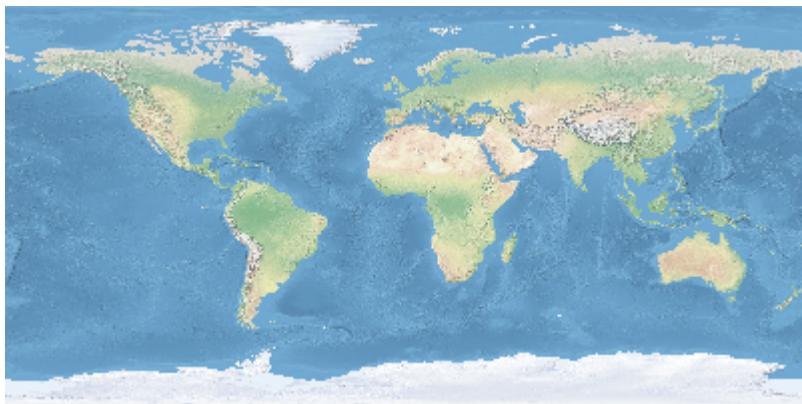

#### Drawing to an Image


All of the drawToImage methods take a single required parameter but can also take the following optional parameters:

- style = A Style

- bounds = The Bounds
- size = The size of the canvas ([400,350])
- imageType = The format ("jpeg", "png", "gif")
- proj = The Projection


*Draw a Geometry to an Image*

```
Geometry geometry = new Point(-122.376, 47.587).buffer(0.5)
BufferedImage image = Draw.drawImage(geometry,
    style: new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5),
    bounds: new Bounds(-122.876,47.087,-121.876,48.087),
    size: [400,400],
    imageType: "png",
    proj: "EPSG:4326",
    backgroundColor: "#a5bfdd"
)
```

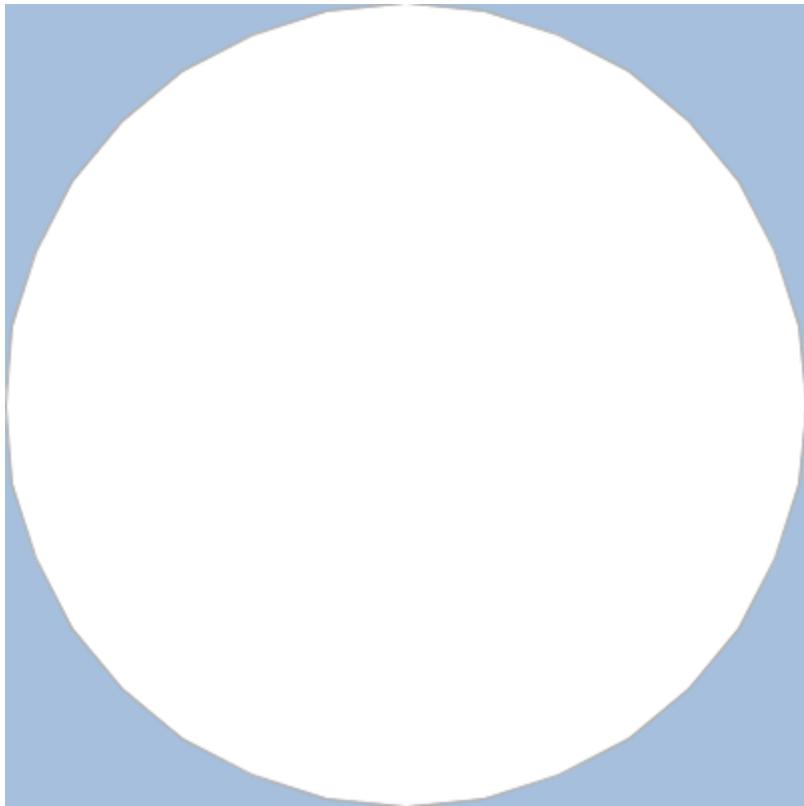


*Draw a List of Geometries to an Image*

```
Point point = new Point(-122.376, 47.587)
List geometries = [1.5, 1.0, 0.5].collect { double distance ->
    point.buffer(distance)
}
BufferedImage image = Draw.drawImage(geometries)
```

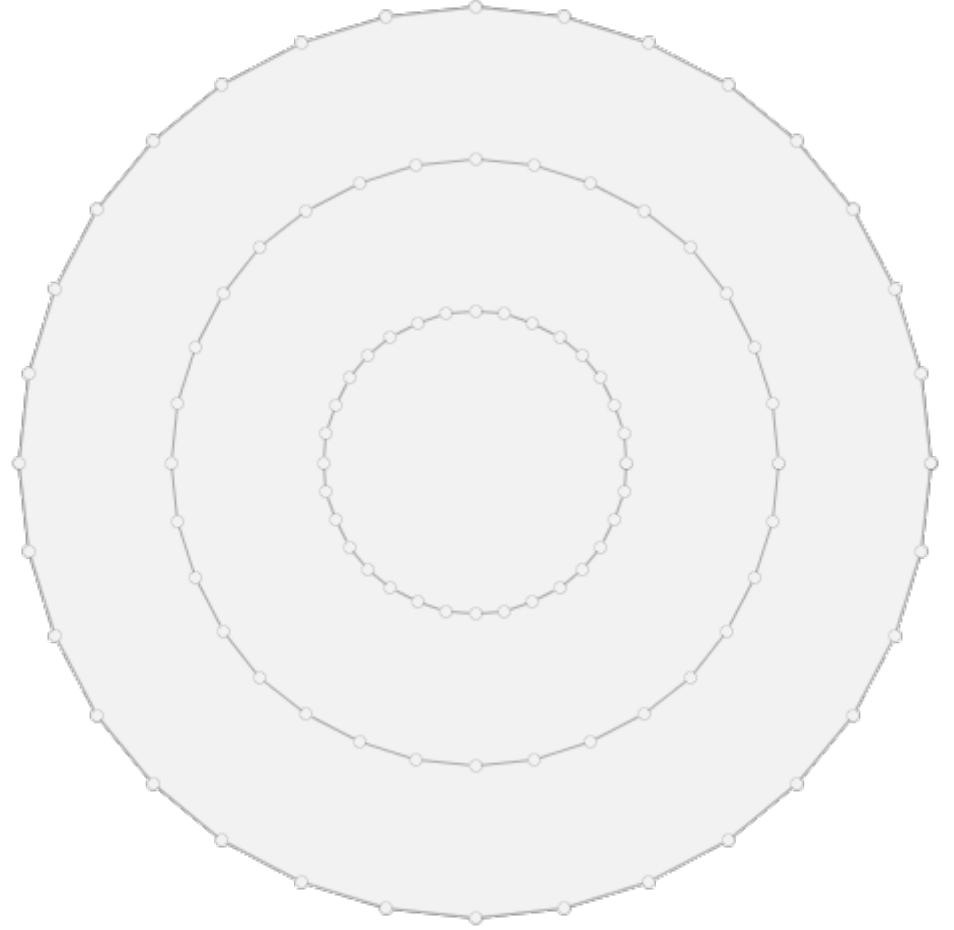


### *Draw a Feature to an Image*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
Feature feature = layer.first(filter: "NAME_1='Washington'")
BufferedImage image = Draw.drawToImage(feature, bounds: feature.bounds)
```

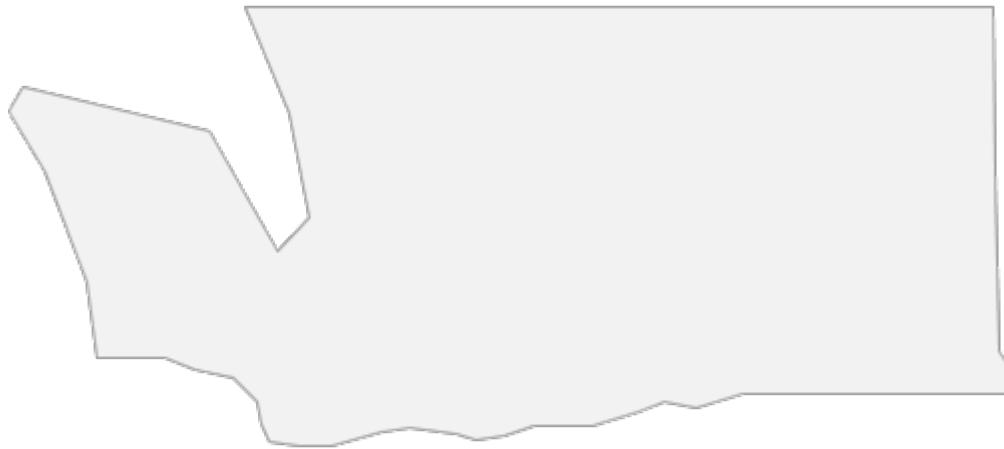


### *Draw a Layer to an Image*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
layer.style = new Fill("LightSteelBlue") + new Stroke("LightSlateGrey", 0.25)
BufferedImage image = Draw.drawImage(layer, bounds: layer.bounds)
```

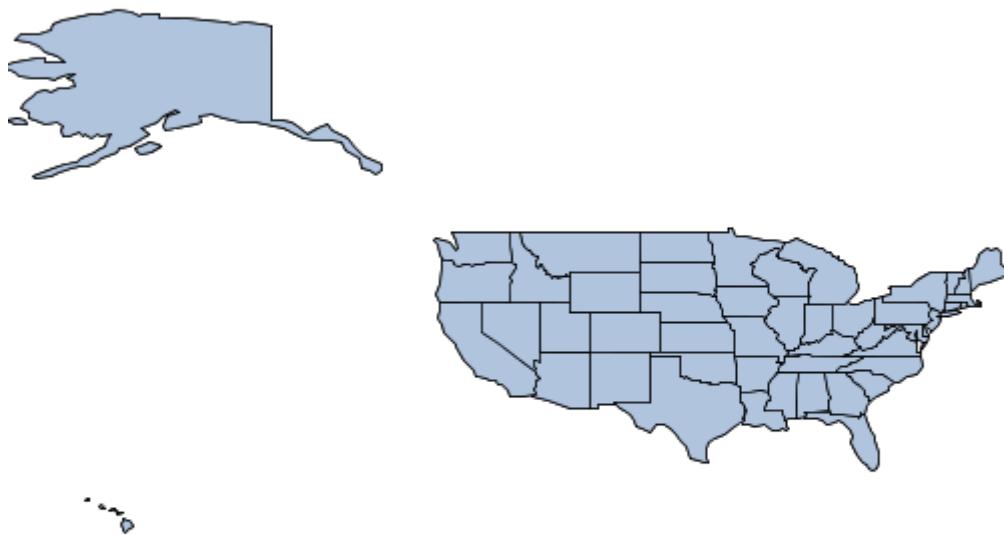

### *Draw a Raster to an Image*

```
Raster raster = new geoscript.layer.GeoTIFF(new File('src/main/resources/earth.tif')).read()
BufferedImage image = Draw.drawToImage(raster, bounds: raster.bounds, size: [400,200])
```

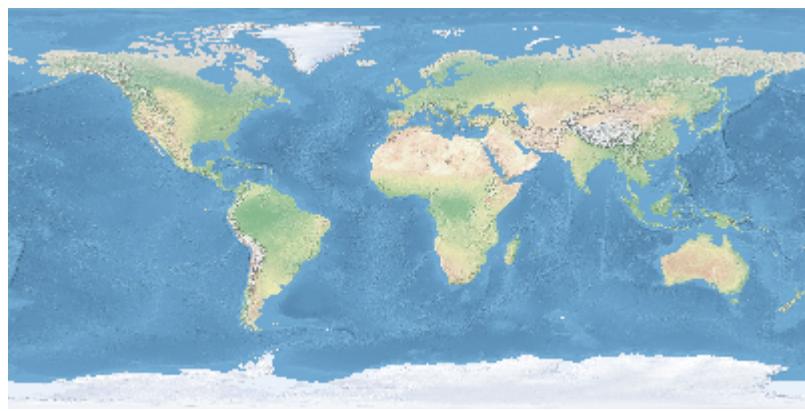


## Plotting


### Plotting to a File or GUI

The Plot module can plot a Geometry, a list of Geometries, a Feature, or a Layer to a File, a File name, an OutputStream, or a simple GUI.

### Plot a Geometry to a File


```
File file = new File("geometry.png")
Geometry geometry = new Point(-122.376, 47.587).buffer(0.5)
Plot.plot(geometry, out: file)
```

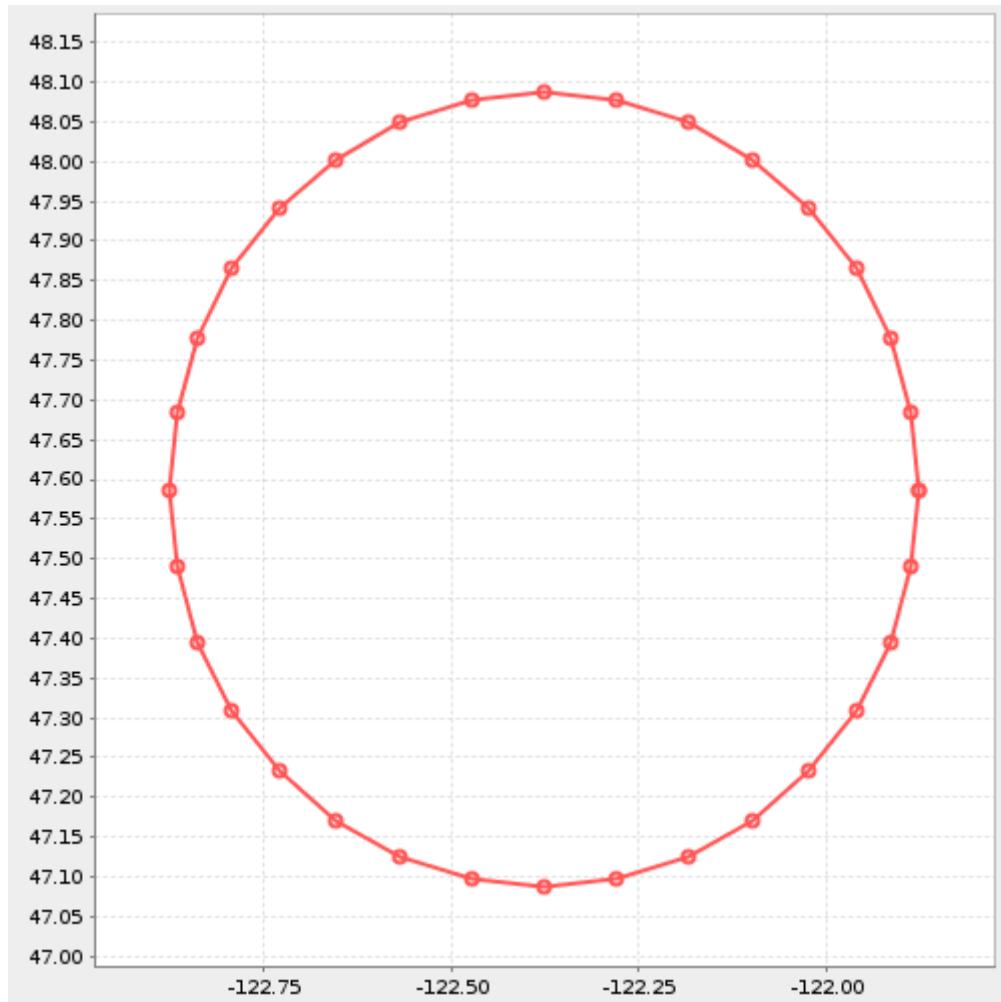

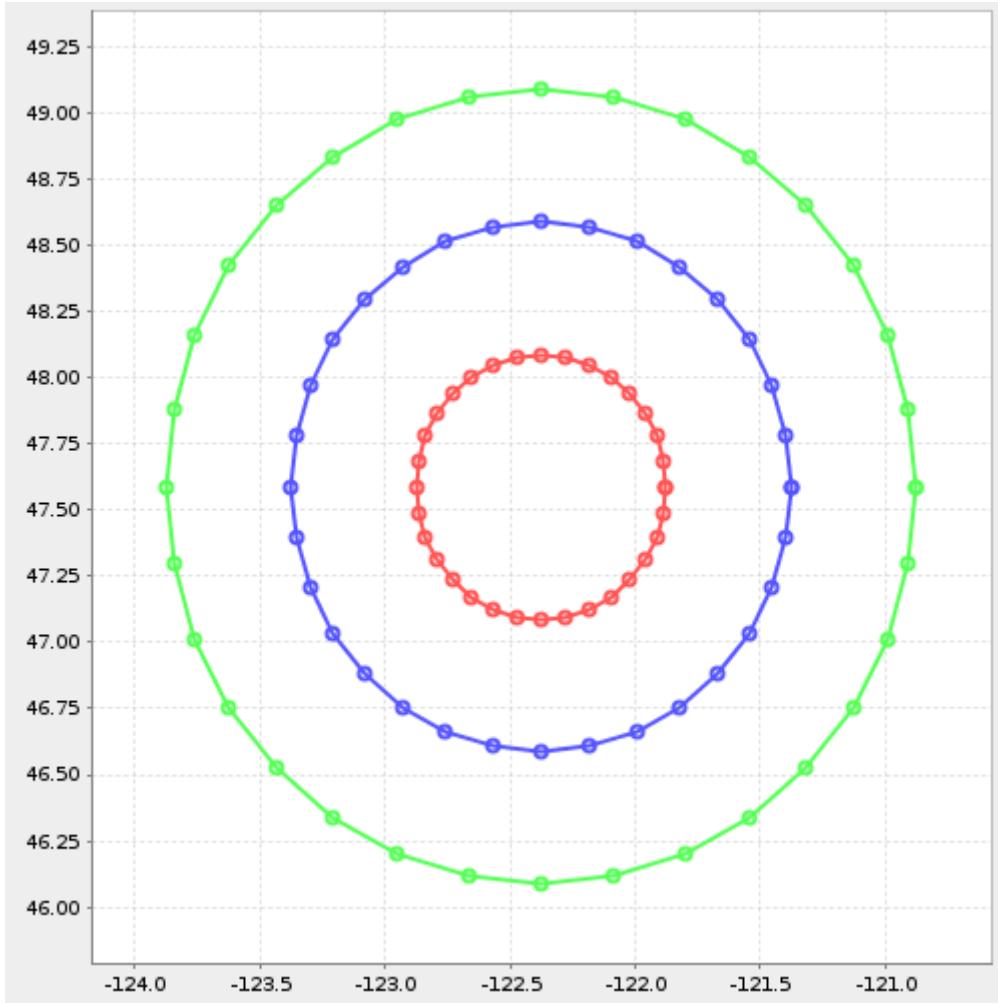


Plot a Feature to a File name

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
Feature feature = layer.first(filter: "NAME_1='Washington'")
Plot.plot(feature, out: "feature.png")
```

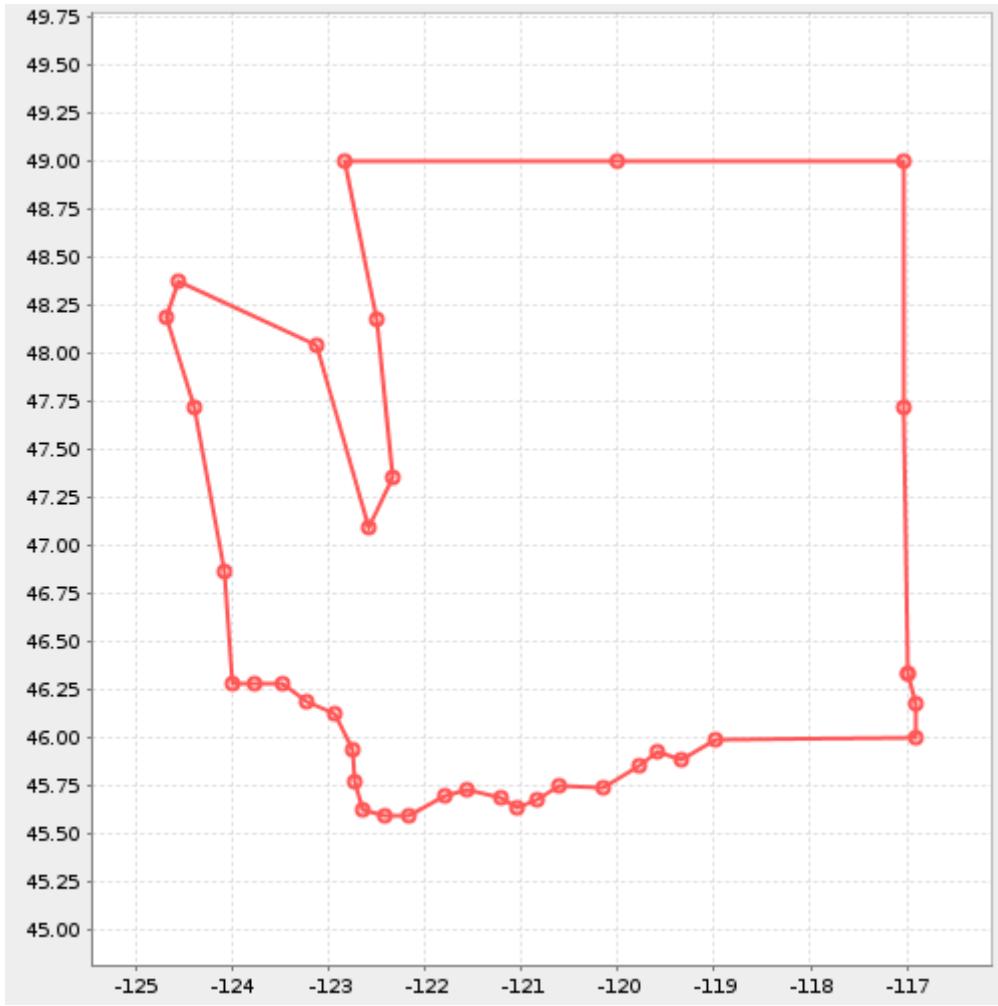

*Plot a Layer to a GUI*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
Plot.plot(layer)
```

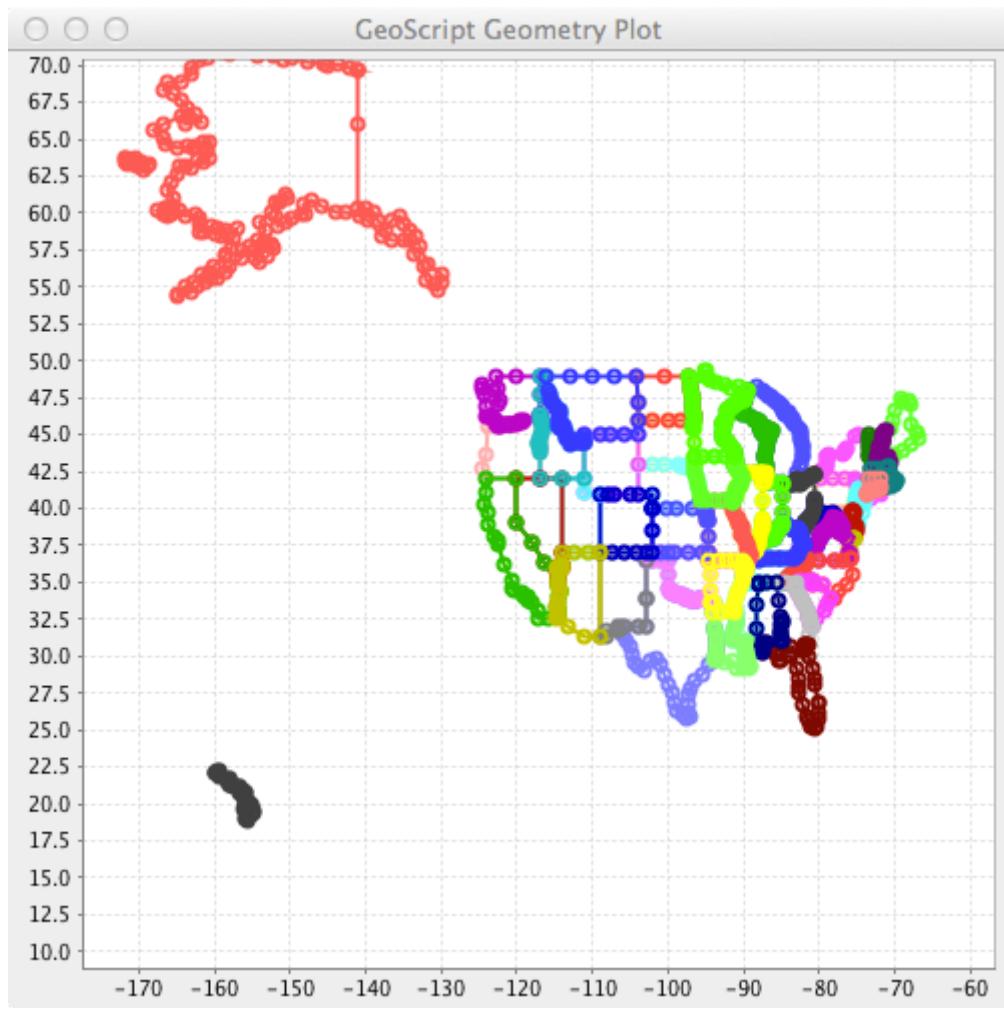


## Plotting to an Image

The Plot module can plot a Geometry, a list of Geometries, a Feature, or a Layer to an image.


### *Plot a Geometry to an Image*

```
Geometry geometry = new Point(-122.376, 47.587).buffer(0.5)
BufferedImage image = Plot.plotToImage(geometry, size: [400,400],)
```

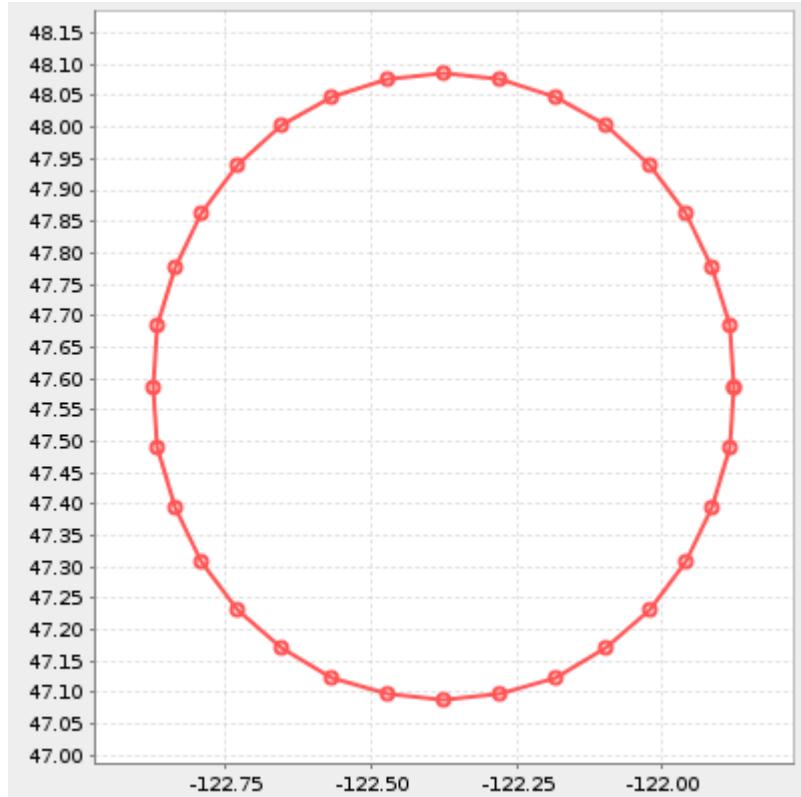


## *Plot a List of Geometries to an Image*

```
Point point = new Point(-122.376, 47.587)
List geometries = [1.5, 1.0, 0.5].collect { double distance ->
    point.buffer(distance)
}
BufferedImage image = Plot.plotToImage(geometries)
```

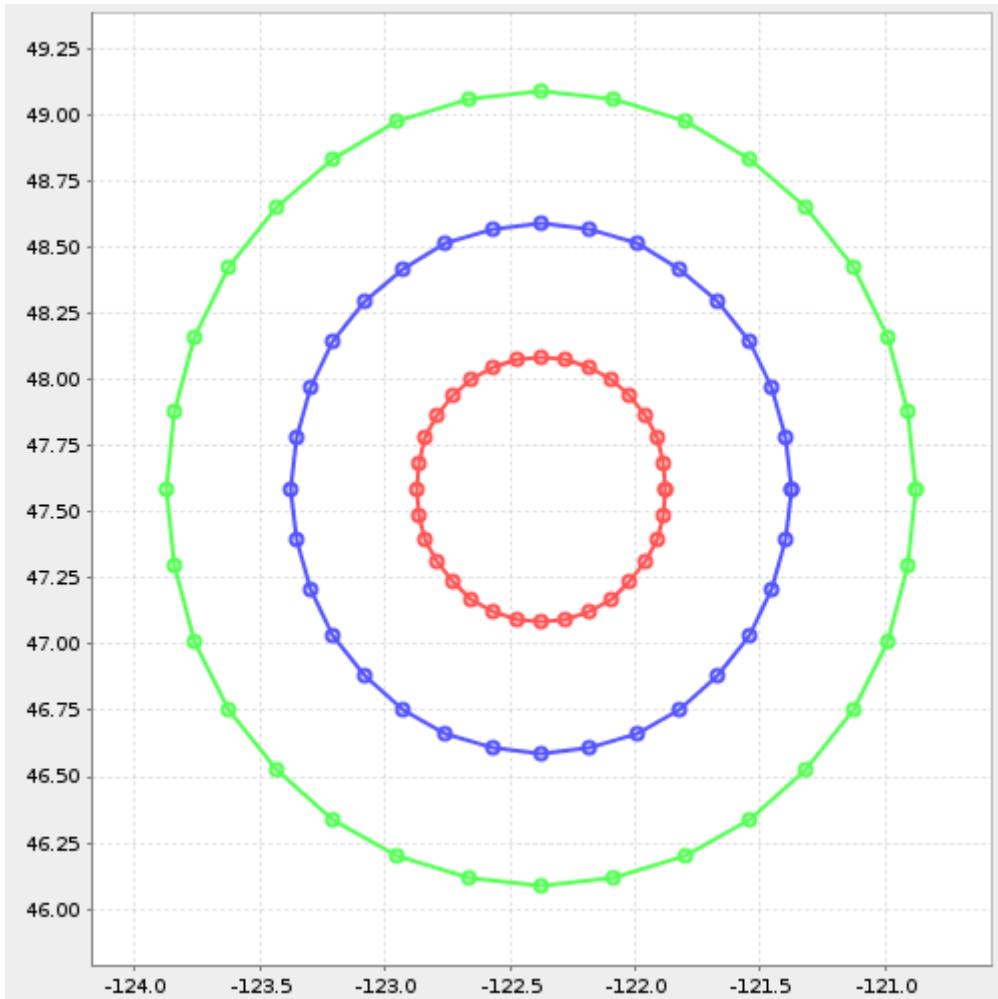


### Plot a Feature to an Image

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
Feature feature = layer.first(filter: "NAME_1='Washington'")
BufferedImage image = Plot.plotToImage(feature, bounds: feature.bounds)
```

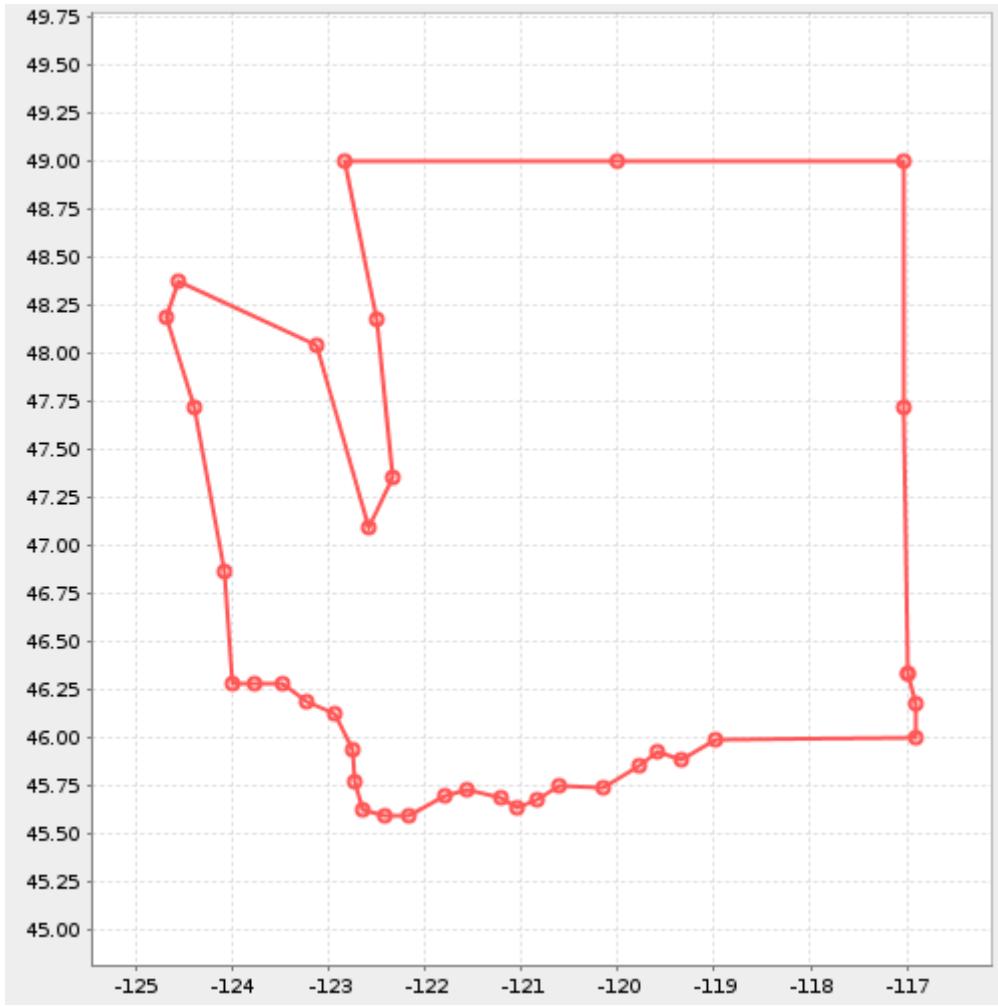

### Plot a Layer to an Image

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer layer = workspace.get("states")
BufferedImage image = Plot.plotToImage(layer, bounds: layer.bounds)
```

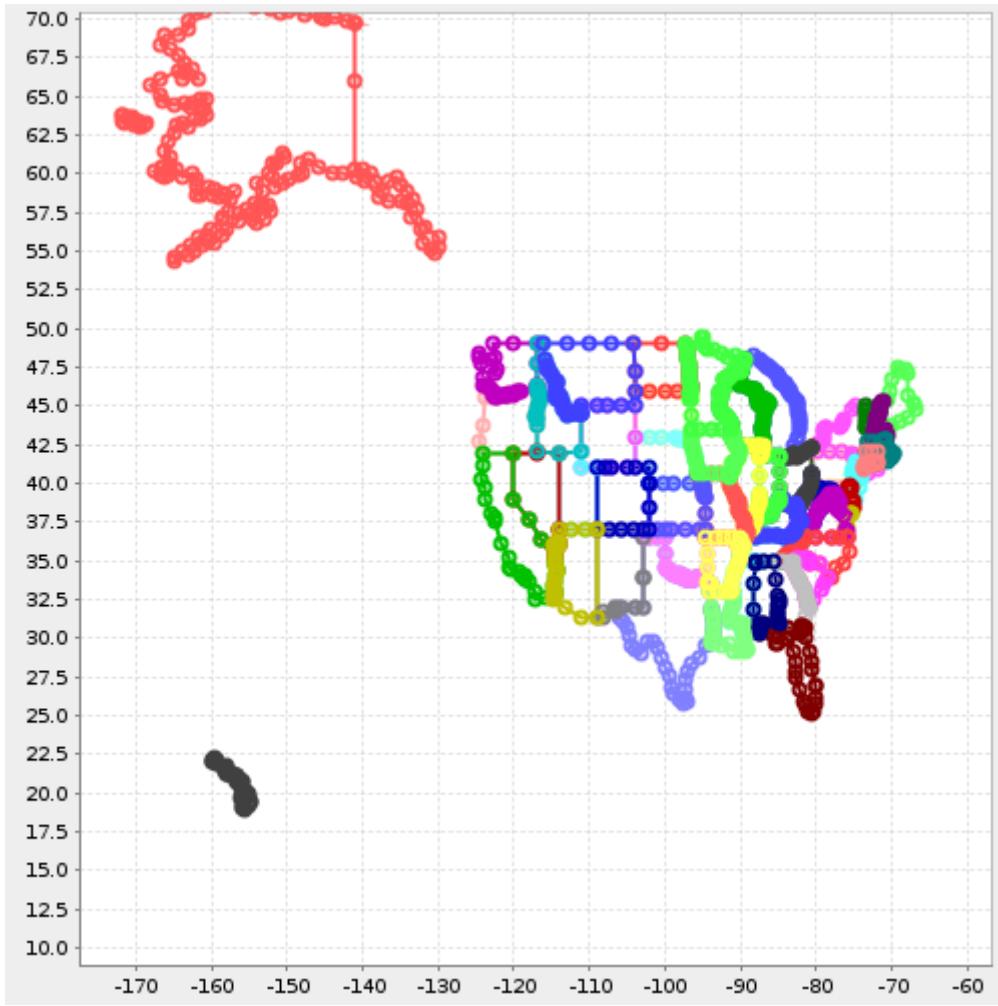


## Style Recipes

Styles are found in the [geoscript.style](#) package.

Styles are made up Symbolizers and Composites. A Symbolizer is a particular style like Stroke or Fill. Symbolizers also have methods for controlling the drawing order (zindex), the min and max scale (range), and filtering (where).


## Creating Basic Styles

```
Fill fill = new Fill("#6B8E23")
```

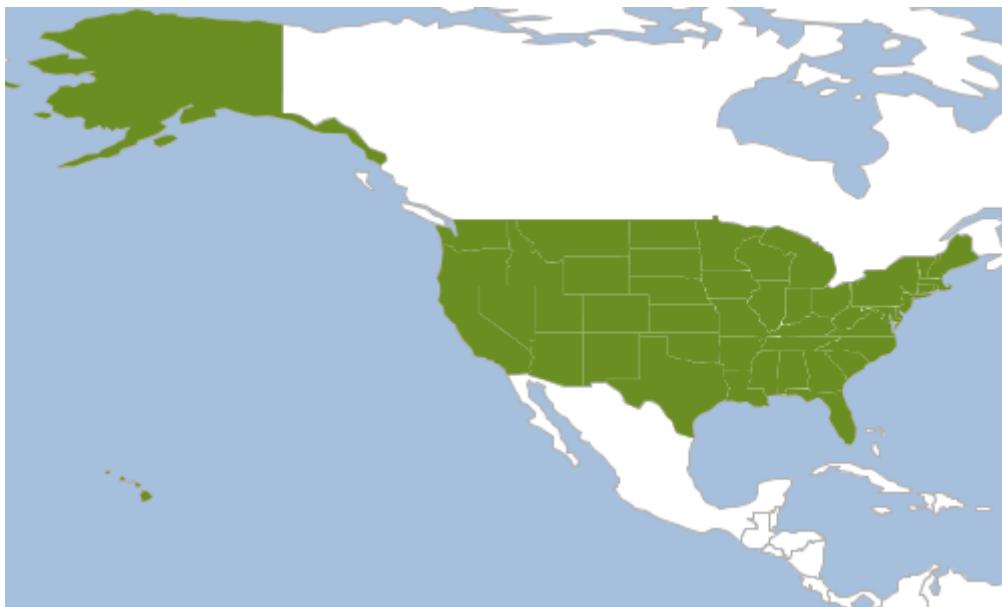


A Composite is simply two or more Symbolizers. So, a Composite would be a combination of a Stroke symbolizer (to style the boundary) and a Fill Symbolizer (to style the interior).

```
Composite composite = new Fill("#6B8E23") + new Stroke("black", 0.75)
```

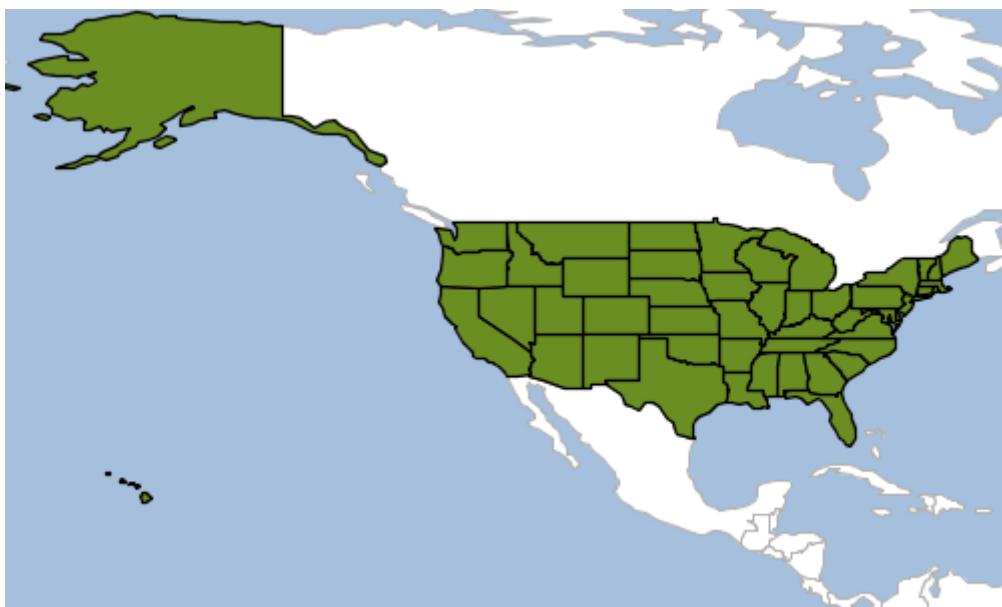


A Symbolizer can use the where method to restrict which features are styled.

```
Symbolizer symbolizer = new Fill("#ffffcc").where("PEOPLE < 4504128.33") +
    new Fill("#41b6c4").where("PEOPLE BETWEEN 4504128.33 AND 16639804.33") +
    new Fill("#253494").where("PEOPLE > 16639804.33")
```

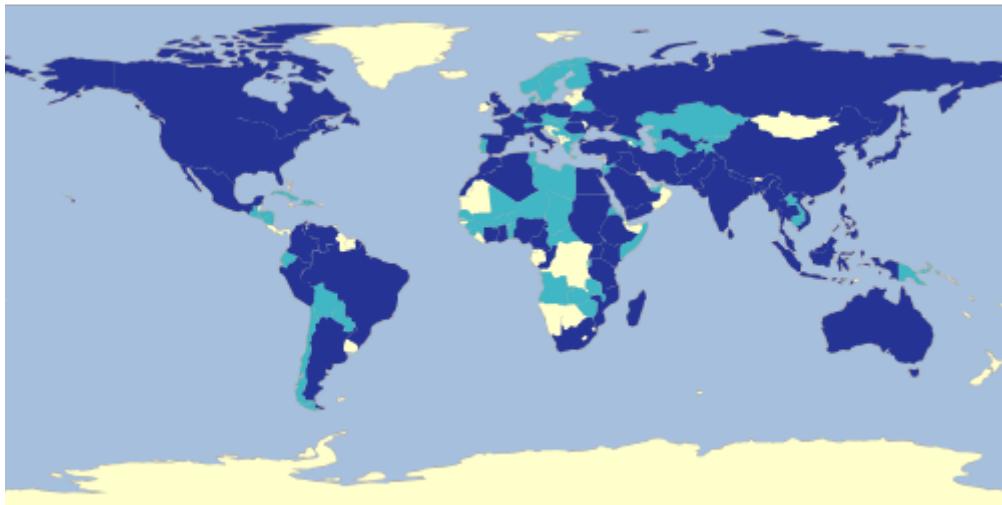


The `zindex` method is used to order Symbolizers on top of each other. In this recipe we use it to create line casings.

```
Symbolizer symbolizer = new Stroke("black", 2.0).zindex(0) + new Stroke("white", 0.1)  
    .zindex(1)
```

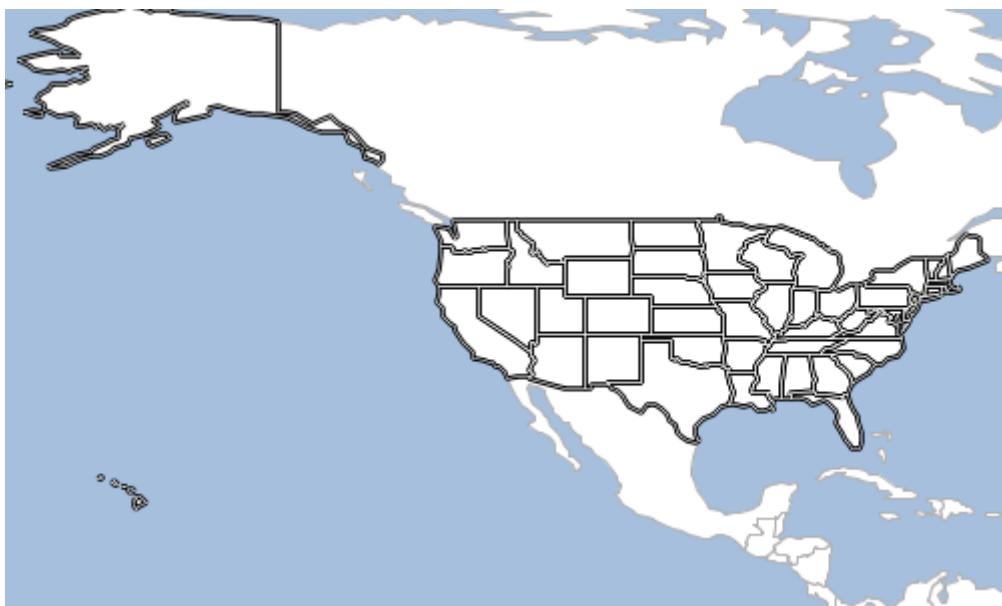

The `scale` method is used to create Symbolizers that are dependent on map scale.

```
Symbolizer symbolizer = (new Fill("white") + new Stroke("black", 0.1)) + new Label  
    ("NAME_1")  
        .point(anchor: [0.5, 0.5])  
        .polygonAlign("mbr")  
        .range(max: 16000000)
```

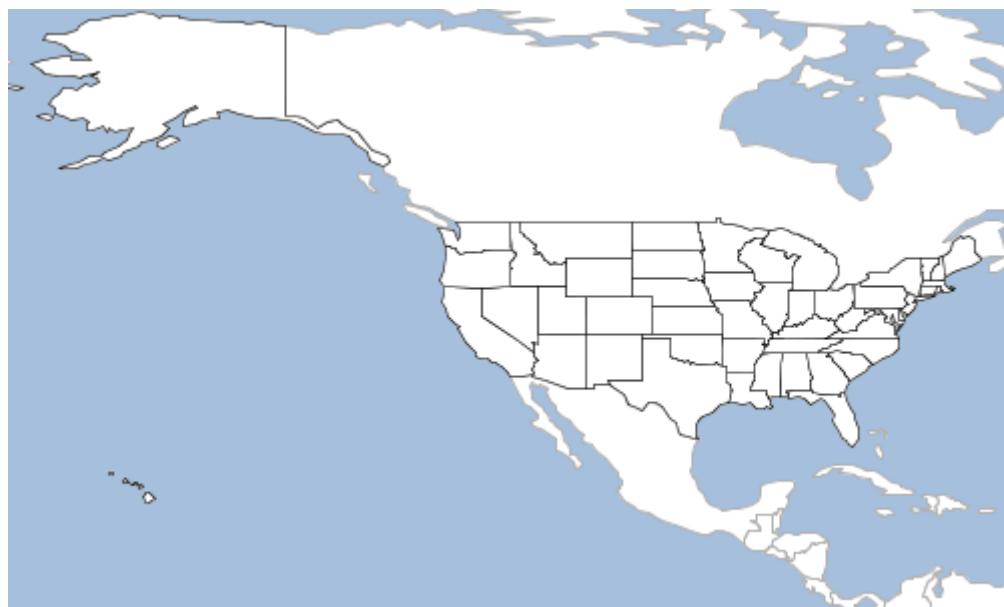

## Creating Strokes

*Create a Stroke Symbolizer with a Color*

```
Stroke stroke = new Stroke("#1E90FF")
```



*Create a Stroke Symbolizer with a Color and Width*

```
Stroke stroke = new Stroke("#1E90FF", 0.5)
```



*Create a Stroke Symbolizer with casing*

```
Symbolizer stroke = new Stroke(color: "#333333", width: 5, cap: "round").zindex(0) +  
    new Stroke(color: "#6699FF", width: 3, cap: "round").zindex(1)
```



Create a Stroke Symbolizer with Dashes

```
Stroke stroke = new Stroke("#1E90FF", 0.75, [5,5], "round", "bevel")
```




Create a Stroke Symbolizer with railroad Hatching

```
Symbolizer stroke = new Stroke("#1E90FF", 1) + new Hatch("vertline", new Stroke("#1E90FF", 0.5), 6).zindex(1)
```




Create a Stroke Symbolizer with spaced Shape symbols

```
Symbolizer stroke = new Stroke(width: 0, dash: [4, 4]).shape(new Shape("#1E90FF", 6, "circle").stroke("navy", 0.75))
```

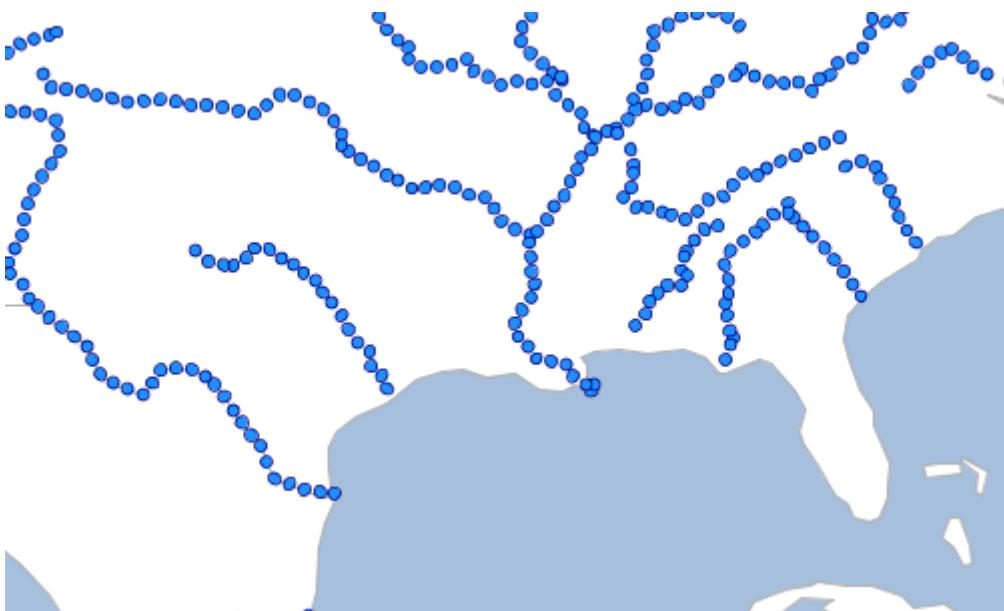

Create a Stroke Symbolizer with alternating spaced Shape symbols


```
Symbolizer stroke = new Stroke("#0000FF", 1, [10,10]).zindex(0) + new Stroke(null, 0, [[5,15],7.5])  
    .shape(new Shape(null, 5, "circle").stroke("#000033",1)).zindex(1)
```

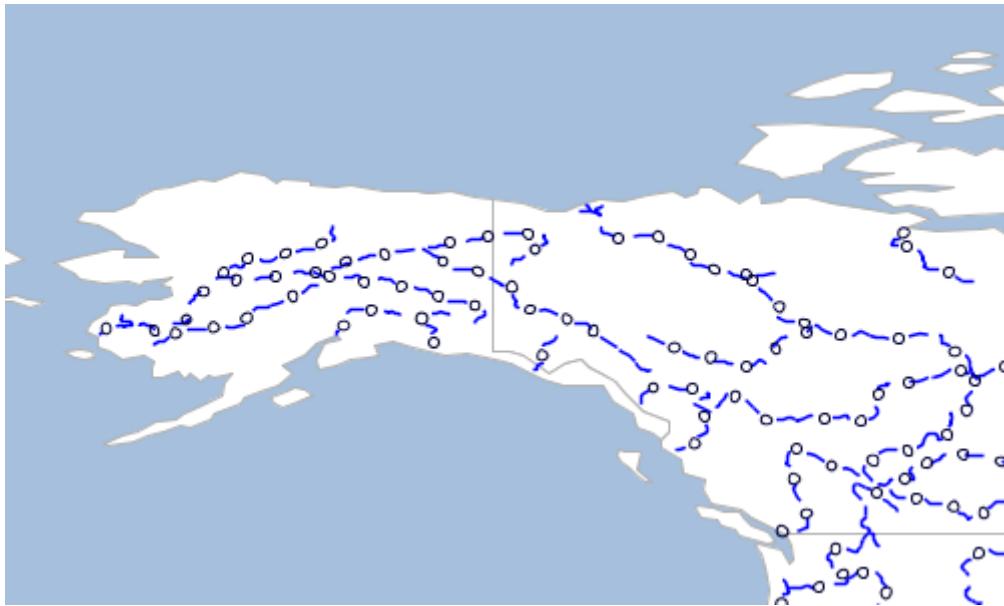

## Creating Fills


*Create a Fill Symbolizer with a Color*

```
Fill fill = new Fill("#6B8E23")
```

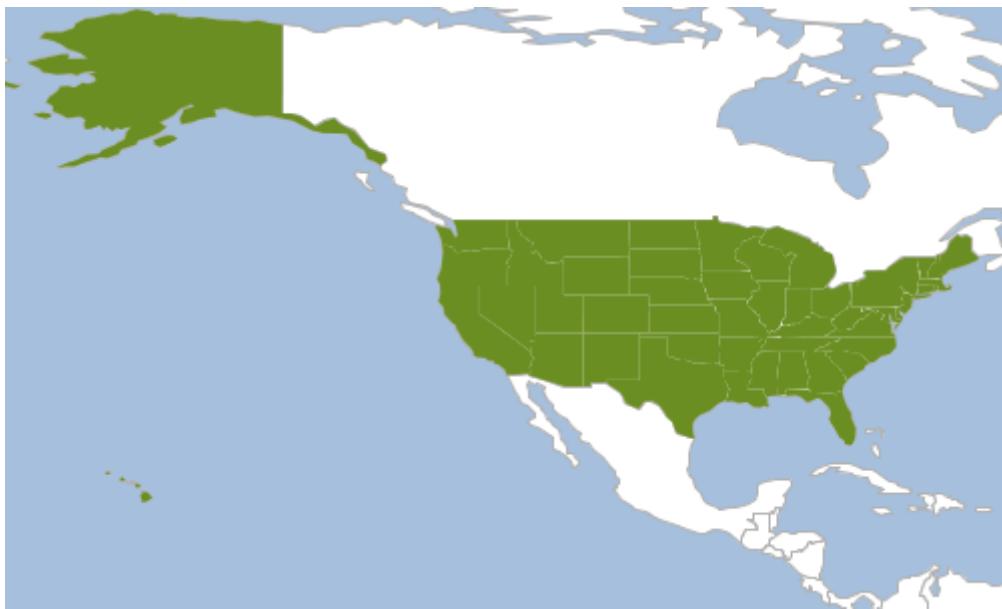


*Create a Fill Symbolizer with a Color and a Stroke*

```
Symbolizer symbolizer = new Fill("#6B8E23") + new Stroke("black", 0.1)
```

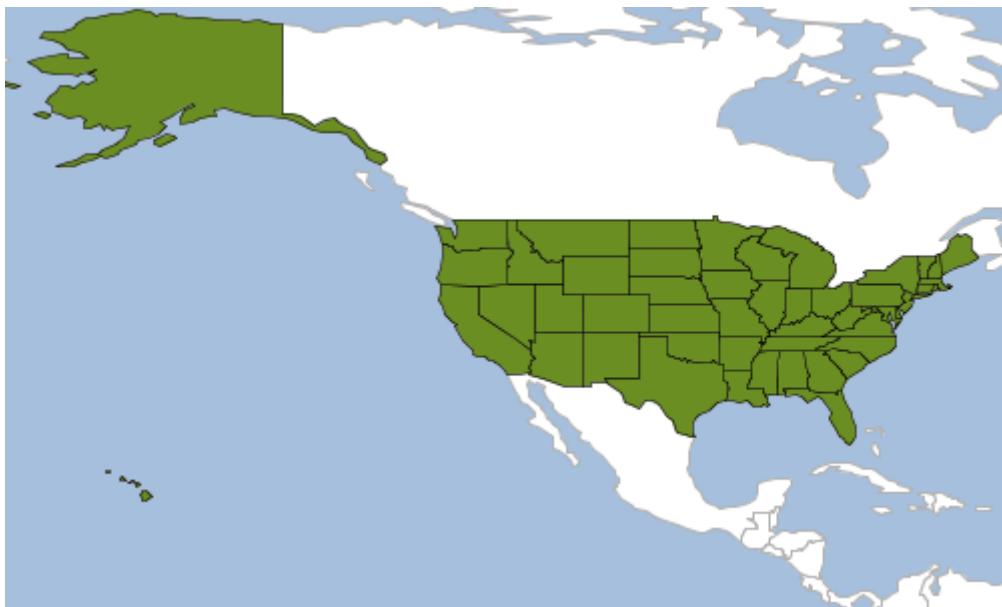


Create a Fill Symbolizer with a Color and Opacity

```
Fill fill = new Fill("#6B8E23", 0.35)
```

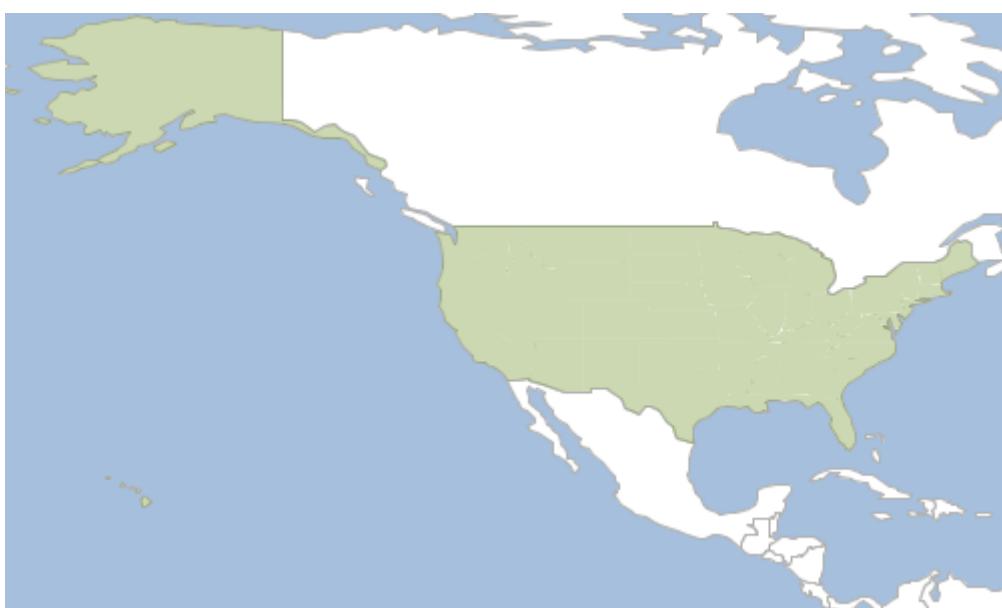


Create a Fill Symbolizer from named parameters

```
Fill fill = new Fill(color: "wheat", opacity: 0.75)
```

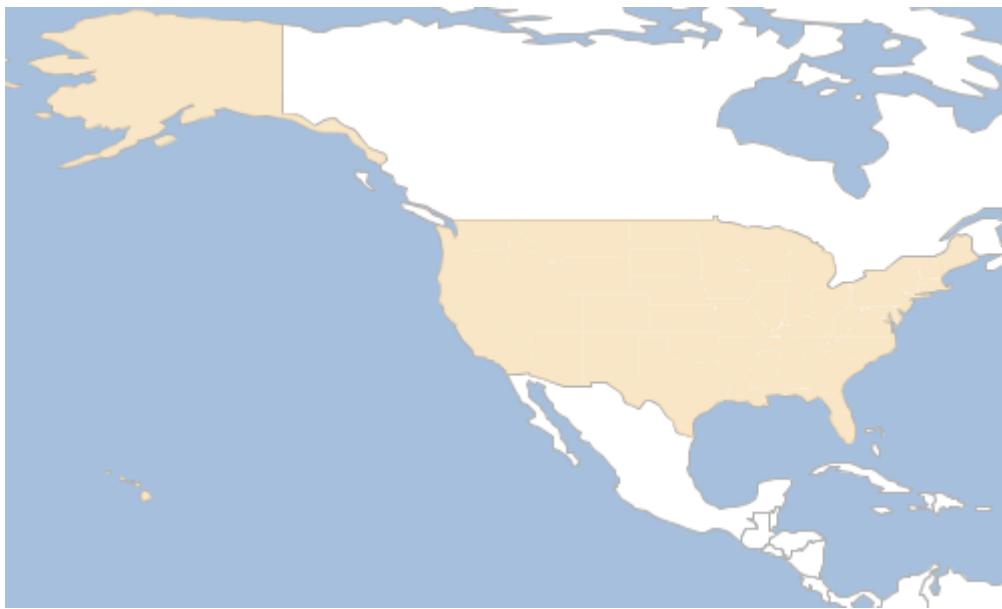


Create a Fill Symbolizer with an Icon

```
Fill fill = new Fill("green").icon('src/main/resources/trees.png', 'image/png')
```

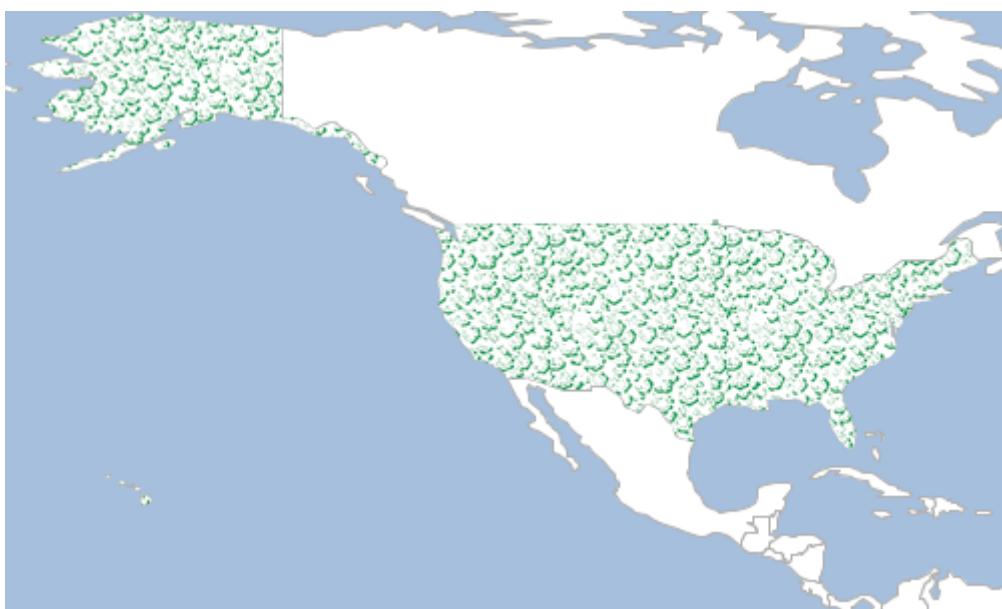


Create a Fill Symbolizer with a Hatch

```
Fill fill = new Fill("green").hatch("slash", new Stroke("green", 0.25), 8)
```

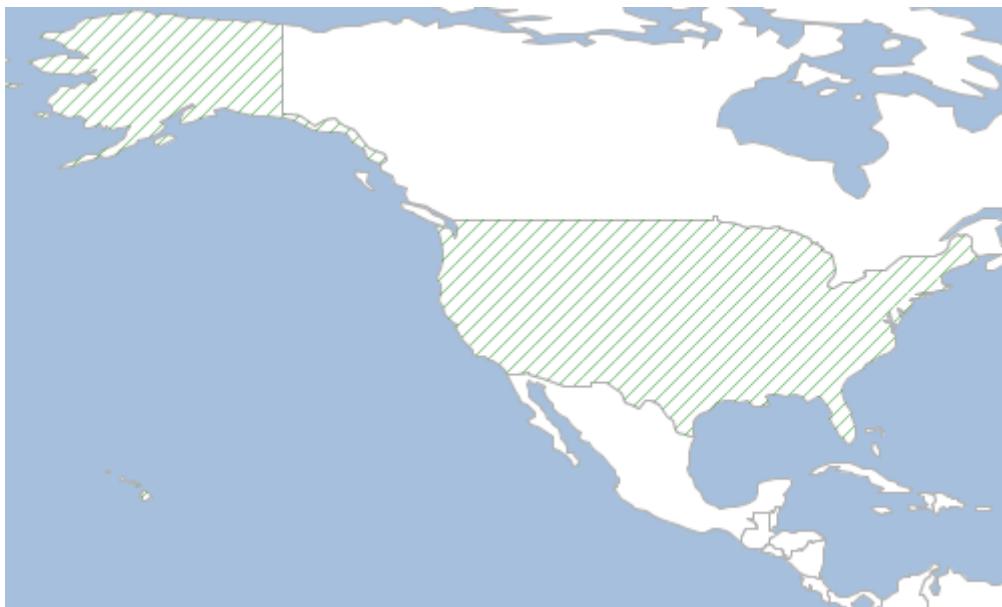

Create a Fill Symbolizer with a random fill


```
Symbolizer symbolizer = new Fill("white").hatch("circle", new Fill("black"), 2).  
random(  
    random: "free",  
    seed: 0,  
    symbolCount: 50,  
    tileSize: 50,  
    rotation: "none"  
) + new Stroke("black", 0.25)
```

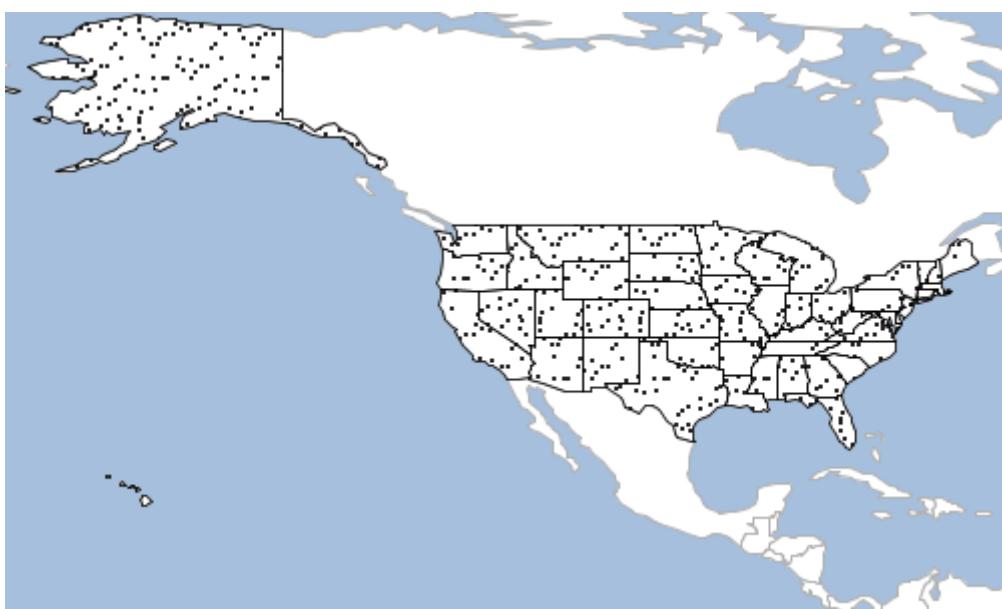

## Creating Shapes


Create a Shape Symbolizer with a Color

```
Shape shape = new Shape("navy")
```

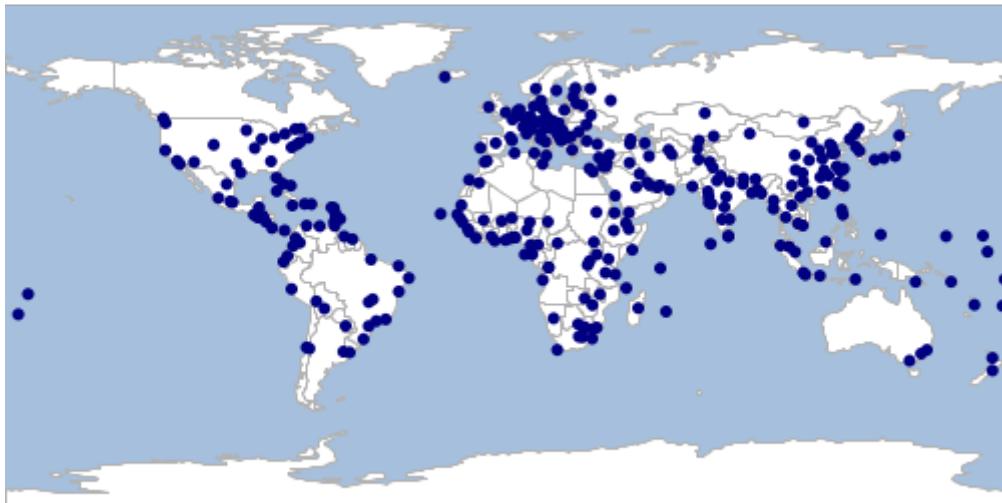


Create a Shape Symbolizer with a color, size, type, opacity and angle

```
Shape shape = new Shape("#9370DB", 8, "triangle", 0.75, 45)
```

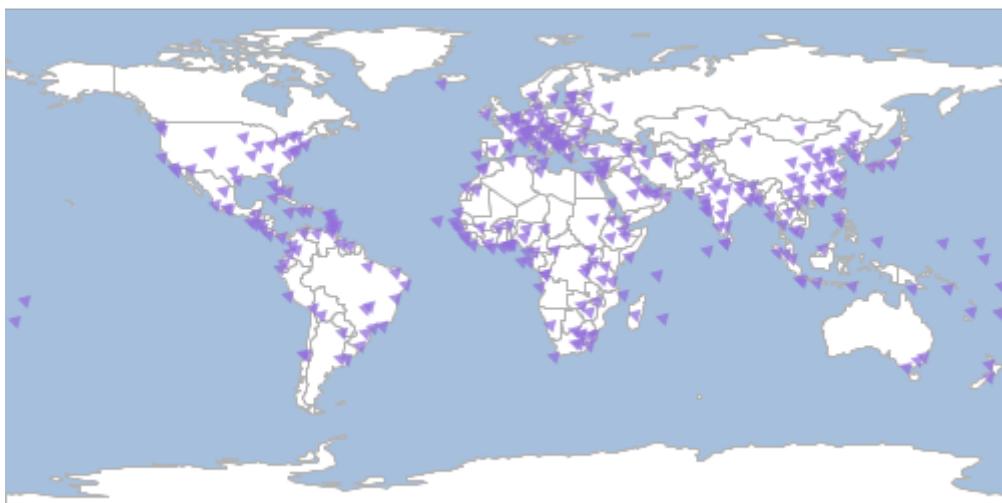


Create a Shape Symbolizer with named parameters

```
Shape shape = new Shape(color: "#8B4513", size: 10, type: "star", opacity: 1.0,  
rotation: 0)
```

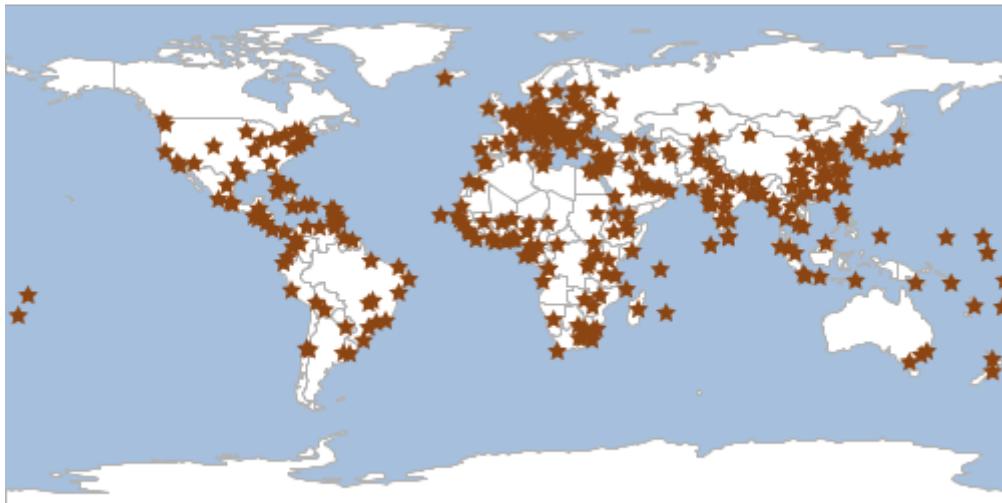

*Create a Shape Symbolizer with Stroke outline*

```
Symbolizer symbolizer = new Shape("white", 10).stroke("navy", 0.5)
```

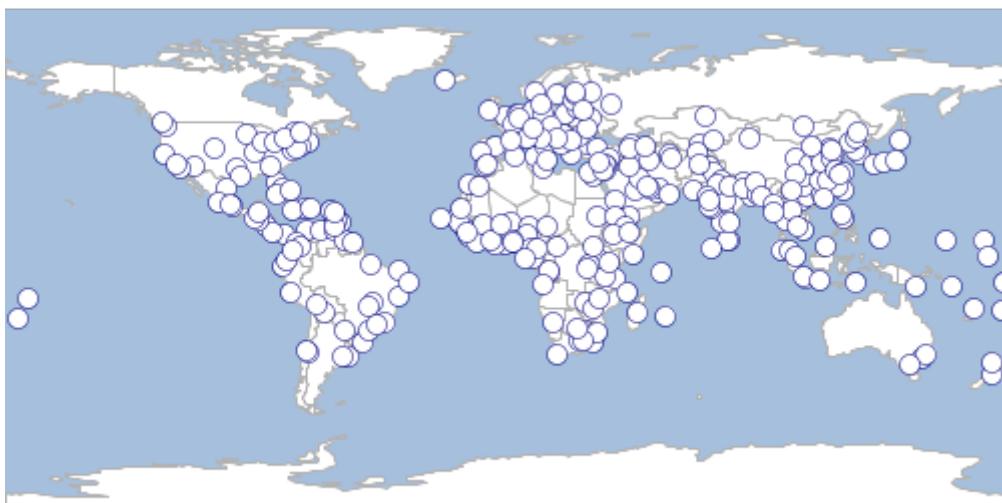

## Creating Icons


*Create an Icon Symbolizer*

```
Symbolizer symbolizer = new Icon("src/main/resources/place.png", "image/png", 12)
```



Create an Icon Symbolizer

```
Symbolizer symbolizer = new Icon(url: "src/main/resources/place.png", format:  
"image/png", size: 10)
```

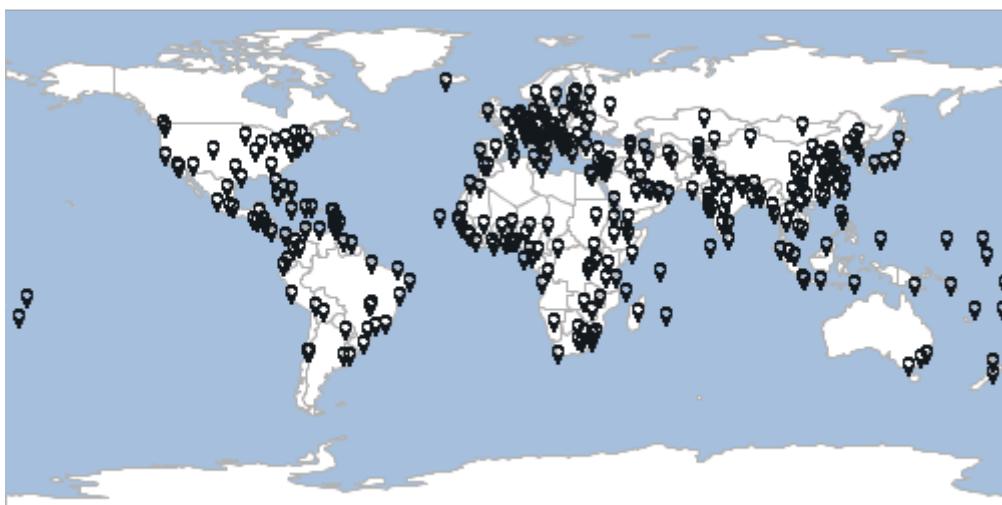

## Creating Labels

Create a Label for a Point Layer

```
Symbolizer symbolizer = new Shape("blue", 6).stroke("navy", 0.5) + new Label("NAME"  
).point(  
    [0.5, 0.5], ①  
    [0, 5.0], ②  
    0           ③  
)
```

① anchor

② displacement

③ rotation



Create a Label for a Point Layer with a Font

```
Symbolizer symbolizer = new Shape("blue", 6).stroke("navy", 0.5) + new Label("NAME")
).point(
    [0.5,0.5],
    [0, 5.0],
    0
) + new Font(
    "normal", ①
    "bold", ②
    12, ③
    "Arial" ④
)
```

① style (normal, italic, oblique)

② weight (normal, bold)

③ size (8,12,16,etc..)

④ family (serif, arial, verdana)



Create a Label for a Point Layer with Halo

```
Symbolizer symbolizer = new Shape("blue", 6).stroke("navy", 0.5) + new Label("NAME")
).point(
    [0.5,0.5],
    [0, 5.0],
    0
).fill(new Fill("white")) + new Halo(new Fill("navy"), 2.5)
```



Create a Label for a Polygon Layer

```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.1) + new Label
("NAME_1")
.point(anchor: [0.5,0.5])
.polygonAlign("mbr")
```



Create a Label for a Polygon Layer using an Expression

```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.1) + new Label
(Expression.fromCQL("strToLowercase(NAME_1")))
    .point(anchor: [0.5,0.5])
    .polygonAlign("mbr")
```



Create a Label for a Line Layer

```
Symbolizer symbolizer = new Stroke("blue", 0.75) + new Label("name")
    .fill(new Fill("navy"))
    .linear(follow: true, offset: 50, displacement: 200, repeat: 150
).maxDisplacement(400).maxAngleDelta(90)
    .halo(new Fill("white"), 2.5)
    .font(new Font(size: 10, weight: "bold"))
```



## Creating Transforms


Create a normal Transform symbolizer that styles a polygon as a point by calculating it's centroid

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
Symbolizer symbolizer = new Transform("centroid(the_geom)") +
    new Shape(color: "red", size: 10, type: "star")
countries.style = symbolizer
```



Create a rendering Transform symbolizer that styles a point layer by calculating the convex hull


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer places = workspace.get("places")
Process process = new Process("convexhull",
    "Create a convexhull around the features",
    [features: geoscript.layer.Cursor],
    [result: geoscript.layer.Cursor],
    { inputs ->
        def geoms = new GeometryCollection(inputs.features.collect{ f -> f.geom})
        def output = new Layer()
        output.add([geoms.convexHull])
        [result: output]
    }
)
Function function = new Function(process, new Function("parameter", new Expression
("features")))
Symbolizer symbolizer = new Transform(function, Transform.RENDERING) + new Fill
("aqua", 0.75) + new Stroke("navy", 0.5)
places.style = symbolizer
```

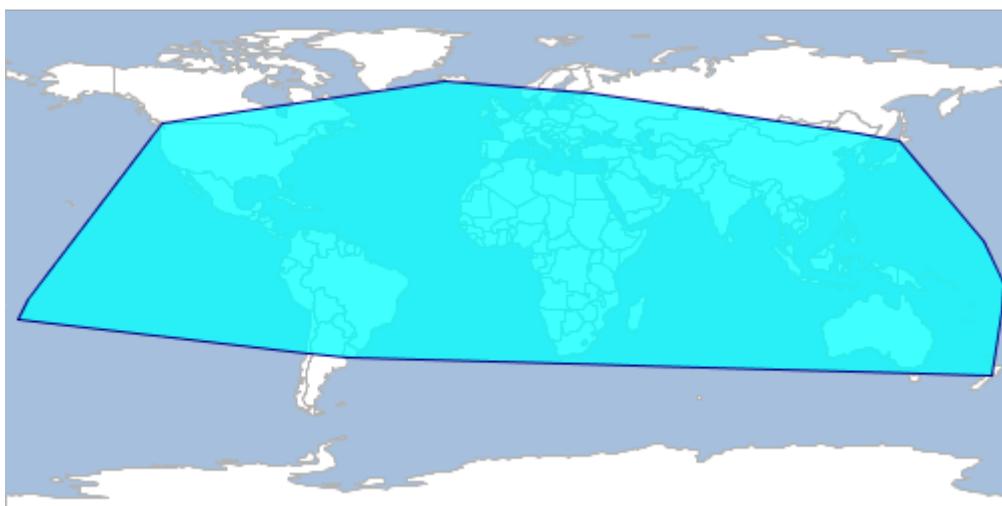

## Creating Gradients


Create a Gradient Symbolizer from a Layer's Field using quantile method

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
Gradient gradient = new Gradient(countries, "PEOPLE", "quantile", 8, "Greens")
countries.style = gradient
```

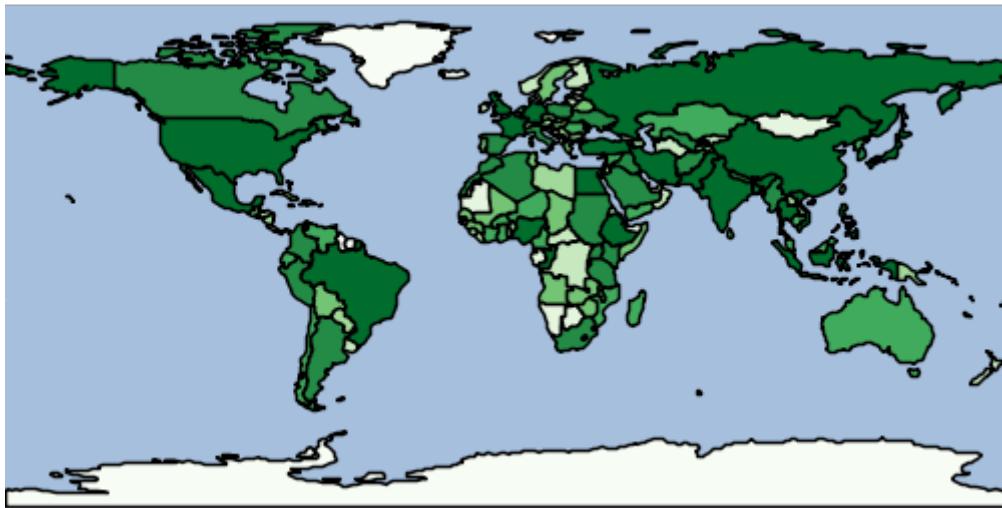


Create a Gradient Symbolizer from a Layer's Field using equal interval method

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
Gradient gradient = new Gradient(countries, "PEOPLE", "equalinterval", 3, "Reds")
countries.style = gradient
```

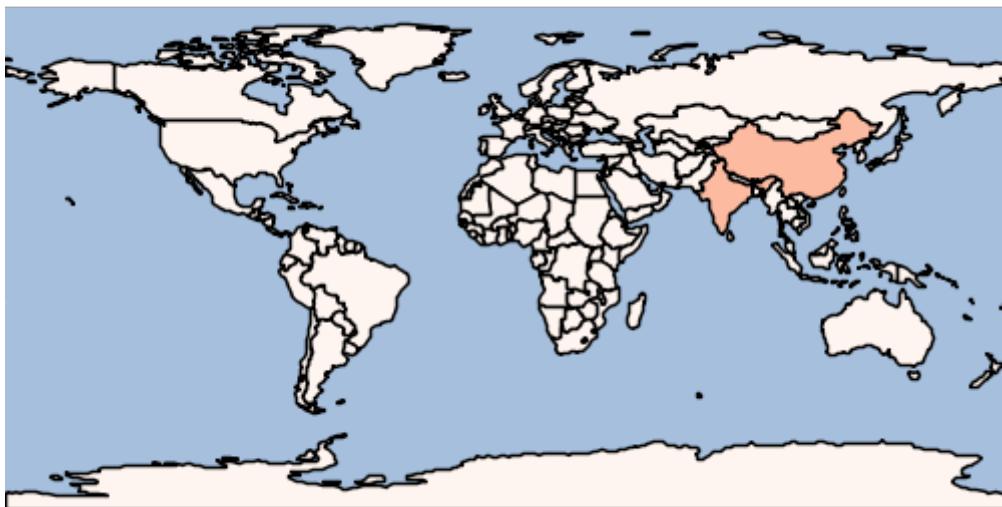

Create a custom Gradient Symbolizer between Symbolizers and values


```
Gradient gradient = new Gradient(  
    new Property("POP2020"),  
    [0, 10000, 20000, 30000],  
    [  
        new Shape("white", 4).stroke("black", 0.5),  
        new Shape("#b0d2e8", 8).stroke("black", 0.5),  
        new Shape("#3e8ec4", 16).stroke("black", 0.5),  
        new Shape("#08306b", 24).stroke("black", 0.5)  
    ],  
    5,  
    "linear"  
)
```

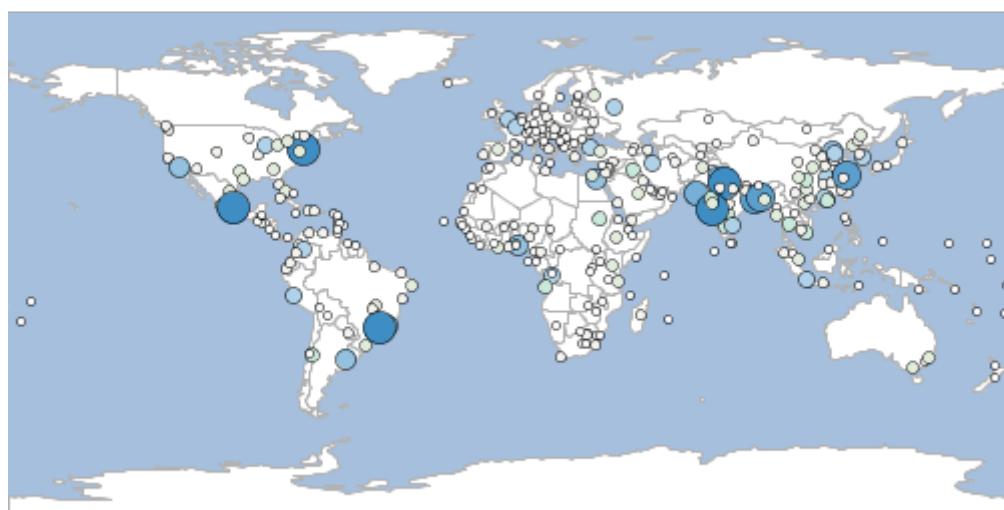

## Creating Unique Values


Create a Unique Values Symbolizer from a Layer's Field

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')  
Layer countries = workspace.get("countries")  
UniqueValues uniqueValues = new UniqueValues(countries, "NAME")  
countries.style = uniqueValues
```

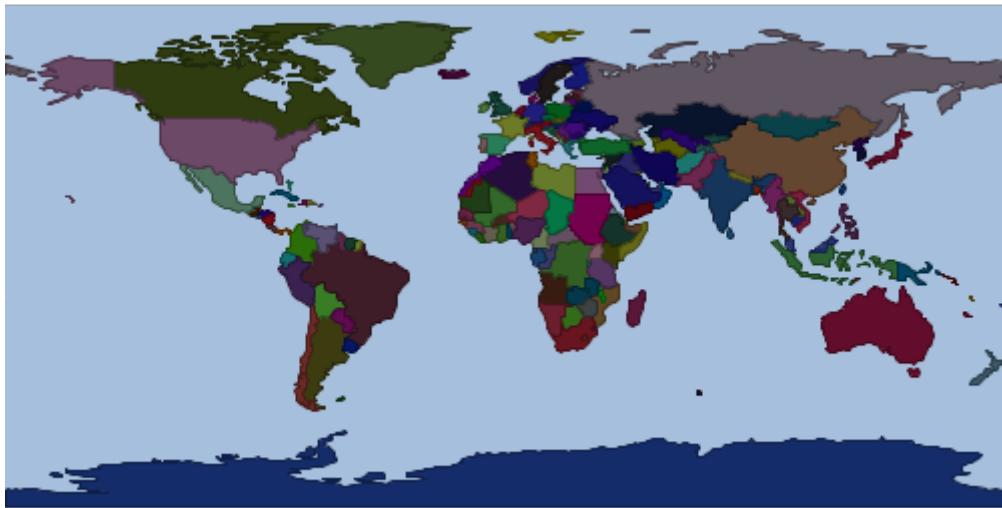


*Create a Unique Values Symbolizer from a Layer's Field and a Closure*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
UniqueValues uniqueValues = new UniqueValues(countries, "NAME", {int index, String
value -> Color.getRandom()})
countries.style = uniqueValues
```

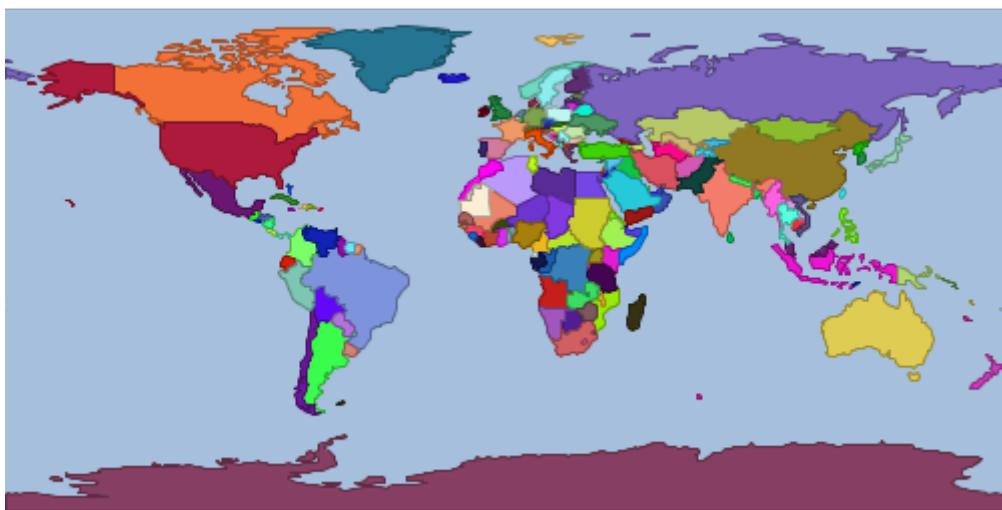

*Create a Unique Values Symbolizer from a Layer's Field and a color palette*


```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
UniqueValues uniqueValues = new UniqueValues(countries, "NAME",
"LightPurpleToDarkPurpleHeatMap")
countries.style = uniqueValues
```

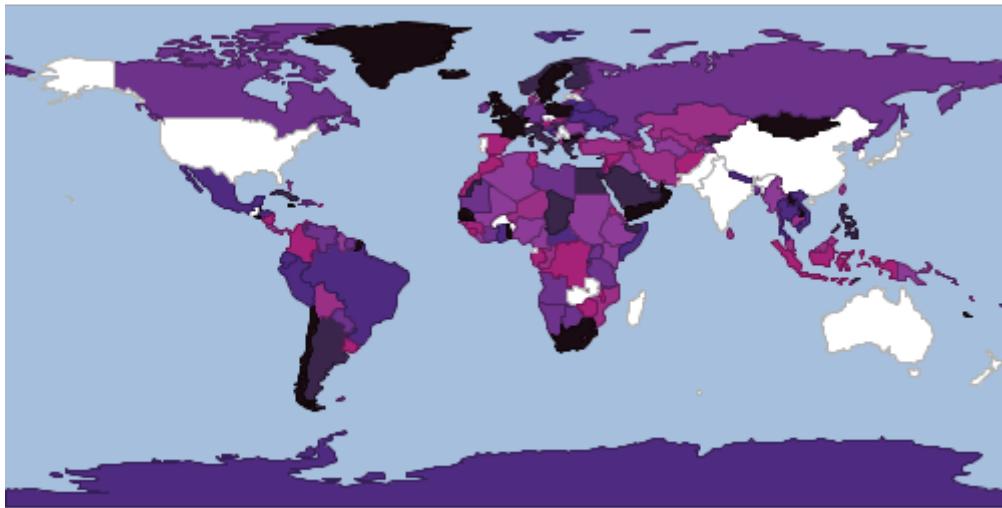

## Creating Color Maps


*Create a ColorMap Symbolizer for a Raster using a list of Colors*

```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
ColorMap colorMap = new ColorMap([
    [color: "#9fd182", quantity:25],
    [color: "#3e7f3c", quantity:470],
    [color: "#133912", quantity:920],
    [color: "#08306b", quantity:1370],
    [color: "#fffff5", quantity:1820],
])
raster.style = colorMap
```

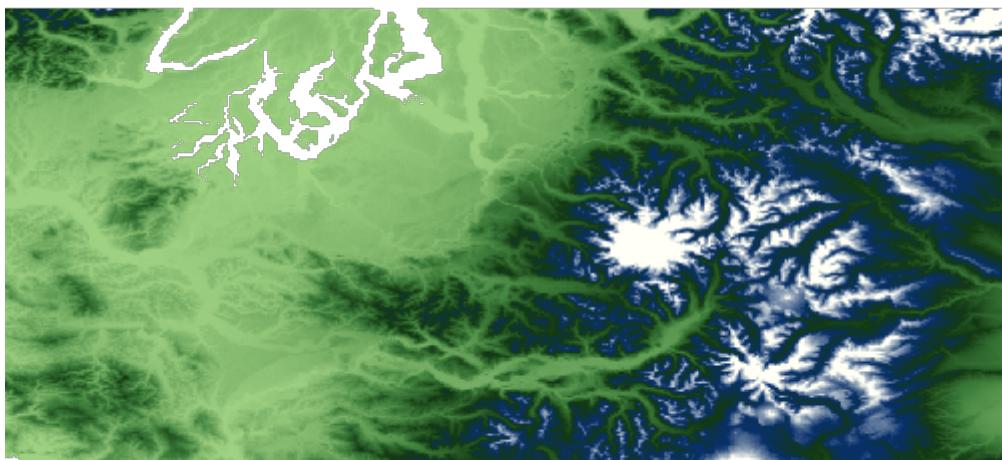

Create a ColorMap Symbolizer for a Raster using a list of Colors with opacity

```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
ColorMap colorMap = new ColorMap([
    [color: "#9fd182", quantity:25],
    [color: "#3e7f3c", quantity:470],
    [color: "#133912", quantity:920],
    [color: "#08306b", quantity:1370],
    [color: "#fffff5", quantity:1820],
]).opacity(0.25)
raster.style = colorMap
```

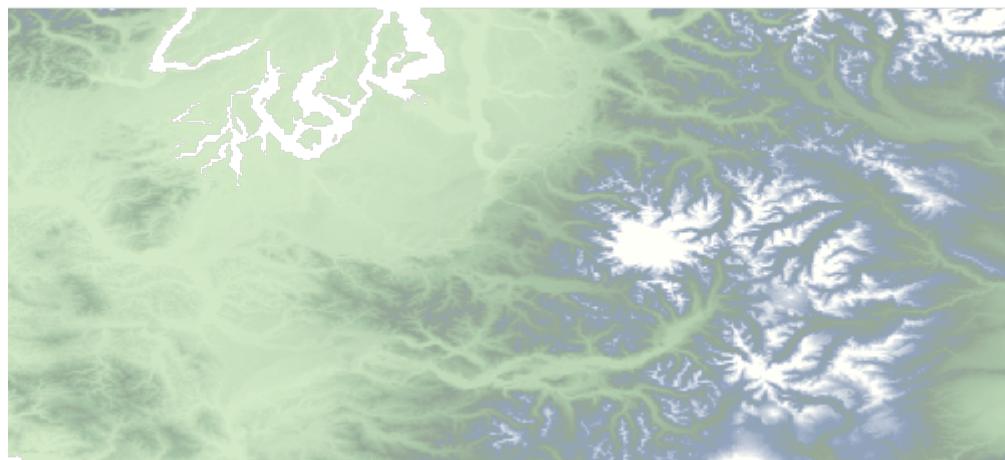

Create a ColorMap Symbolizer for a Raster using a color palette


```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
ColorMap colorMap = new ColorMap(
    25,          ①
    1820,        ②
    "MutedTerrain", ③
    5            ④
)
println colorMap
raster.style = colorMap
```

① min value

② max value

③ color palette name

④ number of categories

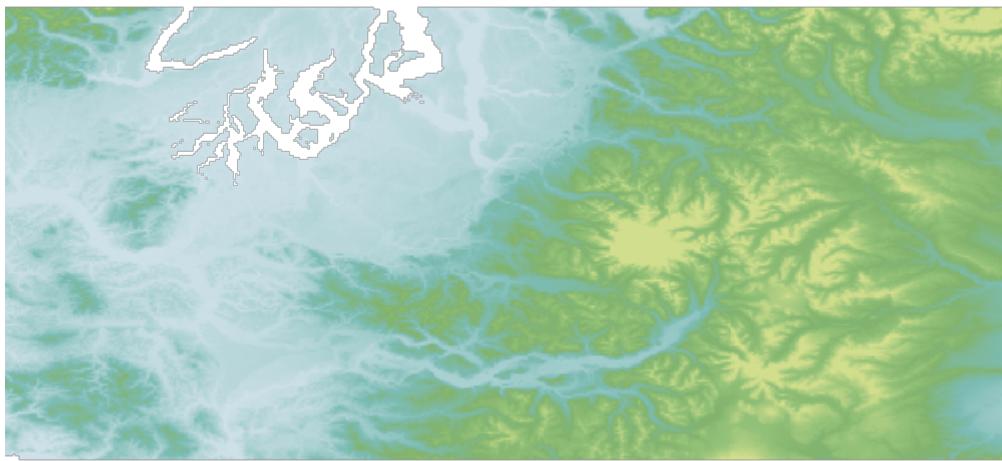

Create a ColorMap Symbolizer with intervals for a Raster using a list of Colors


```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
ColorMap colorMap = new ColorMap([
    [color: "#9fd182", quantity:25],
    [color: "#3e7f3c", quantity:470],
    [color: "#133912", quantity:920],
    [color: "#08306b", quantity:1370],
    [color: "#fffff5", quantity:1820],
], "intervals", true)
raster.style = colorMap
```



## Creating Channel Selection and Contrast Enhancement


Create a Raster Symbolizer using ChannelSelection and ContrastEnhancement using the normalize method

```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
Symbolizer symbolizer = new ChannelSelection()
    .gray("1", new ContrastEnhancement("normalize"))
raster.style = symbolizer
```

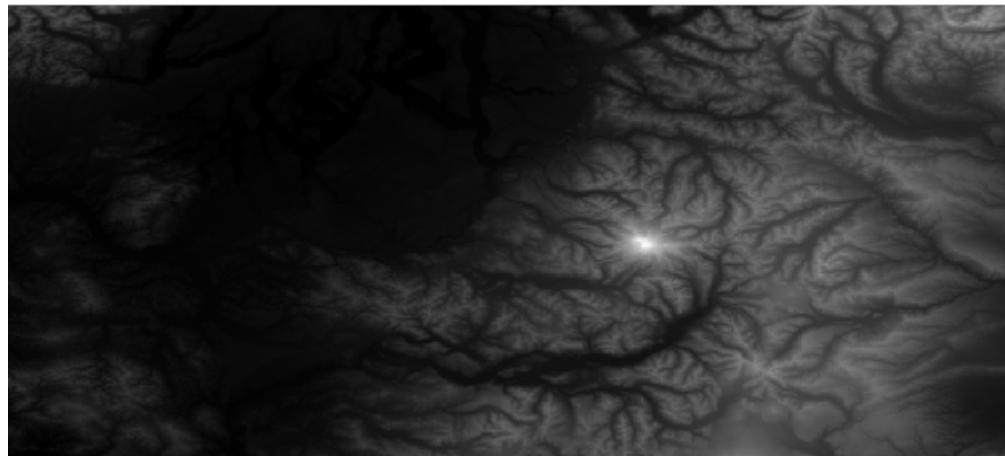

Create a Raster Symbolizer using ChannelSelection and ContrastEnhancement using the histogram method

```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
Symbolizer symbolizer = new ChannelSelection()
    .gray("1", new ContrastEnhancement("histogram", 0.65))
raster.style = symbolizer
```

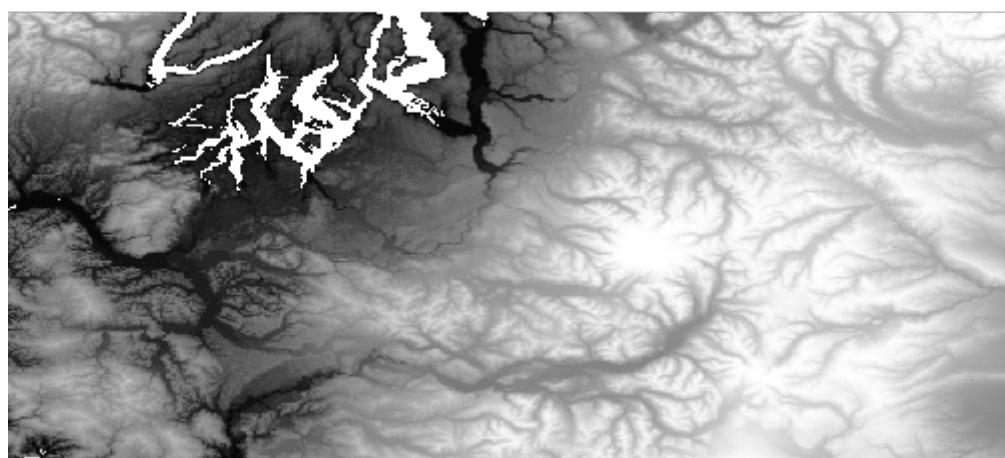

# Reading and Writing Styles

Style Readers and Writers are found in the [geoscript.style.io](#) package.

## Finding Style Readers and Writers

*List all Style Writers*

```
List<Writer> writers = Writers.list()
writers.each { Writer writer ->
    println writer.class.getSimpleName
}
```

```
SLDWriter
ColorTableWriter
YSLDWriter
```

*Find a Style Writer*

```
Writer writer = Writers.find("sld")
println writer.class.getSimpleName
```

```
SLDWriter
```

*List all Style Readers*

```
List<Reader> readers = Readers.list()
readers.each { Reader reader ->
    println reader.class.getSimpleName
}
```

```
SLDReader
CSSReader
ColorTableReader
YSLDReader
SimpleStyleReader
```

*Find a Style Reader*

```
Reader reader = Readers.find("sld")
println reader.class.getSimpleName
```

```
SLDReader
```

## SLD

GeoScript Groovy can read and write Style Layer Descriptor (SLD) documents.

*Write a Symbolizer to SLD*

```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.5)
SLDWriter writer = new SLDWriter()
String sld = writer.write(symbolizer)
println sld
```


```
<?xml version="1.0" encoding="UTF-8"?><sld:StyledLayerDescriptor
xmlns="http://www.opengis.net/sld" xmlns:sld="http://www.opengis.net/sld"
xmlns:gml="http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc"
version="1.0.0">
  <sld:UserLayer>
    <sld:LayerFeatureConstraints>
      <sld:FeatureTypeConstraint/>
    </sld:LayerFeatureConstraints>
    <sld:UserStyle>
      <sld:Name>Default Styler</sld:Name>
      <sld:FeatureTypeStyle>
        <sld:Name>name</sld:Name>
        <sld:Rule>
          <sld:PolygonSymbolizer>
            <sld:Fill>
              <sld:CssParameter name="fill">#ffffff</sld:CssParameter>
            </sld:Fill>
          </sld:PolygonSymbolizer>
          <sld:LineSymbolizer>
            <sld:Stroke>
              <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>
            </sld:Stroke>
          </sld:LineSymbolizer>
        </sld:Rule>
      </sld:FeatureTypeStyle>
    </sld:UserStyle>
  </sld:UserLayer>
</sld:StyledLayerDescriptor>
```

## *Read a Style from an SLD String*

```
String sld = """<?xml version="1.0" encoding="UTF-8"?>
<sld:StyledLayerDescriptor xmlns="http://www.opengis.net/sld"
  xmlns:sld="http://www.opengis.net/sld" xmlns:ogc="http://www.opengis.net/ogc"
  xmlns:gml="http://www.opengis.net/gml" version="1.0.0">
  <sld:UserLayer>
    <sld:LayerFeatureConstraints>
      <sld:FeatureTypeConstraint/>
    </sld:LayerFeatureConstraints>
    <sld:UserStyle>
      <sld:Name>Default Styler</sld:Name>
      <sld:FeatureTypeStyle>
        <sld:Name>name</sld:Name>
        <sld:Rule>
          <sld:PolygonSymbolizer>
            <sld:Fill>
              <sld:CssParameter name="fill">#ffffff</sld:CssParameter>
            </sld:Fill>
          </sld:PolygonSymbolizer>
          <sld:LineSymbolizer>
            <sld:Stroke>
              <sld:CssParameter name="stroke">#000000</sld:CssParameter>
              <sld:CssParameter name="stroke-width">0.5</sld:CssParameter>
            </sld:Stroke>
          </sld:LineSymbolizer>
        </sld:Rule>
      </sld:FeatureTypeStyle>
    </sld:UserStyle>
  </sld:UserLayer>
</sld:StyledLayerDescriptor>
"""

SLDReader reader = new SLDReader()
Style style = reader.read(sld)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = style
```

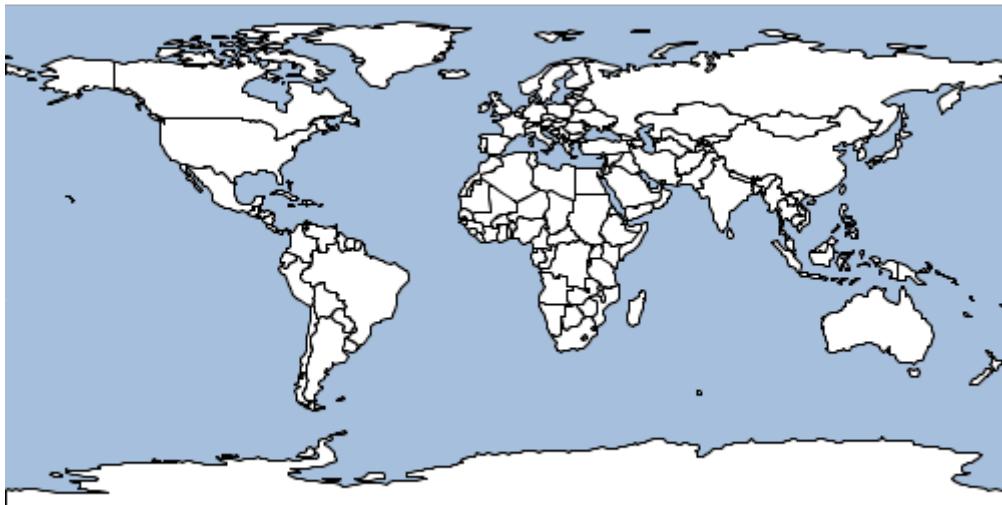

## CSS


GeoScript Groovy can only read CSS documents.

*Read a Style from an CSS String*

```
String css = """
* {
    fill: #eeeeee;
    fill-opacity: 1.0;
    stroke: #000000;
    stroke-width: 1.2;
}
"""

CSSReader reader = new CSSReader()
Style style = reader.read(css)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = style
```

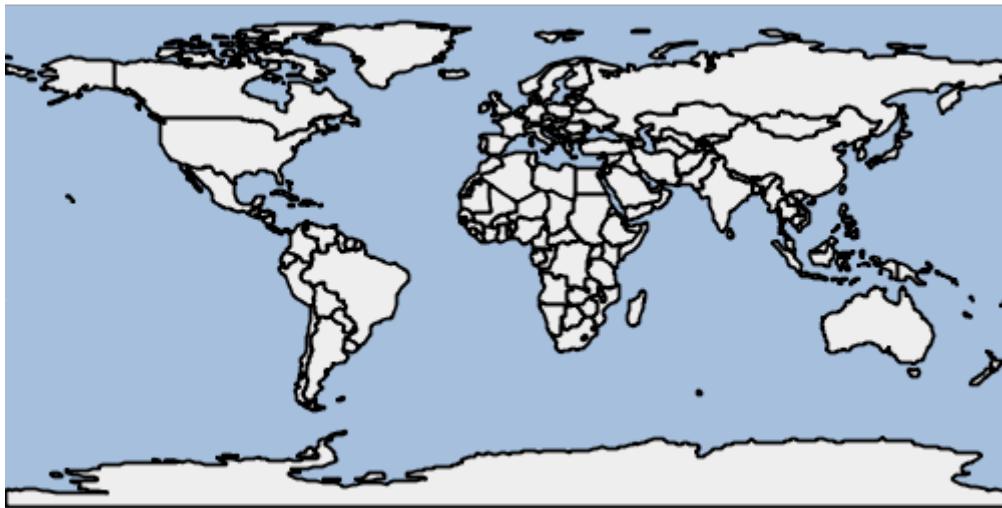

## YSLD

GeoScript Groovy can read and write YAML Style Layer Descriptors (YSLD) documents.

*Write a Symbolizer to YSLD*


```
Symbolizer symbolizer = new Fill("white") + new Stroke("black", 0.5)
YSLDWriter writer = new YSLDWriter()
String ysld = writer.write(symbolizer)
println ysld
```

```
name: Default Styler
feature-styles:
- name: name
  rules:
  - scale: [min, max]
    symbolizers:
    - polygon:
        fill-color: '#FFFFFF'
    - line:
        stroke-color: '#000000'
        stroke-width: 0.5
```

## *Read a Style from an YAML Style Layer Descriptors (YSLD) String*

```
String ysls = """
name: Default Styler
feature-styles:
- name: name
  rules:
  - scale: [min, max]
    symbolizers:
    - polygon:
      fill-color: '#FFFFFF'
    - line:
      stroke-color: '#000000'
      stroke-width: 0.5
"""
YSLDReader reader = new YSLDReader()
Style style = reader.read(ysls)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = style
```

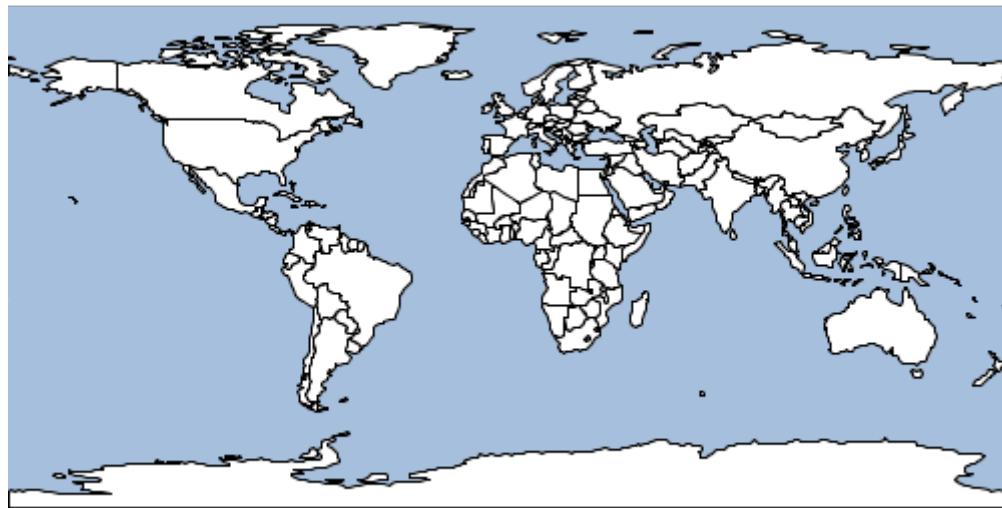

## **Simple Style Reader**

A SimpleStyleReader that can easily create simple Styles using Maps or Strings.

- Fill properties: fill and fill-opacity
- Stroke properties: stroke, stroke-width, stroke-opacity
- Shape properties: shape, shape-size, shape-type
- Label properties: label-size, label-style, label-weight, label-family

*Read a Style with fill and stroke properties from a Simple Style String*

```
String str = "fill=#555555 fill-opacity=0.6 stroke=#555555 stroke-width=0.5"
SimpleStyleReader reader = new SimpleStyleReader()
Style style = reader.read(str)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = style
```



*Read a Style with fill, stroke, and label properties from a Simple Style String*

```
String str = "fill:white stroke=navy label=NAME label-size=10"
SimpleStyleReader reader = new SimpleStyleReader()
Style style = reader.read(str)


Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = style
```



*Read a Style with shape properties from a Simple Style String*

```
String str = "shape-type=circle shape-size=8 shape=orange"
SimpleStyleReader reader = new SimpleStyleReader()
Style style = reader.read(str)
println style

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer places = workspace.get("places")
places.style = style
```

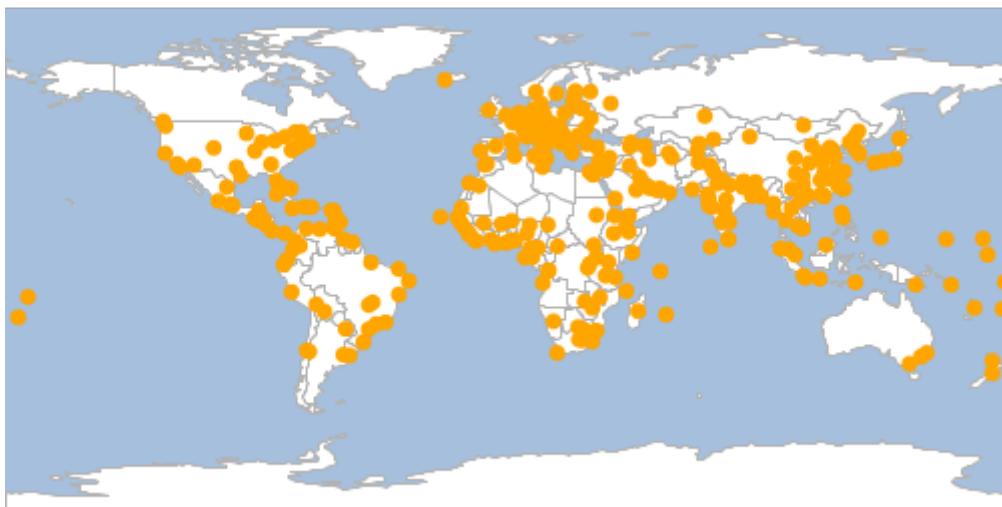

*Read a Style with fill and stroke properties from a Simple Style Map*

```
Map map = [
    'fill': '#555555',
    'fill-opacity': 0.6,
    'stroke': '#555555',
    'stroke-width': 0.5
]
SimpleStyleReader reader = new SimpleStyleReader()
Style style = reader.read(map)

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = style
```



## Color Table

GeoScript Groovy can read and write color table strings and files. This format can be used with ColorMaps to style Rasters.


*Write a ColorMap to a color table string*

```
ColorMap colorMap = new ColorMap(25, 1820, "BoldLandUse", 5)
ColorTableWriter writer = new ColorTableWriter()
String str = writer.write(colorMap)
println str
```

```
25.0 178 156 195
473.75 79 142 187
922.5 143 146 56
1371.25 193 132 55
1820.0 181 214 177
```

*Read a ColorMap from a color table string*

```
Format format = new GeoTIFF(new File('src/main/resources/pc.tif'))
Raster raster = format.read()
ColorTableReader reader = new ColorTableReader()
ColorMap colorMap = reader.read("""25.0 178 156 195
473.75 79 142 187
922.5 143 146 56
1371.25 193 132 55
1820.0 181 214 177
""")
raster.style = colorMap
```

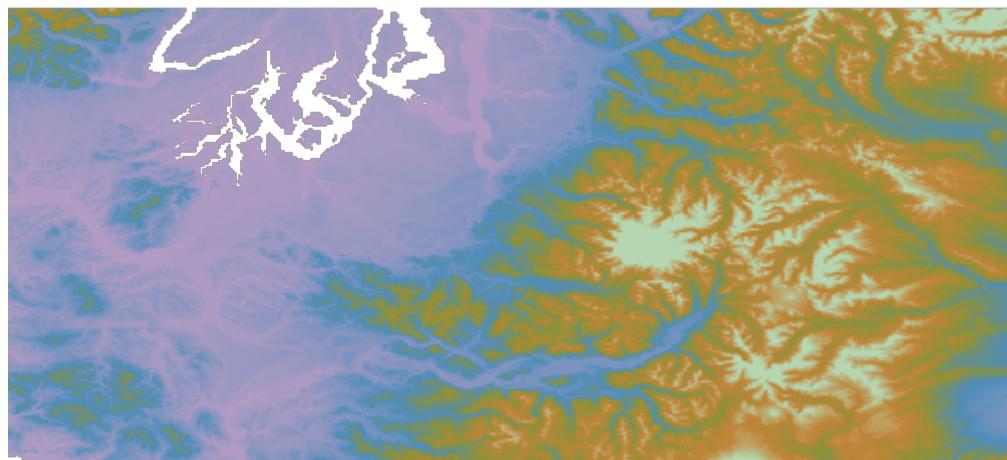

## Workspace Recipes

The Workspace classes are in the [geoscript.workspace](#) package.

A Workspace is a collection of Layers. You can create, add, remove, and get Layers. There are many different kinds of Workspaces in GeoScript including Memory, PostGIS, Directory (for Shapefiles), GeoPackage, and many more.

## Using Workspaces

*Create a Workspace*

```
Workspace workspace = new Workspace()
```

### Create a Layer

```
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
println layer
```

```
cities
```

### Check whether a Workspace has a Layer by name

```
boolean hasCities = workspace.has("cities")
println hasCities
```

```
true
```

### Get a Layer from a Workspace

```
Layer citiesLayer = workspace.get('cities')
println citiesLayer
```

```
cities
```

### Add a Layer to a Workspace

```
Schema statesSchema = new Schema("states", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer statesLayer = new Layer("states", statesSchema)
workspace.add(statesLayer)
println workspace.has("states")
```

```
true
```

*Get the names of all Layers in a Workspace*

```
List<String> names = workspace.names  
names.each { String name ->  
    println name  
}
```

H2  
PostGIS (JNDI)  
Web Feature Server (NG)  
SQLite  
Shapefile  
MySQL (JNDI)  
PostGIS  
H2 (JNDI)  
Directory of spatial files (shapefiles)  
Properties  
GeoPackage  
SpatiaLite (JNDI)  
MySQL  
Geobuf

*Remove a Layer from a Workspace*

```
workspace.remove("cities")  
println workspace.has('cities')
```

false

*Close the Workspace when you are done*

```
workspace.close()
```

## Using a Directory Workspace

A Directory Workspace is a directory of Shapefiles.

*Create a Directory Workspace*

```
Directory directory = new Directory("src/main/resources/data")  
println directory.toString()
```

Directory[/home/travis/build/jericks/geoscript-groovy-cookbook/src/main/resources/data]

*View the Workspace's format*

```
String format = directory.format  
println format
```

Directory

*View the Workspace's File*

```
File file = directory.file  
println file
```

```
/home/travis/build/jericks/geoscript-groovy-cookbook/src/main/resources/data
```

*View the Workspace's list of Layer names*

```
List names = directory.names  
names.each { String name ->  
    println name  
}
```

states

*Get a Layer by name*

```
Layer layer = directory.get("states")  
int count = layer.count  
println "Layer ${layer.name} has ${count} Features."
```

```
Layer states has 49 Features.
```

*Close the Directory when done.*

```
directory.close()
```

## Investigating Workspaces

*Get available Workspace names*

```
List<String> names = Workspace.getWorkspaceNames()
names.each { String name ->
    println name
}
```

```
H2
PostGIS (JNDI)
Web Feature Server (NG)
SQLite
Shapefile
MySQL (JNDI)
PostGIS
H2 (JNDI)
Directory of spatial files (shapefiles)
Properties
GeoPackage
SpatiaLite (JNDI)
MySQL
Geobuf
```

*Get parameters for a Workspace*

```
List<Map> parameters = Workspace.getWorkspaceParameters("GeoPackage")
parameters.each { Map param ->
    println "Parameter = ${param.key} Type = ${param.type} Required? ${param.required}"
}
```

```
Parameter = dbtype Type = java.lang.String Required? true
Parameter = database Type = java.io.File Required? true
Parameter = passwd Type = java.lang.String Required? false
Parameter = namespace Type = java.lang.String Required? false
Parameter = Expose primary keys Type = java.lang.Boolean Required? false
Parameter = fetch size Type = java.lang.Integer Required? false
Parameter = Batch insert size Type = java.lang.Integer Required? false
Parameter = Primary key metadata table Type = java.lang.String Required? false
Parameter = Session startup SQL Type = java.lang.String Required? false
Parameter = Session close-up SQL Type = java.lang.String Required? false
Parameter = Callback factory Type = java.lang.String Required? false
```

## Creating Workspaces

## Creating a Workspace from a connection string

You can create a Workspace from a connection string that contains parameters in key=value format with optional single quotes.

*Create a Shapefile Workspace*

```
String connectionString = "url='states.shp' 'create spatial index'=true"
Workspace workspace = Workspace.getWorkspace(connectionString)
```

*Create a GeoPackage Workspace*

```
connectionString = "dbtype=geopkg database=layers.gpkg"
workspace = Workspace.getWorkspace(connectionString)
```

*Create a H2 Workspace*

```
connectionString = "dbtype=h2 database=layers.db"
workspace = Workspace.getWorkspace(connectionString)
```

## Creating a Workspace from a connection map

You can create a Workspace from a connection map that contains parameters.

*Create a H2 Workspace*

```
Map params = [dbtype: 'h2', database: 'test.db']
Workspace workspace = Workspace.getWorkspace(params)
```

*Create a PostGIS Workspace*

```
params = [
    dbtype: 'postgis',
    database: 'postgres',
    host: 'localhost',
    port: 5432,
    user: 'postgres',
    passwd: 'postgres'
]
workspace = Workspace.getWorkspace(params)
```

*Create a GeoBuf Workspace*

```
params = [file: 'layers.pbf', precision: 6, dimension:2]
workspace = Workspace.getWorkspace(params)
```

## Creating Directory Workspaces

Create a Directory Workspace from a directory name

```
Workspace workspace = new Directory("src/main/resources/shapefiles")
println workspace.format
println "-----"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

```
Directory
-----
ocean (2)
countries (177)
```

Create a Directory Workspace from a File directory

```
Workspace workspace = new Directory(new File("src/main/resources/shapefiles"))
println workspace.format
println "-----"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

```
Directory
-----
ocean (2)
countries (177)
```

Create a Directory Workspace from a URL

```
Directory directory = Directory.fromURL(
    new URL(
        "http://www.naturalearthdata.com/http://www.naturalearthdata.com/download/110m/cultural/ne_110m_admin_0_countries.zip"),
    new File("naturalearth")
)
println directory.format
println "-----"
directory.names.each { String name ->
    println "${name} (${directory.get(name).count})"
}
```

Directory

-----  
ne\_110m\_admin\_0\_countries (177)

## Creating GeoPackage Workspaces

*Create a GeoPackage Workspace from a file name*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
println workspace.format
println "-----"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

GeoPackage

-----  
countries (177)  
ocean (2)  
places (326)  
rivers (460)  
states (52)

*Create a GeoPackage Workspace from a File*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
println workspace.format
println "-----"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

GeoPackage

-----  
countries (177)  
ocean (2)  
places (326)  
rivers (460)  
states (52)

## Creating H2 Workspaces

*Create a H2 Workspace from a File*

```
Workspace workspace = new H2(new File("src/main/resources/h2/data.db"))
println workspace.format
println "--"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

```
H2
--
countries (177)
ocean (2)
places (326)
states (52)
```

## Creating Geobuf Workspaces

*Create a Geobuf Workspace from a File*

```
Workspace workspace = new Geobuf(new File("src/main/resources/geobuf"))
println workspace.format
println "-----"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

```
Geobuf
-----
ocean (2)
places (326)
countries (177)
```

## Creating Property Workspaces

*Create a Property Workspace from a File*

```
Workspace workspace = new Property(new File("src/main/resources/property"))
println workspace.format
println "-----"
workspace.names.each { String name ->
    println "${name} (${workspace.get(name).count})"
}
```

```
Property
```

```
-----
```

```
circles (10)  
places (10)
```

# Layer Recipes

The Layer classes are in the [geoscript.layer](#) package.

A Layer is a collection of Features.

## Getting a Layer's Properties

*Get a Layer from a Workspace and it's name*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("countries")  
String name = layer.name  
println "Name: ${name}"
```

```
Name: countries
```

*The Layer's Format*

```
String format = layer.format  
println "Format: ${format}"
```

```
Format: GeoPackage
```

*Count the number of Features*

```
int count = layer.count  
println "# of Features: ${count}"
```

```
# of Features: 177
```

*Get the Layer's Projection*

```
Projection proj = layer.proj  
println "Projection: ${proj}"
```

Projection: EPSG:4326

*Get the Bounds of the Layer*

```
Bounds bounds = layer.bounds  
println "Bounds: ${bounds}"
```

```
Bounds: (-179.9999999999997,-  
90.0000000000003,180.00000000000014,83.64513000000002,EPSG:4326)
```

## Getting a Layer's Features

### Each Feature

*Iterate over a Layer's Features*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("states")  
layer.eachFeature { Feature feature ->  
    println feature["NAME_1"]  
}
```

```
Minnesota  
Montana  
North Dakota  
Hawaii  
Idaho  
Washington  
Arizona  
California  
Colorado  
Nevada  
...
```

*Iterate over a subset of a Layer's Features*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("states")  
layer.eachFeature("NAME_1 LIKE 'M%'") { Feature feature ->  
    println feature["NAME_1"]  
}
```

```
Minnesota  
Montana  
Missouri  
Massachusetts  
Mississippi  
Maryland  
Maine  
Michigan
```

*Iterate over a Layer's Features with parameters.*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("states")  
layer.eachFeature(sort: ["NAME_1"], start: 0, max: 5, fields: ["NAME_1"], filter:  
"NAME_1 LIKE 'M%'") { Feature feature ->  
    println feature["NAME_1"]  
}
```

```
Maine  
Maryland  
Massachusetts  
Michigan  
Minnesota
```

## Parameters

- filter: The Filter or Filter String to limit the Features. Defaults to null.
- sort: A List of Lists that define the sort order [[Field or Field name, "ASC" or "DESC"],...]. Not all Layers support sorting!
- max: The maximum number of Features to include
- start: The index of the record to start the cursor at. Together with maxFeatures this simulates paging. Not all Layers support the start index and paging!
- fields: A List of Fields or Field names to include. Used to select only a subset of Fields.

## Read all Features

### *Read all Feature into a List*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<Feature> features = layer.features

println "# Features = ${features.size()}"
features.each { Feature feature ->
    println feature["NAME_1"]
}
```

```
# Features = 52
Minnesota
Montana
North Dakota
Hawaii
Idaho
Washington
Arizona
California
Colorado
Nevada
...
...
```

## Collect values

### *Collect values from a Layer's Features*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<String> names = layer.collectFromFeature { Feature f ->
    f["NAME_1"]
}.sort()

println "# Names = ${names.size()}"
names.each { String name ->
    println name
}
```

```
# Names = 52
Alabama
Alaska
Arizona
Arkansas
California
Colorado
Connecticut
Delaware
District of Columbia
Florida
...
...
```

Collect values from a Layer's Features with parameters.

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<String> names = layer.collectFromFeature(
    sort: ["NAME_1"],
    start: 0,
    max: 5,
    fields: ["NAME_1"],
    filter: "NAME_1 LIKE 'M%'") { Feature f ->
    f["NAME_1"]
}

println "# Names = ${names.size()}"
names.each { String name ->
    println name
}
```


```
# Names = 5
Maine
Maryland
Massachusetts
Michigan
Minnesota
```

## First

Get the first Feature that matches the Filter.

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
Feature feature = layer.first(filter: "NAME_1='Washington'")
println feature.get("NAME_1")
```

Washington

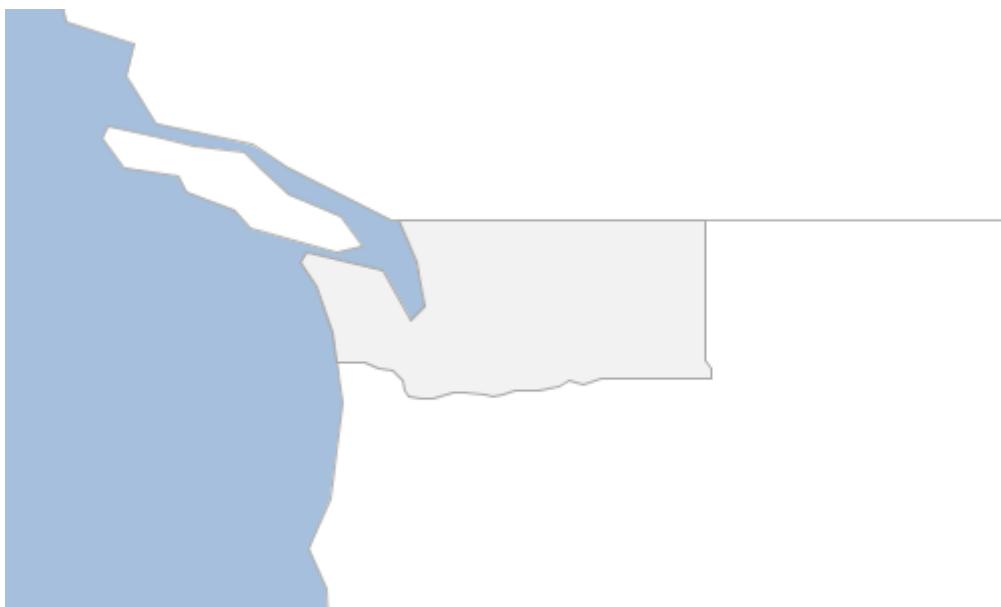

*Get the first Feature sorted by name ascending and descending.*


```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")

Feature featureAsc = layer.first(sort: "NAME_1 ASC")
println featureAsc.get("NAME_1")

Feature featureDesc = layer.first(sort: "NAME_1 DESC")
println featureDesc.get("NAME_1")
```

Alabama  
Wyoming

## Filter

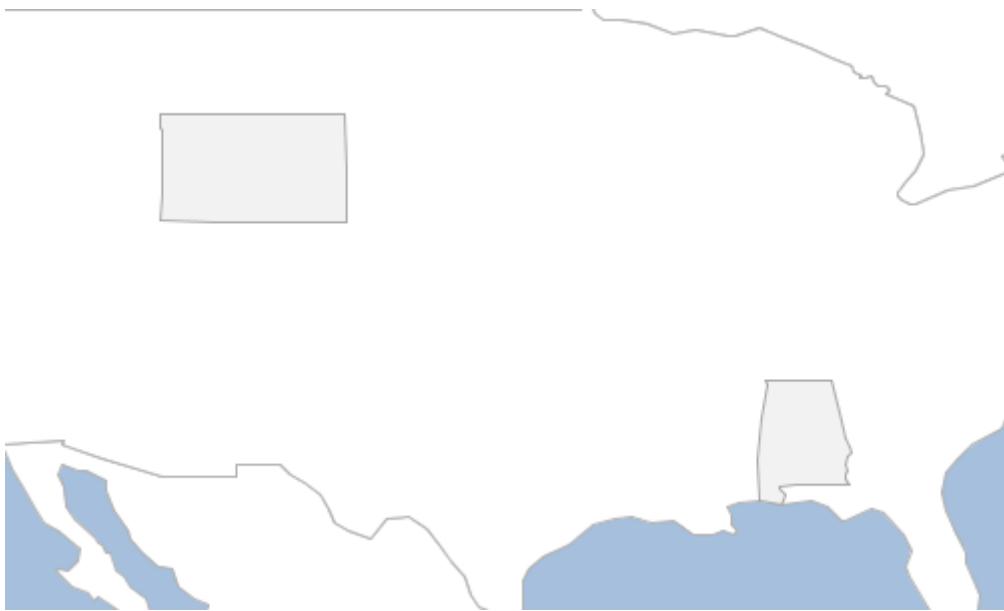

Create a new Layer from an existing Layer with just the Features that match a Filter.

```
Workspace workspace = new Directory("target")
Layer layer = workspace.get("countries")
Layer disputedLayer = layer.filter("TYPE='Disputed'")
```



## Cursor

Iterate over a Layer's Features with a Cursor

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
Cursor cursor = layer.cursor
cursor.each { Feature feature ->
    println feature["NAME_1"]
}
```

```
Minnesota  
Montana  
North Dakota  
Hawaii  
Idaho  
Washington  
Arizona  
California  
Colorado  
Nevada  
...
```

#### *Iterate over a subset of a Layer's Features with a Cursor*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("states")  
Cursor cursor = layer.getCursor(filter: "NAME_1 LIKE 'M%'")  
while(cursor.hasNext()) {  
    Feature feature = cursor.next()  
    println feature["NAME_1"]  
}
```

```
Minnesota  
Montana  
Missouri  
Massachusetts  
Mississippi  
Maryland  
Maine  
Michigan
```

#### *Iterate over a Layer's Features with parameters with a Cursor*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("states")  
layer.getCursor(sort: ["NAME_1"], start: 0, max: 5, fields: ["NAME_1"], filter:  
"NAME_1 LIKE 'M%'").each { Feature feature ->  
    println feature["NAME_1"]  
}
```

```
Maine  
Maryland  
Massachusetts  
Michigan  
Minnesota
```

## Parameters

- filter: The Filter or Filter String to limit the Features. Defaults to null.
- sort: A List of Lists that define the sort order [[Field or Field name, "ASC" or "DESC"],...]. Not all Layers support sorting!
- max: The maximum number of Features to include
- start: The index of the record to start the cursor at. Together with maxFeatures this simulates paging. Not all Layers support the start index and paging!
- fields: A List of Fields or Field names to include. Used to select only a subset of Fields.

# Adding, Updating, and Deleting

## Add Features to a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)

// Add a Feature with a Map
Map attributes = [
    geom: new Point(-122.333056, 47.609722),
    id: 1,
    name: "Seattle",
    state: "WA"
]
layer.add(attributes)

// Add a Feature with a List
List values = [
    new Point(-122.459444, 47.241389),
    2,
    "Tacoma",
    "WA"
]
layer.add(values)

// Add a Feature
Feature feature = schema.feature([
    id:3,
    name: "Fargo",
    state: "ND",
    geom: new Point(-96.789444, 46.877222)
])
```


```

layer.add(feature)

// Add Features from a List of Maps
List<Map> features = [
    [
        geom: new Point(-100.778889, 46.813333),
        id:4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)

```

<b>id</b>	<b>name</b>	<b>state</b>
1	Seattle	WA
2	Tacoma	WA
3	Fargo	ND
4	Bismarck	ND
5	Mandan	ND

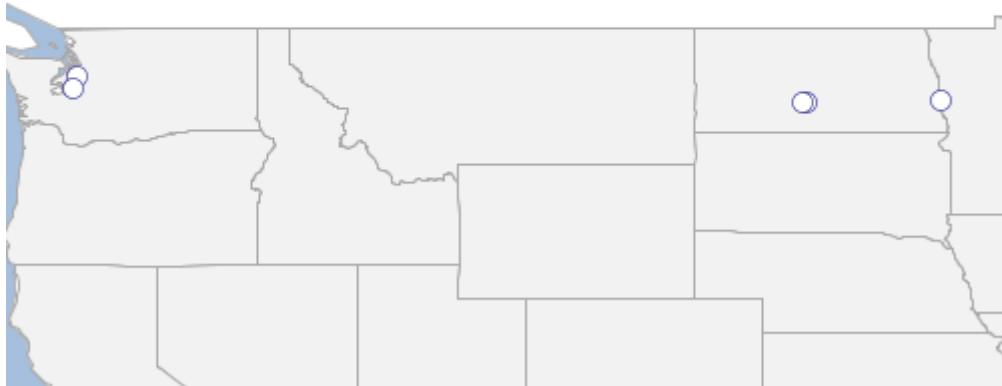


## Update Features in a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id:3,
        name: "Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id:4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)

layer.update(layer.schema.state, "North Dakota", "state='ND'")
layer.update(layer.schema.state, "Washington", "state='WA'")
```

<b>id</b>	<b>name</b>	<b>state</b>
1	Seattle	Washington

<b>id</b>	<b>name</b>	<b>state</b>
2	Tacoma	Washington
3	Fargo	North Dakota
4	Bismarck	North Dakota
5	Mandan	North Dakota

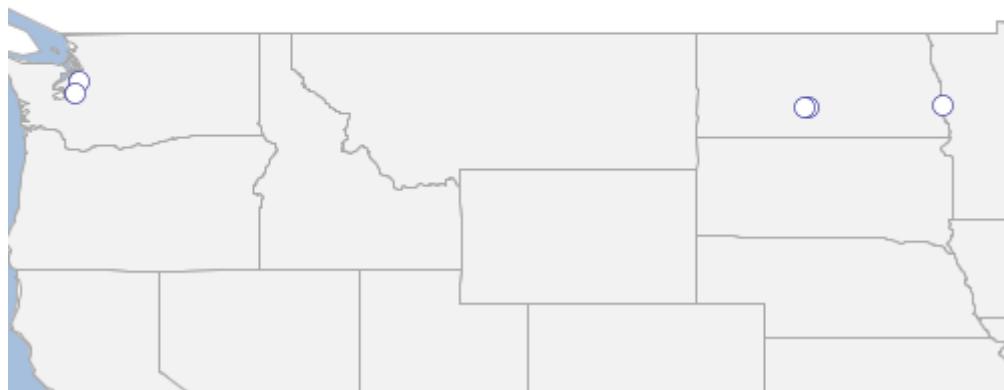

## Delete Features from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id:3,
        name: "Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id:4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)

layer.delete("state='ND'")
```

<b>id</b>	<b>name</b>	<b>state</b>
1	Seattle	WA
2	Tacoma	WA




Add Features to a Layer using a Writer. A Writer can add Features more efficiently because it commits batches of Features in Transactions.

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer")
])
Layer layer = workspace.create(schema)

Bounds bounds = new Bounds(-180,-90,180,90, "EPSG:4326")
MultiPoint points = Geometry.createRandomPoints(bounds.geometry, 100)

geoscript.layer.Writer writer = layer.writer
try {
    points.geometries.eachWithIndex { Point point, int index ->
        Feature feature = writer.newFeature
        feature['id'] = index
        feature['geom'] = point
        writer.add(feature)
    }
} finally {
    writer.close()
}
```

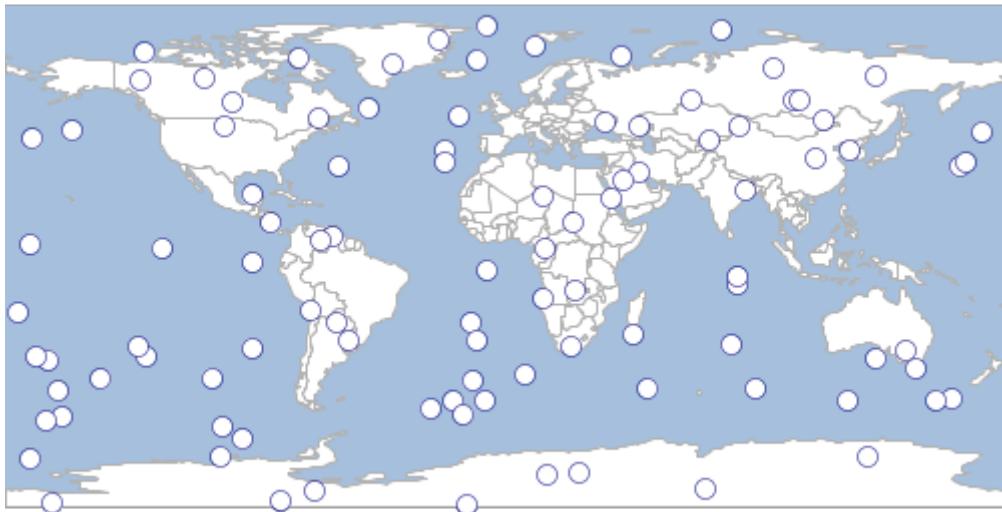


*Add Features to a Layer using a Writer inside of a Closure.*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer")
])
Layer layer = workspace.create(schema)

Bounds bounds = new Bounds(-180,-90,180,90, "EPSG:4326")
MultiPoint points = Geometry.createRandomPoints(bounds.geometry, 100)

layer.withWriter { geoscript.layer.Writer writer ->
    points.geometries.eachWithIndex { Point point, int index ->
        Feature feature = writer.newFeature
        feature['id'] = index
        feature['geom'] = point
        writer.add(feature)
    }
}
```

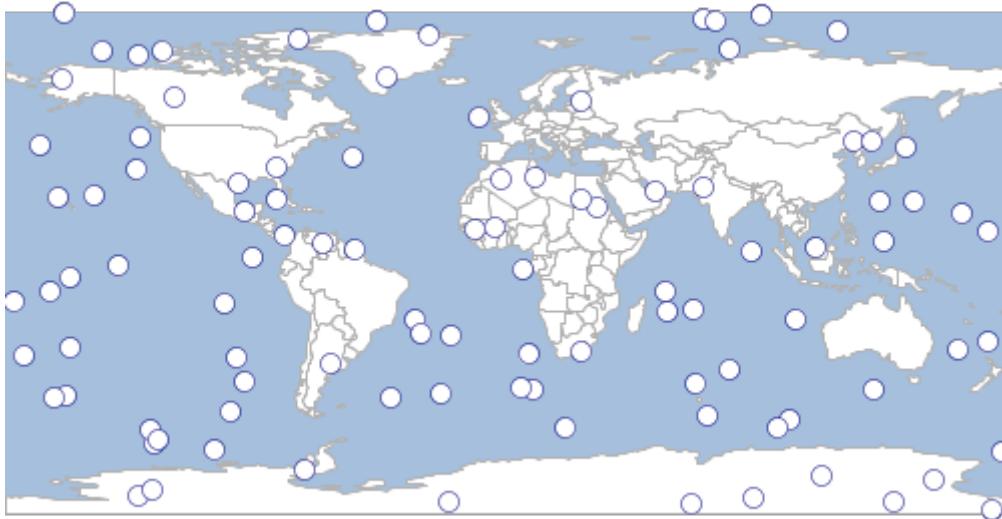

# Shapefiles

Shapefiles are a very commonly used format for storing spatial data. So, instead of creating a Directory Workspace and getting the Layer from the Workspace, you can use the Shapefile class.

## Read

*Read existing Shapefiles*

```
Shapefile countries = new Shapefile("src/main/resources/shapefiles/countries.shp")
println "# Features in Countries = ${countries.count}"

Shapefile ocean = new Shapefile(new File("src/main/resources/shapefiles/ocean.shp"))
println "# Features in Ocean = ${ocean.count}"
```

```
# Features in Countries = 177
```

```
# Features in Ocean = 2
```




## Create

### Create a new Shapefile

```
Directory workspace = new Directory("target")
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id:3,
        name: "Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id:4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)
```

<b>id</b>	<b>name</b>	<b>state</b>
1	Seattle	WA
2	Tacoma	WA
3	Fargo	ND

<b>id</b>	<b>name</b>	<b>state</b>
4	Bismarck	ND
5	Mandan	ND

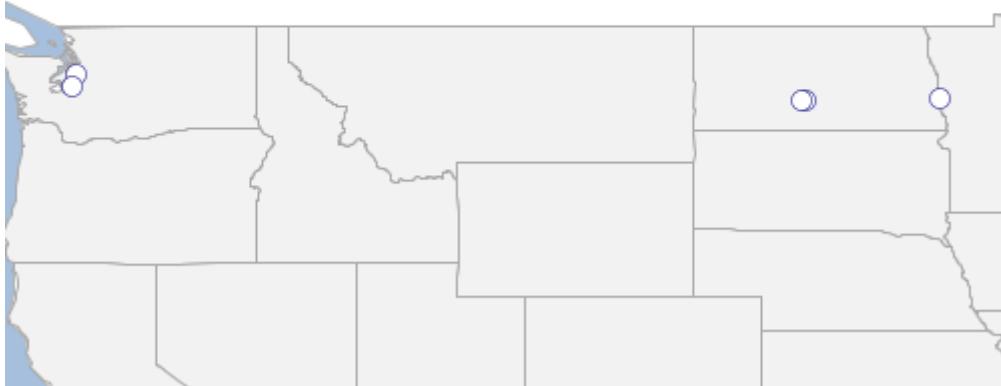

## Property

GeoScript can store spatial data in a simple plain text format. With the `Property` class you can access a single property file directly.

### Read


*Read existing Property files*

```
geoscript.layer.Property circles = new geoscript.layer.Property
("src/main/resources/property/circles.properties")
println "# Features in circles = ${circles.count}"

geoscript.layer.Property places = new geoscript.layer.Property(new File
("src/main/resources/property/places.properties"))
println "# Features in places = ${places.count}"
```

```
# Features in circles = 10
```

```
# Features in places = 10
```

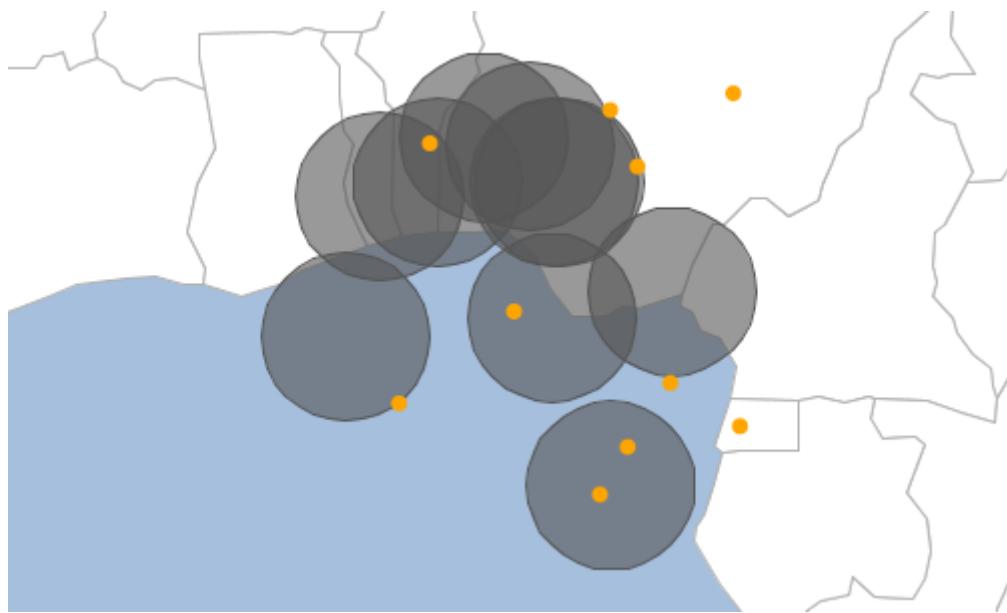


**Create**

## Create a new Property

```
geoscript.workspace.Property workspace = new geoscript.workspace.Property("target")
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id:3,
        name: "Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id:4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)
```

<b>id</b>	<b>name</b>	<b>state</b>
1	Seattle	WA
2	Tacoma	WA
3	Fargo	ND

<b>id</b>	<b>name</b>	<b>state</b>
4	Bismarck	ND
5	Mandan	ND

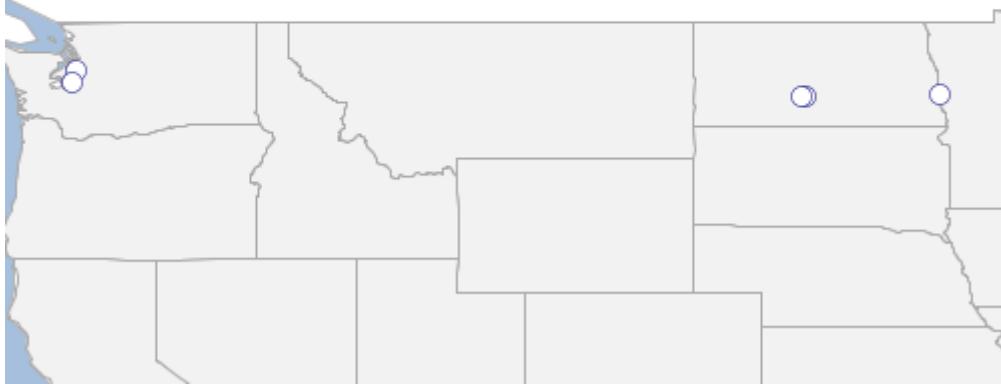

## Geoprocessing


### Reproject

*Reproject a Layer from it's source projection to a target projection*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer states = workspace.get("states")
println "States = ${states.proj}"

Projection projection = new Projection("EPSG:3857")
Workspace outputWorkspace = new Memory()
Layer statesInWebMercator = states.reproject(projection, outputWorkspace,
"states_3857")
println "Reprojected States = ${statesInWebMercator.proj}"
```


States = EPSG:4326  
 Reprojected States = EPSG:3857

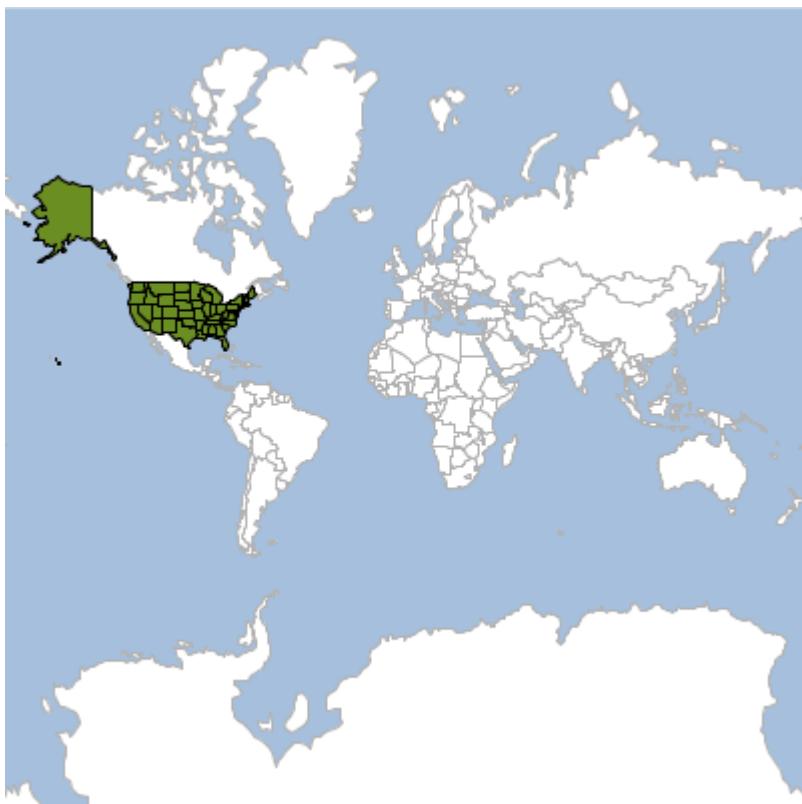

## Buffer

*Buffer a Layer of populated places*


```
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
Layer places = workspace.get("places")
Layer buffer = places.buffer(5)
```

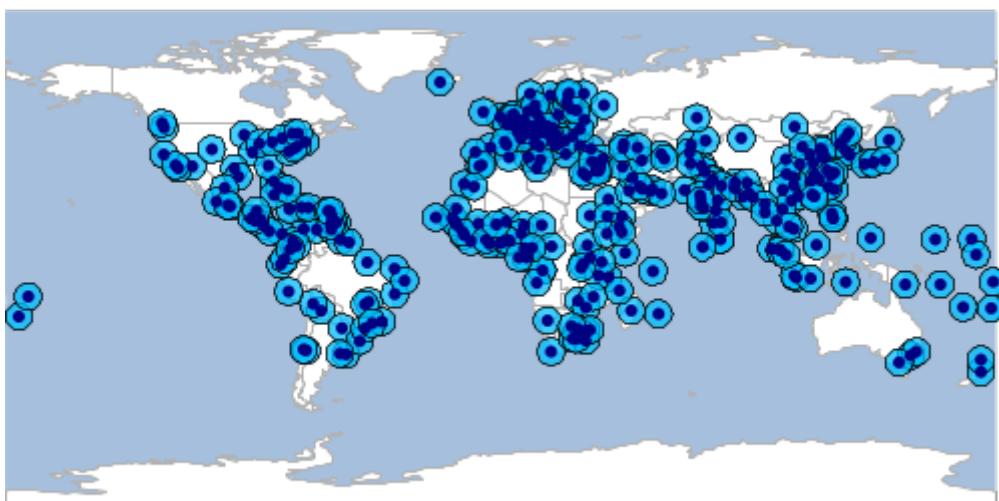

## Dissolve

## Dissolve a Layer by a Field

```
Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Layer regions = states.dissolve(states.schema.get("SUB_REGION"))
```

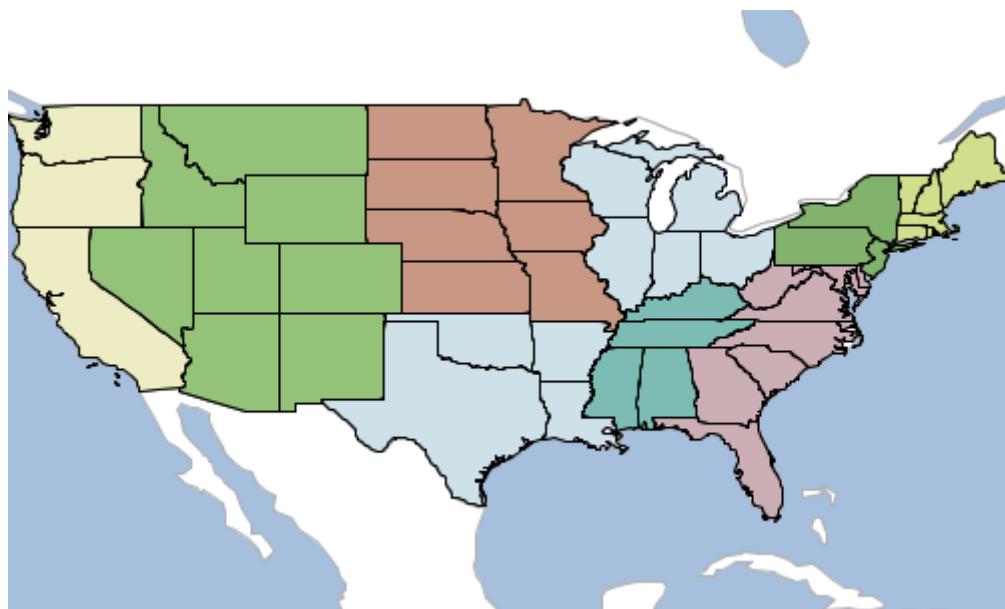

## Merge

## Merge two Layer together


```
Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Feature washington = states.first(filter: "STATE_NAME='Washington'")
Feature oregon = states.first(filter: "STATE_NAME='Oregon'")

Schema waSchema = new Schema("washington",
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "int")
)
Layer waLayer = new Memory().create(waSchema)
waLayer.withWriter { geoscript.layer.Writer writer ->
    Geometry.createRandomPoints(washington.geom, 50).points.eachWithIndex { Point pt,
        int index ->
        writer.add(waSchema.feature([geom: pt, id: index]))
    }
}
println "The Washington Layer has ${waLayer.count} features"

Schema orSchema = new Schema("oregon",
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "int")
)
Layer orLayer = new Memory().create(orSchema)
orLayer.withWriter { geoscript.layer.Writer writer ->
    Geometry.createRandomPoints(oregon.geom, 50).points.eachWithIndex { Point pt, int
        index ->
        writer.add(orSchema.feature([geom: pt, id: index]))
    }
}
println "The Oregon Layer has ${orLayer.count} features"

Layer mergedLayer = orLayer.merge(waLayer)
println "The merged Layer has ${mergedLayer.count} features"
```

```
The Washington Layer has 50 features
The Oregon Layer has 50 features
The merged Layer has 100 features
```

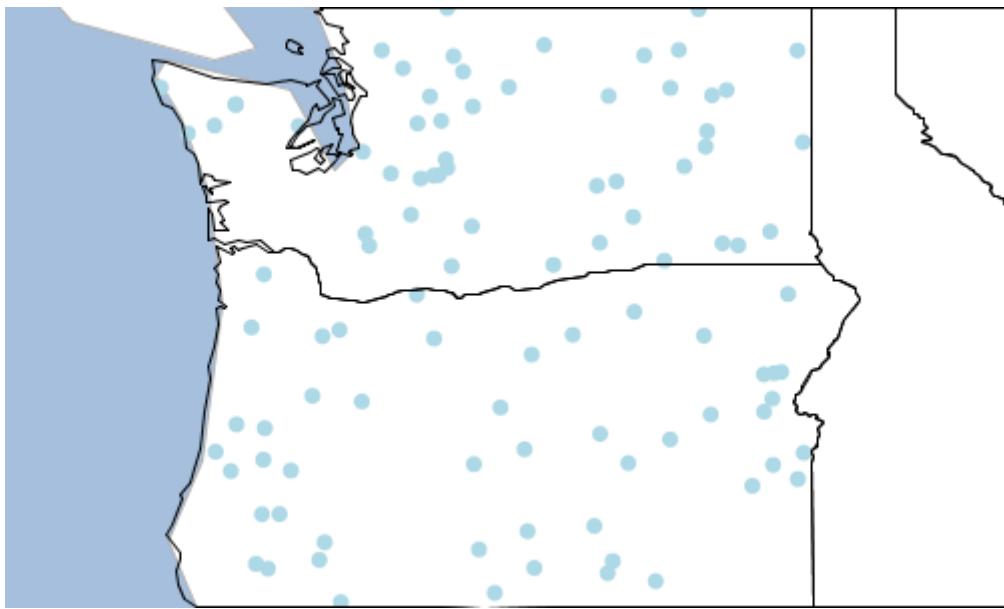


## Split

*Split a Layer into Layers based on the value from a Field*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
Layer rivers = workspace.get("rivers")
Workspace outWorkspace = new Memory()
rivers.split(rivers.schema.get("scalerank"), outWorkspace)

outWorkspace.layers.each { Layer layer ->
    println "${layer.name} has ${layer.count} features"
}
```

```
rivers_0 has 1 features
rivers_1 has 27 features
rivers_2 has 35 features
rivers_3 has 53 features
rivers_4 has 71 features
rivers_5 has 67 features
rivers_6 has 206 features
```

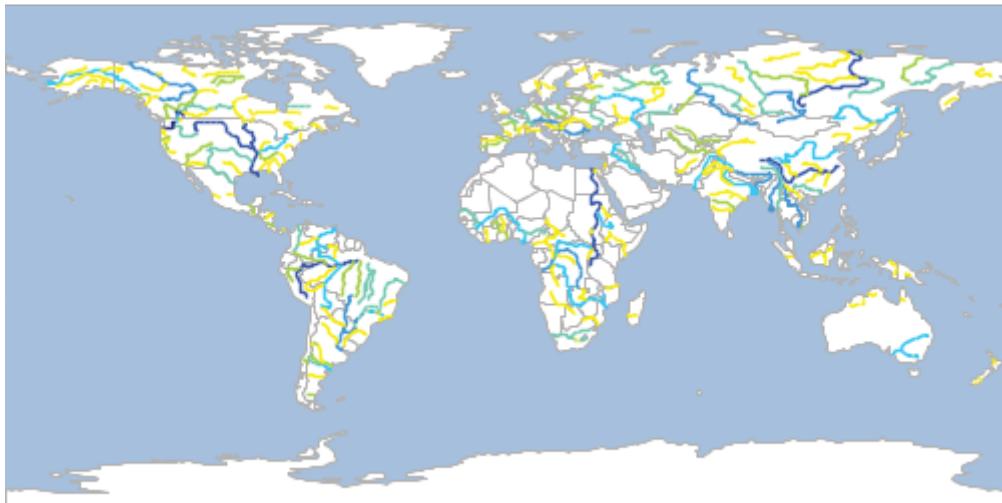


*Split a Layer into Layers based on another Layer*

```
Schema schema = new Schema("grid", [
    new Field("geom", "Polygon", "EPSG:4326"),
    new Field("col", "int"),
    new Field("row", "int"),
    new Field("row_col", "string")
])
Workspace gridWorkspace = new Directory("target")
Layer gridLayer = gridWorkspace.create(schema)
new Bounds(-180,-90,180,90,"EPSG:4326").generateGrid(2, 3, "polygon", {cell, col, row
->
    gridLayer.add([
        "geom": cell,
        "col": col,
        "row": row,
        "row_col": "${row} ${col}"
    ])
})
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
Layer countries = workspace.get("countries")

Workspace outWorkspace = new Memory()
countries.split(gridLayer,gridLayer.schema.get("row_col"),outWorkspace)

outWorkspace.layers.each { Layer layer ->
    println "${layer.name} has ${layer.count} features"
}
```

```
countries_1_1 has 6 features
countries_1_2 has 6 features
countries_2_1 has 44 features
countries_2_2 has 74 features
countries_3_1 has 13 features
countries_3_2 has 70 features
```

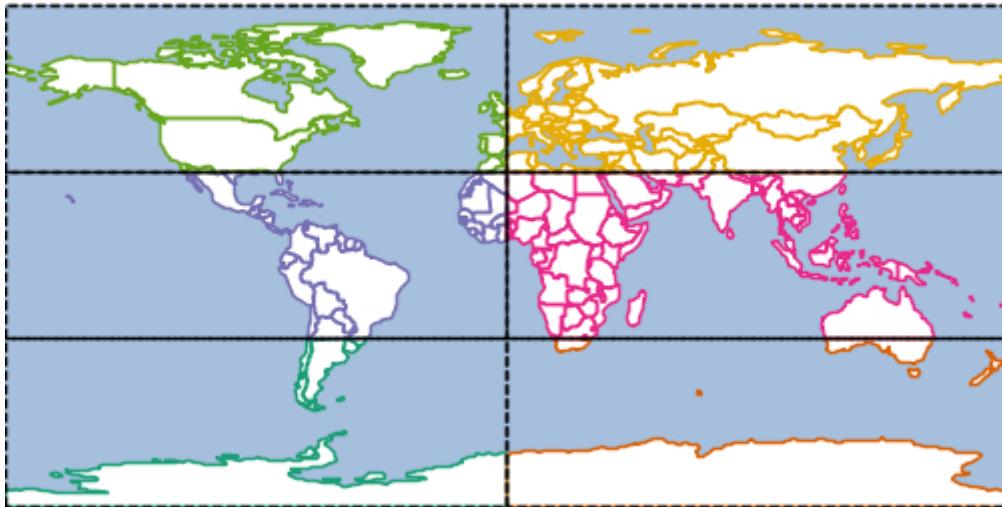


## Transform

*Transform one Layer into another Layer*

```
Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Layer centroids = states.transform("centroids", [
    geom: "centroid(the_geom)",
    name: "strToUpperCase(STATE_NAME)",
    ratio: "FEMALE / MALE"
])
centroids.eachFeature(max: 5) {Feature f ->
    println "${f.geom} ${f['name']} = ${f['ratio']}"
}
```

```
ILLINOIS = 1.0587396098110435
DISTRICT OF COLUMBIA = 1.1447503268897763
DELAWARE = 1.0626439771122835
WEST VIRGINIA = 1.0817203227723509
MARYLAND = 1.0621588832568312
```

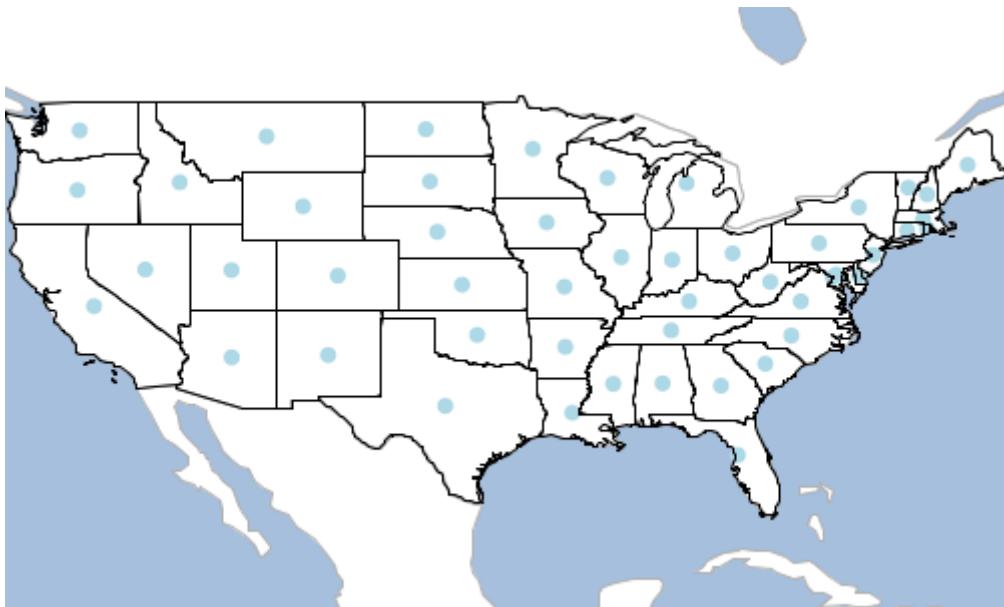

## Layer Algebra


GeoScript can do layer algebra. All of the examples below use Layer A (red) and Layer B (green).



## Clip


*Clip Layer A with Layer B*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.clip(layerB)
```

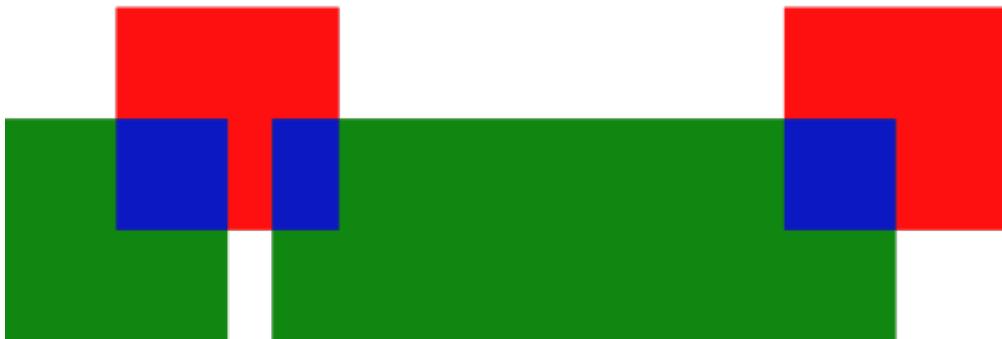

### Clip Layer B with Layer A


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.clip(layerA, outWorkspace, outLayer: "ba_clip")
```

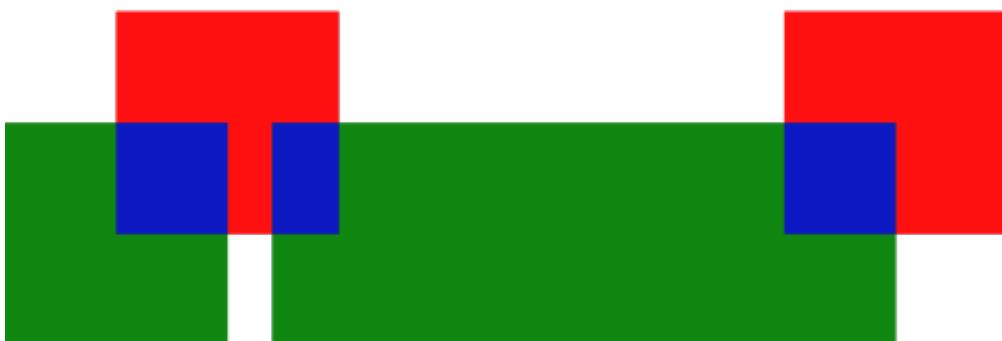

### Erase

#### Erase Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.erase(layerB)
```

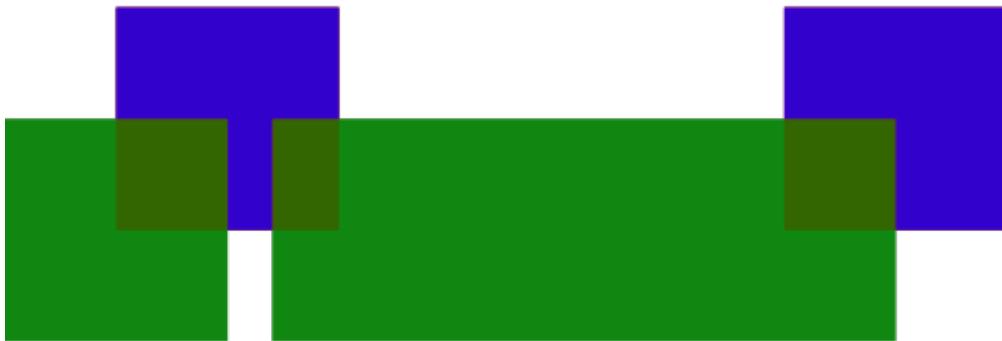

### Erase Layer B with Layer A


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.erase(layerA, outWorkspace, outLayer: "ba_erase")
```



## Identity

### Identity Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.identity(layerB)
```

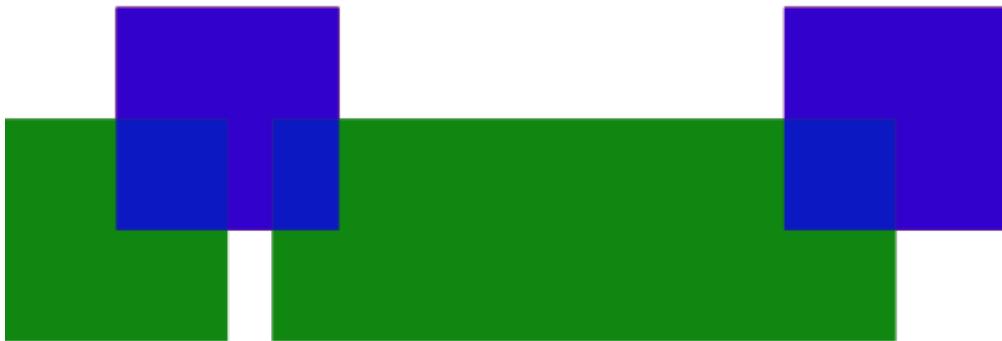

*Identity Layer B with Layer A*


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.identity(layerA, outWorkspace, outLayer:
"ba_identity")
```



## Intersection


*Intersection Layer A with Layer B*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.intersection(layerB)
```

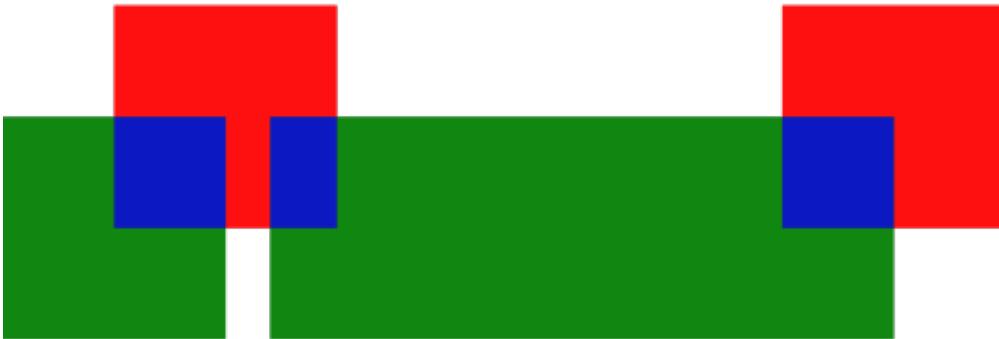

### *Intersection Layer B with Layer A*


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.intersection(layerA, outWorkspace, outLayer:
"ba_intersection")
```

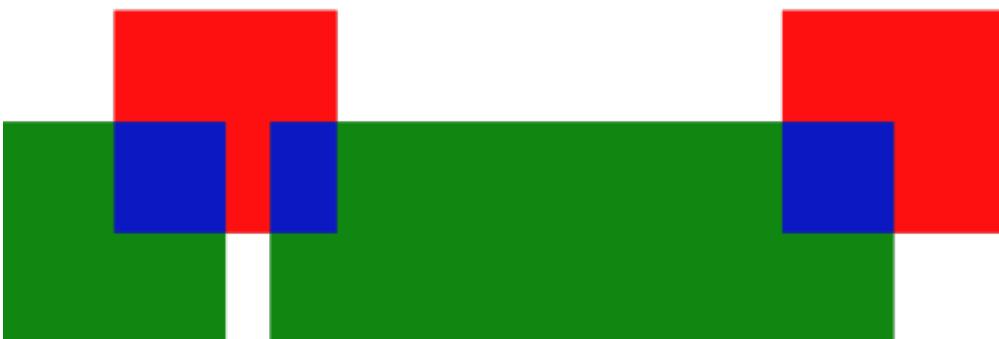

## Symmetric Difference


### *Symmetric Difference Layer A with Layer B*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.symDifference(layerB)
```

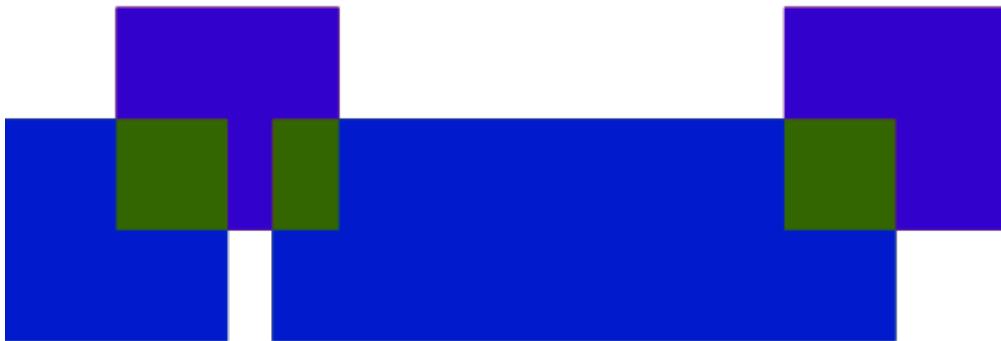

### Symmetric Difference Layer B with Layer A


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.symDifference(layerA, outWorkspace, outLayer:
"ba_symdifference")
```

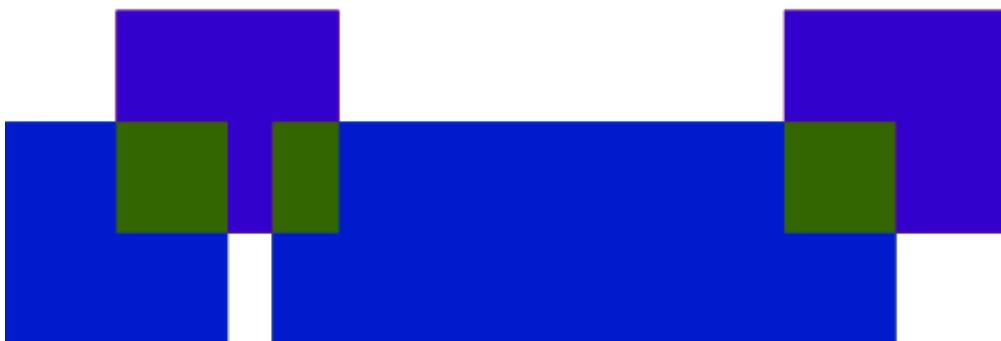

## Update


### Update Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.update(layerB)
```

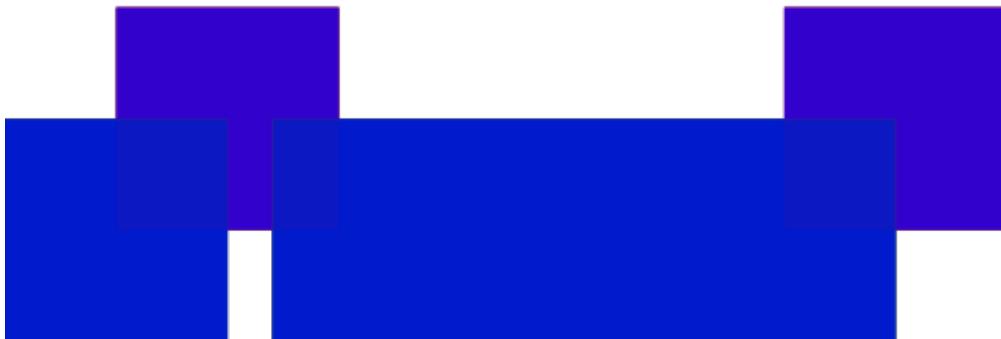

#### *Update Layer B with Layer A*


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.update(layerA, outWorkspace: outWorkspace, outLayer:
"ba_update")
```

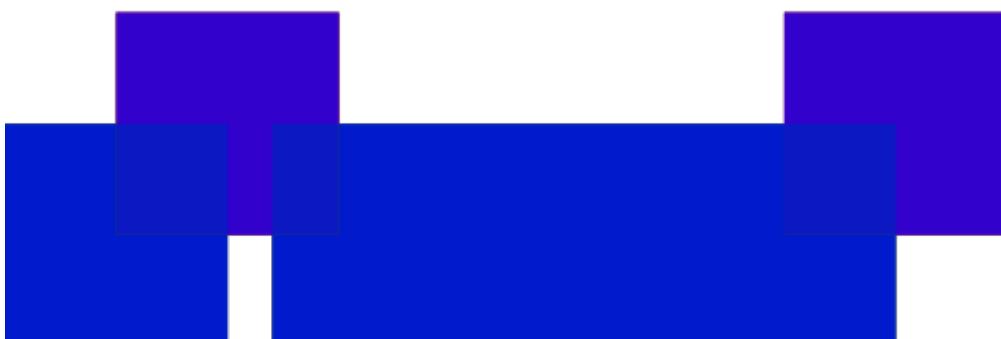

## Union


#### *Union Layer A with Layer B*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.union(layerB)
```

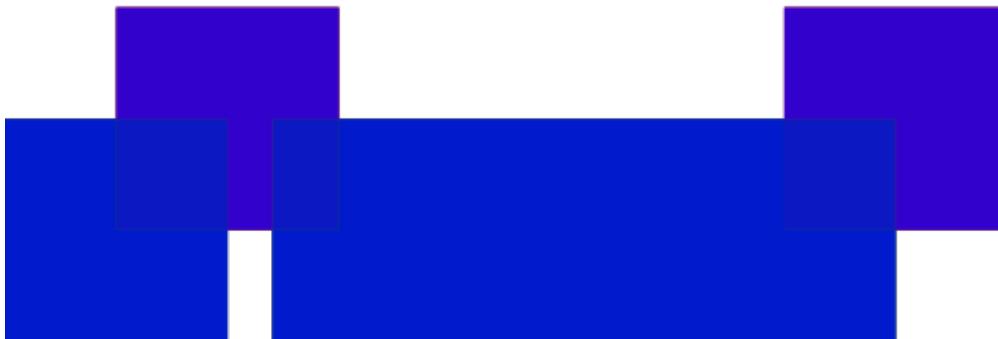

*Union Layer B with Layer A*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.union(layerA, outWorkspace: outWorkspace, outLayer: "ba_union")
```

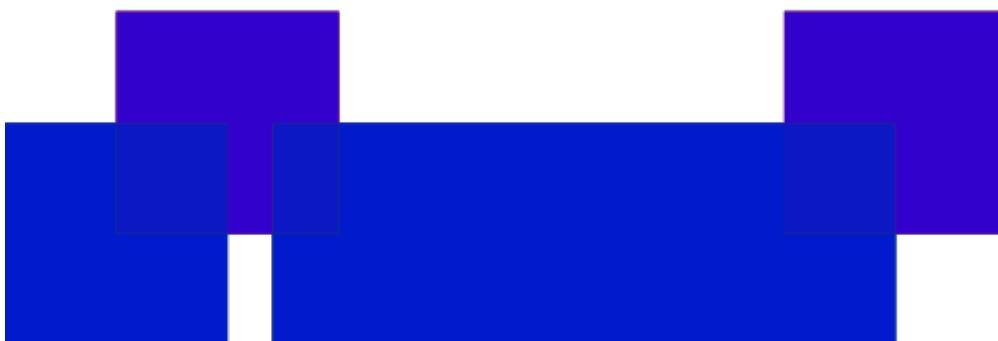

## Reading and Writing Layers

The Layer IO classes are in the [geoscript.layer.io](#) package.

### Finding Layer Writer and Readers

## List all Layer Writers

```
List<Writer> writers = Writers.list()
writers.each { Writer writer ->
    println writer.className
}
```

```
CsvWriter
GeobufWriter
GeoJSONWriter
GeoRSSWriter
GmlWriter
GpxWriter
KmlWriter
MvtWriter
```

## Find a Layer Writer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])
Writer writer = Writers.find("csv")
String csv = writer.write(layer)
println csv
```

```
"geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.48416 47.2619)","2","Tacoma"
```

## List all Layer Readers

```
List<Reader> readers = Readers.list()
readers.each { Reader reader ->
    println reader.class.getSimpleName
}
```

```
CsvReader
GeobufReader
GeoJSONReader
GeoRSSReader
GmlReader
GpxReader
KmlReader
MvtReader
```

## Find a Layer Reader

```
Reader reader = Readers.find("csv")
Layer layer = reader.read("""geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.48416 47.2619)","2","Tacoma"
""")
println "# features = ${layer.count}"
```

```
# features = 2
```

## GeoJSON

## Get GeoJSON String from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String geojson = layer.toJSONString()
println geojson
```

```
{  
  "type": "FeatureCollection",  
  "features": [  
    {  
      "type": "Feature",  
      "geometry": {  
        "type": "Point",  
        "coordinates": [  
          -122.3204,  
          47.6024  
        ]  
      },  
      "properties": {  
        "id": 1,  
        "name": "Seattle"  
      },  
      "id": "fid-69c2ab3c_168a22066ff_-6907"  
    },  
    {  
      "type": "Feature",  
      "geometry": {  
        "type": "Point",  
        "coordinates": [  
          -122.4842,  
          47.2619  
        ]  
      },  
      "properties": {  
        "id": 2,  
        "name": "Tacoma"  
      },  
      "id": "fid-69c2ab3c_168a22066ff_-6905"  
    }  
  ]  
}
```

## *Write a Layer to a GeoJSON String*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])


GeoJSONWriter writer = new GeoJSONWriter()
String geojson = writer.write(layer)
println geojson
```

```
{  
  "type": "FeatureCollection",  
  "features": [  
    {  
      "type": "Feature",  
      "geometry": {  
        "type": "Point",  
        "coordinates": [  
          -122.3204,  
          47.6024  
        ]  
      },  
      "properties": {  
        "id": 1,  
        "name": "Seattle"  
      },  
      "id": "fid-69c2ab3c_168a22066ff_-7e31"  
    },  
    {  
      "type": "Feature",  
      "geometry": {  
        "type": "Point",  
        "coordinates": [  
          -122.4842,  
          47.2619  
        ]  
      },  
      "properties": {  
        "id": 2,  
        "name": "Tacoma"  
      },  
      "id": "fid-69c2ab3c_168a22066ff_-7e2f"  
    }  
  ]  
}
```

## Read a Layer from a GeoJSON String

```
String geoJson = """
{
  "type": "FeatureCollection",
  "features": [
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.3204,
          47.6024
        ]
      },
      "properties": {
        "id": 1,
        "name": "Seattle"
      },
      "id": "1"
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.681944,
          45.52
        ]
      },
      "properties": {
        "id": 2,
        "name": "Portland"
      },
      "id": "2"
    }
  ]
}
"""

GeoJSONReader reader = new GeoJSONReader()
Layer layer = reader.read(geoJson)
```

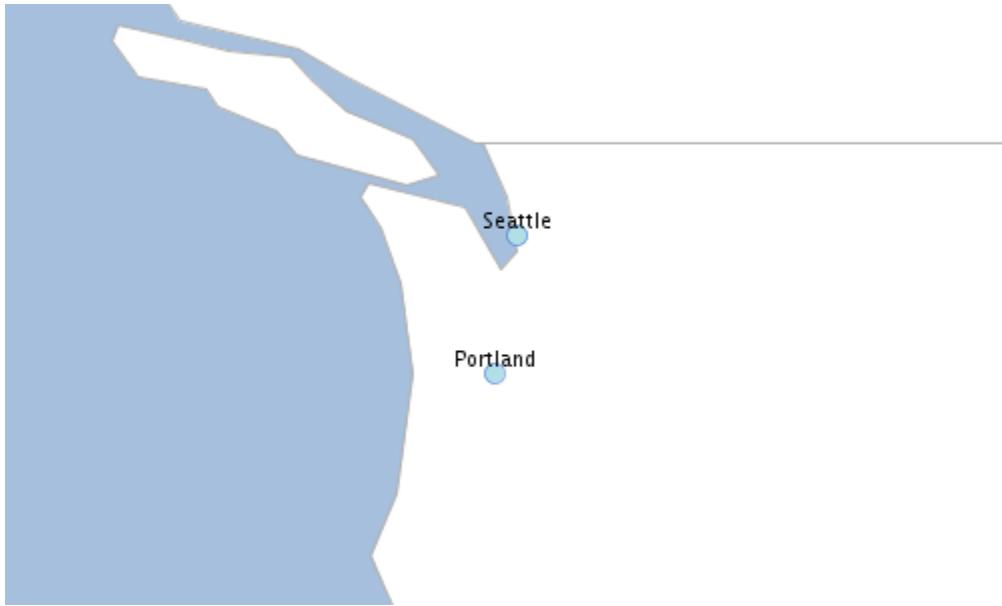

## GeoBuf

*Get GeoBuf String from a Layer*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String geobuf = layer.toGeobufString()
println geobuf
```

```
0a0269640a046e616d6510021806223d0a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a07536561
74746c650a1c0a0c08001a08ffd6e77498a3892d6a0218026a080a065461636f6d61
```

### *Write a Layer to a GeoBuf String*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.681944, 45.52),
    id: 2,
    name: "Portland"
])

GeobufWriter writer = new GeobufWriter()
String geobuf = writer.write(layer)
println geobuf
```

```
0a0269640a046e616d6510021806223f0a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a07536561
74746c650a1e0a0c08001a08afe9ff7480d2b42b6a0218026a0a0a08506f72746c616e64
```

### *Read a Layer from a GeoBuf String*

```
String geobuf =
"0a0269640a046e616d6510021806223f0a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a07536561
74746c650a1e0a0c08001a08afe9ff7480d2b42b6a0218026a0a0a08506f72746c616e64"
GeobufReader reader = new GeobufReader()
Layer layer = reader.read(geobuf)
```



## GML

*Get GML String from a Layer*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])
String gml = layer.toGMLString()
println gml
```

```
<wfs:FeatureCollection xmlns:wfs="http://www.opengis.net/wfs">
  <gml:boundedBy xmlns:gml="http://www.opengis.net/gml">
    <gml:Box srsName="http://www.opengis.net/gml/srs/epsg.xml#4326">
      <gml:coord>
        <gml:X>
          -122.48416
        </gml:X>
        <gml:Y>
```

```

    47.2619
    </gml:Y>
</gml:coord>
<gml:coord>
    <gml:X>
        -122.3204
    </gml:X>
    <gml:Y>
        47.6024
    </gml:Y>
</gml:coord>
</gml:Box>
</gml:boundedBy>
<gml:featureMember xmlns:gml="http://www.opengis.net/gml">
    <gsf:cities xmlns:gsf="http://geoscript.org/feature" fid="fid-69c2ab3c_168a22066ff_-739c">
        <gml:name>
            Seattle
        </gml:name>
        <gsf:geom>
            <gml:Point>
                <gml:coord>
                    <gml:X>
                        -122.3204
                    </gml:X>
                    <gml:Y>
                        47.6024
                    </gml:Y>
                </gml:coord>
            </gml:Point>
        </gsf:geom>
        <gsf:id>
            1
        </gsf:id>
    </gsf:cities>
</gml:featureMember>
<gml:featureMember xmlns:gml="http://www.opengis.net/gml">
    <gsf:cities xmlns:gsf="http://geoscript.org/feature" fid="fid-69c2ab3c_168a22066ff_-739a">
        <gml:name>
            Tacoma
        </gml:name>
        <gsf:geom>
            <gml:Point>
                <gml:coord>
                    <gml:X>
                        -122.48416
                    </gml:X>
                    <gml:Y>
                        47.2619
                    </gml:Y>

```

```
</gml:coord>
</gml:Point>
</gsf:geom>
<gsf:id>
  2
</gsf:id>
</gsf:cities>
</gml:featureMember>
</wfs:FeatureCollection>
```

### Write a Layer to a GML String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])
GmlWriter writer = new GmlWriter()
String gml = writer.write(layer)
println gml
```

```
<wfs:FeatureCollection xmlns:gsf="http://geoscript.org/feature"
  xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:wfs="http://www.opengis.net/wfs"
  xmlns:gml="http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc">
  <gml:boundedBy>
    <gml:Box srsName="http://www.opengis.net/gml/srs/epsg.xml#4326">
      <gml:coord>
        <gml:X>-122.48416</gml:X>
        <gml:Y>47.2619</gml:Y>
      </gml:coord>
      <gml:coord>
        <gml:X>-122.3204</gml:X>
        <gml:Y>47.6024</gml:Y>
      </gml:coord>
    </gml:Box>
  </gml:boundedBy>
  <gml:featureMember>
    <gsf:cities fid="fid-69c2ab3c_168a22066ff_-73b6">
      <gml:name>Seattle</gml:name>
      <gsf:geom>
        <gml:Point>
          <gml:coord>
            <gml:X>-122.3204</gml:X>
            <gml:Y>47.6024</gml:Y>
          </gml:coord>
        </gml:Point>
      </gsf:geom>
      <gsf:id>1</gsf:id>
    </gsf:cities>
  </gml:featureMember>
  <gml:featureMember>
    <gsf:cities fid="fid-69c2ab3c_168a22066ff_-73b4">
      <gml:name>Tacoma</gml:name>
      <gsf:geom>
        <gml:Point>
          <gml:coord>
            <gml:X>-122.48416</gml:X>
            <gml:Y>47.2619</gml:Y>
          </gml:coord>
        </gml:Point>
      </gsf:geom>
      <gsf:id>2</gsf:id>
    </gsf:cities>
  </gml:featureMember>
</wfs:FeatureCollection>
```

## Read a Layer from a GML String

```
String gml = """
<wfs:FeatureCollection xmlns:gsf="http://geoscript.org/feature"
xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:wfs="http://www.opengis.net/wfs"
xmlns:gml="http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc">
  <gml:boundedBy>
    <gml:Box srsName="http://www.opengis.net/gml/srs/epsg.xml#4326">
      <gml:coord>
        <gml:X>-122.48416</gml:X>
        <gml:Y>47.2619</gml:Y>
      </gml:coord>
      <gml:coord>
        <gml:X>-122.3204</gml:X>
        <gml:Y>47.6024</gml:Y>
      </gml:coord>
    </gml:Box>
  </gml:boundedBy>
  <gml:featureMember>
    <gsf:cities fid="fid-a7cd555_1634fc34503_-7fff">
      <gml:name>Seattle</gml:name>
      <gsf:geom>
        <gml:Point>
          <gml:coord>
            <gml:X>-122.3204</gml:X>
            <gml:Y>47.6024</gml:Y>
          </gml:coord>
        </gml:Point>
      </gsf:geom>
      <gsf:id>1</gsf:id>
    </gsf:cities>
  </gml:featureMember>
  <gml:featureMember>
    <gsf:cities fid="fid-a7cd555_1634fc34503_-7ffd">
      <gml:name>Portland</gml:name>
      <gsf:geom>
        <gml:Point>
          <gml:coord>
            <gml:X>-122.681944</gml:X>
            <gml:Y>45.52</gml:Y>
          </gml:coord>
        </gml:Point>
      </gsf:geom>
      <gsf:id>2</gsf:id>
    </gsf:cities>
  </gml:featureMember>
</wfs:FeatureCollection>
"""

GmlReader reader = new GmlReader()
Layer layer = reader.read(gml)
```



## KML

*Get KML String from a Layer*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])
String kml = layer.toKMLString()
println kml
```

```
<kml:kml xmlns:kml="http://www.opengis.net/kml/2.2">
  <kml:Document>
    <kml:Folder>
      <kml:name>
        cities
      </kml:name>
      <kml:Schema kml:name="cities" kml:id="cities">
        <kml:SimpleField kml:name="id" kml:type="Integer"/>
```

```
<kml:SimpleField kml:name="name" kml:type="String"/>
</kml:Schema>
<kml:Placemark>
  <kml:name>
    fid-69c2ab3c_168a22066ff_-6a12
  </kml:name>
  <kml:Style>
    <kml:IconStyle>
      <kml:color>
        ff0000ff
      </kml:color>
    </kml:IconStyle>
  </kml:Style>
  <kml:ExtendedData>
    <kml:SchemaData kml:schemaUrl="#cities">
      <kml:SimpleData kml:name="id">
        1
      </kml:SimpleData>
      <kml:SimpleData kml:name="name">
        Seattle
      </kml:SimpleData>
    </kml:SchemaData>
  </kml:ExtendedData>
  <kml:Point>
    <kml:coordinates>
      -122.3204,47.6024
    </kml:coordinates>
  </kml:Point>
</kml:Placemark>
<kml:Placemark>
  <kml:name>
    fid-69c2ab3c_168a22066ff_-6a10
  </kml:name>
  <kml:Style>
    <kml:IconStyle>
      <kml:color>
        ff0000ff
      </kml:color>
    </kml:IconStyle>
  </kml:Style>
  <kml:ExtendedData>
    <kml:SchemaData kml:schemaUrl="#cities">
      <kml:SimpleData kml:name="id">
        2
      </kml:SimpleData>
      <kml:SimpleData kml:name="name">
        Tacoma
      </kml:SimpleData>
    </kml:SchemaData>
  </kml:ExtendedData>
  <kml:Point>
```

```
<kml:coordinates>
    -122.48416,47.2619
</kml:coordinates>
</kml:Point>
</kml:Placemark>
</kml:Folder>
</kml:Document>
</kml:kml>
```

### *Write a Layer to a KML String*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])
KmlWriter writer = new KmlWriter()
String kml = writer.write(layer)
println kml
```

```

<kml:kml xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1">
  <kml:Document>
    <kml:Placemark id="fid-69c2ab3c_168a22066ff_-73ae">
      <kml:name>Seattle</kml:name>
      <kml:Point>
        <kml:coordinates>-122.3204,47.6024</kml:coordinates>
      </kml:Point>
    </kml:Placemark>
    <kml:Placemark id="fid-69c2ab3c_168a22066ff_-73ac">
      <kml:name>Tacoma</kml:name>
      <kml:Point>
        <kml:coordinates>-122.48416,47.2619</kml:coordinates>
      </kml:Point>
    </kml:Placemark>
  </kml:Document>
</kml:kml>

```

### *Read a Layer from a KML String*

```

String kml = """
<kml:kml xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:kml="http://earth.google.com/kml/2.1">
  <kml:Document>
    <kml:Placemark id="fid-61215c1b_1634ca279f5_-7fff">
      <kml:name>Seattle</kml:name>
      <kml:Point>
        <kml:coordinates>-122.3204,47.6024</kml:coordinates>
      </kml:Point>
    </kml:Placemark>
    <kml:Placemark id="fid-61215c1b_1634ca279f5_-7ffd">
      <kml:name>Portland</kml:name>
      <kml:Point>
        <kml:coordinates>-122.681944,45.52</kml:coordinates>
      </kml:Point>
    </kml:Placemark>
  </kml:Document>
</kml:kml>
"""

KmlReader reader = new KmlReader()
Layer layer = reader.read(kml)

```



## CSV

*Write a Layer to a CSV String*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])
CsvWriter writer = new CsvWriter()
String csv = writer.write(layer)
println csv
```

```
"geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.48416 47.2619)","2","Tacoma"
```

### *Read a Layer from a CSV String*

```
String csv = """geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.681944 45.52)","2","Portland"
"""

CsvReader reader = new CsvReader()
Layer layer = reader.read(csv)
```



### **GeoRSS**

## *Write a Layer to a GeoRSS String*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

GeoRSSWriter writer = new GeoRSSWriter()
String georss = writer.write(layer)
println georss
```

```
<?xml version="1.0" encoding="UTF-8"?><feed
  xmlns:georss="http://www.georss.org/georss" xmlns="http://www.w3.org/2005/Atom">
  <title>cities</title>
  <subtitle>cities geom: Point(EPSG:4326), id: Integer, name: String</subtitle>
  <link>http://geoscript.org/feature</link>
  <entry>
    <title>fid-69c2ab3c_168a22066ff_-7a3a</title>
    <summary>[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]</summary>
    <updated>Thu Jan 31 04:17:53 UTC 2019</updated>
    <georss:point>47.6024 -122.3204</georss:point>
  </entry>
  <entry>
    <title>fid-69c2ab3c_168a22066ff_-7a38</title>
    <summary>[geom:POINT (-122.48416 47.2619), id:2, name:Tacoma]</summary>
    <updated>Thu Jan 31 04:17:53 UTC 2019</updated>
    <georss:point>47.2619 -122.48416</georss:point>
  </entry>
</feed>
```

### *Read a Layer from a GeoRSS String*

```
String georss = """<?xml version="1.0" encoding="UTF-8"?>
<feed xmlns:georss="http://www.georss.org/georss" xmlns="http://www.w3.org/2005/Atom">
<title>cities</title>
<subtitle>cities geom: Point(EPSG:4326), id: Integer, name: String</subtitle>
<link>http://geoscript.org/feature</link>
<entry>
<title>Seattle</title>
<summary>[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]</summary>
<updated>Fri May 11 15:23:05 PDT 2018</updated>
<georss:point>47.6024 -122.3204</georss:point>
</entry>
<entry>
<title>Portland</title>
<summary>[geom:POINT (-122.681944 45.52), id:2, name:Portland]</summary>
<updated>Fri May 11 15:23:05 PDT 2018</updated>
<georss:point>45.52 -122.681944</georss:point>
</entry>
</feed>
"""

GeoRSSReader reader = new GeoRSSReader()
Layer layer = reader.read(georss)
```



### **GPX**

## *Write a Layer to a GPX String*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

GpxWriter writer = new GpxWriter()
String gpx = writer.write(layer)
println gpx
```

```
<?xml version="1.0" encoding="UTF-8"?><gpx xmlns="http://www.topografix.com/GPX/1/1"
version="1.1" creator="geoscript">
<wpt lat="47.6024" lon="-122.3204">
<name>fid-69c2ab3c_168a22066ff_-73b2</name>
</wpt>
<wpt lat="47.2619" lon="-122.48416">
<name>fid-69c2ab3c_168a22066ff_-73b0</name>
</wpt>
</gpx>
```

## *Read a Layer from a GPX String*

```
String gpx = """<?xml version="1.0" encoding="UTF-8"?>
<gpx xmlns="http://www.topografix.com/GPX/1/1" version="1.1" creator="geoscript">
<wpt lat="47.6024" lon="-122.3204">
<name>Seattle</name>
</wpt>
<wpt lat="45.52" lon="-122.681944">
<name>Portland</name>
</wpt>
</gpx>
"""

GpxReader reader = new GpxReader()
Layer layer = reader.read(gpx)
```




## Graticules

### Square


*Create a square graticules Layer*

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 20
double spacing = 5
Layer layer = Graticule.createSquares(bounds, length, spacing)
```

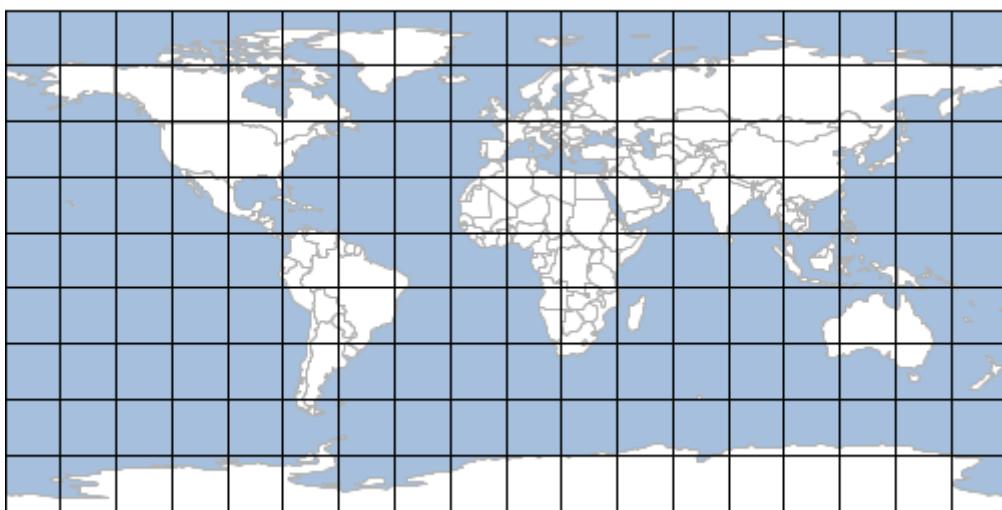

*Create a square graticules Shapefile Layer*


```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 30
double spacing = -1
Workspace workspace = new Directory("target")
Layer layer = Graticule.createSquares(bounds, length, spacing, workspace: workspace,
layer: "squares")
```

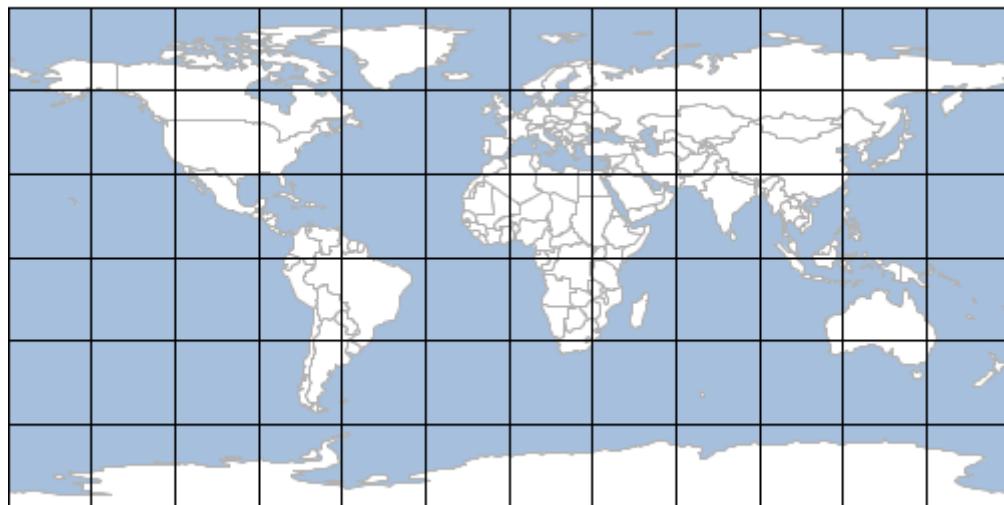

## Hexagon


*Create a flat hexagon graticules Layer*

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 20
double spacing = 5
String orientation = "flat"
Layer layer = Graticule.createHexagons(bounds, length, spacing, orientation)
```

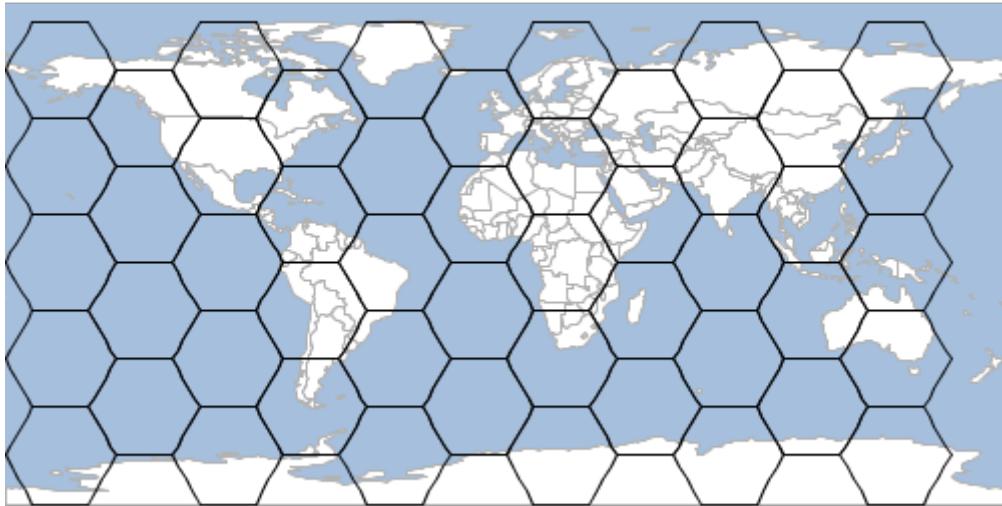


Create a angled hexagon graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 10
double spacing = 5
String orientation = "angled"
Layer layer = Graticule.createHexagons(bounds, length, spacing, orientation)
```

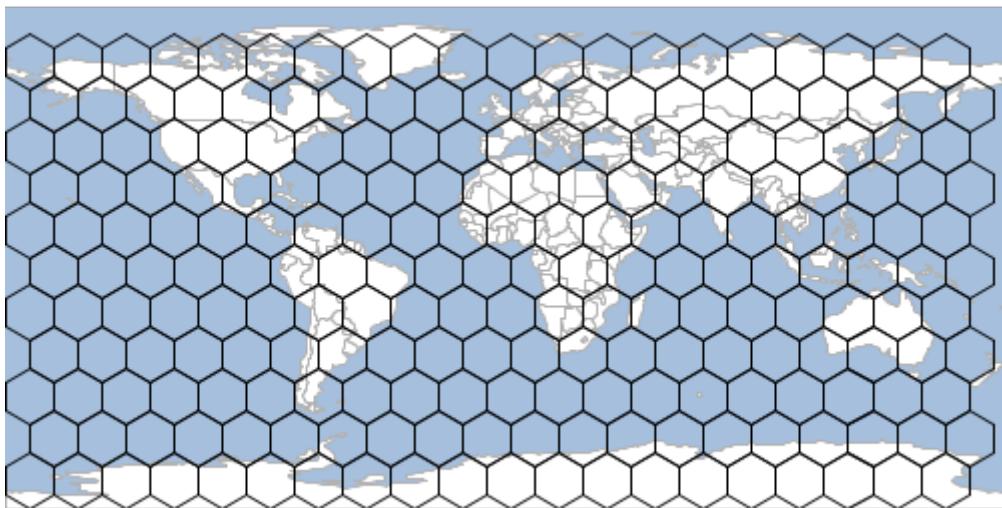


Create a hexagon graticules Layer intersecting Washington States

```
Layer states = new Shapefile("src/main/resources/data/states.shp")
Feature feature = states.first(filter: "STATE_NAME = 'Washington'")
Layer layer = Graticule.createHexagons(feature.bounds.expandBy(1.0), 0.2, -1.0,
"flat", createFeature: { GridElement e ->
    new Point(e.center.x, e.center.y).buffer(0.2).intersects(feature.geom)
})
```

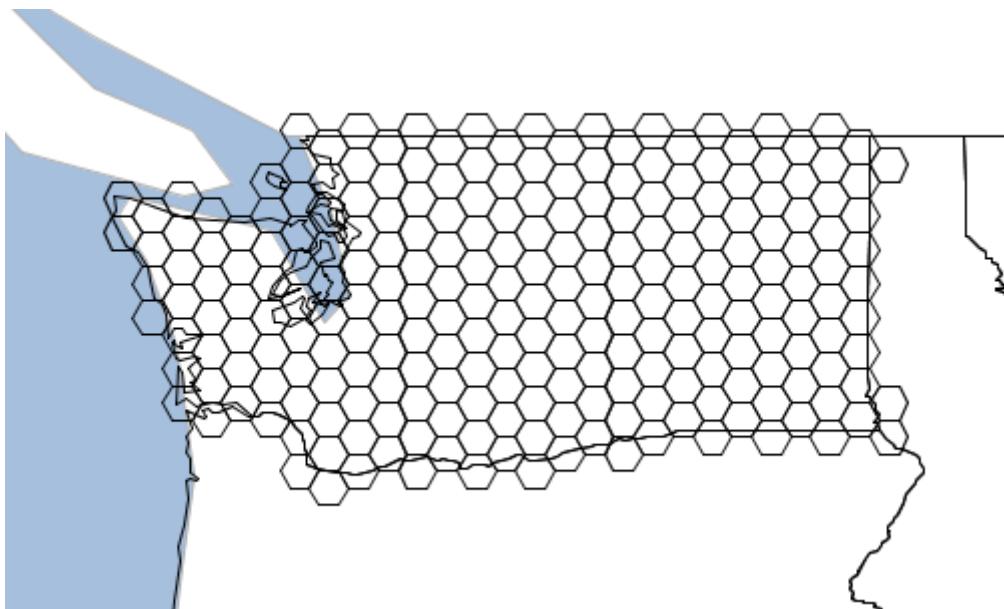

Create a hexagon graticules Layer with a custom schema


```
Layer states = new Shapefile("src/main/resources/data/states.shp")
Schema schema = new Schema("hexagon", [
    new Field("geom", "Polygon"),
    new Field("color", "java.awt.Color")
])
Bounds b = states.bounds.expandBy(1)
Layer layer = Graticule.createHexagons(b, 2.0, -1.0, "flat", schema: schema,
setAttributes: { GridElement e, Map attributes -
    attributes["color"] = Color.randomPastel.asColor()
})
layer.style = new Fill(new Property("color"), 0.5)
```

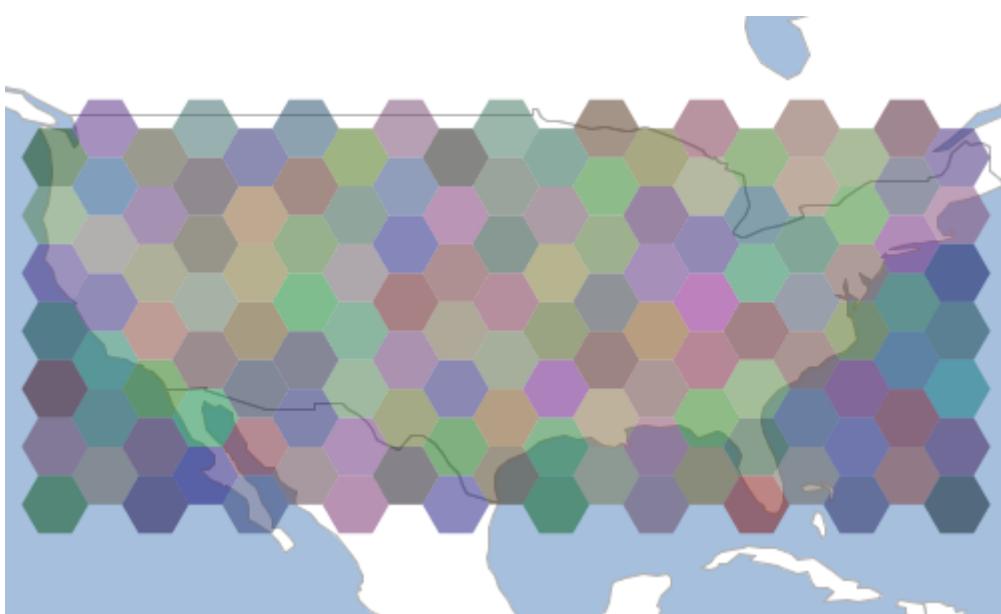

## Line

*Create a line graticules Layer*


```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
Layer layer = Graticule.createLines(bounds, [
    [orientation: 'vertical', level: 2, spacing: 20],
    [orientation: 'vertical', level: 1, spacing: 10 ],
    [orientation: 'horizontal', level: 2, spacing: 20],
    [orientation: 'horizontal', level: 1, spacing: 10 ]
], 2.0)
```

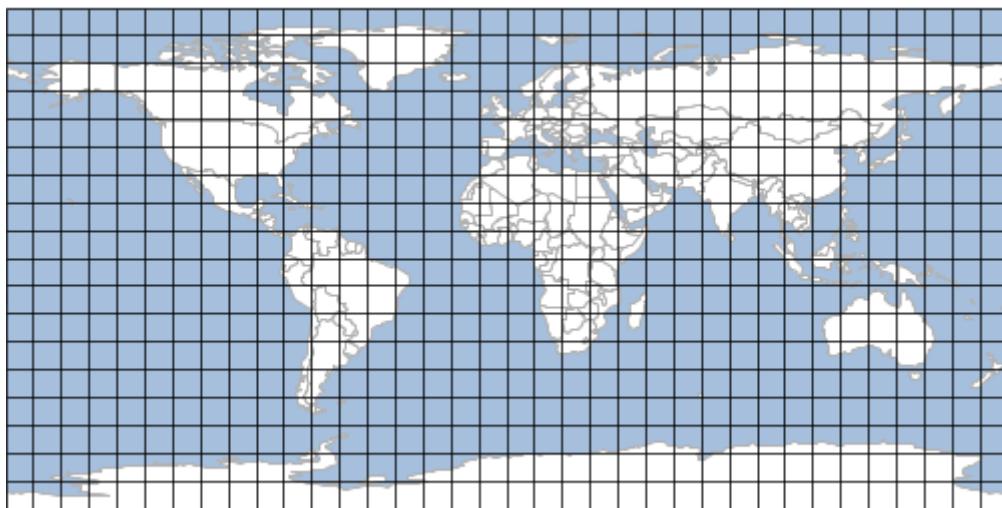

## Rectangle

*Create a rectangular graticules Layer*

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double width = 20
double height = 10
Layer layer = Graticule.createRectangles(bounds, width, height, -1)
```

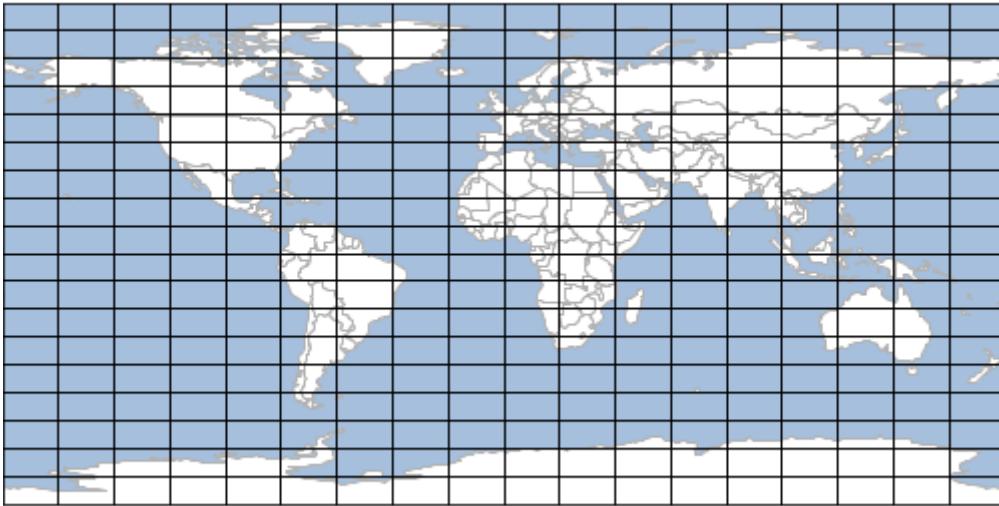

# Format Recipes

The Format classes are in the [geoscript.layer](#) package.

A Format is a collection of Rasters.

## Get a Format

Get a Format from a File

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
println format.name
```

GeoTIFF

## Get Names

Get names of the Rasters in a Format. Some Formats can contain more than one Raster.


```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
List<String> names = format.names
names.each { String name ->
    println name
}
```

earth

## Read a Raster

Read a Raster from a File

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
```

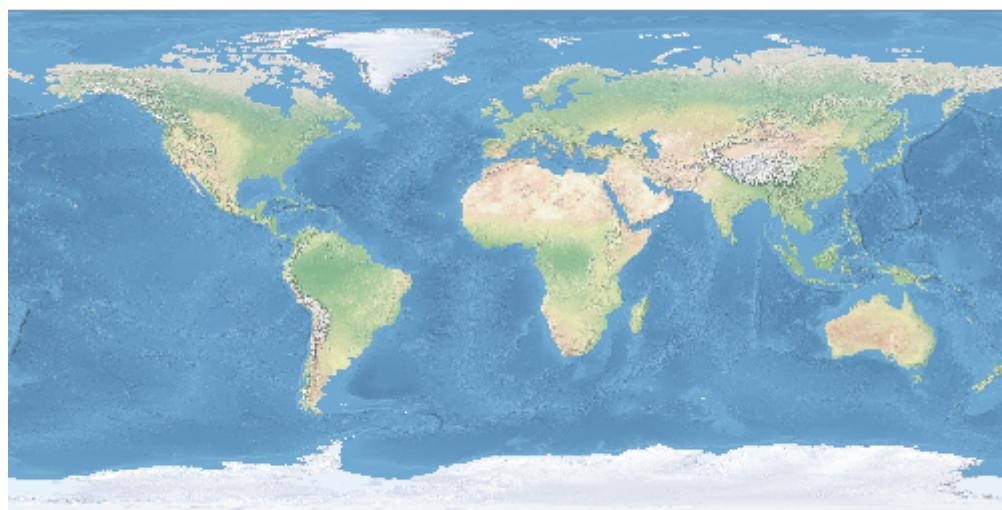


## Write a Raster

Write a Raster to a File

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")

File outFile = new File("target/earth.png")
Format outFormat = Format.getFormat(outFile)
outFormat.write(raster)
Raster outRaster = outFormat.read("earth")
```

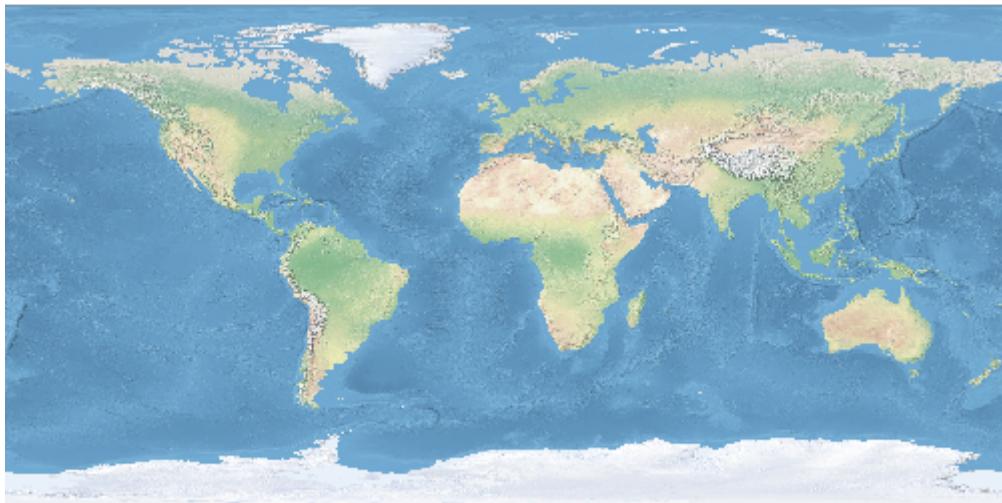

## Check for a Raster

Check to see if the Format has a Raster

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)

boolean hasEarth = format.has("earth")
println "Has raster named earth? ${hasEarth}"

boolean hasWorld = format.has("world")
println "Has raster named world? ${hasWorld}"
```


```
Has raster named earth? true
Has raster named world? false
```

## GeoTIFF

### Read

Read a GeoTIFF Raster from a File

```
File file = new File("src/main/resources/earth.tif")
GeoTIFF geotiff = new GeoTIFF(file)
Raster raster = geotiff.read("earth")
```

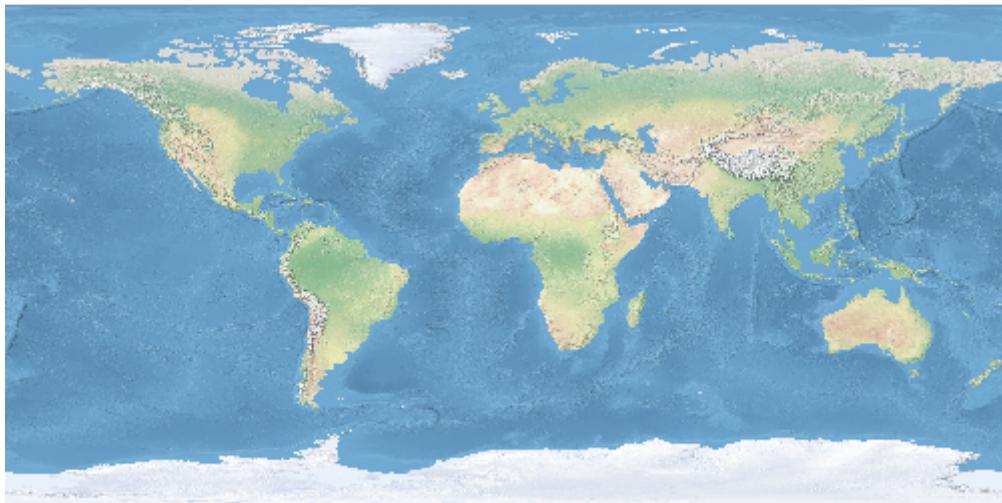


## Write

Write a GeoTIFF Raster to an ArcGrid Raster

```
File file = new File("src/main/resources/earth.tif")
GeoTIFF geotiff = new GeoTIFF(file)
Raster raster = geotiff.read("earth")

File arcGridFile = new File("target/earth.asc")
ArcGrid arcGrid = new ArcGrid(arcGridFile)
arcGrid.write(raster)
Raster arcGridRaster = arcGrid.read("earth")
```

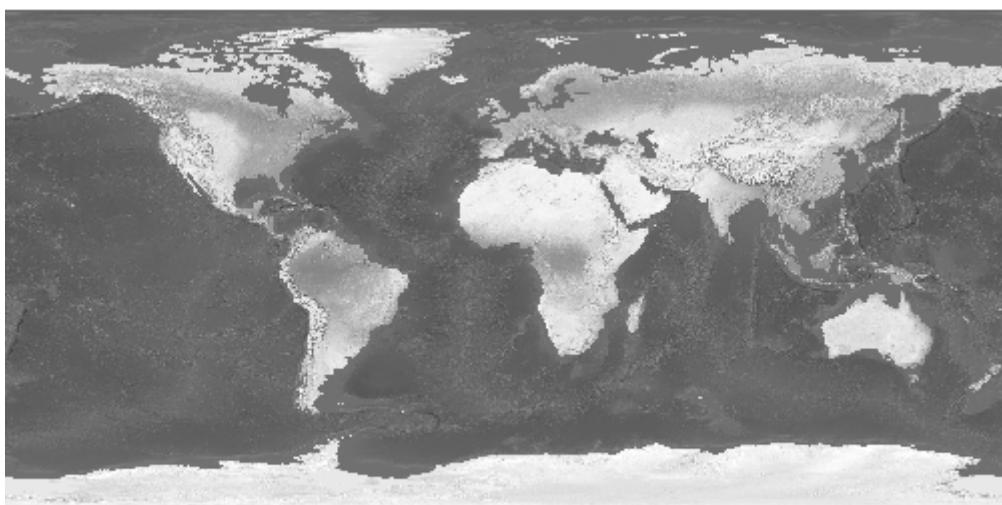


## WorldImage

## Read

Read a WorldImage Raster from a File

```
File file = new File("src/main/resources/earth.png")
WorldImage worldImage = new WorldImage(file)
Raster raster = worldImage.read("earth")
```

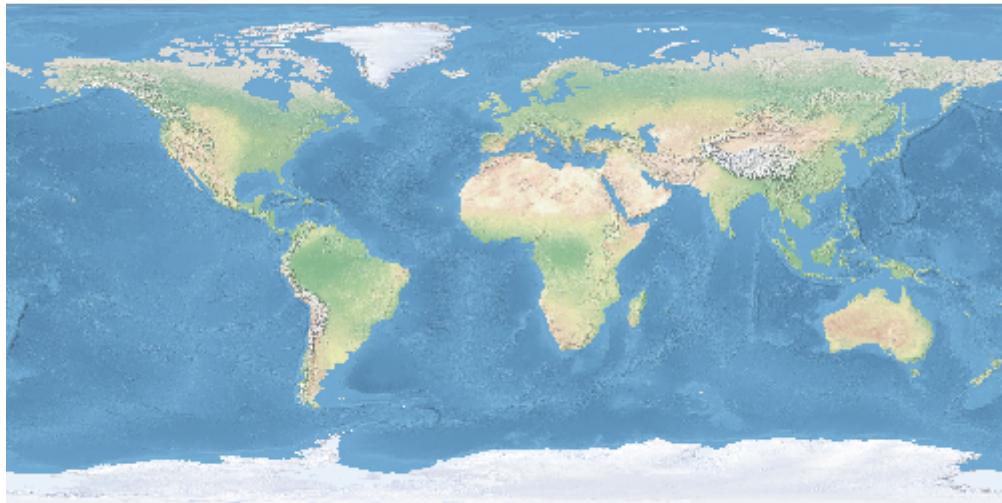


## Raster Recipes

The Raster classes are in the [geoscript.layer](#) package.

## Raster Properties

Read a Raster from a File

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
```

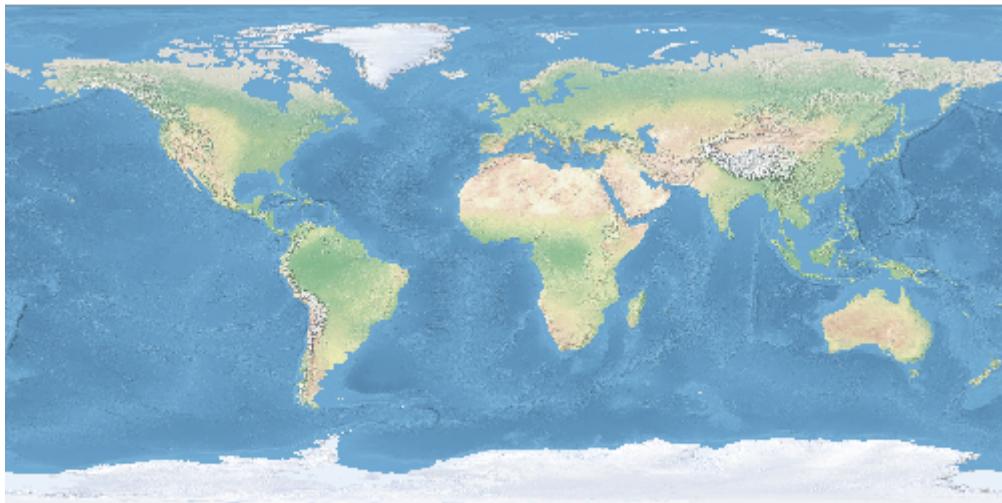

Get the Raster's Bounds.

```
Bounds bounds = raster.bounds  
println "Bounds: ${bounds}"
```

```
Bounds: (-179.9999999999997,-89.9999999998205,179.99999999996405,90.0,EP SG:4326)
```

Get the Raster's Projection.

```
Projection projection = raster.proj  
println "Projection: ${projection}"
```

```
Projection: EPSG:4326
```

Get the Raster's Size.

```
List size = raster.size  
println "Size: ${size[0]}x${size[1]}"
```

```
Size: 800x400
```

Get the Raster's number of columns and rows.

```
int cols = raster.cols  
int rows = raster.rows  
println "Columns: ${cols} Rows: ${rows}"
```

```
Columns: 800 Rows: 400
```

Get the Raster's Bands.

```
List<Band> bands = raster.bands  
println "Bands:  
bands.each { Band band ->  
    println " ${band}"  
}
```

```
Band:  
RED_BAND  
GREEN_BAND  
BLUE_BAND
```

Get the Raster's block size.

```
List blockSize = raster.blockSize  
println "Block size: ${blockSize[0]}x${blockSize[1]}"
```

```
Block size: 800x8
```

Get the Raster's pixel size.

```
List pixelSize = raster.pixelSize  
println "Pixel size: ${pixelSize[0]}x${pixelSize[1]}"
```

```
Pixel size: 0.4499999999995505x0.449999999999551
```

Get more information about a Raster's Bounds.

```

File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
List<Band> bands = raster.bands
bands.each { Band band ->
    println "${band}"
    println "  Min = ${band.min}"
    println "  Max = ${band.max}"
    println "  No Data = ${band.noData}"
    println "  Is No Data = ${band.isNoData(12.45)}"
    println "  Unit = ${band.unit}"
    println "  Scale = ${band.scale}"
    println "  Offset = ${band.offset}"
    println "  Type = ${band.type}"
}

```

#### RED\_BAND

```

Min = 0.0
Max = 255.0
No Data = [0.0]
Is No Data = false
Unit = null
Scale = 1.0
Offset = 0.0
Type = byte

```

#### GREEN\_BAND

```

Min = 0.0
Max = 255.0
No Data = [0.0]
Is No Data = false
Unit = null
Scale = 1.0
Offset = 0.0
Type = byte

```

#### BLUE\_BAND

```

Min = 0.0
Max = 255.0
No Data = [0.0]
Is No Data = false
Unit = null
Scale = 1.0
Offset = 0.0
Type = byte

```

Get the minimum and maximum values from a Raster for each band


```
Map extrema = raster.extrema  
println "Min values: ${extrema.min} Max values: ${extrema.max}"
```

```
Min value: [56.0, 84.0, 91.0] Max value: [255.0, 255.0, 255.0]
```

## Raster Values

Get values from a Raster

```
File file = new File("src/main/resources/pc.tif")  
Format format = Format.getFormat(file)  
Raster raster = format.read("pc")
```

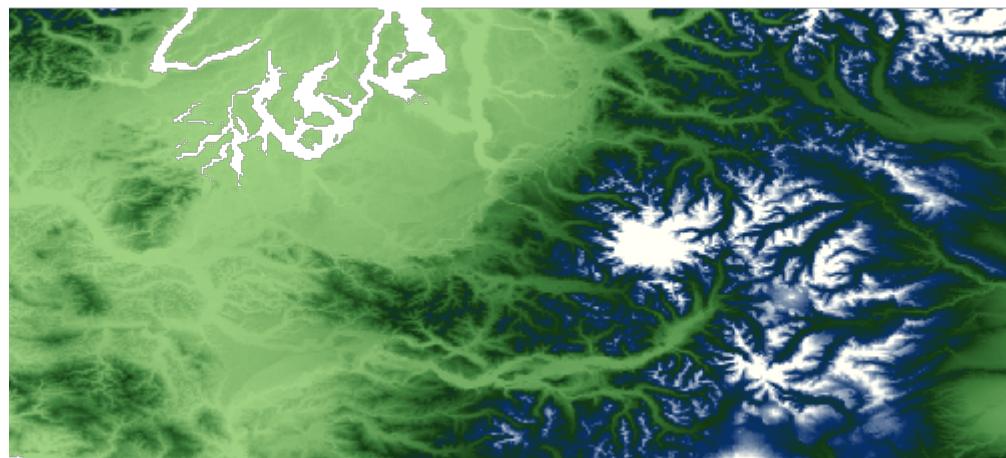

Get values from a Raster with a Point.

```
double elevation = raster.getValue(new Point(-121.799927, 46.867703))  
println elevation
```

```
3069.0
```

Get values from a Raster with a Pixel Location.

```
List pixel = [100,200]  
elevation = raster.getValue(pixel)  
println elevation
```

288.0

## Set values on a Raster

```
File file = new File("src/main/resources/earth.tif")
GeoTIFF geotiff = new GeoTIFF(file)
Raster raster = geotiff.read("earth")


File arcGridFile = new File("target/earth.asc")
ArcGrid arcGrid = new ArcGrid(arcGridFile)
arcGrid.write(raster)
Raster arcGridRaster = arcGrid.read("earth")

arcGridRaster.eachCell {double value, double x, double y ->
    double newValue = value + 100
    arcGridRaster.setValue([x as int, y as int], newValue)
}

File arcGridAddFile = new File("target/earth_100.asc")
ArcGrid arcGridAdd = new ArcGrid(arcGridAddFile)
arcGridAdd.write(arcGridRaster)
Raster arcGridRasterAdd = arcGridAdd.read("earth_100")

List pixels = [
    [92, 298],
    [393.0, 343.0],
    [795.0, 399.0]
]
pixels.each { List pixel ->
    println "Original: ${raster.getValue(pixel)} New:
    ${arcGridRasterAdd.getValue(pixel)}"
}
```

```
Original: 97.0 New: 197.0
Original: 96.0 New: 196.0
Original: 237.0 New: 337.0
```

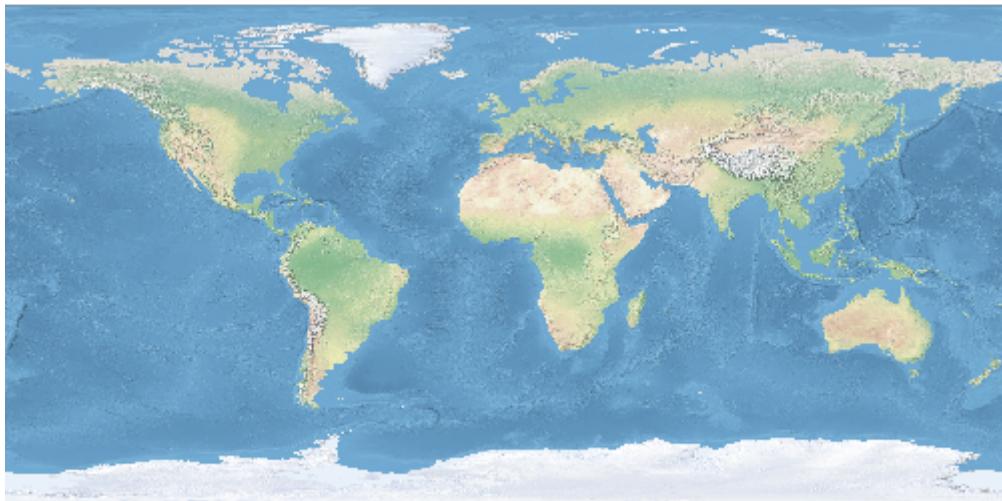

# Raster Processing

## Crop

Crop a Raster with a Bounds


```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
Raster croppedRaster = raster.crop(new Bounds(-160.927734, 6.751896, -34.716797
, 57.279043, "EPSG:4326"))
```



## Project

Reproject a Raster to another Projection


```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
Projection projection = new Projection("EPSG:3857")
Raster projectedRaster = raster.crop(projection.geoBounds).reproject(projection)
```

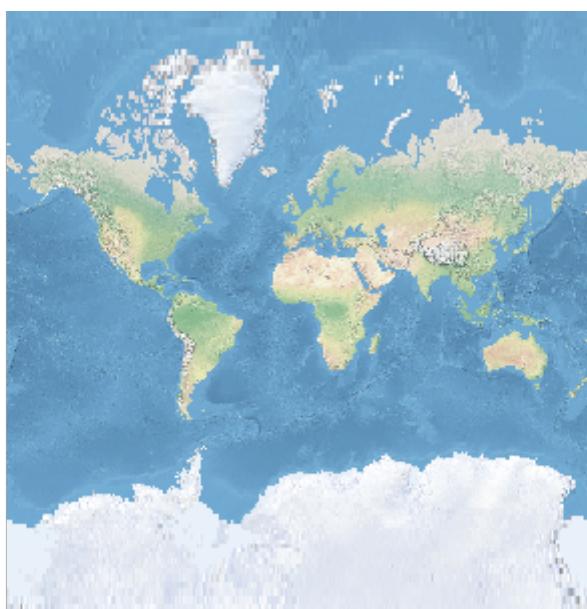

## Contours

Create vector contours from a Raster


```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
int band = 0
int interval = 300
boolean simplify = true
boolean smooth = true
Layer contours = raster.contours(band, interval, simplify, smooth)
```

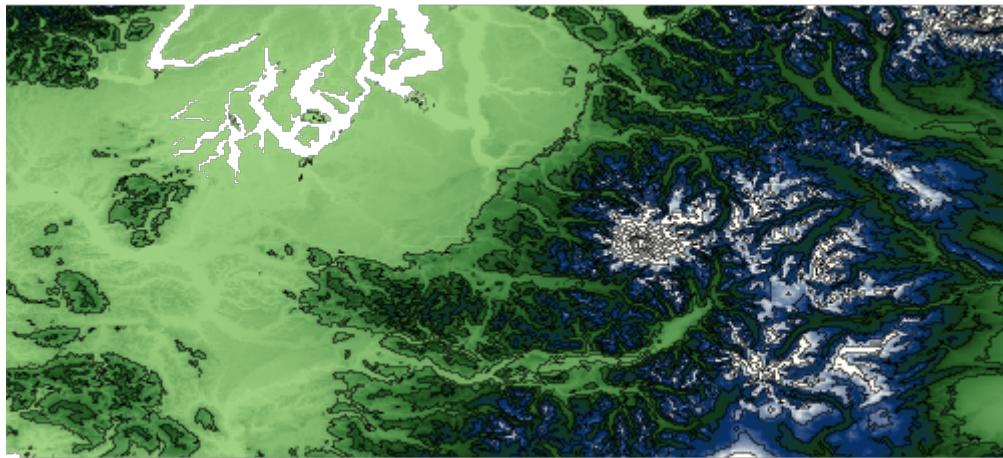

## Stylize

Stylize a Raster by baking in a style to create a new Raster


```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster stylizedRaster = raster.stylize(new ColorMap([
    [color: "#9fd182", quantity:25],
    [color: "#3e7f3c", quantity:470],
    [color: "#133912", quantity:920],
    [color: "#08306b", quantity:1370],
    [color: "#fffff5", quantity:1820],
]))
```

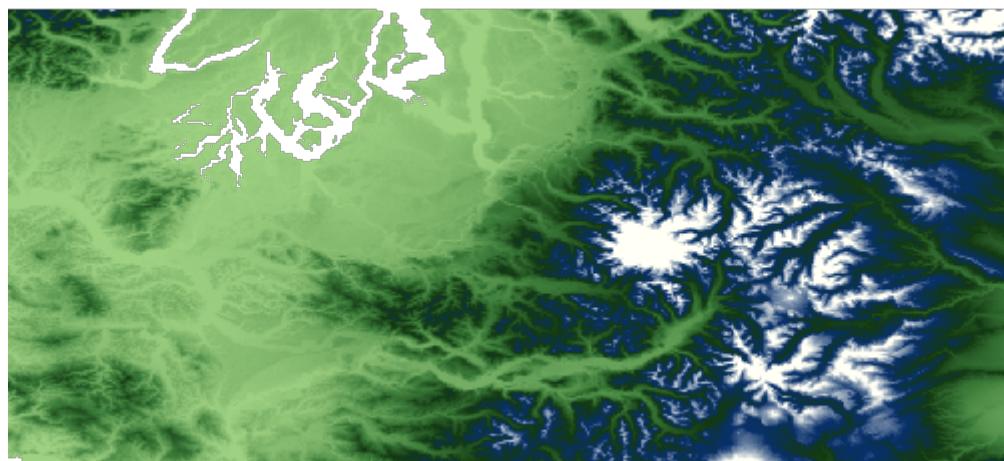

## Reclassify

Reclassify a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster reclassifiedRaster = raster.reclassify([
    [min:0,    max:0,    value: 1],
    [min:0,    max:50,   value: 2],
    [min:50,   max:200,  value: 3],
    [min:200,  max:1000, value: 4],
    [min:1000, max:1500, value: 5],
    [min:1500, max:4000, value: 6]
])
```

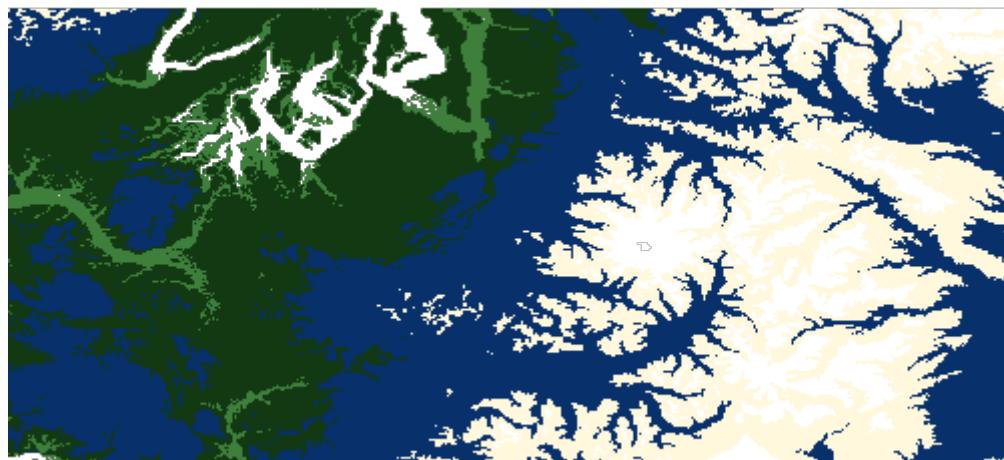


## Scale

Scale a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println "Original Raster Size = ${raster.size[0]}x${raster.size[1]}"

Raster scaledRaster = raster.scale(0.5, 0.5)
println "Scaled Raster Size = ${scaledRaster.size[0]}x${scaledRaster.size[1]}"
```

```
Original Raster Size = 800x400
Scaled Raster Size = 400x200
```

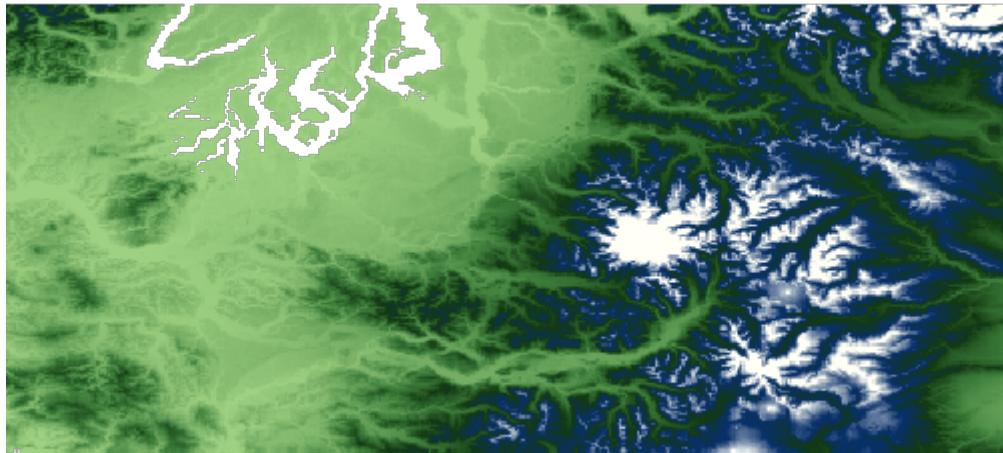

## Invert

Invert the values of a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster invertedRaster = raster.invert()
```

## Exponent

Calculate the exponent of the values of a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster expRaster = raster.exp()
```



## Log


Calculate the log of the values of a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster logRaster = raster.log()
```

## Vectorize

Create a Polygon Layer from a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster reclassifiedRaster = raster.reclassify([
    [min:0,    max:0,    value: 1],
    [min:0,    max:50,   value: 2],
    [min:50,   max:200,  value: 3],
    [min:200,  max:1000, value: 4],
    [min:1000, max:1500, value: 5],
    [min:1500, max:4000, value: 6]
])
Layer layer = reclassifiedRaster.polygonLayer
```

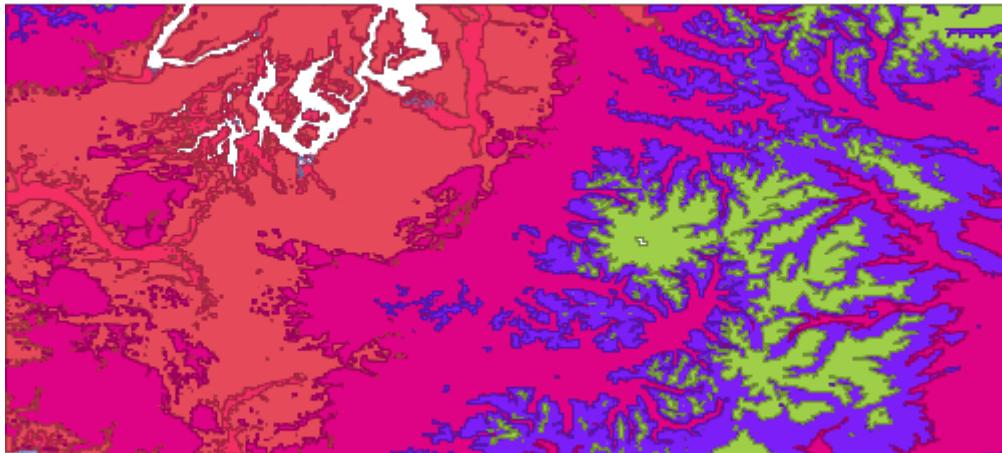

Create a Point Layer from a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc").crop(new Bounds(-121.878548,46.808402,-121.636505
,46.896097, "EPSG:4326"))
Layer layer = raster.pointLayer
```



## Raster Algebra

### Add

Add a constant value to a Raster


```

File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927, 46.867703))
println elevation1

Raster higherRaster = raster.add(100.00)
double elevation2 = higherRaster.getValue(new Point(-121.799927, 46.867703))
println elevation2

```

3069.0  
3169.0

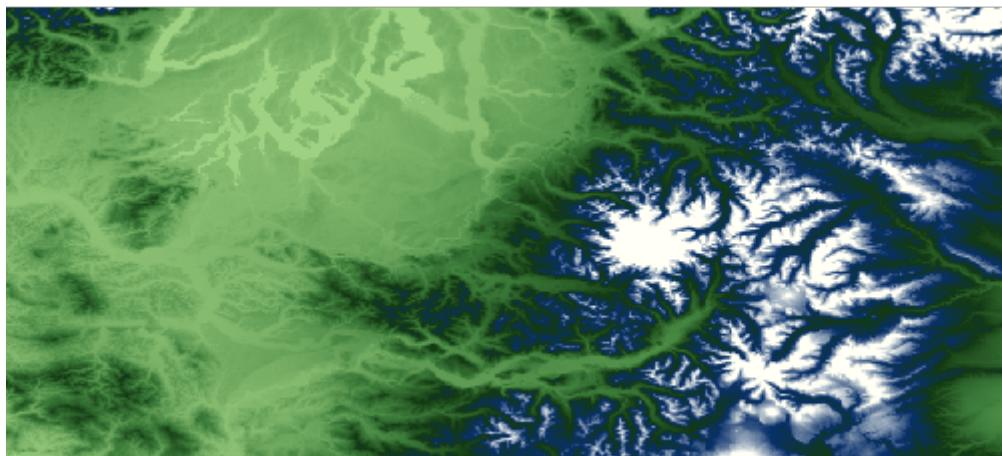

## Subtract

Subtract a constant value from a Raster


```

File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927, 46.867703))
println elevation1

Raster lowerRaster = raster.minus(50.00)
double elevation2 = lowerRaster.getValue(new Point(-121.799927, 46.867703))
println elevation2

```

3069.0  
3019.0

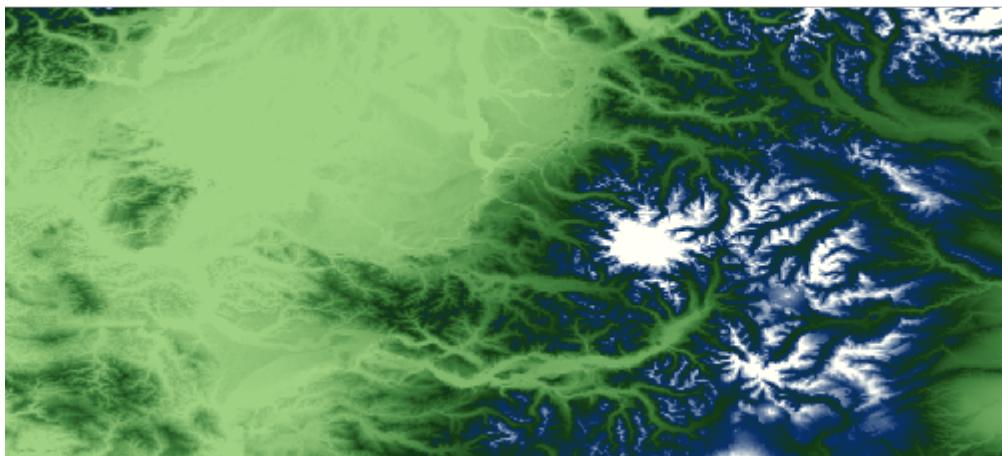


Subtract the Raster from a constant value

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927, 46.867703))
println elevation1

Raster lowerRaster = raster.minusFrom(2000.0)
double elevation2 = lowerRaster.getValue(new Point(-121.799927, 46.867703))
println elevation2
```

```
3069.0
-1069.0
```

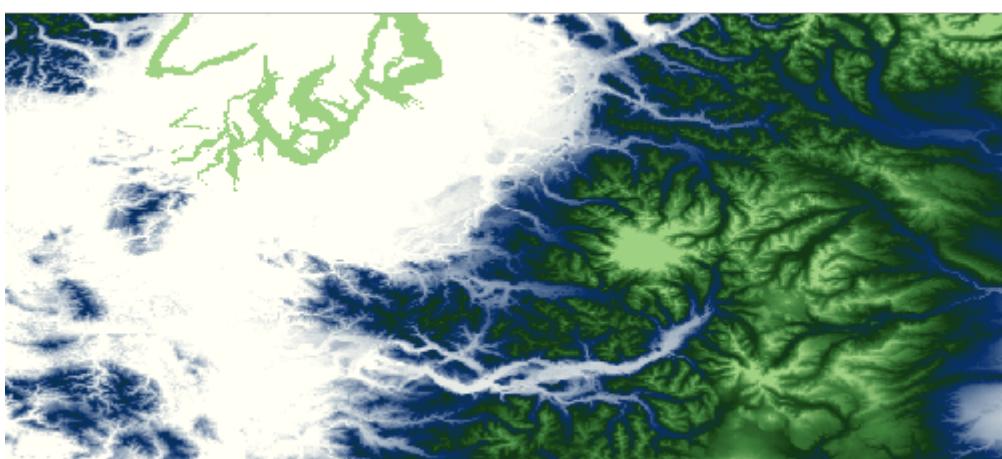


## Multiply

Multiply a constant value against a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927, 46.867703))
println elevation1

Raster higherRaster = raster.multiply(2.0)
double elevation2 = higherRaster.getValue(new Point(-121.799927, 46.867703))
println elevation2
```

```
3069.0
6138.0
```

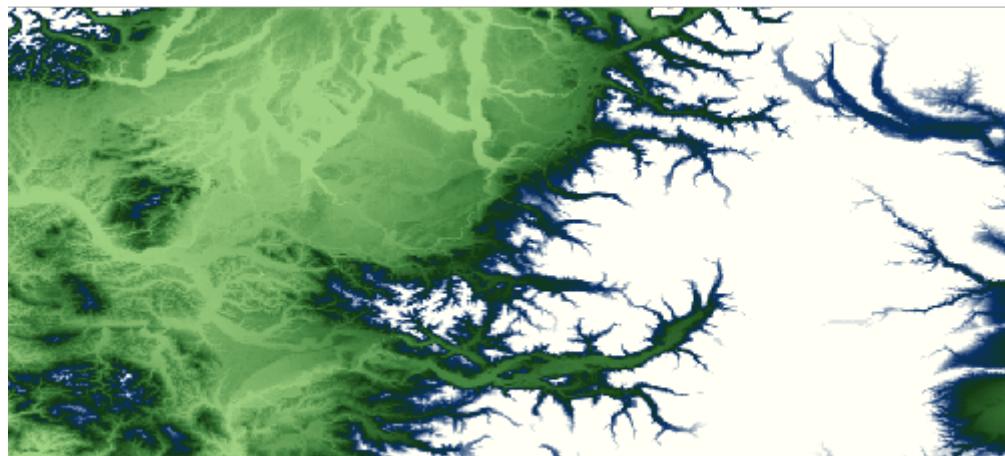


## Divide

Divide a constant value against a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927, 46.867703))
println elevation1

Raster lowerRaster = raster.divide(2.0)
double elevation2 = lowerRaster.getValue(new Point(-121.799927, 46.867703))
println elevation2
```

```
3069.0  
1534.5
```

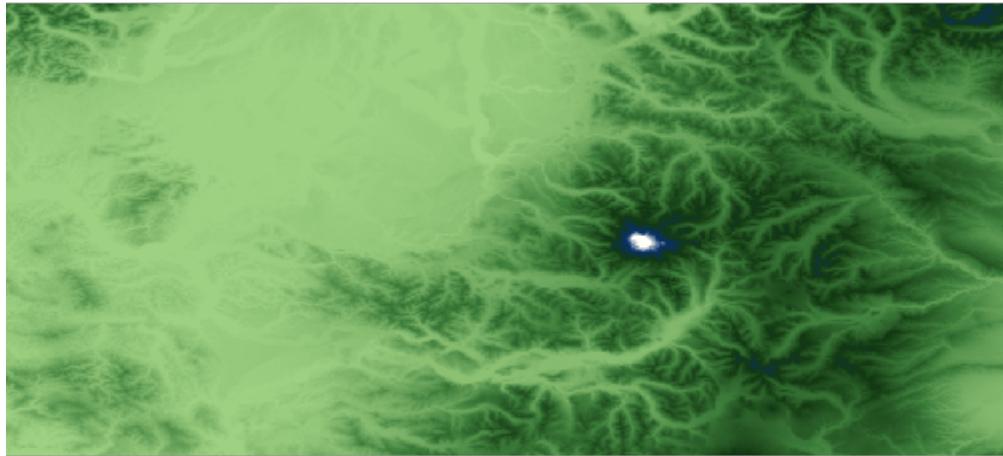

# Tile Recipes

The Tile classes are in the [geoscript.layer](#) package.

## Tile

### Tile Properties

Get a Tile's Properties.

```
byte[] data = new File("src/main/resources/tile.png").bytes
Tile tile = new Tile(2,1,3,data)
println "Z = ${tile.z}"
println "X = ${tile.x}"
println "Y = ${tile.y}"
println "Tile = ${tile.toString()}"
println "# bytes = ${tile.data.length}"
println "Data as base64 encoded string = ${tile.base64String}"
```

```
Z = 2
X = 1
Y = 3
Tile = Tile(x:1, y:3, z:2)
# bytes = 11738
Data as base64 encoded string = iVBORw0KGgoAAAANSUhEUgAAAQAAAAEACAYAAABccqh...  
AAAtO...
```

## ImageTile Properties

Some Tiles contain an Image. ImageTile's have an image property.

```
byte[] data = new File("src/main/resources/tile.png").bytes
ImageTile tile = new ImageTile(0,0,0,data)
BufferedImage image = tile.image
```



## Grid

A Grid describes a level in a Pyramid of Tiles.

### Grid Properties

```
Grid grid = new Grid(1, 2, 2, 78206.0, 78206.0)
println "Zoom Level: ${grid.z}"
println "Width / # Columns: ${grid.width}"
println "Height / # Rows: ${grid.height}"
println "Size / # Tiles: ${grid.size}"
println "X Resolution: ${grid.xResolution}"
println "Y Resolution: ${grid.yResolution}"
```

```
Zoom Level: 1
Width / # Columns: 2
Height / # Rows: 2
Size / # Tiles: 4
X Resolution: 78206.0
Y Resolution: 78206.0
```

## Pyramid

## Pyramid Properties

Get the Pyramid's Bounds.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
```

```
Bounds bounds = pyramid.bounds  
println bounds
```

```
(-2.0036395147881314E7, -  
2.0037471205137067E7, 2.0036395147881314E7, 2.0037471205137067, EPSG:3857)
```

Get the Pyramid's projection.

```
Projection proj = pyramid.proj  
println proj
```

```
EPSG:3857
```

Get the Pyramid's Origin.

```
Pyramid.Origin origin = pyramid.origin  
println origin
```

```
BOTTOM_LEFT
```

Get the Pyramid's Tile Width and Height.

```
int tileSize = pyramid.tileWidth  
int tileHeight = pyramid.tileHeight  
println "${tileWidth} x ${tileHeight}"
```

```
256 x 256
```

## Create Pyramids

Create a Global Mercator Pyramid.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
println "Projection: ${pyramid.proj}"
println "Origin: ${pyramid.origin}"
println "Bounds: ${pyramid.bounds}"
println "Max Zoom: ${pyramid.maxGrid.z}"
```

```
Projection: EPSG:3857
Origin: BOTTOM_LEFT
Bounds: (-2.0036395147881314E7,-2.003747120513706E7,2.0036395147881314E7,2.003747120513706E7,EPSG:3857)
Max Zoom: 19
```

Create a Global Geodetic Pyramid.

```
Pyramid pyramid = Pyramid.createGlobalGeodeticPyramid()
println "Projection: ${pyramid.proj}"
println "Origin: ${pyramid.origin}"
println "Bounds: ${pyramid.bounds}"
println "Max Zoom: ${pyramid.maxGrid.z}"
```

```
Projection: EPSG:4326
Origin: BOTTOM_LEFT
Bounds: (-179.99,-89.99,179.99,89.99,EPSG:4326)
Max Zoom: 19
```

Create a Global Mercator Pyramid from a well known name.

Well known names include:

- GlobalMercator
- Mercator
- GlobalMercatorBottomLeft
- GlobalMercatorTopLeft
- GlobalGeodetic
- Geodetic

```
Pyramid pyramid = Pyramid.fromString("mercator")
println "Projection: ${pyramid.proj}"
println "Origin: ${pyramid.origin}"
println "Bounds: ${pyramid.bounds}"
println "Max Zoom: ${pyramid.maxGrid.z}"
```

```
Projection: EPSG:3857
Origin: BOTTOM_LEFT
Bounds: (-2.0036395147881314E7, -2.0037471205137067E7, 2.0036395147881314E7, 2.0037471205137067, EPSG:3857)
Max Zoom: 19
```

## Get Bounds from a Pyramid

Get the Bounds for a Tile.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Tile tile = new Tile(2, 1, 1)
Bounds bounds = pyramid.bounds(tile)
println "The bounds of ${tile} is ${bounds}"
```


```
The bounds of Tile(x:1, y:1, z:2) is (-1.0018197573940657E7, -1.0018735602568535E7, 0.0, -3.725290298461914E-9, EPSG:3857)
```



Get the Bounds for an area around a Point at a zoom level.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Point point = Projection.transform(new Point(22.1539306640625, 37.67077737288316),
"EPSG:4326", "EPSG:3857")
int zoomLevel = 8
int width = 400
int height = 400
Bounds bounds = pyramid.bounds(point, zoomLevel, width, height)
println "The bounds around ${point} is ${bounds}"
```

The bounds around POINT (2466164.2805929263 4533021.525424092) is  
(2343967.4055929263,4410824.650424092,2588361.1555929263,4655218.400424092, EPSG:3857)

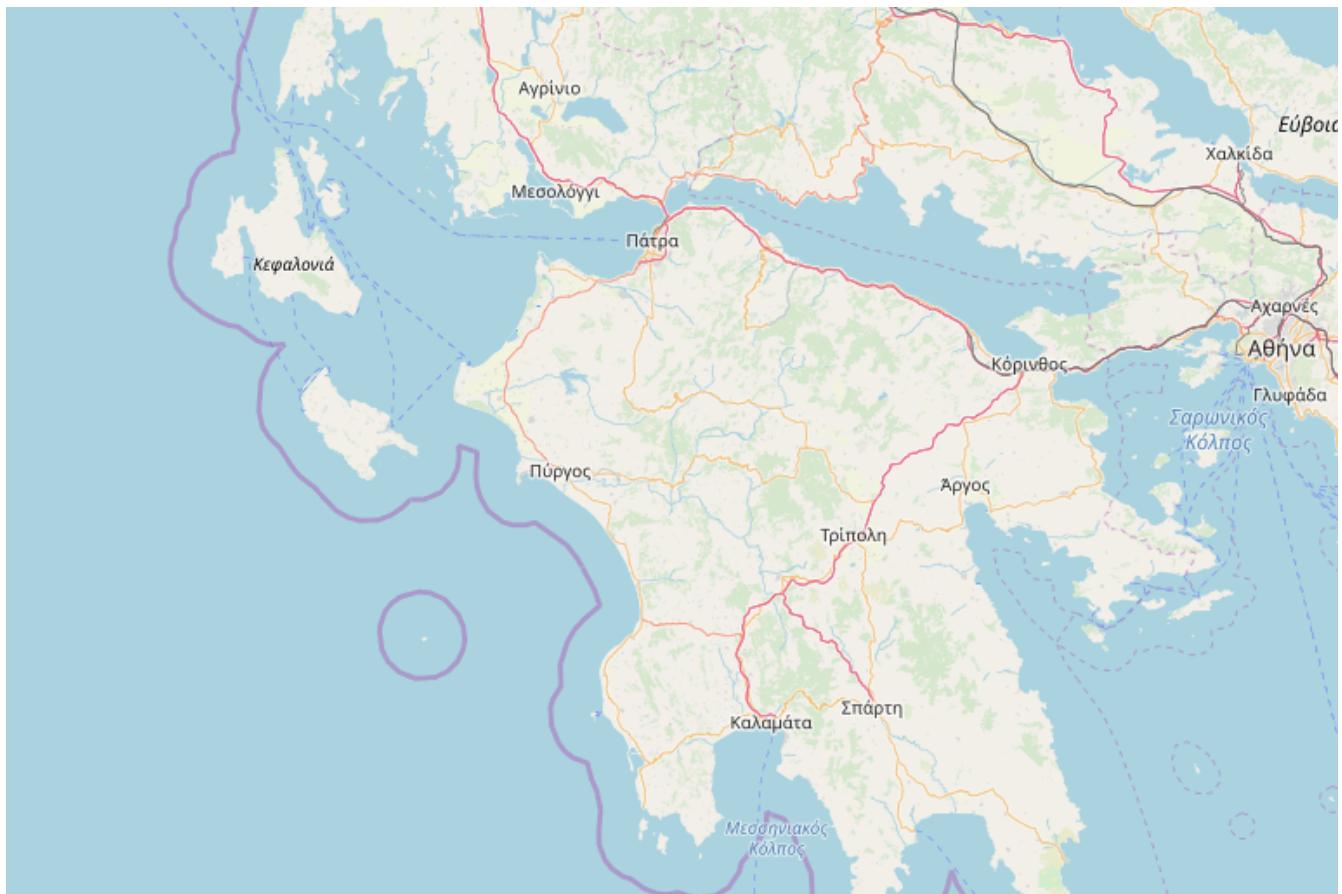

## Get a Grid from a Pyramid

Get a the min Grid.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()  
Grid grid = pyramid.minGrid  
println "Zoom Level: ${grid.z}"  
println "Width / # Columns: ${grid.width}"  
println "Height / # Rows: ${grid.height}"  
println "Size / # Tiles: ${grid.size}"  
println "X Resolution: ${grid.xResolution}"  
println "Y Resolution: ${grid.yResolution}"
```

```
Zoom Level: 0  
Width / # Columns: 1  
Height / # Rows: 1  
Size / # Tiles: 1  
X Resolution: 156412.0  
Y Resolution: 156412.0
```

Get a the max Grid.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Grid grid = pyramid.maxGrid
println "Zoom Level: ${grid.z}"
println "Width / # Columns: ${grid.width}"
println "Height / # Rows: ${grid.height}"
println "Size / # Tiles: ${grid.size}"
println "X Resolution: ${grid.xResolution}"
println "Y Resolution: ${grid.yResolution}"
```

```
Zoom Level: 19
Width / # Columns: 524288
Height / # Rows: 524288
Size / # Tiles: 274877906944
X Resolution: 0.29833221435546875
Y Resolution: 0.29833221435546875
```

Get a Grid from a Pyramid by Zoom Level.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Grid grid = pyramid.grid(1)
println "Zoom Level: ${grid.z}"
println "Width / # Columns: ${grid.width}"
println "Height / # Rows: ${grid.height}"
println "Size / # Tiles: ${grid.size}"
println "X Resolution: ${grid.xResolution}"
println "Y Resolution: ${grid.yResolution}"
```

```
Zoom Level: 1
Width / # Columns: 2
Height / # Rows: 2
Size / # Tiles: 4
X Resolution: 78206.0
Y Resolution: 78206.0
```

Get a Grid from a Pyramid by a Bounds and Resolution.

```

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Bounds bounds = new Bounds(-123.09, 46.66, -121.13, 47.48, "EPSG:4326").reproject
("EPSG:3857")
Grid grid = pyramid.grid(bounds, bounds.width / 400.0, bounds.height / 200.0)
println "Zoom Level: ${grid.z}"
println "Width / # Columns: ${grid.width}"
println "Height / # Rows: ${grid.height}"
println "Size / # Tiles: ${grid.size}"
println "X Resolution: ${grid.xResolution}"
println "Y Resolution: ${grid.yResolution}"

```

```

Zoom Level: 8
Width / # Columns: 256
Height / # Rows: 256
Size / # Tiles: 65536
X Resolution: 610.984375
Y Resolution: 610.984375

```

Get a Grid from a Pyramid by a Bounds and Size.

```

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Bounds bounds = new Bounds(-123.09, 46.66, -121.13, 47.48, "EPSG:4326").reproject
("EPSG:3857")
Grid grid = pyramid.grid(bounds, 400, 200)
println "Zoom Level: ${grid.z}"
println "Width / # Columns: ${grid.width}"
println "Height / # Rows: ${grid.height}"
println "Size / # Tiles: ${grid.size}"
println "X Resolution: ${grid.xResolution}"
println "Y Resolution: ${grid.yResolution}"

```

```

Zoom Level: 8
Width / # Columns: 256
Height / # Rows: 256
Size / # Tiles: 65536
X Resolution: 610.984375
Y Resolution: 610.984375

```

## Get Tile Coordinates

Get the tile coordinates from a Pyramid by Bounds and zoom level

```

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Bounds bounds = new Bounds(-124.7314220000001, 24.955967, -66.969849, 49.371735,
"EPSG:4326").reproject("EPSG:3857")
long zoomLevel = 4
Map<String, Integer> coords = pyramid.getTileCoordinates(bounds, zoomLevel)
println "Min X = ${coords minX}"
println "Min Y = ${coords minY}"
println "Max X = ${coords maxX}"
println "Max Y = ${coords maxY}"

```

```

Min X = 2
Min Y = 9
Max X = 5
Max Y = 10

```

## Get the tile coordinates from a Pyramid by Bounds and Grid

```

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid()
Bounds bounds = new Bounds(20.798492, 36.402494, 22.765045, 37.223768, "EPSG:4326"
).reproject("EPSG:3857")
Grid grid = pyramid.grid(10)
Map<String, Integer> coords = pyramid.getTileCoordinates(bounds, grid)
println "Min X = ${coords minX}"
println "Min Y = ${coords minY}"
println "Max X = ${coords maxX}"
println "Max Y = ${coords maxY}"

```

```

Min X = 571
Min Y = 623
Max X = 576
Max Y = 626

```

## Reading and Writing Pyramids

The Pyramid IO classes are in the [geoscript.layer.io](#) package.

### Finding Pyramid Writer and Readers

*List all Pyramid Writers*

```

List<PyramidWriter> writers = PyramidWriters.list()
writers.each { PyramidWriter writer -
    println writer.className
}

```

```
CsvPyramidWriter  
GdalTmsPyramidWriter  
JsonPyramidWriter  
XmlPyramidWriter
```

### Find a Pyramid Writer

```
Pyramid pyramid = Pyramid.createGlobalGeodeticPyramid(maxZoom: 2)  
PyramidWriter writer = PyramidWriters.find("csv")  
String pyramidStr = writer.write(pyramid)  
println pyramidStr
```

```
EPSG:4326  
-179.99,-89.99,179.99,89.99,EPGS:4326  
BOTTOM_LEFT  
256,256  
0,2,1,0.703125,0.703125  
1,4,2,0.3515625,0.3515625  
2,8,4,0.17578125,0.17578125
```

### List all Pyramid Readers

```
List<PyramidReader> readers = PyramidReaders.list()  
readers.each { PyramidReader reader ->  
    println reader.className  
}
```

```
CsvPyramidReader  
GdalTmsPyramidReader  
JsonPyramidReader  
XmlPyramidReader
```

## Find a Pyramid Reader

```
PyramidReader reader = PyramidReaders.find("csv")
Pyramid pyramid = reader.read("""EPSG:3857
-2.0036395147881314E7,
-2.0037471205137067E7,2.0036395147881314E7,2.0037471205137067,EPSG:3857
BOTTOM_LEFT
256,256
0,1,1,156412.0,156412.0
1,2,2,78206.0,78206.0
2,4,4,39103.0,39103.0
3,8,8,19551.5,19551.5
4,16,16,9775.75,9775.75
""")  
println pyramid
```

```
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.0036395147881314E7,-2.0037471205137067E7,2.0036395147881314E7,2.0037471205137067,EPSG:3857), origin:BOTTOM_LEFT, tileSize:256, tileHeight:256)
```

## JSON

Get a JSON String from a Pyramid.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid(maxZoom: 4)
String json = pyramid.json
println json
```

```
{
  "proj": "EPSG:3857",
  "bounds": {
    "minX": -2.0036395147881314E7,
    "minY": -2.0037471205137067E7,
    "maxX": 2.0036395147881314E7,
    "maxY": 2.0037471205137067E7
  },
  "origin": "BOTTOM_LEFT",
  "tileSize": {
    "width": 256,
    "height": 256
  },
  "grids": [
    {
      "z": 0,
      "width": 1,
      "height": 1,
      "xres": 156412.0,
```

```

    "yres": 156412.0
},
{
    "z": 1,
    "width": 2,
    "height": 2,
    "xres": 78206.0,
    "yres": 78206.0
},
{
    "z": 2,
    "width": 4,
    "height": 4,
    "xres": 39103.0,
    "yres": 39103.0
},
{
    "z": 3,
    "width": 8,
    "height": 8,
    "xres": 19551.5,
    "yres": 19551.5
},
{
    "z": 4,
    "width": 16,
    "height": 16,
    "xres": 9775.75,
    "yres": 9775.75
}
]
}

```

## XML

Get a XML String from a Pyramid.

```

Pyramid pyramid = Pyramid.createGlobalMercatorPyramid(maxZoom: 4)
String xml = pyramid.xml
println xml

```

```

<pyramid>
    <proj>EPSG:3857</proj>
    <bounds>
        <minX>-2.0036395147881314E7</minX>
        <minY>-2.0037471205137067E7</minY>
        <maxX>2.0036395147881314E7</maxX>
        <maxY>2.0037471205137067E7</maxY>
    </bounds>

```

```
<origin>BOTTOM_LEFT</origin>
<tileSize>
    <width>256</width>
    <height>256</height>
</tileSize>
<grids>
    <grid>
        <z>0</z>
        <width>1</width>
        <height>1</height>
        <xres>156412.0</xres>
        <yres>156412.0</yres>
    </grid>
    <grid>
        <z>1</z>
        <width>2</width>
        <height>2</height>
        <xres>78206.0</xres>
        <yres>78206.0</yres>
    </grid>
    <grid>
        <z>2</z>
        <width>4</width>
        <height>4</height>
        <xres>39103.0</xres>
        <yres>39103.0</yres>
    </grid>
    <grid>
        <z>3</z>
        <width>8</width>
        <height>8</height>
        <xres>19551.5</xres>
        <yres>19551.5</yres>
    </grid>
    <grid>
        <z>4</z>
        <width>16</width>
        <height>16</height>
        <xres>9775.75</xres>
        <yres>9775.75</yres>
    </grid>
</grids>
</pyramid>
```

## CSV

Get a CSV String from a Pyramid.

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid(maxZoom: 4)
String csv = pyramid.csv
println csv
```

```
EPSG:3857
-2.0036395147881314E7,
-2.003747120513706E7,2.0036395147881314E7,2.003747120513706E7,EPGS:3857
BOTTOM_LEFT
256,256
0,1,1,156412.0,156412.0
1,2,2,78206.0,78206.0
2,4,4,39103.0,39103.0
3,8,8,19551.5,19551.5
4,16,16,9775.75,9775.75
```

## GDAL XML

Write a Pyramid to a GDAL XML File

```
Pyramid pyramid = Pyramid.createGlobalMercatorPyramid(maxZoom: 4)
GdalTmsPyramidWriter writer = new GdalTmsPyramidWriter()
String xml = writer.write(pyramid, serverUrl: 'https://myserver.com/${z}/${x}/${y}',
imageFormat: 'png')
println xml
```

```
<GDAL_WMS>
  <Service name='TMS'>
    <ServerURL>https://myserver.com/${z}/${x}/${y}</ServerURL>
    <SRS>EPSG:3857</SRS>
    <ImageFormat>png</ImageFormat>
  </Service>
  <DataWindow>
    <UpperLeftX>-2.0036395147881314E7</UpperLeftX>
    <UpperLeftY>2.003747120513706E7</UpperLeftY>
    <LowerRightX>2.0036395147881314E7</LowerRightX>
    <LowerRightY>-2.003747120513706E7</LowerRightY>
    <TileLevel>4</TileLevel>
    <TileCountX>1</TileCountX>
    <TileCountY>1</TileCountY>
    <YOrigin>bottom</YOrigin>
  </DataWindow>
  <Projection>EPSG:3857</Projection>
  <BlockSizeX>256</BlockSizeX>
  <BlockSizeY>256</BlockSizeY>
  <BandsCount>3</BandsCount>
</GDAL_WMS>
```

## Read a Pyramid from a GDAL XML File

```
String xml = '''<GDAL_WMS>
<Service name='TMS'>
  <ServerURL>https://myserver.com/${z}/${x}/${y}</ServerURL>
  <SRS>EPSG:3857</SRS>
  <ImageFormat>png</ImageFormat>
</Service>
<DataWindow>
  <UpperLeftX>-2.0036395147881314E7</UpperLeftX>
  <UpperLeftY>2.003747120513706E7</UpperLeftY>
  <LowerRightX>2.0036395147881314E7</LowerRightX>
  <LowerRightY>-2.003747120513706E7</LowerRightY>
  <TileLevel>4</TileLevel>
  <TileCountX>1</TileCountX>
  <TileCountY>1</TileCountY>
  <YOrigin>bottom</YOrigin>
</DataWindow>
<Projection>EPSG:3857</Projection>
<BlockSizeX>256</BlockSizeX>
<BlockSizeY>256</BlockSizeY>
<BandsCount>3</BandsCount>
</GDAL_WMS>'''
GdalTmsPyramidReader reader = new GdalTmsPyramidReader()
Pyramid pyramid = reader.read(xml)
```

```
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.0036395147881314E7,-2.003747120513706E7,2.0036395147881314E7,2.003747120513706E7,EPSC:3857), origin:BOTTOM_LEFT, tileSize:256, tileHeight:256)
```

## Generating Tiles

### Generating Image Tiles

#### MBTiles

Generate Image Tiles to a MBTiles file

```

File file = new File("target/world.mbtiles")
MBTiles mbtiles = new MBTiles(file, "World", "World Tiles")

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")

ImageTileRenderer renderer = new ImageTileRenderer(mbtiles, [ocean, countries])
TileGenerator generator = new TileGenerator()
generator.generate(mbtiles, renderer, 0, 2)

```



Generate Image Tiles to a GeoPackage file

## GeoPackage


```

File file = new File("target/world.gpkg")
geoscript.layer.GeoPackage geopackage = new geoscript.layer.GeoPackage(file, "World",
Pyramid.createGlobalGeodeticPyramid())

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")

ImageTileRenderer renderer = new ImageTileRenderer(geopackage, [ocean, countries])
TileGenerator generator = new TileGenerator()
generator.generate(geopackage, renderer, 0, 2)

```

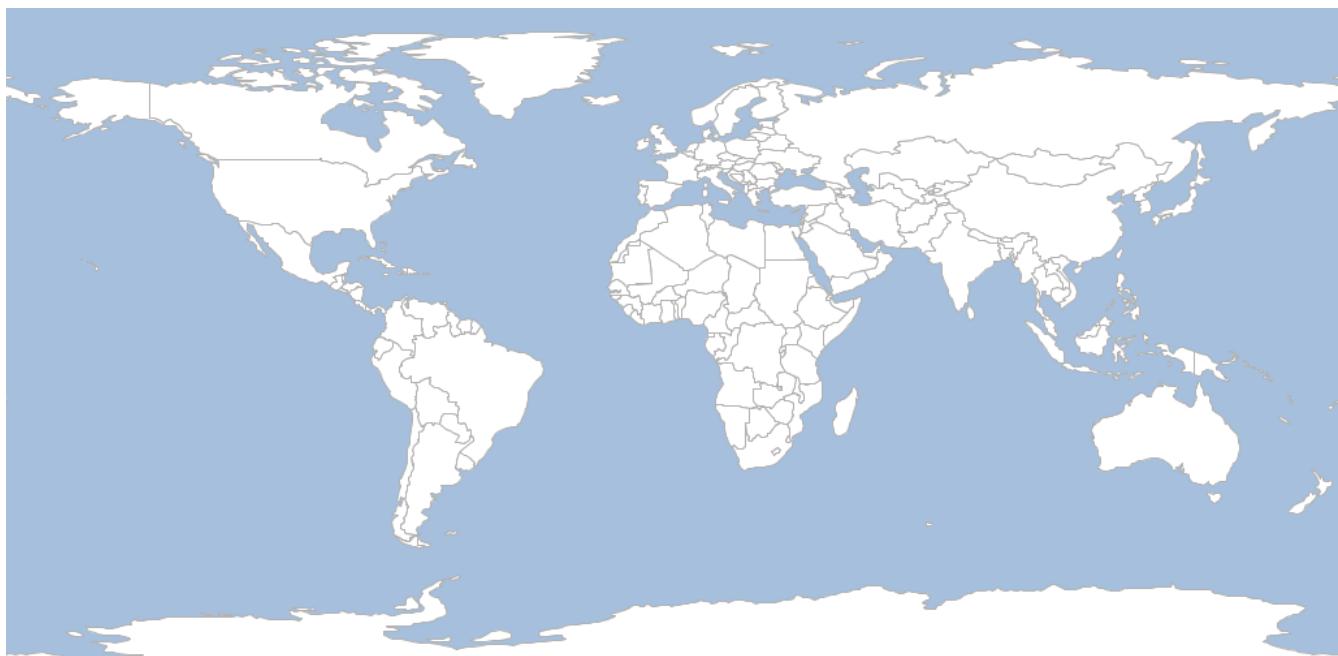

Generate Image Tiles to a TMS directory

**TMS**

```

File directory = new File("target/tiles")
directory.mkdirs()
TMS tms = new TMS("world", "png", directory, Pyramid.createGlobalMercatorPyramid())

Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer countries = workspace.get("countries")
countries.style = new Fill("#ffffff") + new Stroke("#b2b2b2", 0.5)
Layer ocean = workspace.get("ocean")
ocean.style = new Fill("#a5bfdd")

ImageTileRenderer renderer = new ImageTileRenderer(tms, [ocean, countries])
TileGenerator generator = new TileGenerator()
generator.generate(tms, renderer, 0, 2)

```



## Tile Layer

### Tile Layer Properties

Create a TileLayer from an MBTiles File.

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)
```

Get the TileLayer's name.

```
String name = mbtiles.name
println name
```

countries

Get the TileLayer's Bounds.

```
Bounds bounds = mbtiles.bounds
println bounds
```

```
(-2.0036395147881314E7,-
2.0037471205137067E7,2.0036395147881314E7,2.0037471205137067,EPSG:3857)
```

Get the TileLayer's Projection.

```
Projection proj = mbtiles.proj
println proj
```

EPSG:3857

Get the TileLayer's Pyramid.

```
Pyramid pyramid = mbtiles.pyramid
println pyramid
```

```
geoscript.layer.Pyramid(proj:EPSG:3857, bounds:(-2.0036395147881314E7,-
2.0037471205137067E7,2.0036395147881314E7,2.0037471205137067,EPSG:3857),
origin:BOTTOM_LEFT, tileSize:256, tileHeight:256)
```

Get a Tile from a TileLayer.

```
Tile tile = mbtiles.get(0, 0, 0)
println tile
```

```
Tile(x:0, y:0, z:0)
```



## Get, put, and delete a Tile from a TileLayer

Get a Tile from a TileLayer.

```
MBTiles layer = new MBTiles(file)
ImageTile tile = layer.get(0,0,0)
```



Add a Tile to a TileLayer.

```
File newTileFile = new File("src/main/resources/yellowtile.png")
ImageTile newTile = new ImageTile(0,0,0, newTileFile.bytes)
layer.put(newTile)
newTile = layer.get(0,0,0)
```



Remove a Tile from a TileLayer.

```
layer.delete(newTile)
newTile = layer.get(0,0,0)
println "Image = ${newTile.image}"
```

```
Image = null
```

Close a TileLayer

```
layer.close()
```

## Delete Tiles from a TileLayer

```
MBTiles layer = new MBTiles(file)
layer.tiles(1).each { Tile tile ->
    println "${tile} = ${tile.image == null}"
}
```

```
Tile(x:0, y:0, z:1) = false
Tile(x:1, y:0, z:1) = false
Tile(x:0, y:1, z:1) = false
Tile(x:1, y:1, z:1) = false
```

```
layer.delete(layer.tiles(1))
layer.tiles(1).each { Tile tile ->
    println "${tile} = ${tile.image == null}"
}
```

```
Tile(x:0, y:0, z:1) = true
Tile(x:1, y:0, z:1) = true
Tile(x:0, y:1, z:1) = true
Tile(x:1, y:1, z:1) = true
```

## Tiles

Get a TileCursor from a TileLayer with all of the Tiles in a zoom level.

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

long zoomLevel = 1
TileCursor tileCursor = mbtiles.tiles(zoomLevel)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}
```

```
Zoom Level: 1
# of tiles: 4
Bounds: (-2.0036395147881314E7,-
2.003747120513706E7,2.0036395147881314E7,2.003747120513706E7,EPGS:3857)
Width / # Columns: 2
Height / # Rows: 2
MinX: 0, MinY: 0, MaxX: 1, MaxY: 1

Tiles:
Tile(x:0, y:0, z:1)
Tile(x:1, y:0, z:1)
Tile(x:0, y:1, z:1)
Tile(x:1, y:1, z:1)
```

Get a TileCursor from a TileLayer with Tiles from a zoom level between min and max x and y coordinates.

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

long zoomLevel = 4
long minX = 2
long minY = 4
long maxX = 5
long maxY = 8
TileCursor tileCursor = mbtiles.tiles(zoomLevel, minX, minY, maxX, maxY)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor.minX}, MinY: ${tileCursor.minY}, MaxX: ${tileCursor.maxX},
MaxY: ${tileCursor.maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}
```

```
Zoom Level: 4
# of tiles: 20
Bounds: (-1.5027296360910986E7, -1.0018735602568535E7, -
5009098.786970329, 2504683.900642129, EPSG:3857)
Width / # Columns: 4
Height / # Rows: 5
MinX: 2, MinY: 4, MaxX: 5, MaxY: 8
```

Tiles:

```
Tile(x:2, y:4, z:4)
Tile(x:3, y:4, z:4)
Tile(x:4, y:4, z:4)
Tile(x:5, y:4, z:4)
Tile(x:2, y:5, z:4)
Tile(x:3, y:5, z:4)
Tile(x:4, y:5, z:4)
Tile(x:5, y:5, z:4)
Tile(x:2, y:6, z:4)
Tile(x:3, y:6, z:4)
Tile(x:4, y:6, z:4)
Tile(x:5, y:6, z:4)
Tile(x:2, y:7, z:4)
Tile(x:3, y:7, z:4)
Tile(x:4, y:7, z:4)
Tile(x:5, y:7, z:4)
Tile(x:2, y:8, z:4)
Tile(x:3, y:8, z:4)
Tile(x:4, y:8, z:4)
Tile(x:5, y:8, z:4)
```

Get a TileCursor from a TileLayer for a zoom level and a given Bounds.

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-102.875977, 45.433154, -96.481934, 48.118434,
"EPSG:4326").reproject("EPSG:3857")
int zoomLevel = 8
TileCursor tileCursor = mbtiles.tiles(bounds, zoomLevel)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}
```

```
Zoom Level: 8
# of tiles: 24
Bounds: (-1.1583540944868885E7, 5635538.7764447965, -
1.0644334922311949E7, 6261709.751605326, EPSG:3857)
Width / # Columns: 6
Height / # Rows: 4
MinX: 54, MinY: 164, MaxX: 59, MaxY: 167
```

Tiles:

```
Tile(x:54, y:164, z:8)
Tile(x:55, y:164, z:8)
Tile(x:56, y:164, z:8)
Tile(x:57, y:164, z:8)
Tile(x:58, y:164, z:8)
Tile(x:59, y:164, z:8)
Tile(x:54, y:165, z:8)
Tile(x:55, y:165, z:8)
Tile(x:56, y:165, z:8)
Tile(x:57, y:165, z:8)
Tile(x:58, y:165, z:8)
Tile(x:59, y:165, z:8)
Tile(x:54, y:166, z:8)
Tile(x:55, y:166, z:8)
Tile(x:56, y:166, z:8)
Tile(x:57, y:166, z:8)
Tile(x:58, y:166, z:8)
Tile(x:59, y:166, z:8)
Tile(x:54, y:167, z:8)
Tile(x:55, y:167, z:8)
Tile(x:56, y:167, z:8)
Tile(x:57, y:167, z:8)
Tile(x:58, y:167, z:8)
Tile(x:59, y:167, z:8)
```

Get a TileCursor from a TileLayer for a zoom level and given x and y resolutions.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-124.73142200000001, 24.955967, -66.969849, 49.371735,
"EPSG:4326").reproject("EPSG:3857")
double resolutionX = bounds.width / 400
double resolutionY = bounds.height / 300
TileCursor tileCursor = mbtiles.tiles(bounds, resolutionX, resolutionY)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 4
# of tiles: 8
Bounds: (-1.5027296360910986E7,2504683.9006421305,-
5009098.786970329,7514051.701926393,EPSG:3857)
Width / # Columns: 4
Height / # Rows: 2
MinX: 2, MinY: 9, MaxX: 5, MaxY: 10

Tiles:
Tile(x:2, y:9, z:4)
Tile(x:3, y:9, z:4)
Tile(x:4, y:9, z:4)
Tile(x:5, y:9, z:4)
Tile(x:2, y:10, z:4)
Tile(x:3, y:10, z:4)
Tile(x:4, y:10, z:4)
Tile(x:5, y:10, z:4)

```

Get a TileCursor from a TileLayer for a Bounds and a given canvas width and height.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-102.875977, 45.433154, -96.481934, 48.118434,
"EPSG:4326").reproject("EPSG:3857")
int width = 400
int height = 400
TileCursor tileCursor = mbtiles.tiles(bounds, width, height)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 7
# of tiles: 6
Bounds: (-1.1583540944868885E7,5635538.7764447965,-
1.0644334922311949E7,6261709.751605329,EPSG:3857)
Width / # Columns: 3
Height / # Rows: 2
MinX: 27, MinY: 82, MaxX: 29, MaxY: 83

Tiles:
Tile(x:27, y:82, z:7)
Tile(x:28, y:82, z:7)
Tile(x:29, y:82, z:7)
Tile(x:27, y:83, z:7)
Tile(x:28, y:83, z:7)
Tile(x:29, y:83, z:7)

```

Get a TileCursor from a TileLayer around a Point at a given zoom level for a given canvas width and height.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Point point = Projection.transform(new Point(-102.875977, 45.433154), "EPSG:4326",
"EPSG:3857")
int zoomLevel = 12
int width = 400
int height = 400
TileCursor tileCursor = mbtiles.tiles(point, zoomLevel, width, height)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 12
# of tiles: 9
Bounds: (-1.1466140192049267E7,5674674.46239233,-
1.1436790003844364E7,5704026.226852979,EPSG:3857)
Width / # Columns: 3
Height / # Rows: 3
MinX: 876, MinY: 2628, MaxX: 878, MaxY: 2630

```

```

Tiles:
Tile(x:876, y:2628, z:12)
Tile(x:877, y:2628, z:12)
Tile(x:878, y:2628, z:12)
Tile(x:876, y:2629, z:12)
Tile(x:877, y:2629, z:12)
Tile(x:878, y:2629, z:12)
Tile(x:876, y:2630, z:12)
Tile(x:877, y:2630, z:12)
Tile(x:878, y:2630, z:12)

```

Get the tile coordinates from a TileLayer by Bounds and Grid

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)
Bounds bounds = new Bounds(20.798492, 36.402494, 22.765045, 37.223768, "EPSG:4326"
).reproject("EPSG:3857")
Grid grid = mbtiles.pyramid.grid(10)
Map<String, Integer> coords = mbtiles.getTileCoordinates(bounds, grid)
println "Min X = ${coords minX}"
println "Min Y = ${coords minY}"
println "Max X = ${coords maxX}"
println "Max Y = ${coords maxY}"

```

```

Min X = 571
Min Y = 623
Max X = 576
Max Y = 626

```

## TileCursor

A TileCursor is a way to get a collection of Tiles from a TileLayer.

Get a TileCursor with all of the Tiles from a TileLayer in a zoom level.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

long zoomLevel = 1
TileCursor tileCursor = new TileCursor(mbtiles, zoomLevel)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 1
# of tiles: 4
Bounds: (-2.0036395147881314E7,-
2.003747120513706E7,2.0036395147881314E7,2.003747120513706E7,EPGS:3857)
Width / # Columns: 2
Height / # Rows: 2
MinX: 0, MinY: 0, MaxX: 1, MaxY: 1

Tiles:
Tile(x:0, y:0, z:1)
Tile(x:1, y:0, z:1)
Tile(x:0, y:1, z:1)
Tile(x:1, y:1, z:1)

```

Get a TileCursor with Tiles from a TileLayer in a zoom level between min and max x and y coordinates.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

long zoomLevel = 4
long minX = 2
long minY = 4
long maxX = 5
long maxY = 8
TileCursor tileCursor = new TileCursor(mbtiles, zoomLevel, minX, minY, maxX, maxY)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```
Zoom Level: 4
# of tiles: 20
Bounds: (-1.5027296360910986E7, -1.0018735602568535E7, -
5009098.786970329, 2504683.900642129, EPSG:3857)
Width / # Columns: 4
Height / # Rows: 5
MinX: 2, MinY: 4, MaxX: 5, MaxY: 8
```

Tiles:

```
Tile(x:2, y:4, z:4)
Tile(x:3, y:4, z:4)
Tile(x:4, y:4, z:4)
Tile(x:5, y:4, z:4)
Tile(x:2, y:5, z:4)
Tile(x:3, y:5, z:4)
Tile(x:4, y:5, z:4)
Tile(x:5, y:5, z:4)
Tile(x:2, y:6, z:4)
Tile(x:3, y:6, z:4)
Tile(x:4, y:6, z:4)
Tile(x:5, y:6, z:4)
Tile(x:2, y:7, z:4)
Tile(x:3, y:7, z:4)
Tile(x:4, y:7, z:4)
Tile(x:5, y:7, z:4)
Tile(x:2, y:8, z:4)
Tile(x:3, y:8, z:4)
Tile(x:4, y:8, z:4)
Tile(x:5, y:8, z:4)
```

Get a TileCursor with Tiles from a TileLayer in a zoom level for a given Bounds.

```
File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-102.875977, 45.433154, -96.481934, 48.118434,
"EPSG:4326").reproject("EPSG:3857")
int zoomLevel = 8
TileCursor tileCursor = new TileCursor(mbtiles, bounds, zoomLevel)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}
```

```
Zoom Level: 8
# of tiles: 24
Bounds: (-1.1583540944868885E7, 5635538.7764447965, -
1.0644334922311949E7, 6261709.751605326, EPSG:3857)
Width / # Columns: 6
Height / # Rows: 4
MinX: 54, MinY: 164, MaxX: 59, MaxY: 167
```

Tiles:

```
Tile(x:54, y:164, z:8)
Tile(x:55, y:164, z:8)
Tile(x:56, y:164, z:8)
Tile(x:57, y:164, z:8)
Tile(x:58, y:164, z:8)
Tile(x:59, y:164, z:8)
Tile(x:54, y:165, z:8)
Tile(x:55, y:165, z:8)
Tile(x:56, y:165, z:8)
Tile(x:57, y:165, z:8)
Tile(x:58, y:165, z:8)
Tile(x:59, y:165, z:8)
Tile(x:54, y:166, z:8)
Tile(x:55, y:166, z:8)
Tile(x:56, y:166, z:8)
Tile(x:57, y:166, z:8)
Tile(x:58, y:166, z:8)
Tile(x:59, y:166, z:8)
Tile(x:54, y:167, z:8)
Tile(x:55, y:167, z:8)
Tile(x:56, y:167, z:8)
Tile(x:57, y:167, z:8)
Tile(x:58, y:167, z:8)
Tile(x:59, y:167, z:8)
```

Get a TileCursor with Tiles from a TileLayer in a zoom level for a given x and y resolution.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-124.73142200000001, 24.955967, -66.969849, 49.371735,
"EPSG:4326").reproject("EPSG:3857")
double resolutionX = bounds.width / 400
double resolutionY = bounds.height / 300
TileCursor tileCursor = new TileCursor(mbtiles, bounds, resolutionX, resolutionY)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 4
# of tiles: 8
Bounds: (-1.5027296360910986E7,2504683.9006421305,-
5009098.786970329,7514051.701926393,EPSG:3857)
Width / # Columns: 4
Height / # Rows: 2
MinX: 2, MinY: 9, MaxX: 5, MaxY: 10

Tiles:
Tile(x:2, y:9, z:4)
Tile(x:3, y:9, z:4)
Tile(x:4, y:9, z:4)
Tile(x:5, y:9, z:4)
Tile(x:2, y:10, z:4)
Tile(x:3, y:10, z:4)
Tile(x:4, y:10, z:4)
Tile(x:5, y:10, z:4)

```

Get a TileCursor with Tiles from a TileLayer within a Bounds for a given canvas width and height.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-102.875977, 45.433154, -96.481934, 48.118434,
"EPSG:4326").reproject("EPSG:3857")
int width = 400
int height = 400
TileCursor tileCursor = new TileCursor(mbtiles, bounds, width, height)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 7
# of tiles: 6
Bounds: (-1.1583540944868885E7,5635538.7764447965,-
1.0644334922311949E7,6261709.751605329,EPSG:3857)
Width / # Columns: 3
Height / # Rows: 2
MinX: 27, MinY: 82, MaxX: 29, MaxY: 83

Tiles:
Tile(x:27, y:82, z:7)
Tile(x:28, y:82, z:7)
Tile(x:29, y:82, z:7)
Tile(x:27, y:83, z:7)
Tile(x:28, y:83, z:7)
Tile(x:29, y:83, z:7)

```

Get a TileCursor with Tiles from a TileLayer around a Point at a given zoom level for a given canvas width and height.

```

File file = new File("src/main/resources/tiles.mbtiles")
MBTiles mbtiles = new MBTiles(file)

Bounds bounds = new Bounds(-102.875977, 45.433154, -96.481934, 48.118434,
"EPSG:4326").reproject("EPSG:3857")
int width = 400
int height = 400
TileCursor tileCursor = new TileCursor(mbtiles, bounds, width, height)

println "Zoom Level: ${tileCursor.z}"
println "# of tiles: ${tileCursor.size}"
println "Bounds: ${tileCursor.bounds}"
println "Width / # Columns: ${tileCursor.width}"
println "Height / # Rows: ${tileCursor.height}"
println "MinX: ${tileCursor minX}, MinY: ${tileCursor minY}, MaxX: ${tileCursor maxX},
MaxY: ${tileCursor maxY}"

println "Tiles:"
tileCursor.each { Tile t ->
    println t
}

```

```

Zoom Level: 7
# of tiles: 6
Bounds: (-1.1583540944868885E7,5635538.7764447965,-
1.0644334922311949E7,6261709.751605329,EPSG:3857)
Width / # Columns: 3
Height / # Rows: 2
MinX: 27, MinY: 82, MaxX: 29, MaxY: 83


Tiles:
Tile(x:27, y:82, z:7)
Tile(x:28, y:82, z:7)
Tile(x:29, y:82, z:7)
Tile(x:27, y:83, z:7)
Tile(x:28, y:83, z:7)
Tile(x:29, y:83, z:7)

```

## OSM


Create a TileLayer for OSM tiles.

```
OSM osm = new OSM()
```

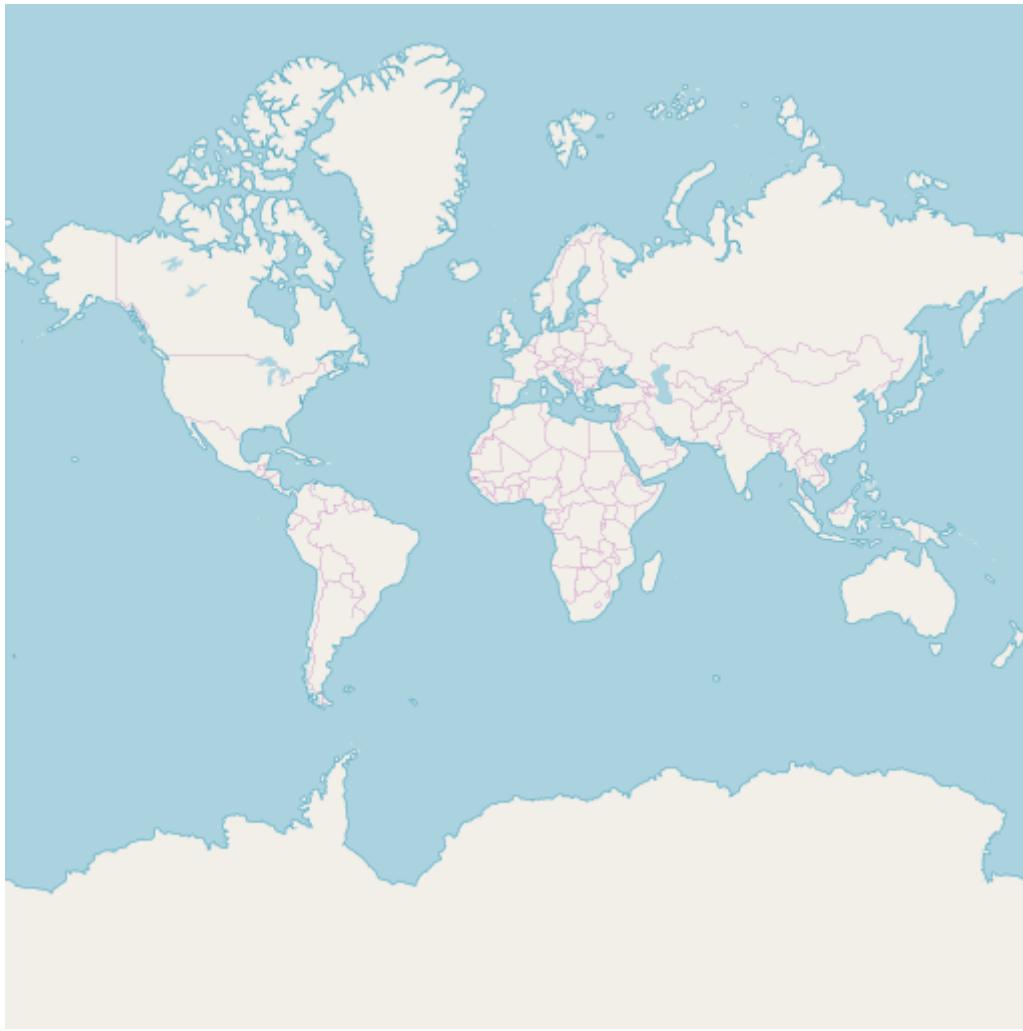

Create a TileLayer for OSM tiles with custom urls.

```
OSM osm = new OSM("OSM", [  
    "http://a.tile.openstreetmap.org",  
    "http://b.tile.openstreetmap.org",  
    "http://c.tile.openstreetmap.org"  
])
```

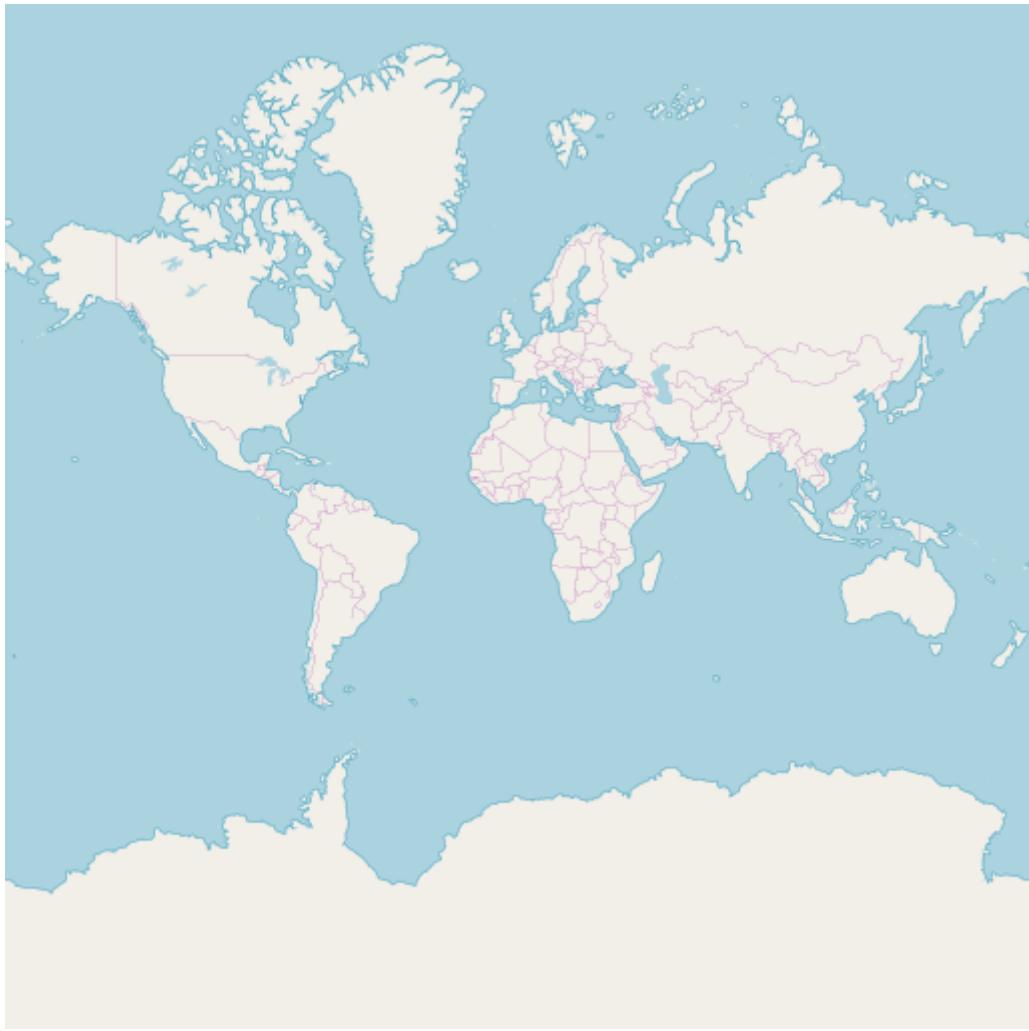

## Standard OSM

Create a TileLayer for OSM tiles.

```
OSM osm = OSM.getWellKnownOSM("osm")
```



## Stamen Toner

Create a TileLayer for OSM Stamen Toner tiles.

```
OSM osm = OSM.getWellKnownOSM("stamen-toner")
```



## Stamen Toner Lite

Create a TileLayer for OSM Stamen Toner Lite tiles.

```
OSM osm = OSM.getWellKnownOSM("stamen-toner-lite")
```



## Stamen Water Color

Create a TileLayer for OSM Stamen Water Color tiles.

```
OSM osm = OSM.getWellKnownOSM("stamen-watercolor")
```



## Stamen Terrain

Create a TileLayer for OSM Stamen Terrain tiles.

```
OSM osm = OSM.getWellKnownOSM("stamen-terrain")
```

