

Table of Contents

Layer Recipes	1
Getting a Layer's Properties	1
Getting a Layer's Features	2
Geoprocessing.....	5
Layer Algebra	11
Reading and Writing Features	18
Graticules	27

Layer Recipes

The Layer classes are in the [geoscript.layer](#) package.

A Layer is a collection of Features.

Getting a Layer's Properties

Get a Layer from a Workspace and it's name

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("countries")
String name = layer.name
println "Name: ${name}"
```

Name: countries

The Layer's Format

```
String format = layer.format
println "Format: ${format}"
```

Format: GeoPackage

Count the number of Features

```
int count = layer.count
println "# of Features: ${count}"
```

of Features: 177

Get the Layer's Projection

```
Projection proj = layer.proj
println "Projection: ${proj}"
```

Projection: EPSG:4326

Get the Bounds of the Layer

```
Bounds bounds = layer.bounds
println "Bounds: ${bounds}"
```

```
Bounds: (-179.99999999999997, -
90.000000000000003, 180.00000000000014, 83.64513000000002, EPSG:4326)
```

Getting a Layer's Features

Iterate over a Layer's Features

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
layer.eachFeature { Feature feature ->
    println feature["NAME_1"]
}
```

```
Minnesota
Montana
North Dakota
Hawaii
Idaho
Washington
Arizona
California
Colorado
Nevada
...
```

Iterate over a subset of a Layer's Features

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
layer.eachFeature("NAME_1 LIKE 'M%'") { Feature feature ->
    println feature["NAME_1"]
}
```

Minnesota
Montana
Missouri
Massachusetts
Mississippi
Maryland
Maine
Michigan

Iterate over a Layer's Features with parameters.

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
layer.eachFeature(sort: ["NAME_1"], start: 0, max: 5, fields: ["NAME_1"], filter:
"NAME_1 LIKE 'M%'" ) { Feature feature ->
    println feature["NAME_1"]
}
```

Maine
Maryland
Massachusetts
Michigan
Minnesota

Parameters

- filter: The Filter or Filter String to limit the Features. Defaults to null.
- sort: A List of Lists that define the sort order [[Field or Field name, "ASC" or "DESC"],...]. Not all Layers support sorting!
- max: The maximum number of Features to include
- start: The index of the record to start the cursor at. Together with maxFeatures this simulates paging. Not all Layers support the start index and paging!
- fields: A List of Fields or Field names to include. Used to select only a subset of Fields.

Read all Feature into a List

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<Feature> features = layer.features

println "# Features = ${features.size()}"
features.each { Feature feature ->
    println feature["NAME_1"]
}
```

```
# Features = 52
Minnesota
Montana
North Dakota
Hawaii
Idaho
Washington
Arizona
California
Colorado
Nevada
...
```

Collect values from a Layer's Features

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<String> names = layer.collectFromFeature { Feature f ->
    f["NAME_1"]
}.sort()

println "# Names = ${names.size()}"
names.each { String name ->
    println name
}
```

```
# Names = 52
Alabama
Alaska
Arizona
Arkansas
California
Colorado
Connecticut
Delaware
District of Columbia
Florida
...
```

Collect values from a Layer's Features with parameters.

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<String> names = layer.collectFromFeature(
    sort: ["NAME_1"],
    start: 0,
    max: 5,
    fields: ["NAME_1"],
    filter: "NAME_1 LIKE 'M%'" ) { Feature f ->
        f["NAME_1"]
    }

println "# Names = ${names.size()}"
names.each { String name ->
    println name
}
```


```
# Names = 5
Maine
Maryland
Massachusetts
Michigan
Minnesota
```

Geoprocessing

Buffer

Buffer a Layer of populated places


```
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
Layer places = workspace.get("places")
Layer buffer = places.buffer(5)
```

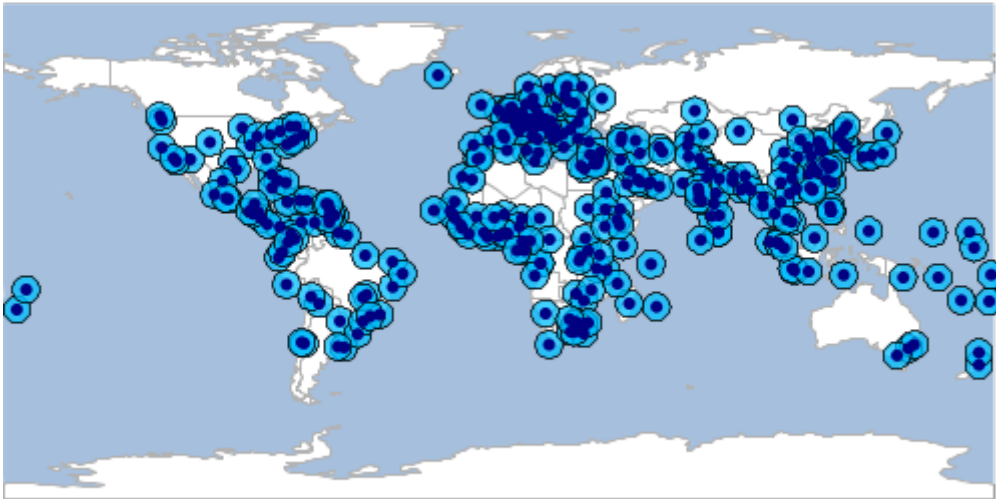

Dissolve

Dissolve a Layer by a Field

```
Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Layer regions = states.dissolve(states.schema.get("SUB_REGION"))
```

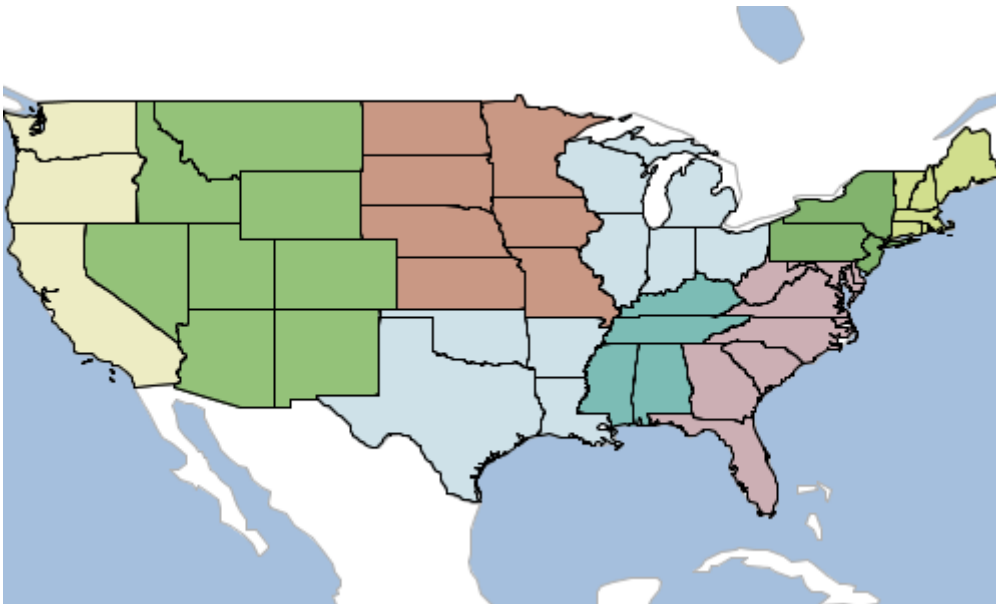

Merge

Merge two Layer together


```
Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Feature washington = states.first(filter: "STATE_NAME='Washington'")
Feature oregon = states.first(filter: "STATE_NAME='Oregon'")

Schema waSchema = new Schema("washington",[
    new Field("geom","Point","EPSG:4326"),
    new Field("id","int")
])
Layer waLayer = new Memory().create(waSchema)
waLayer.withWriter { geoscript.layer.Writer writer ->
    Geometry.createRandomPoints(washington.geom, 50).points.eachWithIndex { Point pt,
int index ->
        writer.add(waSchema.feature([geom: pt, id: index]))
    }
}
println "The Washington Layer  has ${waLayer.count} features"

Schema orSchema = new Schema("oregon",[
    new Field("geom","Point","EPSG:4326"),
    new Field("id","int")
])
Layer orLayer = new Memory().create(orSchema)
orLayer.withWriter { geoscript.layer.Writer writer ->
    Geometry.createRandomPoints(oregon.geom, 50).points.eachWithIndex { Point pt, int
index ->
        writer.add(orSchema.feature([geom: pt, id: index]))
    }
}
println "The Oregon Layer  has ${orLayer.count} features"

Layer mergedLayer = orLayer.merge(waLayer)
println "The merged Layer has ${mergedLayer.count} features"
```

```
The Washington Layer  has 50 features
The Oregon Layer  has 50 features
The merged Layer has 100 features
```

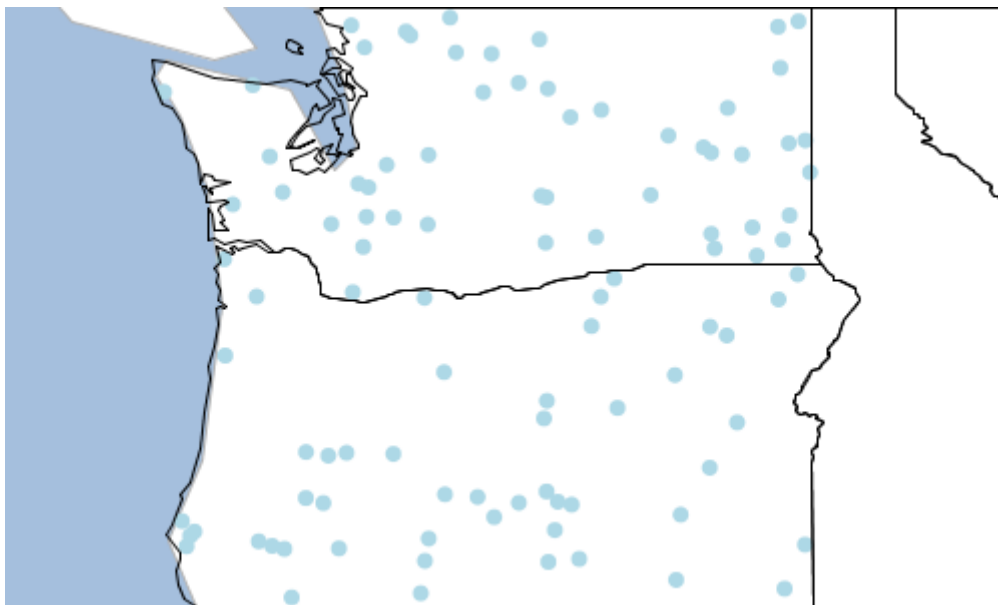
Split

Split a Layer into Layers based on the value from a Field

```
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
Layer rivers = workspace.get("rivers")
Workspace outWorkspace = new Memory()
rivers.split(rivers.schema.get("scalerank"), outWorkspace)

outWorkspace.layers.each { Layer layer ->
    println "${layer.name} has ${layer.count} features"
}
```

```
rivers_0 has 1 features
rivers_1 has 27 features
rivers_2 has 35 features
rivers_3 has 53 features
rivers_4 has 71 features
rivers_5 has 67 features
rivers_6 has 206 features
```

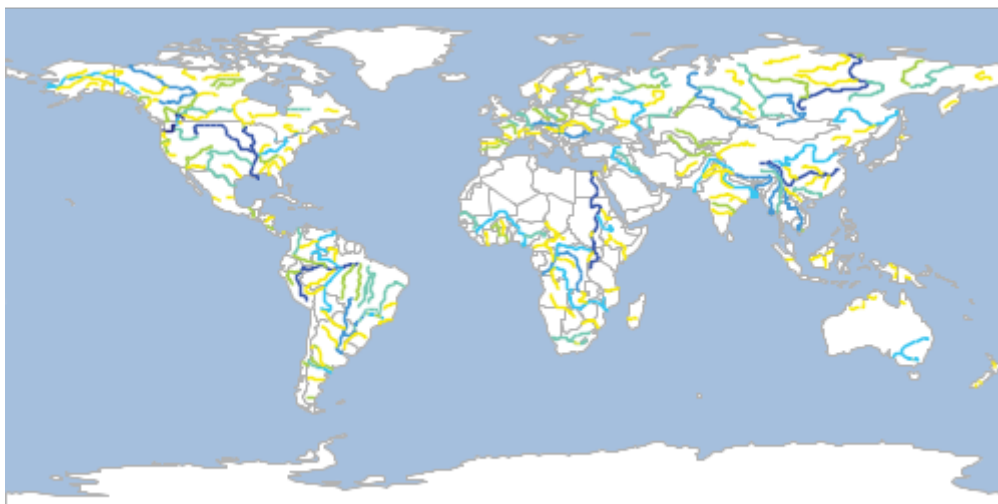

Split a Layer into Layers based on another Layer

```
Schema schema = new Schema("grid",[
    new Field("geom","Polygon","EPSG:4326"),
    new Field("col","int"),
    new Field("row","int"),
    new Field("row_col","string")
])
Workspace gridWorkspace = new Directory("target")
Layer gridLayer = gridWorkspace.create(schema)
new Bounds(-180,-90,180,90,"EPSG:4326").generateGrid(2, 3, "polygon", {cell, col, row
->
    gridLayer.add([
        "geom": cell,
        "col": col,
        "row": row,
        "row_col": "${row} ${col}"
    ])
})

Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
Layer countries = workspace.get("countries")


Workspace outWorkspace = new Memory()
countries.split(gridLayer,gridLayer.schema.get("row_col"),outWorkspace)

outWorkspace.layers.each { Layer layer ->
    println "${layer.name} has ${layer.count} features"
}
```

```

countries_1_1 has 6 features
countries_1_2 has 6 features
countries_2_1 has 44 features
countries_2_2 has 74 features
countries_3_1 has 13 features
countries_3_2 has 70 features

```

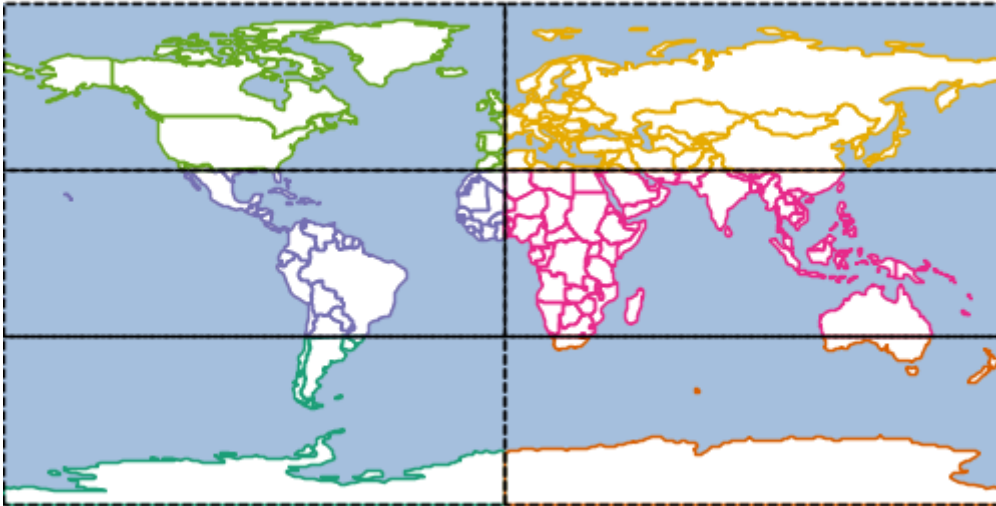

Transform

Transform one Layer into another Layer

```


Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Layer centroids = states.transform("centroids", [
    geom: "centroid(the_geom)",
    name: "strToUpperCase(STATE_NAME)",
    ratio: "FEMALE / MALE"
])
centroids.eachFeature(max: 5) {Feature f ->
    println "${f.geom} ${f['name']} = ${f['ratio']}"
}

```

```

ILLINOIS = 1.0587396098110435
DISTRICT OF COLUMBIA = 1.1447503268897763
DELAWARE = 1.0626439771122835
WEST VIRGINIA = 1.0817203227723509
MARYLAND = 1.0621588832568312

```

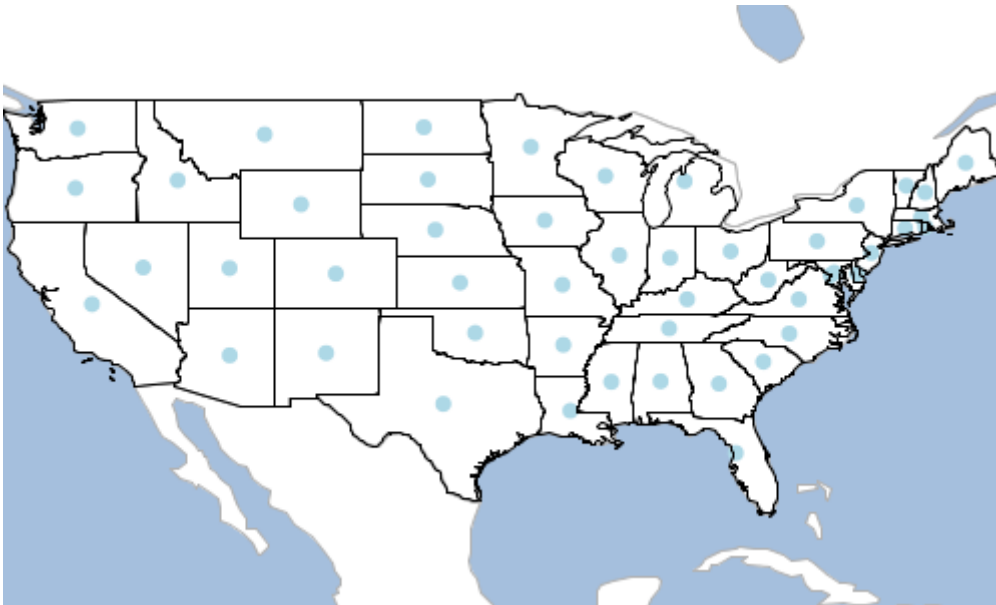

Layer Algebra

GeoScript can do layer algebra. All of the examples below use Layer A (red) and Layer B (green).



Clip

Clip Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.clip(layerB)
```



Clip Layer B with Layer A


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.clip(layerA, outWorkspace, outLayer: "ba_clip")
```



Erase

Erase Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.erase(layerB)
```

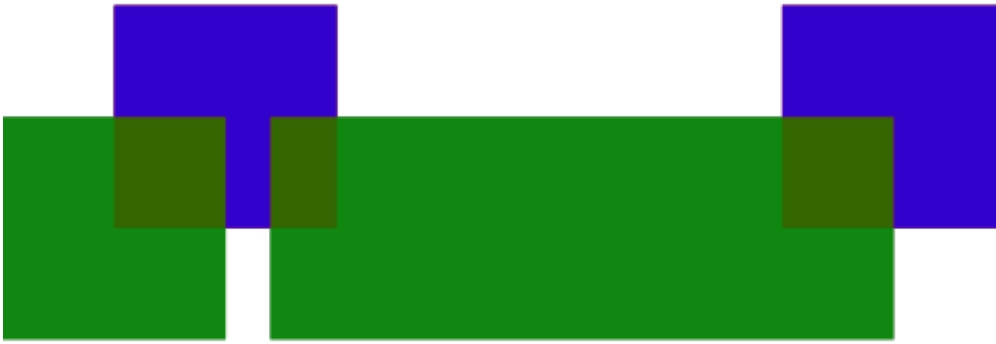

Erase Layer B with Layer A


```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.erase(layerA, outWorkspace, outLayer: "ba_erase")
```



Identity


Identity Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.identity(layerB)
```

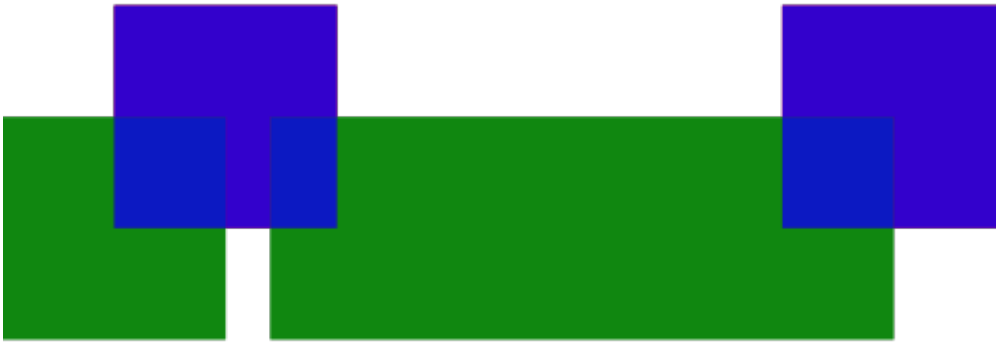

Identity Layer B with Layer A

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.identity(layerA, outWorkspace: outWorkspace, outLayer:
"ba_identity")
```

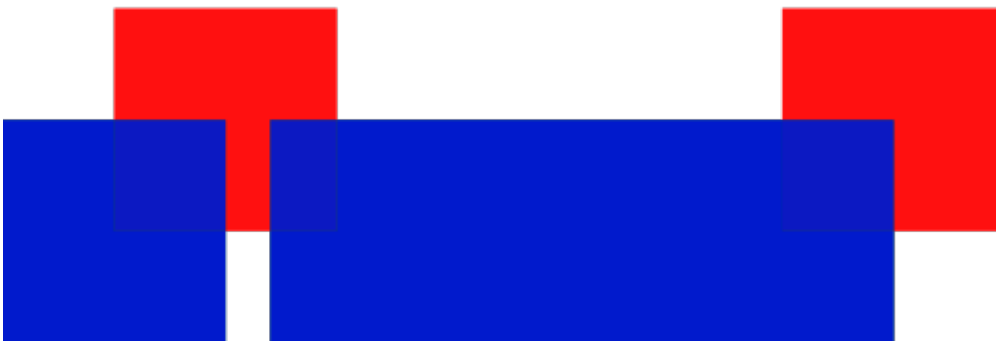

Intersection

Intersection Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.intersection(layerB)
```



Intersection Layer B with Layer A

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.intersection(layerA, outWorkspace: outWorkspace, outLayer:
"ba_intersection")
```



Symmetric Difference


Symmetric Difference Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.symDifference(layerB)
```




Symmetric Difference Layer B with Layer A

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.symDifference(layerA, outWorkspace: outWorkspace, outLayer:
"ba_symdifference")
```

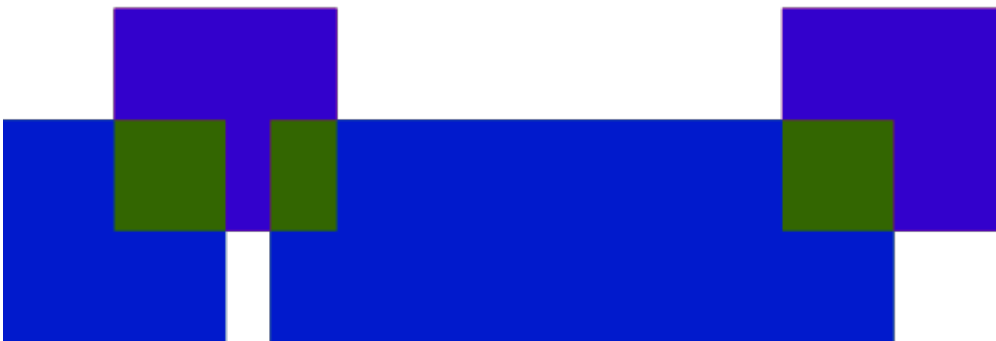

Update


Update Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.update(layerB)
```



Update Layer B with Layer A

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.update(layerA, outWorkspace: outWorkspace, outLayer:
"ba_update")
```

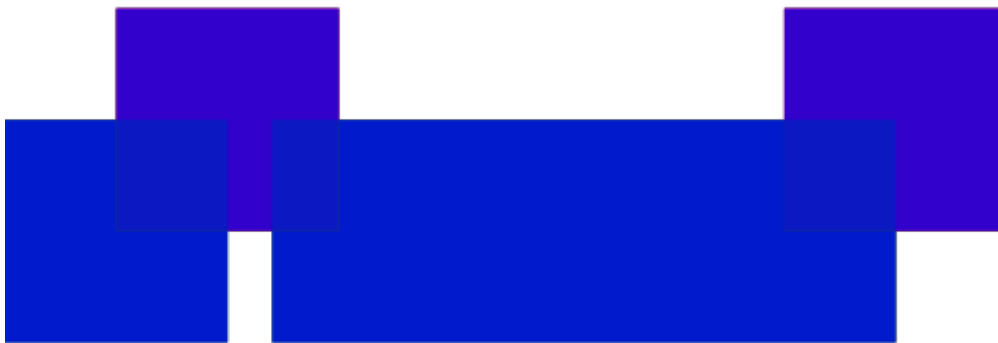

Union

Union Layer A with Layer B

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.union(layerB)
```



Union Layer B with Layer A

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.union(layerA, outWorkspace, outLayer: "ba_union")
```



Reading and Writing Features

The Layer IO classes are in the [geoscript.layer.io](#) package.

Finding Layer Writer and Readers

List all Layer Writers

```
List<Writer> writers = Writers.list()
writers.each { Writer writer ->
    println writer.class.simpleName
}
```

```
CsvWriter
GeobufWriter
GeoJSONWriter
GeoRSSWriter
GmlWriter
GpxWriter
KmlWriter
MvtWriter
```

Find a Layer Writer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

Writer writer = Writers.find("csv")
String csv = writer.write(layer)
println csv
```

```
"geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.48416 47.2619)","2","Tacoma"
```

List all Layer Readers

```
List<Reader> readers = Readers.list()
readers.each { Reader reader ->
    println reader.class.simpleName
}
```

```
CsvReader
GeobufReader
GeoJSONReader
GeoRSSReader
GmlReader
GpxReader
KmlReader
MvtReader
```

Find a Layer Reader

```
Reader reader = Readers.find("csv")
Layer layer = reader.read("""geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.48416 47.2619)","2","Tacoma"
""")
println "# features = ${layer.count}"
```

```
# features = 2
```

GeoJSON

Get GeoJSON String from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String geojson = layer.toJSONString()
println geojson
```

```

{
  "type": "FeatureCollection",
  "features": [
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.3204,
          47.6024
        ]
      },
      "properties": {
        "id": 1,
        "name": "Seattle"
      },
      "id": "fid-617cb598_1611ad61f33_-71ee"
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.4842,
          47.2619
        ]
      },
      "properties": {
        "id": 2,
        "name": "Tacoma"
      },
      "id": "fid-617cb598_1611ad61f33_-71ec"
    }
  ]
}

```

GeoBuf

Get GeoBuf String from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String geobuf = layer.toGeobufString()
println geobuf
```

```
0a0269640a046e616d6510021806223d0a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a07536561
74746c650a1c0a0c08001a08ff6e77498a3892d6a0218026a080a065461636f6d61
```

GML

Get GML String from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String gml = layer.toGMLString()
println gml
```

```
<wfs:FeatureCollection xmlns:wfs="http://www.opengis.net/wfs">
  <gml:boundedBy xmlns:gml="http://www.opengis.net/gml">
    <gml:Box srsName="http://www.opengis.net/gml/srs/epsg.xml#4326">
      <gml:coord>
        <gml:X>
          -122.48416
        </gml:X>
        <gml:Y>
          47.2619
        </gml:Y>
      </gml:coord>
      <gml:coord>
        <gml:X>
          -122.3204
        </gml:X>
        <gml:Y>
          47.6024
        </gml:Y>
      </gml:coord>
    </gml:Box>
  </gml:boundedBy>
  <gml:featureMember xmlns:gml="http://www.opengis.net/gml">
    <gsf:cities xmlns:gsf="http://geoscript.org/feature" fid="fid-617cb598_1611ad61f33_-7943">
      <gml:name>
        Seattle
      </gml:name>
    </gsf:cities>
  </gml:featureMember>
</wfs:FeatureCollection>
```

```

    <gsf:geom>
      <gml:Point>
        <gml:coord>
          <gml:X>
            -122.3204
          </gml:X>
          <gml:Y>
            47.6024
          </gml:Y>
        </gml:coord>
      </gml:Point>
    </gsf:geom>
    <gsf:id>
      1
    </gsf:id>
  </gsf:cities>
</gml:featureMember>
<gml:featureMember xmlns:gml="http://www.opengis.net/gml">
  <gsf:cities xmlns:gsf="http://geoscript.org/feature" fid="fid-
617cb598_1611ad61f33_-7941">
    <gml:name>
      Tacoma
    </gml:name>
    <gsf:geom>
      <gml:Point>
        <gml:coord>
          <gml:X>
            -122.48416
          </gml:X>
          <gml:Y>
            47.2619
          </gml:Y>
        </gml:coord>
      </gml:Point>
    </gsf:geom>
    <gsf:id>
      2
    </gsf:id>
  </gsf:cities>
</gml:featureMember>
</wfs:FeatureCollection>

```

KML

Get KML String from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String kml = layer.toKMLString()
println kml
```

```
<kml:kml xmlns:kml="http://www.opengis.net/kml/2.2">
  <kml:Document>
    <kml:Folder>
      <kml:name>
        cities
      </kml:name>
      <kml:Schema kml:name="cities" kml:id="cities">
        <kml:SimpleField kml:name="id" kml:type="Integer"/>
        <kml:SimpleField kml:name="name" kml:type="String"/>
      </kml:Schema>
      <kml:Placemark>
        <kml:name>
          fid-617cb598_1611ad61f33_-7223
        </kml:name>
        <kml:Style>
          <kml:IconStyle>
            <kml:color>
              ff0000ff
            </kml:color>
          </kml:IconStyle>
        </kml:Style>
        <kml:ExtendedData>
          <kml:SchemaData kml:schemaUrl="#cities">
            <kml:SimpleData kml:name="id">
              1
            </kml:SimpleData>
            <kml:SimpleData kml:name="name">
```

```

        Seattle
      </kml:SimpleData>
    </kml:SchemaData>
  </kml:ExtendedData>
  <kml:Point>
    <kml:coordinates>
      -122.3204,47.6024
    </kml:coordinates>
  </kml:Point>
</kml:Placemark>
<kml:Placemark>
  <kml:name>
    fid-617cb598_1611ad61f33_-7221
  </kml:name>
  <kml:Style>
    <kml:IconStyle>
      <kml:color>
        ff0000ff
      </kml:color>
    </kml:IconStyle>
  </kml:Style>
  <kml:ExtendedData>
    <kml:SchemaData kml:schemaUrl="#cities">
      <kml:SimpleData kml:name="id">
        2
      </kml:SimpleData>
      <kml:SimpleData kml:name="name">
        Tacoma
      </kml:SimpleData>
    </kml:SchemaData>
  </kml:ExtendedData>
  <kml:Point>
    <kml:coordinates>
      -122.48416,47.2619
    </kml:coordinates>
  </kml:Point>
</kml:Placemark>
</kml:Folder>
</kml:Document>
</kml:kml>


```

Graticules

Square


Create a square graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 20
double spacing = 5
Layer layer = Graticule.createSquares(bounds, length, spacing)
```

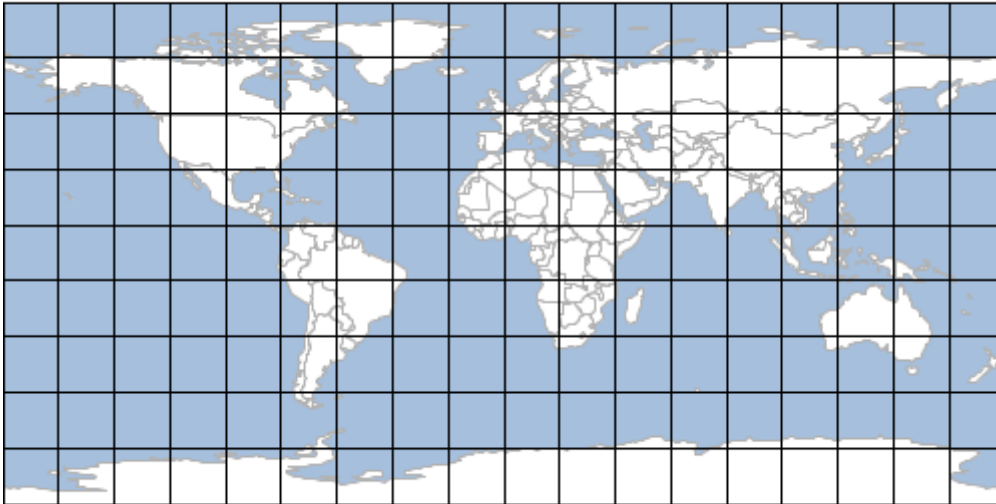

Create a square graticules Shapefile Layer


```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 30
double spacing = -1
Workspace workspace = new Directory("target")
Layer layer = Graticule.createSquares(bounds, length, spacing, workspace: workspace,
layer: "squares")
```

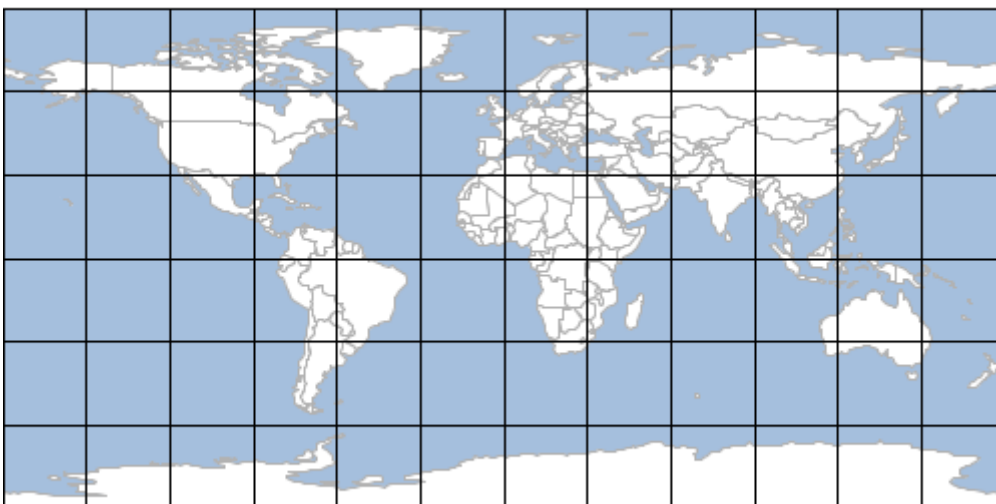

Hexagon

Create a flat hexagon graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 20
double spacing = 5
String orientation = "flat"
Layer layer = Graticule.createHexagons(bounds, length, spacing, orientation)
```

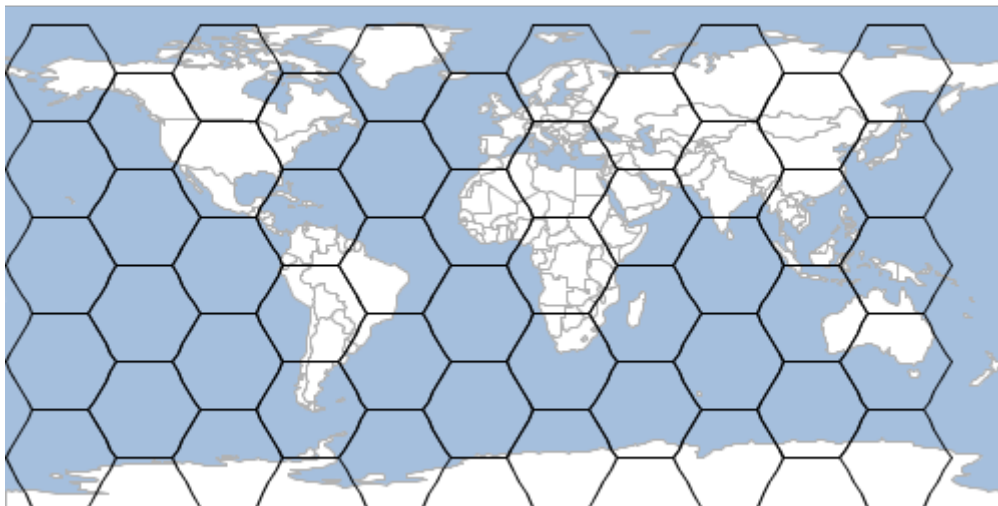

Create a angled hexagon graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 10
double spacing = 5
String orientation = "angled"
Layer layer = Graticule.createHexagons(bounds, length, spacing, orientation)
```

