

# Table of Contents

|                                      |    |
|--------------------------------------|----|
| Layer Recipes .....                  | 1  |
| Getting a Layer's Properties .....   | 1  |
| Getting a Layer's Features .....     | 2  |
| Adding, Updating, and Deleting ..... | 9  |
| Shapefiles .....                     | 16 |
| Property .....                       | 19 |
| Geoprocessing .....                  | 22 |
| Layer Algebra .....                  | 29 |
| Reading and Writing Layers .....     | 36 |
| Graticules .....                     | 60 |

# Layer Recipes

The Layer classes are in the [geoscript.layer](#) package.

A Layer is a collection of Features.

## Getting a Layer's Properties

*Get a Layer from a Workspace and it's name*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("countries")
String name = layer.name
println "Name: ${name}"
```

Name: countries

*The Layer's Format*

```
String format = layer.format
println "Format: ${format}"
```

Format: GeoPackage

*Count the number of Features*

```
int count = layer.count
println "# of Features: ${count}"
```

# of Features: 177

*Get the Layer's Projection*

```
Projection proj = layer.proj
println "Projection: ${proj}"
```

Projection: EPSG:4326

### *Get the Bounds of the Layer*

```
Bounds bounds = layer.bounds
println "Bounds: ${bounds}"
```

```
Bounds: (-179.99999999999997, -
90.000000000000003, 180.00000000000014, 83.64513000000002, EPSG:4326)
```

## Getting a Layer's Features

### Each Feature

#### *Iterate over a Layer's Features*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
layer.eachFeature { Feature feature ->
    println feature["NAME_1"]
}
```

```
Minnesota
Montana
North Dakota
Hawaii
Idaho
Washington
Arizona
California
Colorado
Nevada
...
```

#### *Iterate over a subset of a Layer's Features*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
layer.eachFeature("NAME_1 LIKE 'M%'") { Feature feature ->
    println feature["NAME_1"]
}
```

Minnesota  
Montana  
Missouri  
Massachusetts  
Mississippi  
Maryland  
Maine  
Michigan

*Iterate over a Layer's Features with parameters.*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
layer.eachFeature(sort: ["NAME_1"], start: 0, max: 5, fields: ["NAME_1"], filter:
"NAME_1 LIKE 'M%') { Feature feature ->
    println feature["NAME_1"]
}
```

Maine  
Maryland  
Massachusetts  
Michigan  
Minnesota

## Parameters

- filter: The Filter or Filter String to limit the Features. Defaults to null.
- sort: A List of Lists that define the sort order [[Field or Field name, "ASC" or "DESC"],...]. Not all Layers support sorting!
- max: The maximum number of Features to include
- start: The index of the record to start the cursor at. Together with maxFeatures this simulates paging. Not all Layers support the start index and paging!
- fields: A List of Fields or Field names to include. Used to select only a subset of Fields.

## Read all Features

### *Read all Feature into a List*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<Feature> features = layer.features

println "# Features = ${features.size()}"
features.each { Feature feature ->
    println feature["NAME_1"]
}
```

```
# Features = 52
Minnesota
Montana
North Dakota
Hawaii
Idaho
Washington
Arizona
California
Colorado
Nevada
...
```

## **Collect values**

### *Collect values from a Layer's Features*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<String> names = layer.collectFromFeature { Feature f ->
    f["NAME_1"]
}.sort()

println "# Names = ${names.size()}"
names.each { String name ->
    println name
}
```

```
# Names = 52
Alabama
Alaska
Arizona
Arkansas
California
Colorado
Connecticut
Delaware
District of Columbia
Florida
...
```

*Collect values from a Layer's Features with parameters.*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
List<String> names = layer.collectFromFeature(
    sort: ["NAME_1"],
    start: 0,
    max: 5,
    fields: ["NAME_1"],
    filter: "NAME_1 LIKE 'M%'" ) { Feature f ->
        f["NAME_1"]
    }

println "# Names = ${names.size()}"
names.each { String name ->
    println name
}
```

```
# Names = 5
Maine
Maryland
Massachusetts
Michigan
Minnesota
```

## First

*Get the first Feature that matches the Filter.*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
Feature feature = layer.first(filter: "NAME_1='Washington'")
println feature.get("NAME_1")
```

Washington



*Get the first Feature sorted by name ascending and descending.*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")

Feature featureAsc = layer.first(sort: "NAME_1 ASC")
println featureAsc.get("NAME_1")

Feature featureDesc = layer.first(sort: "NAME_1 DESC")
println featureDesc.get("NAME_1")
```

Alabama  
Wyoming

## Filter



*Create a new Layer from an existing Layer with just the Features that match a Filter.*

```
Workspace workspace = new Directory("target")
Layer layer = workspace.get("countries")
Layer disputedLayer = layer.filter("TYPE='Disputed'")
```



## Cursor

*Iterate over a Layer's Features with a Cursor*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")
Layer layer = workspace.get("states")
Cursor cursor = layer.cursor
cursor.each { Feature feature ->
    println feature["NAME_1"]
}
```



```
Minnesota  
Montana  
North Dakota  
Hawaii  
Idaho  
Washington  
Arizona  
California  
Colorado  
Nevada  
...
```

*Iterate over a subset of a Layer's Features with a Cursor*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("states")  
Cursor cursor = layer.getCursor(filter: "NAME_1 LIKE 'M%'")  
while(cursor.hasNext()) {  
    Feature feature = cursor.next()  
    println feature["NAME_1"]  
}
```

```
Minnesota  
Montana  
Missouri  
Massachusetts  
Mississippi  
Maryland  
Maine  
Michigan
```

*Iterate over a Layer's Features with parameters with a Cursor*

```
Workspace workspace = new GeoPackage("src/main/resources/data.gpkg")  
Layer layer = workspace.get("states")  
layer.getCursor(sort: ["NAME_1"], start: 0, max: 5, fields: ["NAME_1"], filter:  
"NAME_1 LIKE 'M%'").each { Feature feature ->  
    println feature["NAME_1"]  
}
```

```
Maine  
Maryland  
Massachusetts  
Michigan  
Minnesota
```

## Parameters

- filter: The Filter or Filter String to limit the Features. Defaults to null.
- sort: A List of Lists that define the sort order [[Field or Field name, "ASC" or "DESC"],...]. Not all Layers support sorting!
- max: The maximum number of Features to include
- start: The index of the record to start the cursor at. Together with maxFeatures this simulates paging. Not all Layers support the start index and paging!
- fields: A List of Fields or Field names to include. Used to select only a subset of Fields.

## Adding, Updating, and Deleting

### *Add Features to a Layer*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)

// Add a Feature with a Map
Map attributes = [
    geom: new Point(-122.333056, 47.609722),
    id: 1,
    name: "Seattle",
    state: "WA"
]
layer.add(attributes)

// Add a Feature with a List
List values = [
    new Point(-122.459444, 47.241389),
    2,
    "Tacoma",
    "WA"
]
layer.add(values)

// Add a Feature
Feature feature = schema.feature([
    id: 3,
    name: "Fargo",
    state: "ND",
    geom: new Point(-96.789444, 46.877222)
])
```


```

layer.add(feature)

// Add Features from a List of Maps
List<Map> features = [
    [
        geom: new Point(-100.778889, 46.813333),
        id: 4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)

```

| id | name     | state |
|----|----------|-------|
| 1  | Seattle  | WA    |
| 2  | Tacoma   | WA    |
| 3  | Fargo    | ND    |
| 4  | Bismarck | ND    |
| 5  | Mandan   | ND    |

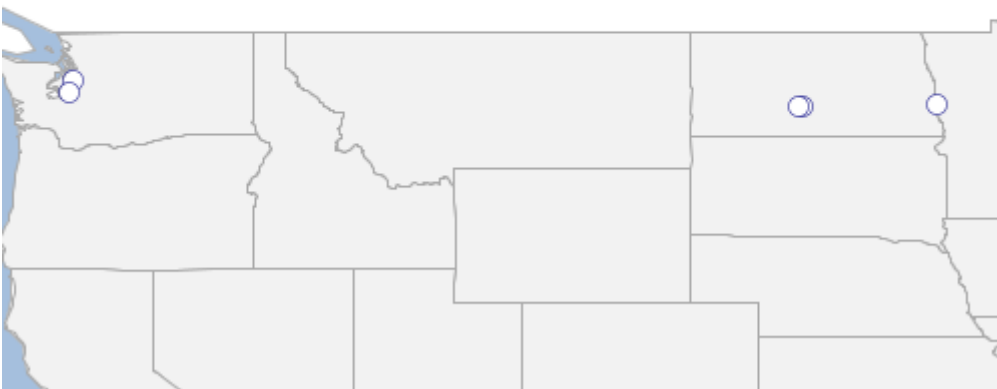

## Update Features in a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id: 3,
        name: " Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id: 4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)

layer.update(layer.schema.state, "North Dakota", "state='ND'")
layer.update(layer.schema.state, "Washington", "state='WA'")
```

| id | name    | state      |
|----|---------|------------|
| 1  | Seattle | Washington |

| id | name     | state        |
|----|----------|--------------|
| 2  | Tacoma   | Washington   |
| 3  | Fargo    | North Dakota |
| 4  | Bismarck | North Dakota |
| 5  | Mandan   | North Dakota |



## Delete Features from a Layer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id: 3,
        name: " Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id: 4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)

layer.delete("state='ND'")
```

| id | name    | state |
|----|---------|-------|
| 1  | Seattle | WA    |
| 2  | Tacoma  | WA    |




*Add Features to a Layer using a Writer. A Writer can add Features more effeciently because is commits batches of Features in Transactions .*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer")
])
Layer layer = workspace.create(schema)

Bounds bounds = new Bounds(-180,-90,180,90, "EPSG:4326")
MultiPoint points = Geometry.createRandomPoints(bounds.geometry, 100)

geoscript.layer.Writer writer = layer.writer
try {
    points.geometries.eachWithIndex { Point point, int index ->
        Feature feature = writer.newFeature
        feature['id'] = index
        feature['geom'] = point
        writer.add(feature)
    }
} finally {
    writer.close()
}
```

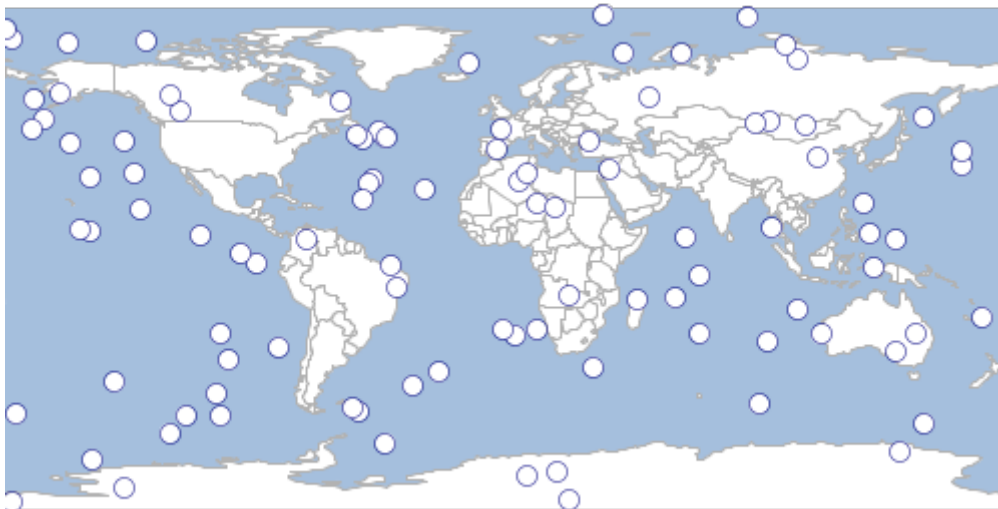


*Add Features to a Layer using a Writer inside of a Closure.*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer")
])
Layer layer = workspace.create(schema)

Bounds bounds = new Bounds(-180, -90, 180, 90, "EPSG:4326")
MultiPoint points = Geometry.createRandomPoints(bounds.geometry, 100)

layer.withWriter { geoscript.layer.Writer writer ->
    points.geometries.eachWithIndex { Point point, int index ->
        Feature feature = writer.newFeature
        feature['id'] = index
        feature['geom'] = point
        writer.add(feature)
    }
}
```



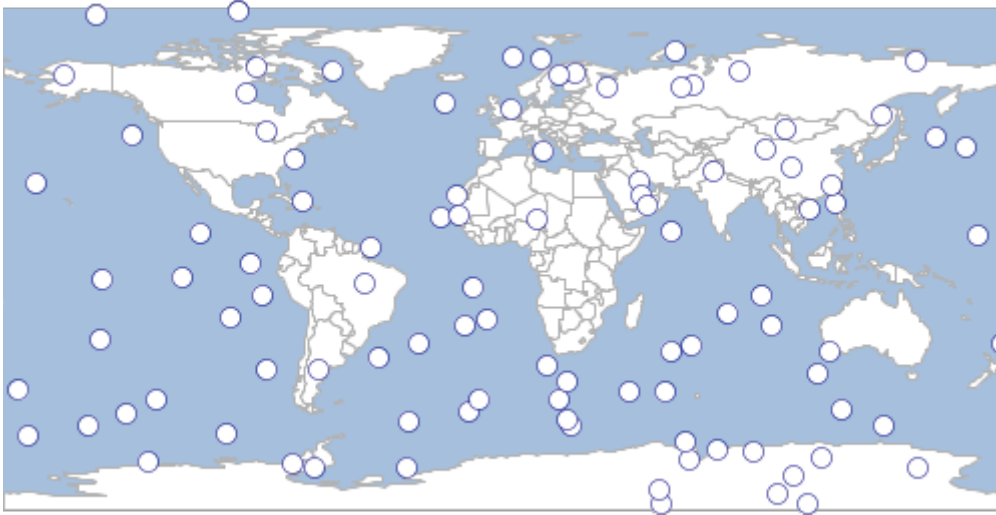

## Shapefiles

Shapefiles are a very commonly used format for storing spatial data. So, instead of creating a Directory Workspace and getting the Layer from the Workspace, you can use the Shapefile class.

### Read

*Read existing Shapefiles*

```
Shapefile countries = new Shapefile("src/main/resources/shapefiles/countries.shp")
println "# Features in Countries = ${countries.count}"

Shapefile ocean = new Shapefile(new File("src/main/resources/shapefiles/ocean.shp"))
println "# Features in Ocean = ${ocean.count}"
```

```
# Features in Countries = 177
```

```
# Features in Ocean = 2
```



**Create**

## Create a new Shapefile

```
Directory workspace = new Directory("target")
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id: 3,
        name: " Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id: 4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)
```

| id | name    | state |
|----|---------|-------|
| 1  | Seattle | WA    |
| 2  | Tacoma  | WA    |
| 3  | Fargo   | ND    |

| id | name     | state |
|----|----------|-------|
| 4  | Bismarck | ND    |
| 5  | Mandan   | ND    |



## Property

GeoScript can store spatial data in a simple plain text format. With the Property class you can access a single property file directly.

### Read


*Read existing Property files*

```
geoscript.layer.Property circles = new geoscript.layer.Property
("src/main/resources/property/circles.properties")
println "# Features in circles = ${circles.count}"

geoscript.layer.Property places = new geoscript.layer.Property(new File
("src/main/resources/property/places.properties"))
println "# Features in places = ${places.count}"
```

```
# Features in circles = 10
```

```
# Features in places = 10
```

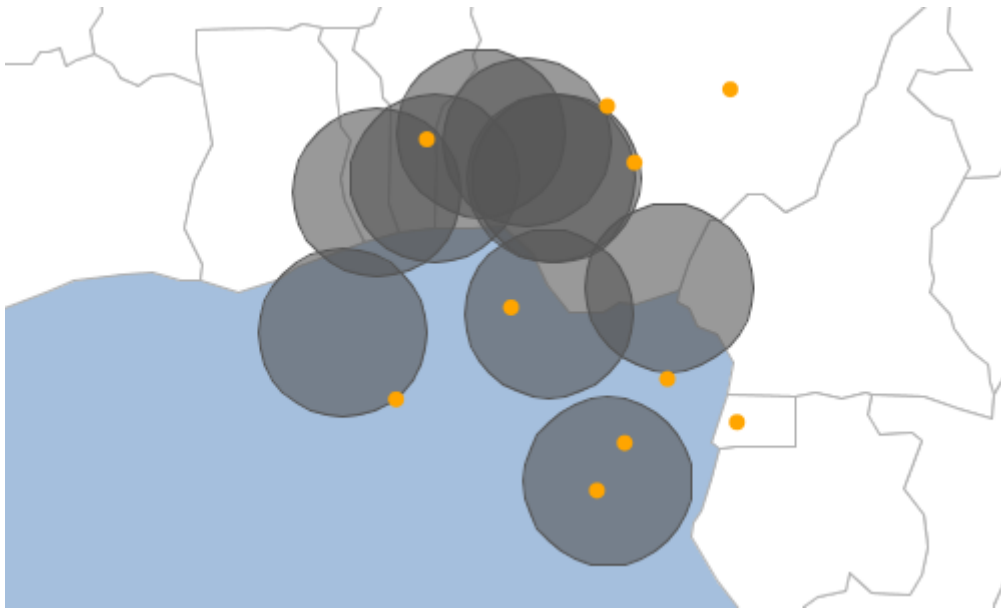

**Create**

## Create a new Property

```
geoscript.workspace.Property workspace = new geoscript.workspace.Property("target")
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String"),
    new Field("state", "String")
])
Layer layer = workspace.create(schema)
List<Map> features = [
    [
        geom: new Point(-122.333056, 47.609722),
        id: 1,
        name: "Seattle",
        state: "WA"
    ],
    [
        geom: new Point(-122.459444, 47.241389),
        id: 2,
        name: "Tacoma",
        state: "WA"
    ],
    [
        id: 3,
        name: " Fargo",
        state: "ND",
        geom: new Point(-96.789444, 46.877222)
    ],
    [
        geom: new Point(-100.778889, 46.813333),
        id: 4,
        name: "Bismarck",
        state: "ND"
    ],
    [
        geom: new Point(-100.891111, 46.828889),
        id: 5,
        name: "Mandan",
        state: "ND"
    ]
]
layer.add(features)
```

| id | name    | state |
|----|---------|-------|
| 1  | Seattle | WA    |
| 2  | Tacoma  | WA    |
| 3  | Fargo   | ND    |

| id | name     | state |
|----|----------|-------|
| 4  | Bismarck | ND    |
| 5  | Mandan   | ND    |



## Geoprocessing

### Reproject

*Reproject a Layer from it's source projection to a target projection*

```
Workspace workspace = new GeoPackage('src/main/resources/data.gpkg')
Layer states = workspace.get("states")
println "States = ${states.proj}"

Projection projection = new Projection("EPSG:3857")
Workspace outputWorkspace = new Memory()
Layer statesInWebMercator = states.reproject(projection, outputWorkspace,
"states_3857")
println "Reprojected States = ${statesInWebMercator.proj}"
```


```
States = EPSG:4326
Reprojected States = EPSG:3857
```



## Buffer

*Buffer a Layer of populated places*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))  
Layer places = workspace.get("places")  
Layer buffer = places.buffer(5)
```

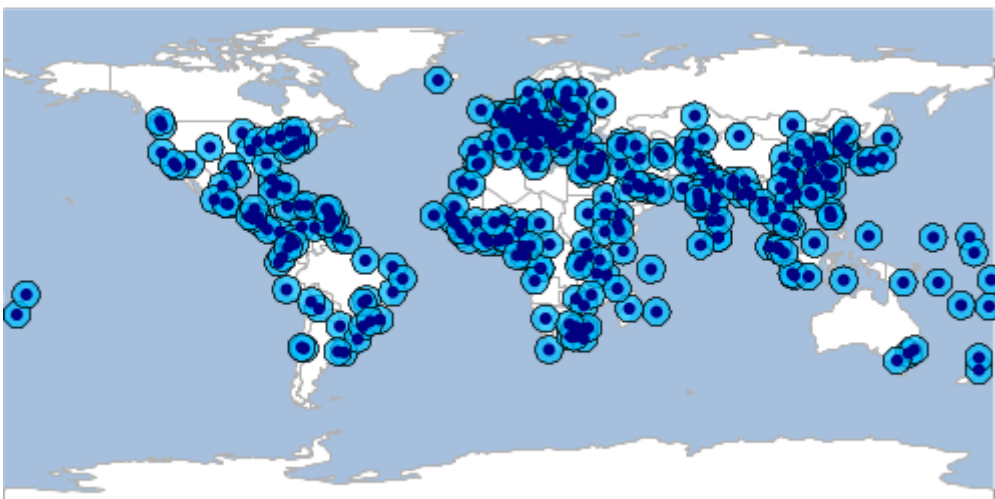


## Dissolve



## *Dissolve a Layer by a Field*

```
Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Layer regions = states.dissolve(states.schema.get("SUB_REGION"))
```

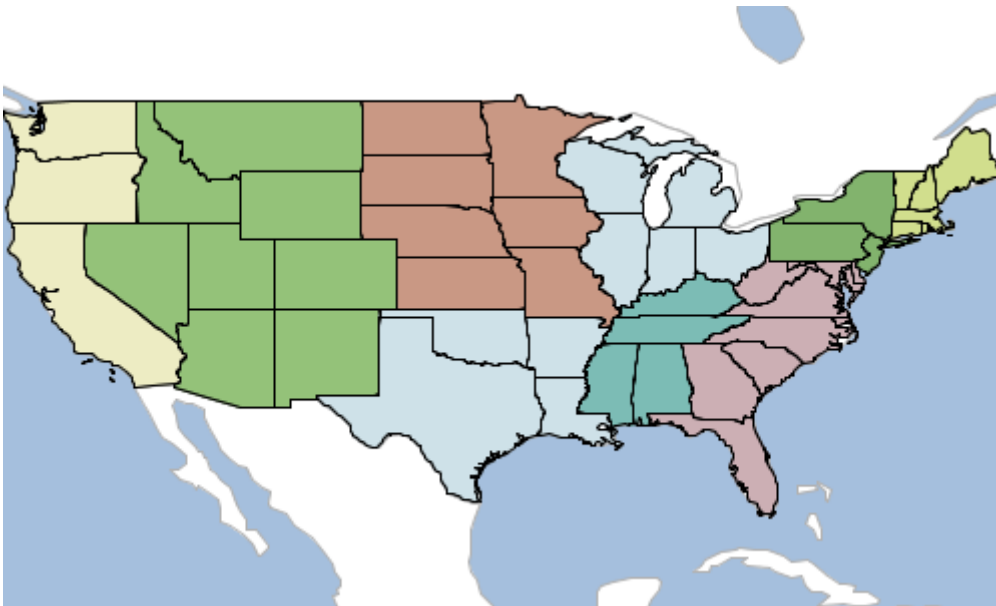

## **Merge**

## Merge two Layer together


```
Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Feature washington = states.first(filter: "STATE_NAME='Washington'")
Feature oregon = states.first(filter: "STATE_NAME='Oregon'")

Schema waSchema = new Schema("washington",[
    new Field("geom","Point","EPSG:4326"),
    new Field("id","int")
])
Layer waLayer = new Memory().create(waSchema)
waLayer.withWriter { geoscript.layer.Writer writer ->
    Geometry.createRandomPoints(washington.geom, 50).points.eachWithIndex { Point pt,
int index ->
        writer.add(waSchema.feature([geom: pt, id: index]))
    }
}
println "The Washington Layer  has ${waLayer.count} features"

Schema orSchema = new Schema("oregon",[
    new Field("geom","Point","EPSG:4326"),
    new Field("id","int")
])
Layer orLayer = new Memory().create(orSchema)
orLayer.withWriter { geoscript.layer.Writer writer ->
    Geometry.createRandomPoints(oregon.geom, 50).points.eachWithIndex { Point pt, int
index ->
        writer.add(orSchema.feature([geom: pt, id: index]))
    }
}
println "The Oregon Layer  has ${orLayer.count} features"

Layer mergedLayer = orLayer.merge(waLayer)
println "The merged Layer has ${mergedLayer.count} features"
```

```
The Washington Layer  has 50 features
The Oregon Layer  has 50 features
The merged Layer has 100 features
```

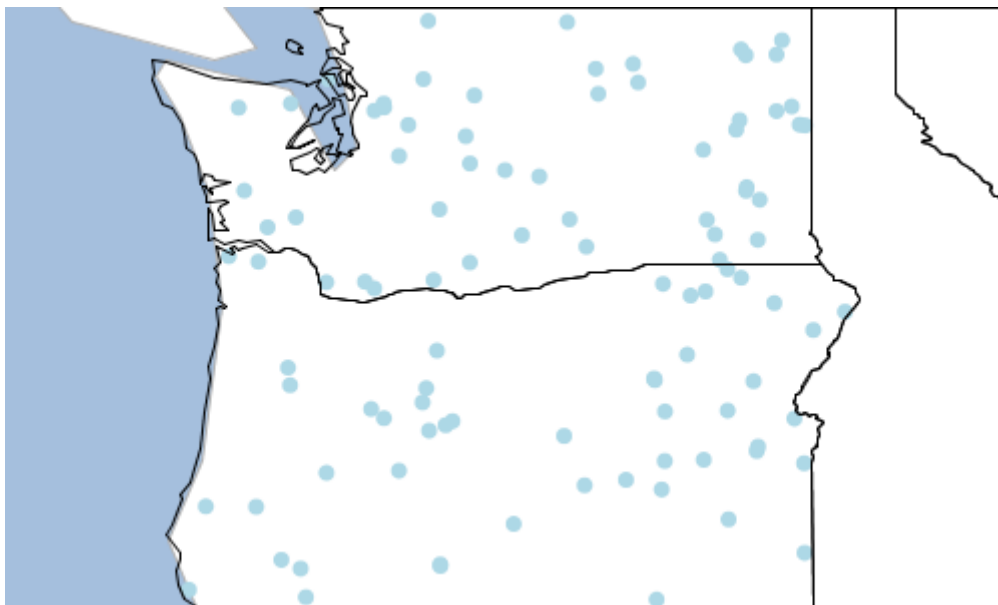


## Split

*Split a Layer into Layers based on the value from a Field*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
Layer rivers = workspace.get("rivers")
Workspace outWorkspace = new Memory()
rivers.split(rivers.schema.get("scalerank"), outWorkspace)

outWorkspace.layers.each { Layer layer ->
    println "${layer.name} has ${layer.count} features"
}
```

```
rivers_0 has 1 features
rivers_1 has 27 features
rivers_2 has 35 features
rivers_3 has 53 features
rivers_4 has 71 features
rivers_5 has 67 features
rivers_6 has 206 features
```

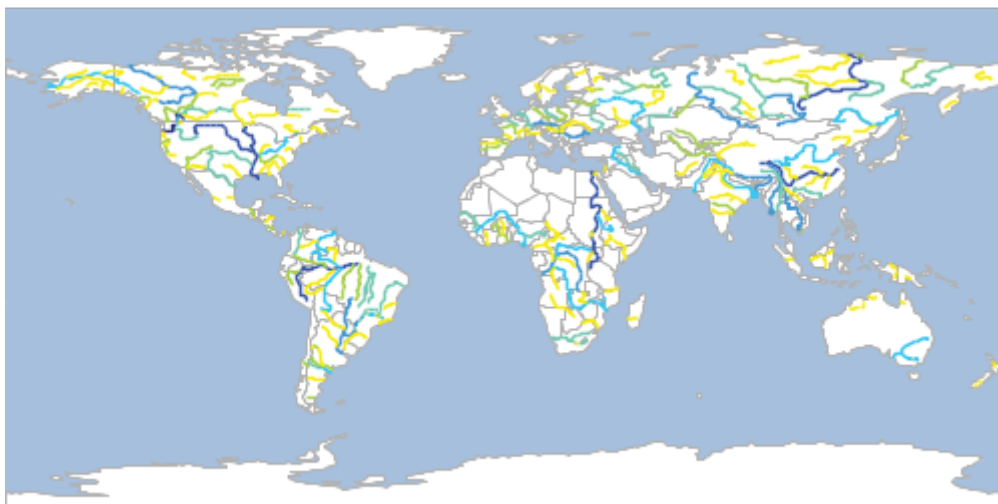

### *Split a Layer into Layers based on another Layer*

```
Schema schema = new Schema("grid",[
    new Field("geom","Polygon","EPSG:4326"),
    new Field("col","int"),
    new Field("row","int"),
    new Field("row_col","string")
])
Workspace gridWorkspace = new Directory("target")
Layer gridLayer = gridWorkspace.create(schema)
new Bounds(-180,-90,180,90,"EPSG:4326").generateGrid(2, 3, "polygon", {cell, col, row
->
    gridLayer.add([
        "geom": cell,
        "col": col,
        "row": row,
        "row_col": "${row} ${col}"
    ])
})

Workspace workspace = new GeoPackage(new File("src/main/resources/data.gpkg"))
Layer countries = workspace.get("countries")

Workspace outWorkspace = new Memory()
countries.split(gridLayer,gridLayer.schema.get("row_col"),outWorkspace)

outWorkspace.layers.each { Layer layer ->
    println "${layer.name} has ${layer.count} features"
}
```

```
countries_1_1 has 6 features
countries_1_2 has 6 features
countries_2_1 has 44 features
countries_2_2 has 74 features
countries_3_1 has 13 features
countries_3_2 has 70 features
```



## Transform

*Transform one Layer into another Layer*

```
Workspace workspace = new Directory(new File("src/main/resources/data"))
Layer states = workspace.get("states")
Layer centroids = states.transform("centroids", [
    geom: "centroid(the_geom)",
    name: "strToUpperCase(STATE_NAME)",
    ratio: "FEMALE / MALE"
])
centroids.eachFeature(max: 5) {Feature f ->
    println "${f.geom} ${f['name']} = ${f['ratio']}"
}
```

```
ILLINOIS = 1.0587396098110435
DISTRICT OF COLUMBIA = 1.1447503268897763
DELAWARE = 1.0626439771122835
WEST VIRGINIA = 1.0817203227723509
MARYLAND = 1.0621588832568312
```



## Layer Algebra

GeoScript can do layer algebra. All of the examples below use Layer A (red) and Layer B (green).



## Clip

*Clip Layer A with Layer B*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.clip(layerB)
```



### *Clip Layer B with Layer A*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.clip(layerA, outWorkspace, outLayer: "ba_clip")
```



## Erase

### *Erase Layer A with Layer B*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.erase(layerB)
```



### *Erase Layer B with Layer A*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.erase(layerA, outWorkspace, outLayer: "ba_erase")
```



## Identity

### *Identity Layer A with Layer B*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.identity(layerB)
```





### *Identity Layer B with Layer A*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.identity(layerA, outWorkspace: outWorkspace, outLayer:
"ba_identity")
```



## Intersection

### *Intersection Layer A with Layer B*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.intersection(layerB)
```



### *Intersection Layer B with Layer A*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.intersection(layerA, outWorkspace: outWorkspace, outLayer:
"ba_intersection")
```



## **Symmetric Difference**

### *Symmetric Difference Layer A with Layer B*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.symDifference(layerB)
```



### *Symmetric Difference Layer B with Layer A*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.symDifference(layerA, outWorkspace: outWorkspace, outLayer:
"ba_symdifference")
```



## Update


### *Update Layer A with Layer B*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.update(layerB)
```



### *Update Layer B with Layer A*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.update(layerA, outWorkspace: outWorkspace, outLayer:
"ba_update")
```

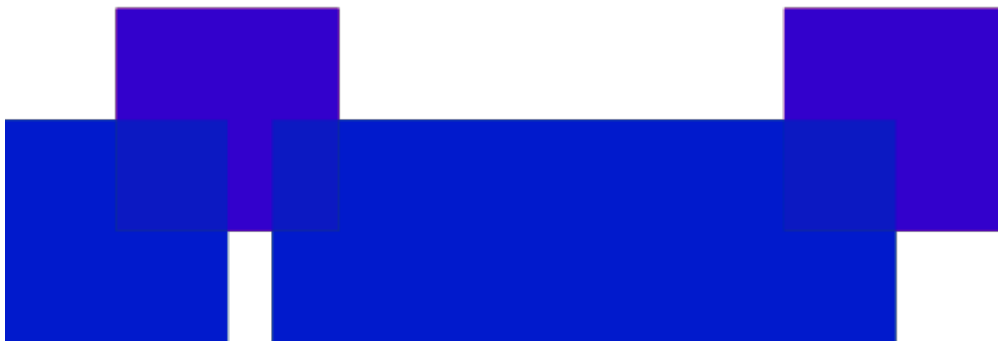

## **Union**

### *Union Layer A with Layer B*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Layer layerC = layerA.union(layerB)
```



*Union Layer B with Layer A*

```
Workspace workspace = new GeoPackage(new File("src/main/resources/layeralgebra.gpkg"))
Layer layerA = workspace.get("a")
Layer layerB = workspace.get("b")
Workspace outWorkspace = new Directory("target")
Layer layerC = layerB.union(layerA, outWorkspace, outLayer: "ba_union")
```



## Reading and Writing Layers

The Layer IO classes are in the [geoscript.layer.io](#) package.

### Finding Layer Writer and Readers

## List all Layer Writers

```
List<Writer> writers = Writers.list()
writers.each { Writer writer ->
    println writer.class.simpleName
}
```

```
CsvWriter
GeobufWriter
GeoJSONWriter
GeoRSSWriter
GmlWriter
GpxWriter
KmlWriter
MvtWriter
```

## Find a Layer Writer

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

Writer writer = Writers.find("csv")
String csv = writer.write(layer)
println csv
```

```
"geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.48416 47.2619)","2","Tacoma"
```

### List all Layer Readers

```
List<Reader> readers = Readers.list()
readers.each { Reader reader ->
    println reader.class.simpleName
}
```

```
CsvReader
GeobufReader
GeoJSONReader
GeoRSSReader
GmlReader
GpxReader
KmlReader
MvtReader
```

### Find a Layer Reader

```
Reader reader = Readers.find("csv")
Layer layer = reader.read("""geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.48416 47.2619)","2","Tacoma"
""")
println "# features = ${layer.count}"
```

```
# features = 2
```

## GeoJSON

### *Get GeoJSON String from a Layer*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String geojson = layer.toJSONString()
println geojson
```



```

{
  "type": "FeatureCollection",
  "features": [
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.3204,
          47.6024
        ]
      },
      "properties": {
        "id": 1,
        "name": "Seattle"
      },
      "id": "fid-5e20cc2e_163b89ca169_-6902"
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.4842,
          47.2619
        ]
      },
      "properties": {
        "id": 2,
        "name": "Tacoma"
      },
      "id": "fid-5e20cc2e_163b89ca169_-6900"
    }
  ]
}

```

### Write a Layer to a GeoJSON String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

GeoJSONWriter writer = new GeoJSONWriter()
String geojson = writer.write(layer)
println geojson
```

```

{
  "type": "FeatureCollection",
  "features": [
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.3204,
          47.6024
        ]
      },
      "properties": {
        "id": 1,
        "name": "Seattle"
      },
      "id": "fid-5e20cc2e_163b89ca169_-7e2c"
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.4842,
          47.2619
        ]
      },
      "properties": {
        "id": 2,
        "name": "Tacoma"
      },
      "id": "fid-5e20cc2e_163b89ca169_-7e2a"
    }
  ]
}

```

```
String geoJson = """
{
  "type": "FeatureCollection",
  "features": [
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.3204,
          47.6024
        ]
      },
      "properties": {
        "id": 1,
        "name": "Seattle"
      },
      "id": "1"
    },
    {
      "type": "Feature",
      "geometry": {
        "type": "Point",
        "coordinates": [
          -122.681944,
          45.52
        ]
      },
      "properties": {
        "id": 2,
        "name": "Portland"
      },
      "id": "2"
    }
  ]
}
"""

GeoJSONReader reader = new GeoJSONReader()
Layer layer = reader.read(geoJson)
```



## GeoBuf

*Get GeoBuf String from a Layer*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String geobuf = layer.toGeobufString()
println geobuf
```

```
0a0269640a046e616d6510021806223d0a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a07536561
74746c650a1c0a0c08001a08ffd6e77498a3892d6a0218026a080a065461636f6d61
```

### Write a Layer to a GeoBuf String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.681944, 45.52),
    id: 2,
    name: "Portland"
])

GeobufWriter writer = new GeobufWriter()
String geobuf = writer.write(layer)
println geobuf
```

```
0a0269640a046e616d6510021806223f0a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a07536561
74746c650a1e0a0c08001a08afe9ff7480d2b42b6a0218026a0a0a08506f72746c616e64
```

### Read a Layer from a GeoBuf String

```
String geobuf =
"0a0269640a046e616d6510021806223f0a1d0a0c08001a089fd8d374c0ebb22d6a0218016a090a0753656
174746c650a1e0a0c08001a08afe9ff7480d2b42b6a0218026a0a0a08506f72746c616e64"
GeobufReader reader = new GeobufReader()
Layer layer = reader.read(geobuf)
```



## GML

*Get GML String from a Layer*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String gml = layer.toGMLString()
println gml
```

```
<wfs:FeatureCollection xmlns:wfs="http://www.opengis.net/wfs">
  <gml:boundedBy xmlns:gml="http://www.opengis.net/gml">
    <gml:Box srsName="http://www.opengis.net/gml/srs/epsg.xml#4326">
      <gml:coord>
        <gml:X>
          -122.48416
        </gml:X>
        <gml:Y>
```

```

        47.2619
      </gml:Y>
    </gml:coord>
  <gml:coord>
    <gml:X>
      -122.3204
    </gml:X>
    <gml:Y>
      47.6024
    </gml:Y>
  </gml:coord>
</gml:Box>
</gml:boundedBy>
<gml:featureMember xmlns:gml="http://www.opengis.net/gml">
  <gsf:cities xmlns:gsf="http://geoscript.org/feature" fid="fid-
5e20cc2e_163b89ca169_-7397">
    <gml:name>
      Seattle
    </gml:name>
    <gsf:geom>
      <gml:Point>
        <gml:coord>
          <gml:X>
            -122.3204
          </gml:X>
          <gml:Y>
            47.6024
          </gml:Y>
        </gml:coord>
      </gml:Point>
    </gsf:geom>
    <gsf:id>
      1
    </gsf:id>
  </gsf:cities>
</gml:featureMember>
<gml:featureMember xmlns:gml="http://www.opengis.net/gml">
  <gsf:cities xmlns:gsf="http://geoscript.org/feature" fid="fid-
5e20cc2e_163b89ca169_-7395">
    <gml:name>
      Tacoma
    </gml:name>
    <gsf:geom>
      <gml:Point>
        <gml:coord>
          <gml:X>
            -122.48416
          </gml:X>
          <gml:Y>
            47.2619
          </gml:Y>

```



```

        </gml:coord>
      </gml:Point>
    </gsf:geom>
    <gsf:id>
      2
    </gsf:id>
  </gsf:cities>
</gml:featureMember>
</wfs:FeatureCollection>

```

### *Write a Layer to a GML String*

```

Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

GmlWriter writer = new GmlWriter()
String gml = writer.write(layer)
println gml

```

```

<wfs:FeatureCollection xmlns:gsf="http://geoscript.org/feature"
xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:wfs="http://www.opengis.net/wfs"
xmlns:gml="http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc">
<gml:boundedBy>
<gml:Box srsName="http://www.opengis.net/gml/srs/epsg.xml#4326">
<gml:coord>
<gml:X>-122.48416</gml:X>
<gml:Y>47.2619</gml:Y>
</gml:coord>
<gml:coord>
<gml:X>-122.3204</gml:X>
<gml:Y>47.6024</gml:Y>
</gml:coord>
</gml:Box>
</gml:boundedBy>
<gml:featureMember>
<gsf:cities fid="fid-5e20cc2e_163b89ca169_-73b1">
<gml:name>Seattle</gml:name>
<gsf:geom>
<gml:Point>
<gml:coord>
<gml:X>-122.3204</gml:X>
<gml:Y>47.6024</gml:Y>
</gml:coord>
</gml:Point>
</gsf:geom>
<gsf:id>1</gsf:id>
</gsf:cities>
</gml:featureMember>
<gml:featureMember>
<gsf:cities fid="fid-5e20cc2e_163b89ca169_-73af">
<gml:name>Tacoma</gml:name>
<gsf:geom>
<gml:Point>
<gml:coord>
<gml:X>-122.48416</gml:X>
<gml:Y>47.2619</gml:Y>
</gml:coord>
</gml:Point>
</gsf:geom>
<gsf:id>2</gsf:id>
</gsf:cities>
</gml:featureMember>
</wfs:FeatureCollection>

```

```

String gml = """
<wfs:FeatureCollection xmlns:gsf="http://geoscript.org/feature"
xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:wfs="http://www.opengis.net/wfs"
xmlns:gml="http://www.opengis.net/gml" xmlns:ogc="http://www.opengis.net/ogc">
  <gml:boundedBy>
    <gml:Box srsName="http://www.opengis.net/gml/srs/epsg.xml#4326">
      <gml:coord>
        <gml:X>-122.48416</gml:X>
        <gml:Y>47.2619</gml:Y>
      </gml:coord>
      <gml:coord>
        <gml:X>-122.3204</gml:X>
        <gml:Y>47.6024</gml:Y>
      </gml:coord>
    </gml:Box>
  </gml:boundedBy>
  <gml:featureMember>
    <gsf:cities fid="fid-a7cd555_1634fc34503_-7fff">
      <gml:name>Seattle</gml:name>
      <gsf:geom>
        <gml:Point>
          <gml:coord>
            <gml:X>-122.3204</gml:X>
            <gml:Y>47.6024</gml:Y>
          </gml:coord>
        </gml:Point>
      </gsf:geom>
      <gsf:id>1</gsf:id>
    </gsf:cities>
  </gml:featureMember>
  <gml:featureMember>
    <gsf:cities fid="fid-a7cd555_1634fc34503_-7ffd">
      <gml:name>Portland</gml:name>
      <gsf:geom>
        <gml:Point>
          <gml:coord>
            <gml:X>-122.681944</gml:X>
            <gml:Y>45.52</gml:Y>
          </gml:coord>
        </gml:Point>
      </gsf:geom>
      <gsf:id>2</gsf:id>
    </gsf:cities>
  </gml:featureMember>
</wfs:FeatureCollection>
"""

GmlReader reader = new GmlReader()
Layer layer = reader.read(gml)

```



## KML

### *Get KML String from a Layer*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

String kml = layer.toKMLString()
println kml
```

```
<kml:kml xmlns:kml="http://www.opengis.net/kml/2.2">
  <kml:Document>
    <kml:Folder>
      <kml:name>
        cities
      </kml:name>
      <kml:Schema kml:name="cities" kml:id="cities">
        <kml:SimpleField kml:name="id" kml:type="Integer"/>
      </kml:Schema>
    </kml:Folder>
  </kml:Document>
</kml:kml>
```

```

    <kml:SimpleField kml:name="name" kml:type="String"/>
  </kml:Schema>
  <kml:Placemark>
    <kml:name>
      fid-5e20cc2e_163b89ca169_-6a0d
    </kml:name>
    <kml:Style>
      <kml:IconStyle>
        <kml:color>
          ff0000ff
        </kml:color>
      </kml:IconStyle>
    </kml:Style>
    <kml:ExtendedData>
      <kml:SchemaData kml:schemaUrl="#cities">
        <kml:SimpleData kml:name="id">
          1
        </kml:SimpleData>
        <kml:SimpleData kml:name="name">
          Seattle
        </kml:SimpleData>
      </kml:SchemaData>
    </kml:ExtendedData>
    <kml:Point>
      <kml:coordinates>
        -122.3204,47.6024
      </kml:coordinates>
    </kml:Point>
  </kml:Placemark>
  <kml:Placemark>
    <kml:name>
      fid-5e20cc2e_163b89ca169_-6a0b
    </kml:name>
    <kml:Style>
      <kml:IconStyle>
        <kml:color>
          ff0000ff
        </kml:color>
      </kml:IconStyle>
    </kml:Style>
    <kml:ExtendedData>
      <kml:SchemaData kml:schemaUrl="#cities">
        <kml:SimpleData kml:name="id">
          2
        </kml:SimpleData>
        <kml:SimpleData kml:name="name">
          Tacoma
        </kml:SimpleData>
      </kml:SchemaData>
    </kml:ExtendedData>
    <kml:Point>

```

```

    <kml:coordinates>
      -122.48416,47.2619
    </kml:coordinates>
  </kml:Point>
</kml:Placemark>
</kml:Folder>
</kml:Document>
</kml:kml>

```

### *Write a Layer to a KML String*

```

Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
  new Field("geom", "Point", "EPSG:4326"),
  new Field("id", "Integer"),
  new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
  geom: new Point(-122.3204, 47.6024),
  id: 1,
  name: "Seattle"
])
layer.add([
  geom: new Point(-122.48416, 47.2619),
  id: 2,
  name: "Tacoma"
])

KmlWriter writer = new KmlWriter()
String kml = writer.write(layer)
println kml

```

```

<kml:kml xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:kml="http://earth.google.com/kml/2.1">
<kml:Document>
<kml:Placemark id="fid-5e20cc2e_163b89ca169_-73a9">
<kml:name>Seattle</kml:name>
<kml:Point>
<kml:coordinates>-122.3204,47.6024</kml:coordinates>
</kml:Point>
</kml:Placemark>
<kml:Placemark id="fid-5e20cc2e_163b89ca169_-73a7">
<kml:name>Tacoma</kml:name>
<kml:Point>
<kml:coordinates>-122.48416,47.2619</kml:coordinates>
</kml:Point>
</kml:Placemark>
</kml:Document>
</kml:kml>

```

### *Read a Layer from a KML String*

```

String kml = ""
<kml:kml xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:kml="http://earth.google.com/kml/2.1">
  <kml:Document>
    <kml:Placemark id="fid-61215c1b_1634ca279f5_-7fff">
      <kml:name>Seattle</kml:name>
      <kml:Point>
        <kml:coordinates>-122.3204,47.6024</kml:coordinates>
      </kml:Point>
    </kml:Placemark>
    <kml:Placemark id="fid-61215c1b_1634ca279f5_-7ffd">
      <kml:name>Portland</kml:name>
      <kml:Point>
        <kml:coordinates>-122.681944,45.52</kml:coordinates>
      </kml:Point>
    </kml:Placemark>
  </kml:Document>
</kml:kml>
""

KmlReader reader = new KmlReader()
Layer layer = reader.read(kml)

```



## CSV

*Write a Layer to a CSV String*

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

CsvWriter writer = new CsvWriter()
String csv = writer.write(layer)
println csv
```

```
"geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.48416 47.2619)","2","Tacoma"
```



### Read a Layer from a CSV String

```
String csv = """"geom:Point:EPSG:4326","id:Integer","name:String"
"POINT (-122.3204 47.6024)","1","Seattle"
"POINT (-122.681944 45.52)","2","Portland"
""""

CsvReader reader = new CsvReader()
Layer layer = reader.read(csv)
```



### GeoRSS

## Write a Layer to a GeoRSS String


```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

GeoRSSWriter writer = new GeoRSSWriter()
String georss = writer.write(layer)
println georss
```

```
<?xml version="1.0" encoding="UTF-8"?>
<feed xmlns:georss="http://www.georss.org/georss" xmlns="http://www.w3.org/2005/Atom">
<title>cities</title>
<subtitle>cities geom: Point(EPSG:4326), id: Integer, name: String</subtitle>
<link>http://geoscript.org/feature</link>
<entry>
<title>fid-5e20cc2e_163b89ca169_-7a35</title>
<summary>[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]</summary>
<updated>Thu May 31 23:51:20 UTC 2018</updated>
<georss:point>47.6024 -122.3204</georss:point>
</entry>
<entry>
<title>fid-5e20cc2e_163b89ca169_-7a33</title>
<summary>[geom:POINT (-122.48416 47.2619), id:2, name:Tacoma]</summary>
<updated>Thu May 31 23:51:20 UTC 2018</updated>
<georss:point>47.2619 -122.48416</georss:point>
</entry>
</feed>
```

```
String georss = "<?xml version='1.0' encoding='UTF-8'?>
<feed xmlns:georss='http://www.georss.org/georss' xmlns='http://www.w3.org/2005/Atom'>
<title>cities</title>
<subtitle>cities geom: Point(EPSG:4326), id: Integer, name: String</subtitle>
<link>http://geoscript.org/feature</link>
<entry>
<title>Seattle</title>
<summary>[geom:POINT (-122.3204 47.6024), id:1, name:Seattle]</summary>
<updated>Fri May 11 15:23:05 PDT 2018</updated>
<georss:point>47.6024 -122.3204</georss:point>
</entry>
<entry>
<title>Portland</title>
<summary>[geom:POINT (-122.681944 45.52), id:2, name:Portland]</summary>
<updated>Fri May 11 15:23:05 PDT 2018</updated>
<georss:point>45.52 -122.681944</georss:point>
</entry>
</feed>
"""

GeoRSSReader reader = new GeoRSSReader()
Layer layer = reader.read(georss)
```

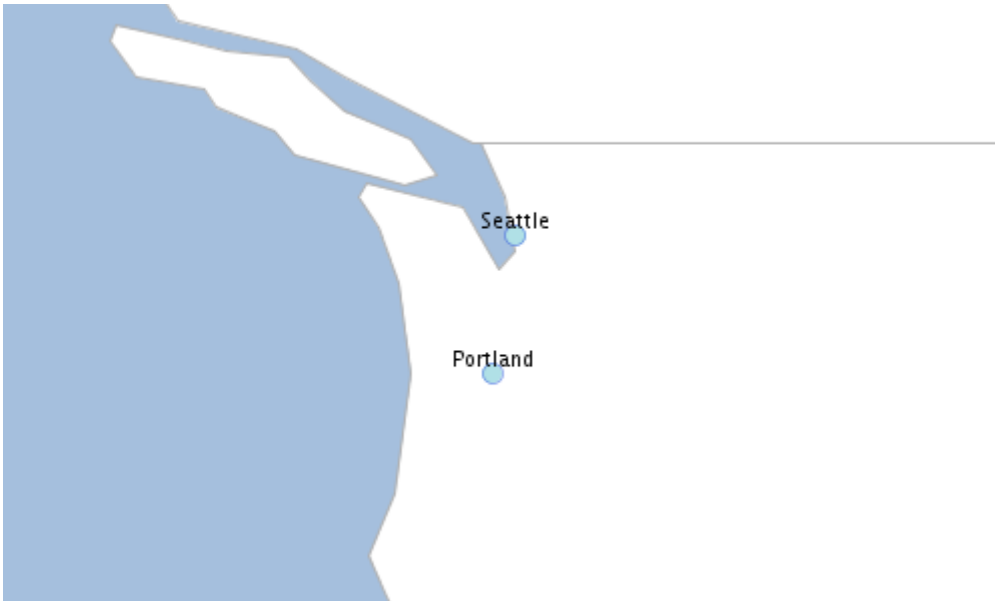

## GPX

### Write a Layer to a GPX String

```
Workspace workspace = new Memory()
Schema schema = new Schema("cities", [
    new Field("geom", "Point", "EPSG:4326"),
    new Field("id", "Integer"),
    new Field("name", "String")
])
Layer layer = workspace.create(schema)
layer.add([
    geom: new Point(-122.3204, 47.6024),
    id: 1,
    name: "Seattle"
])
layer.add([
    geom: new Point(-122.48416, 47.2619),
    id: 2,
    name: "Tacoma"
])

GpxWriter writer = new GpxWriter()
String gpx = writer.write(layer)
println gpx
```

```
<?xml version="1.0" encoding="UTF-8"?>
<gpx xmlns="http://www.topografix.com/GPX/1/1" version="1.1" creator="geoscript">
<wpt lat="47.6024" lon="-122.3204">
<name>fid-5e20cc2e_163b89ca169_-73ad</name>
</wpt>
<wpt lat="47.2619" lon="-122.48416">
<name>fid-5e20cc2e_163b89ca169_-73ab</name>
</wpt>
</gpx>
```

### Read a Layer from a GPX String

```
String gpx = """<?xml version="1.0" encoding="UTF-8"?>
<gpx xmlns="http://www.topografix.com/GPX/1/1" version="1.1" creator="geoscript">
<wpt lat="47.6024" lon="-122.3204">
<name>Seattle</name>
</wpt>
<wpt lat="45.52" lon="-122.681944">
<name>Portland</name>
</wpt>
</gpx>
"""

GpxReader reader = new GpxReader()
Layer layer = reader.read(gpx)
```



## Graticules

### Square

Create a square graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 20
double spacing = 5
Layer layer = Graticule.createSquares(bounds, length, spacing)
```



### Create a square graticules Shapefile Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 30
double spacing = -1
Workspace workspace = new Directory("target")
Layer layer = Graticule.createSquares(bounds, length, spacing, workspace: workspace,
layer: "squares")
```



## Hexagon

### Create a flat hexagon graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 20
double spacing = 5
String orientation = "flat"
Layer layer = Graticule.createHexagons(bounds, length, spacing, orientation)
```




*Create a angled hexagon graticules Layer*

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double length = 10
double spacing = 5
String orientation = "angled"
Layer layer = Graticule.createHexagons(bounds, length, spacing, orientation)
```




*Create a hexagon graticules Layer intersecting Washington States*

```
Layer states = new Shapefile("src/main/resources/data/states.shp")
Feature feature = states.first(filter: "STATE_NAME = 'Washington'")
Layer layer = Graticule.createHexagons(feature.bounds.expandBy(1.0), 0.2, -1.0,
"flat", createFeature: { GridElement e ->
    new Point(e.center.x, e.center.y).buffer(0.2).intersects(feature.geom)
})
```

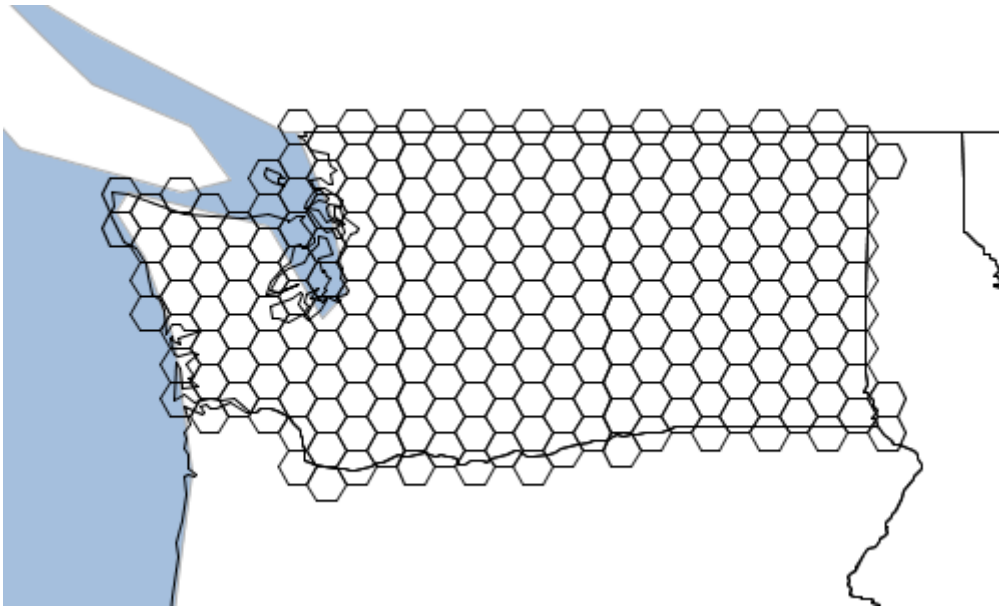

*Create a hexagon graticules Layer with a custom schema*

```
Layer states = new Shapefile("src/main/resources/data/states.shp")
Schema schema = new Schema("hexagon", [
    new Field("geom", "Polygon"),
    new Field("color", "java.awt.Color")
])
Bounds b = states.bounds.expandBy(1)
Layer layer = Graticule.createHexagons(b, 2.0, -1.0, "flat", schema: schema,
    setAttributes: { GridElement e, Map attributes ->
        attributes["color"] = Color.randomPastel.asColor()
    })
layer.style = new Fill(new Property("color"), 0.5)
```

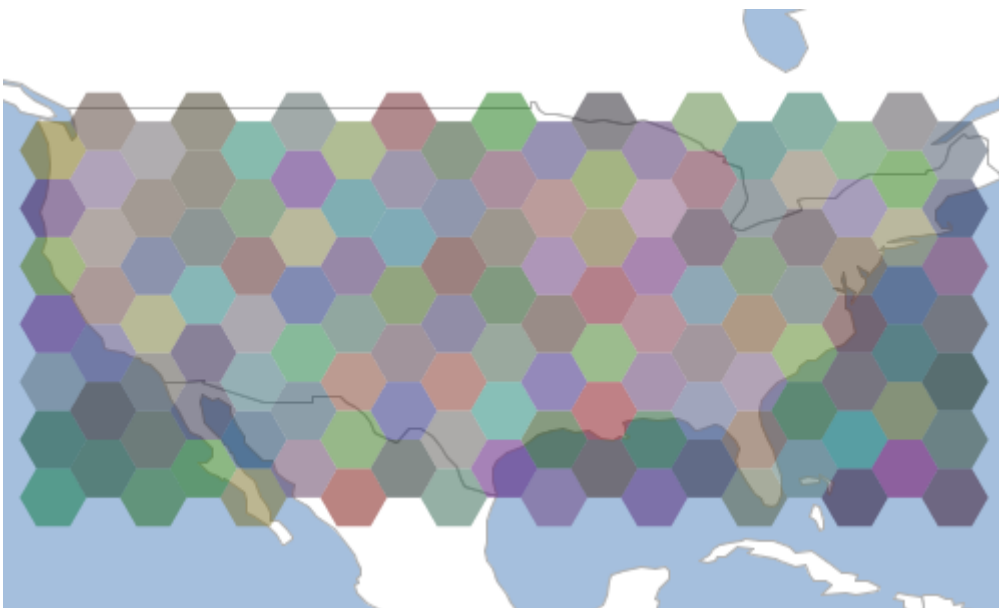

**Line**



### Create a line graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
Layer layer = Graticule.createLines(bounds, [
    [orientation: 'vertical', level: 2, spacing: 20],
    [orientation: 'vertical', level: 1, spacing: 10 ],
    [orientation: 'horizontal', level: 2, spacing: 20],
    [orientation: 'horizontal', level: 1, spacing: 10 ]
], 2.0)
```



## Rectangle

### Create a rectangular graticules Layer

```
Bounds bounds = new Bounds(-180,-90,180,90,"EPSG:4326")
double width = 20
double height = 10
Layer layer = Graticule.createRectangles(bounds, width, height, -1)
```

