Table of Contents

R	aster Recipes	1
	Raster Properties	1
	Raster Values	6
	Raster Processing	12

Raster Recipes

The Raster classes are in the geoscript.layer package.

Raster Properties

Read a Raster from a File

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
```



Get the Raster's Bounds.

```
Bounds bounds = raster.bounds
println "Bounds: ${bounds}"
```

Bounds: (-179.99999999997,-89.99999999998205,179.99999999996405,90.0,EPSG:4326)

Get the Raster's Projection.

```
Projection projection = raster.proj
println "Projection: ${projection}"
```

Projection: EPSG:4326

Get the Raster's Size.

```
List size = raster.size
println "Size: ${size[0]}x${size[1]}"
```

```
Size: 800x400
```

Get the Raster's number of columns and rows.

```
int cols = raster.cols
int rows = raster.rows
println "Columns: ${cols} Rows: ${rows}"
```

```
Columns: 800 Rows: 400
```

Get the Raster's Bands.

```
List<Band> bands = raster.bands
println "Bands:"
bands.each { Band band ->
    println " ${band}"
}
```

```
Band:

RED_BAND

GREEN_BAND

BLUE_BAND
```

Get the Raster's block size.

```
List blockSize = raster.blockSize
println "Block size: ${blockSize[0]}x${blockSize[1]}"
```

```
Block size: 800x8
```

Get the Raster's pixel size.

```
List pixelSize = raster.pixelSize
println "Pixel size: ${pixelSize[0]}x${pixelSize[1]}"
```

```
Pixel size: 0.4499999999995505x0.449999999999551
```

Get more information about a Raster's Bounds.

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
List<Band> bands = raster.bands
bands.each { Band band ->
    println " ${band}"
    println " Min = ${band.min}"
    println " Max = ${band.max}"
    println " No Data = ${band.noData}"
    println " Is No Data = ${band.isNoData(12.45)}"
    println " Unit = ${band.unit}"
    println " Scale = ${band.scale}"
    println " Offset = ${band.offset}"
    println " Type = ${band.type}"
}
```

```
RED_BAND
  Min = 0.0
  Max = 255.0
  No Data = [0.0]
  Is No Data = false
  Unit = null
  Scale = 1.0
  Offset = 0.0
  Type = byte
GREEN_BAND
  Min = 0.0
  Max = 255.0
  No Data = [0.0]
  Is No Data = false
  Unit = null
  Scale = 1.0
  Offset = 0.0
  Type = byte
BLUE_BAND
  Min = 0.0
  Max = 255.0
  No Data = [0.0]
  Is No Data = false
  Unit = null
  Scale = 1.0
  Offset = 0.0
  Type = byte
```

Get the minimum and maximum values from a Raster for each band

Min value: [56.0, 84.0, 91.0] Max value: [255.0, 255.0, 255.0]

```
Map extrema = raster.extrema
println "Min values: ${extrema.min} Max values: ${extrema.max}"
```

Get a Point at the given pixel location.

```
Point point = raster.getPoint(7,9)
println "Geographic location at pixel 7,9 is ${point}"
```

```
Geographic location at pixel 7,9 is POINT (-176.625 85.7249984741211)
```

Get a Pixel location at the given Point.

```
List pixel = raster.getPixel(new Point(-176.625, 85.72499))
println "Pixel coordinates at POINT (-176.625 85.7249984741211) is ${pixel[0]},
${pixel[1]}"
```

```
Pixel coordinates at POINT (-176.625 85.7249984741211) is 7.0, 9.0
```

Determine whether the Raster covers the given Point.

```
boolean containsPoint = raster.contains(new Point(-180, -90))
println "Does raster cover point? ${containsPoint}"
```

```
Does raster cover point? true
```


Determine whether the Raster covers the given Pixel.

```
boolean containsPixel = raster.contains(500,600)
println "Does raster cover pixel? ${containsPixel}"
```

Does raster cover pixel? false

Get a RenderedImage from the Raster

```
RenderedImage image = raster.image
```

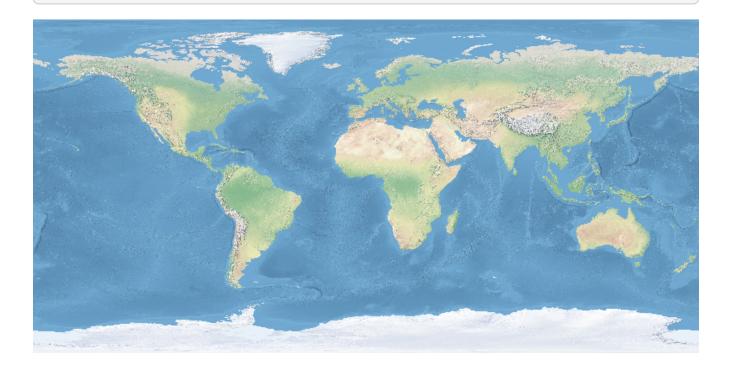

Dispose of the Raster when you are done

```
raster.dispose()
```

Raster Values

Get values from a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
```



Get values from a Raster with a Point.

```
double elevation = raster.getValue(new Point(-121.799927,46.867703))
println elevation
```

3069.0

Get values from a Raster with a Pixel Location.

```
List pixel = [100,200]
elevation = raster.getValue(pixel)
println elevation
```

288.0

Get neighboring values from a Raster with a Point Location.

```
Map neighborsOfPoint = raster.getNeighbors(new Point(-176.625, 85.72499), 0) println "Values neighboring POINT (-176.625 85.7249984741211) = ${neighborsOfPoint}"
```

```
Values neighboring POINT (-176.625 85.7249984741211) = [nw:103.0, n:104.0, ne:109.0, e:109.0, se:111.0, s:110.0, sw:110.0, w:108.0]
```

Get neighboring values from a Raster with a Pixel Location.

```
Map neighborsOfPixel = raster.getNeighbors([7,9], 0)
println "Values neighboring pixel 7,9 = ${neighborsOfPixel}"
```

```
Values neighboring pixel 7,9 = [nw:103.0, n:104.0, ne:109.0, e:109.0, se:111.0, s:110.0, sw:110.0, w:108.0]
```

Get values from a Raster for a range of pixels in a list of lists.

```
int x = 10
int y = 8
int w = 5
int h = 6
int band = 0
List values = raster.getValues(x, y, w, h, band, false)
println values
```

```
[[1032, 1186, 1340, 1435, 1301], [1143, 1143, 1193, 1224, 1313], [942, 938, 966, 982, 1129], [746, 835, 912, 949, 1028], [723, 948, 1130, 1244, 1211], [673, 890, 1100, 1133, 1024]]
```

Get values from a Raster for a range of pixels in a flat list.

```
List flatValues = raster.getValues(x, y, w, h, band, true)
println flatValues
```

```
[1032, 1186, 1340, 1435, 1301, 1143, 1143, 1193, 1224, 1313, 942, 938, 966, 982, 1129, 746, 835, 912, 949, 1028, 723, 948, 1130, 1244, 1211, 673, 890, 1100, 1133, 1024]
```

Get values from a Raster for a range of pixels as a pretty printed string.

String valuesAsString = raster.getValuesAsString(x, y, w, h, band, prettyPrint: true) println valuesAsString

```
| 1032.00 | 1186.00 | 1340.00 | 1435.00 | 1301.00 |

| 1143.00 | 1143.00 | 1193.00 | 1224.00 | 1313.00 |

| 942.00 | 938.00 | 966.00 | 982.00 | 1129.00 |

| 746.00 | 835.00 | 912.00 | 949.00 | 1028.00 |

| 723.00 | 948.00 | 1130.00 | 1244.00 | 1211.00 |

| 673.00 | 890.00 | 1100.00 | 1133.00 | 1024.00 |
```

Iterate over the cells in a Raster.

```
raster.eachCell(bounds: [0,0,5,5]) { double value, double pixelX, double pixelY ->
   println "${pixelX},${pixelY} = ${value}"
}
```

```
0.0,0.0 = 1061.0
1.0,0.0 = 996.0
2.0,0.0 = 945.0
3.0,0.0 = 960.0
4.0,0.0 = 904.0
0.0, 1.0 = 1167.0
1.0, 1.0 = 1149.0
2.0, 1.0 = 1085.0
3.0,1.0 = 966.0
4.0,1.0 = 862.0
0.0,2.0 = 1112.0
1.0,2.0 = 998.0
2.0,2.0 = 882.0
3.0,2.0 = 775.0
4.0,2.0 = 700.0
0.0,3.0 = 990.0
1.0,3.0 = 850.0
2.0,3.0 = 715.0
3.0,3.0 = 638.0
4.0,3.0 = 654.0
0.0, 4.0 = 833.0
1.0,4.0 = 706.0
2.0,4.0 = 611.0
3.0,4.0 = 681.0
4.0, 4.0 = 841.0
```

Iterate over a window of cells in a Raster.

```
raster.eachWindow (bounds: [0,0,8,8], window: [2,2]) { Number[][] windowsValues,
double pixelX, double pixelY ->
    println "${pixelX},${pixelY} = ${windowsValues}"
}
```


```
0.0,0.0 = [[1061, 996], [1167, 1149]]
1.0,0.0 = [[996, 945], [1149, 1085]]
2.0,0.0 = [[945, 960], [1085, 966]]
3.0,0.0 = [[960, 904], [966, 862]]
4.0,0.0 = [[904, 727], [862, 696]]
5.0,0.0 = [[727, 744], [696, 748]]
6.0,0.0 = [[744, 934], [748, 900]]
7.0,0.0 = [[934, 1099], [900, 1042]]
0.0,1.0 = [[1167, 1149], [1112, 998]]
1.0,1.0 = [[1149, 1085], [998, 882]]
2.0,1.0 = [[1085, 966], [882, 775]]
3.0,1.0 = [[966, 862], [775, 700]]
4.0,1.0 = [[862, 696], [700, 661]]
5.0,1.0 = [[696, 748], [661, 818]]
6.0,1.0 = [[748, 900], [818, 995]]
```


```
7.0,1.0 = [[900, 1042], [995, 1125]]
0.0, 2.0 = [[1112, 998], [990, 850]]
1.0,2.0 = [[998, 882], [850, 715]]
2.0,2.0 = [[882, 775], [715, 638]]
3.0,2.0 = [[775, 700], [638, 654]]
4.0,2.0 = [[700, 661], [654, 826]]
5.0,2.0 = [[661, 818], [826, 945]]
6.0,2.0 = [[818, 995], [945, 922]]
7.0,2.0 = [[995, 1125], [922, 1078]]
0.0,3.0 = [[990, 850], [833, 706]]
1.0,3.0 = [[850, 715], [706, 611]]
2.0,3.0 = [[715, 638], [611, 681]]
3.0,3.0 = [[638, 654], [681, 841]]
4.0,3.0 = [[654, 826], [841, 949]]
5.0,3.0 = [[826, 945], [949, 1084]]
6.0,3.0 = [[945, 922], [1084, 1054]]
7.0,3.0 = [[922, 1078], [1054, 1093]]
0.0,4.0 = [[833, 706], [652, 618]]
1.0,4.0 = [[706, 611], [618, 548]]
2.0,4.0 = [[611, 681], [548, 631]]
3.0,4.0 = [[681, 841], [631, 694]]
4.0,4.0 = [[841, 949], [694, 877]]
5.0,4.0 = [[949, 1084], [877, 1018]]
6.0,4.0 = [[1084, 1054], [1018, 1142]]
7.0,4.0 = [[1054, 1093], [1142, 1172]]
0.0,5.0 = [[652, 618], [631, 579]]
1.0,5.0 = [[618, 548], [579, 506]]
2.0,5.0 = [[548, 631], [506, 483]]
3.0,5.0 = [[631, 694], [483, 556]]
4.0,5.0 = [[694, 877], [556, 686]]
5.0,5.0 = [[877, 1018], [686, 825]]
6.0, 5.0 = [[1018, 1142], [825, 1004]]
7.0,5.0 = [[1142, 1172], [1004, 1053]]
0.0,6.0 = [[631, 579], [772, 766]]
1.0,6.0 = [[579, 506], [766, 627]]
2.0,6.0 = [[506, 483], [627, 529]]
3.0,6.0 = [[483, 556], [529, 473]]
4.0,6.0 = [[556, 686], [473, 556]]
5.0,6.0 = [[686, 825], [556, 669]]
6.0,6.0 = [[825, 1004], [669, 810]]
7.0,6.0 = [[1004, 1053], [810, 917]]
0.0,7.0 = [[772, 766], [900, 880]]
1.0,7.0 = [[766, 627], [880, 778]]
2.0,7.0 = [[627, 529], [778, 671]]
3.0,7.0 = [[529, 473], [671, 540]]
4.0,7.0 = [[473, 556], [540, 483]]
5.0,7.0 = [[556, 669], [483, 536]]
6.0,7.0 = [[669, 810], [536, 641]]
```

Set values on a Raster

```
File file = new File("src/main/resources/earth.tif")
GeoTIFF geotiff = new GeoTIFF(file)
Raster raster = geotiff.read("earth")
File arcGridFile = new File("target/earth.asc")
ArcGrid arcGrid = new ArcGrid(arcGridFile)
arcGrid.write(raster)
Raster arcGridRaster = arcGrid.read("earth")
arcGridRaster.eachCell {double value, double x, double y ->
    double newValue = value + 100
    arcGridRaster.setValue([x as int, y as int], newValue)
}
File arcGridAddFile = new File("target/earth_100.asc")
ArcGrid arcGridAdd = new ArcGrid(arcGridAddFile)
arcGridAdd.write(arcGridRaster)
Raster arcGridRasterAdd = arcGridAdd.read("earth_100")
List pixels = [
    [92, 298],
    [393.0, 343.0],
    [795.0, 399.0]
pixels.each { List pixel ->
    println "Original: ${raster.getValue(pixel)} New:
${arcGridRasterAdd.getValue(pixel)}"
}
```

Original: 97.0 New: 197.0 Original: 96.0 New: 196.0 Original: 237.0 New: 337.0

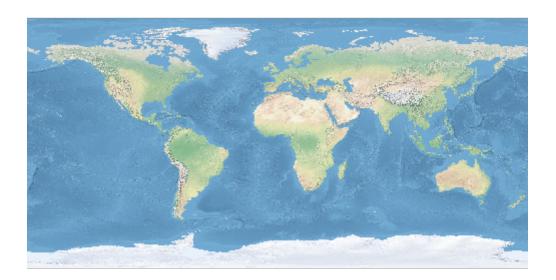

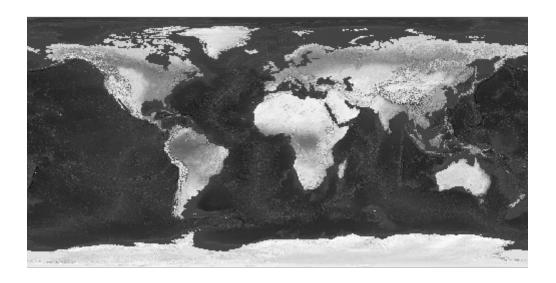

Raster Processing

Crop

Crop a Raster with a Bounds

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
Raster croppedRaster = raster.crop(new Bounds(-160.927734,6.751896,-34.716797,57.279043, "EPSG:4326"))
```



Project

Reproject a Raster to another Projection

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
Projection projection = new Projection("EPSG:3857")
Raster projectedRaster = raster.crop(projection.geoBounds).reproject(projection)
```




Transform

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
```


Scale a Raster

```
Raster scaledRaster = raster.transform(scalex: 10, scaley: 10)
```

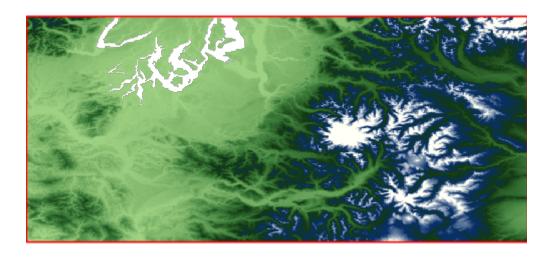


Shear a Raster

Raster shearedRaster = raster.transform(shearx: 10, sheary: 10)

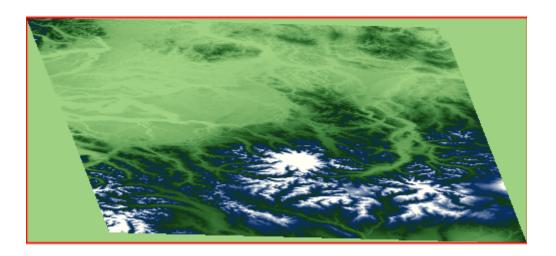


Translate a Raster

Raster translatedRaster = raster.transform(translatex: 10.1, translatey: 12.6)

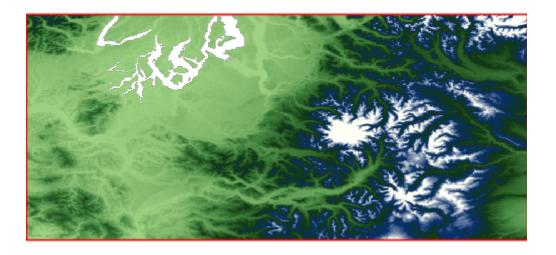

Transform a Raster with a combination of parameters

```
Raster transformedRaster = raster.transform(
    scalex: 1.1, scaley: 2.1,
    shearx: 0.4, sheary: 0.3,
    translatex: 10.1, translatey: 12.6,
    nodata: [-255],
    interpolation: "NEAREST"
)
```

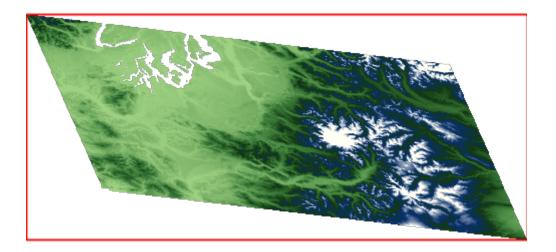

Select Bands

Extract a band from a Raster to create a new Raster

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")

Raster band1 = raster.selectBands([0])
Raster band2 = raster.selectBands([1])
Raster band3 = raster.selectBands([2])
```

Band 1

[raster selectband r] | raster_selectband_r.png

Band 2

[raster selectband g] | raster_selectband_g.png

Band 3

[raster selectband b] | raster_selectband_b.png


Merge

Merge a List of Rasters representing different bands together to create a single Raster

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")

Raster band1 = raster.selectBands([0])
Raster band2 = raster.selectBands([1])
Raster band3 = raster.selectBands([2])

Raster mergedRaster = Raster.merge([band1,band2,band3], transform: "FIRST")
```

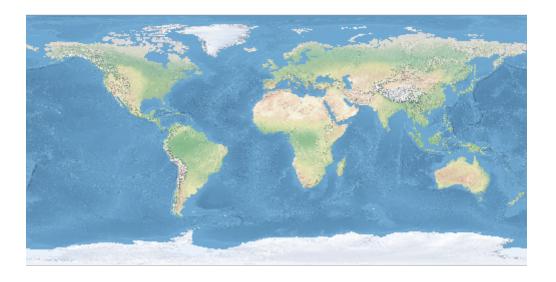



Mosaic

Mosaic a List of Rasters together to create a single Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")

Bounds bounds = raster.bounds
List<Raster> rasters = bounds.tile(0.5).collect { Bounds b -> raster.crop(b)
}
Raster mosaicedRaster = Raster.mosaic(rasters)
```

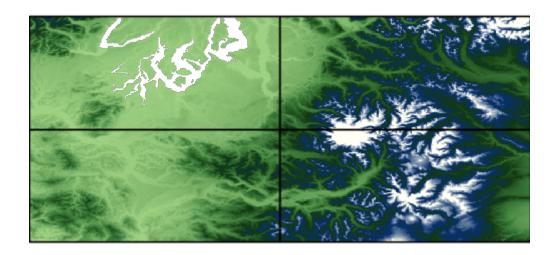


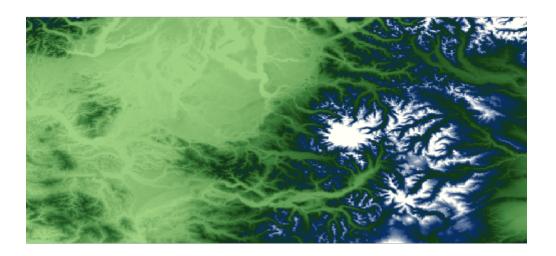

Contours

Create vector contours from a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
int band = 0
int interval = 300
boolean simplify = true
boolean smooth = true
Layer contours = raster.contours(band, interval, simplify, smooth)
```

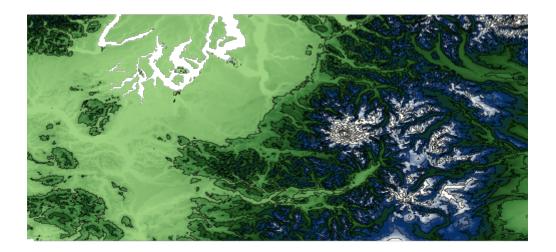


Stylize

Stylize a Raster by baking in a style to create a new Raster



Reclassify

Reclassify a Raster

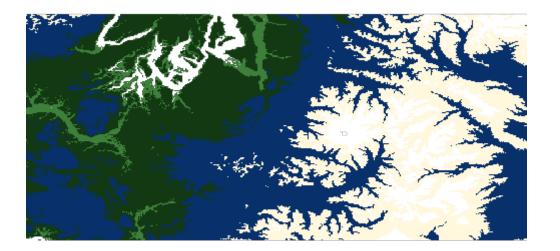


Scale

Scale a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println "Original Raster Size = ${raster.size[0]}x${raster.size[1]}"

Raster scaledRaster = raster.scale(0.5, 0.5)
println "Scaled Raster Size = ${scaledRaster.size[0]}x${scaledRaster.size[1]}"
```

```
Original Raster Size = 800x400
Scaled Raster Size = 400x200
```

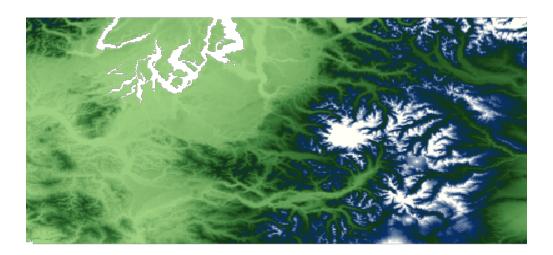

Resample

Resample a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println "Original Raster Bounds = ${raster.bounds}"
println "Original Raster Size = ${raster.size[0]}x${raster.size[1]}"

Raster resampledRaster = raster.resample(size: [400, 400], bbox: raster.bounds.scale(-2))
println "Resampled Raster Bounds = ${resampledRaster.bounds}"
println "Resampled Raster Size =
${resampledRaster.size[0]}x${resampledRaster.size[1]}"
```

```
Original Raster Bounds = (-123.55291606131708,46.25375026634816,-
120.73958272798374,47.522916933014834,EPSG:4326)
Original Raster Size = 800x400
Resampled Raster Bounds = (-124.95958272798374,45.619166933014824,-
119.33291606131708,48.157500266348165,EPSG:4326)
Resampled Raster Size = 400x400
```




Normalize

Normalize a Raster by diving all values by the maximum value.

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println "Original Raster Min Max values = ${raster.extrema.min[0]} -
${raster.extrema.max[0]}"

Raster normalizedRaster = raster.normalize()
println "Normalized Raster Min Max values = ${normalizedRaster.extrema.min[0]} -
${normalizedRaster.extrema.max[0]}"
```

```
Original Raster Min Max values = -23.0 - 4370.0
Normalized Raster Min Max values = -0.005263158120214939 - 1.0
```

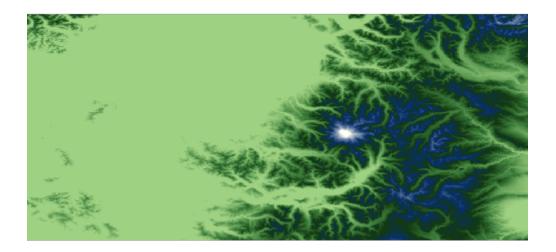

Convolve

Convolve a Raster with a radius.

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println "Original Raster Min Max values = ${raster.extrema.min[0]} -
${raster.extrema.max[0]}"

Raster convolvedRaster = raster.convolve(2)
println "Convolved Raster Min Max values = ${convolvedRaster.extrema.min[0]} -
${convolvedRaster.extrema.max[0]}"
```

```
Original Raster Min Max values = -23.0 - 4370.0
Convolved Raster Min Max values = -32767.0 - 32767.0
```




Convolve a Raster with a width and height.

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
println "Original Raster Min Max values = ${raster.extrema.min[0]} -
${raster.extrema.max[0]}"

Raster convolvedRaster = raster.convolve(1,2)
println "Convolved Raster Min Max values = ${convolvedRaster.extrema.min[0]} -
${convolvedRaster.extrema.max[0]}"
```

```
Original Raster Min Max values = -23.0 - 4370.0
Convolved Raster Min Max values = -32767.0 - 8675.0
```

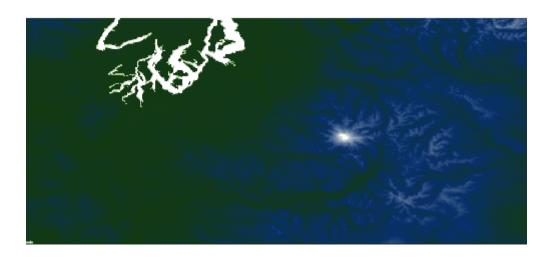

Invert

Invert the values of a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster invertedRaster = raster.invert()
```

Exponent

Calculate the exponent of the values of a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster expRaster = raster.exp()
```




Log

Calculate the log of the values of a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
Raster logRaster = raster.log()
```


Vectorize

Create a Polygon Layer from a Raster

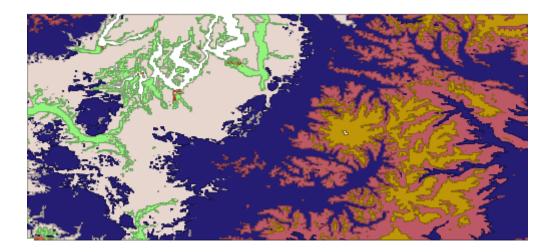


Create a Point Layer from a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc").crop(new Bounds(-121.878548,46.808402,-121.636505,46.896097, "EPSG:4326"))
Layer layer = raster.pointLayer
```

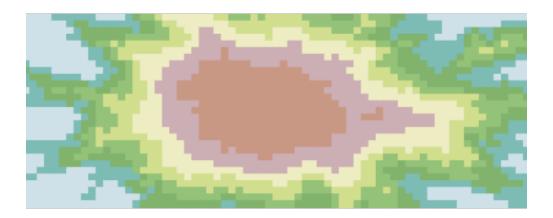

Extract a foot print from a Raster


```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")
Layer layer = raster.extractFootPrint()
```

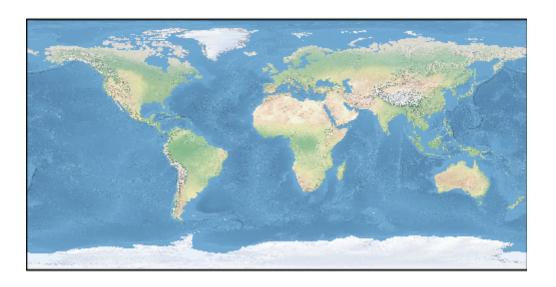

Calculate zonal statistics

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")

Layer zones = new Memory().create("zones", [new Field("geom", "Geometry", "EPSG:4326")])
Bounds bounds = raster.bounds
bounds.tile(0.5).each{b -> zones.add([b.geometry])}
Layer stats = raster.zonalStatistics(0, zones)
```

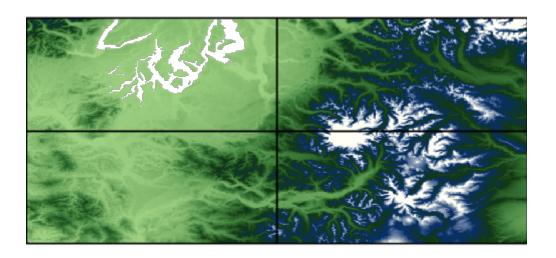

count	min	max	sum	avg	stddev
79950	-3.0	1718.0	2.6618944E7	332.944890556 59943	262.734593744 14483

count	min	max	sum	avg	stddev
80000	254.0	4370.0	9.2963902E7	1162.04877499 99913	439.084190796 6851
71728	-23.0	1755.0	1.1585759E7	161.523519406 64724	179.293892277 23505
80000	24.0	2728.0	7.9051464E7	988.143300000 0056	465.840718845 8327

Histogram


Get histogram of the Raster

```
File file = new File("src/main/resources/earth.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("earth")

Histogram histogram = raster.getHistogram()
println "# of bands = ${histogram.numberOfBands}"
println "# Counts = ${histogram.counts().size()}"
println "# Bins = ${histogram.bins().size()}"
println "Count 25 = ${histogram.count(25)}"
println "Bin 45 = ${histogram.bin(45)}"

Chart chart = Bar.xy(histogram.counts(0).withIndex().collect {int count, int index -> [index, count]})
```

```
# of bands = 3
# Counts = 256
# Bins = 256
Count 25 = 0
Bin 45 = [45.0, 46.0]
```



Raster Algebra


Add

Add a constant value to a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927,46.867703))
println elevation1

Raster higherRaster = raster.add(100.00)
double elevation2 = higherRaster.getValue(new Point(-121.799927,46.867703))
println elevation2
```

```
3069.0
3169.0
```

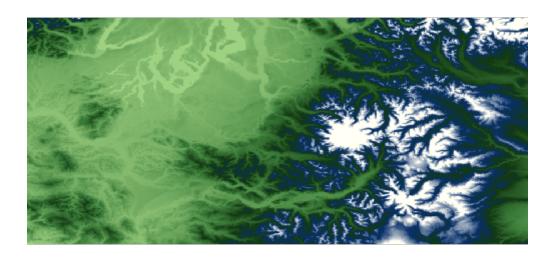

Add two Raster together

```
Raster lowRaster = Format.getFormat(new File("src/main/resources/low.tif")).read(
"low")
Raster highRaster = Format.getFormat(new File("src/main/resources/high.tif")).read
("high")
Raster lowPlusHighRaster = lowRaster.add(highRaster)
```

Low

13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0
1.0	2.0	3.0	4.0

High

17.0	18.0	19.0	20.0
13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0

Low + High

30.0	32.0	34.0	36.0
22.0	24.0	26.0	28.0
14.0	16.0	18.0	20.0
6.0	8.0	10.0	12.0


Subtract

Subtract a constant value from a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927,46.867703))
println elevation1

Raster lowerRaster = raster.minus(50.00)
double elevation2 = lowerRaster.getValue(new Point(-121.799927,46.867703))
println elevation2
```

```
3069.0
3019.0
```

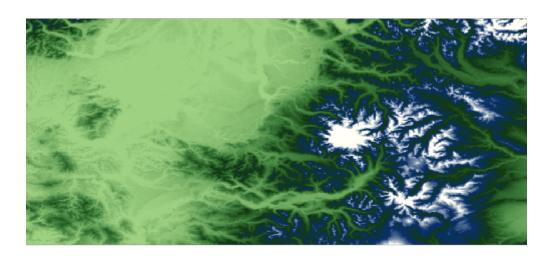


Subtract the Raster from a constant value

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927,46.867703))
println elevation1

Raster lowerRaster = raster.minusFrom(2000.0)
double elevation2 = lowerRaster.getValue(new Point(-121.799927,46.867703))
println elevation2
```

3069.0 -1069.0

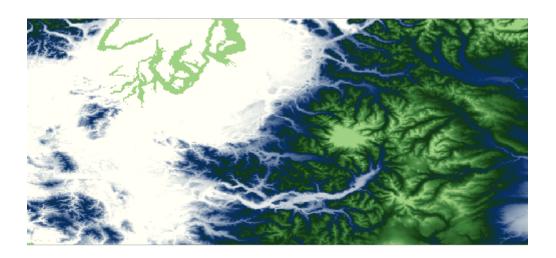

Subtract a Raster from another Raster

```
Raster lowRaster = Format.getFormat(new File("src/main/resources/low.tif")).read(
"low")
Raster highRaster = Format.getFormat(new File("src/main/resources/high.tif")).read
("high")
Raster highMinusLowRaster = highRaster.minus(lowRaster)
```

Low

13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0
1.0	2.0	3.0	4.0

High

17.0	18.0	19.0	20.0
13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0

High - Low

```
4.0
```

Multiply

Multiply a constant value against a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927,46.867703))
println elevation1

Raster higherRaster = raster.multiply(2.0)
double elevation2 = higherRaster.getValue(new Point(-121.799927,46.867703))
println elevation2
```

3069.0 6138.0



Multiply a Raster with another Raster

```
Raster lowRaster = Format.getFormat(new File("src/main/resources/low.tif")).read(
"low")
Raster highRaster = Format.getFormat(new File("src/main/resources/high.tif")).read
("high")
Raster multiplyRaster = highRaster.multiply(lowRaster)
```

Low

13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0
1.0	2.0	3.0	4.0

High

17.0	18.0	19.0	20.0
13.0	14.0	15.0	16.0
9.0	10.0	11.0	12.0
5.0	6.0	7.0	8.0

High * Low

221.0	252.0	285.0	320.0
117.0	140.0	165.0	192.0
45.0	60.0	77.0	96.0
5.0	12.0	21.0	32.0


Divide

Divide a constant value against a Raster

```
File file = new File("src/main/resources/pc.tif")
Format format = Format.getFormat(file)
Raster raster = format.read("pc")
double elevation1 = raster.getValue(new Point(-121.799927,46.867703))
println elevation1

Raster lowerRaster = raster.divide(2.0)
double elevation2 = lowerRaster.getValue(new Point(-121.799927,46.867703))
println elevation2
```

3069.0 1534.5

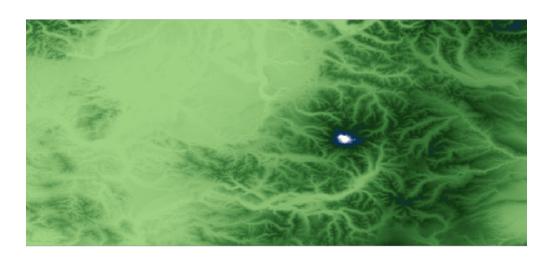

Divide a Raster by another Raster

```
Raster lowRaster = Format.getFormat(new File("src/main/resources/low.tif")).read(
"low")
Raster highRaster = Format.getFormat(new File("src/main/resources/high.tif")).read
("high")
Raster divideRaster = highRaster.divide(lowRaster)
```

Low

13.00	14.00	15.00	16.00
9.00	10.00	11.00	12.00
5.00	6.00	7.00	8.00
1.00	2.00	3.00	4.00

High

17.00	18.00	19.00	20.00
13.00	14.00	15.00	16.00
9.00	10.00	11.00	12.00
5.00	6.00	7.00	8.00

High / Low

1.31	1.29	1.27	1.25
1.44	1.40	1.36	1.33
1.80	1.67	1.57	1.50
5.00	3.00	2.33	2.00