

HTML5 & CSS3 SYNTAX CHEAT SHEET

Comprehensive Desktop & SHS ICT Quick Reference Guide

HTML5 DOCUMENT BOILERPLATE

```
<!-- Standard HTML5 Document Structure --> <!DOCTYPE
html> <html lang="en"> <head> <meta charset="UTF-8">
<meta name="viewport" content="width=device-width,
initial-scale=1.0"> <title>Page Title</title> <link
rel="stylesheet" href="style.css"> </head> <body>
<!-- Main Content Goes Here --> </body> </html>
```

HTML5 SEMANTIC LAYOUT TAGS

TAG	DESCRIPTION & USAGE
<header>	Top banner, branding, or page/section header.
<nav>	Contains primary navigation menu links.
<main>	Main central unique content of the page.
<section>	Thematic grouping of content with heading.
<article>	Self-contained, reusable piece (post/card).
<aside>	Sidebar, supplementary info, callout box.
<footer>	Page or section footer (copyright, links).

HTML5 TEXT & FORMATTING

ELEMENT	SYNTAX / EXAMPLE
Headings	<h1> to <h6> (Heading hierarchy)
Paragraph	Text content here...
Strong / Bold	Important (Semantic)
Emphasized	Italic text (Semantic)
Line Break	 (Self-closing break)
Horizontal Rule	<hr> (Thematic section break line)
Abbreviation	<abbr title="Cascading Style Sheets">CSS</abbr>
Span / Div	 (Inline), <div> (Block container)

HTML5 FORMS & INPUT CONTROLS

ELEMENT / TYPE	SYNTAX & ATTRIBUTES
Form Tag	<form action="url" method="POST" enctype="multi">
Text Input	<input type="text" id="username" required place
Password	<input type="password" id="pass"> (Masked charac
Email / Num	<input type="email"> / <input type="number" min
Radio / Check	<input type="radio" name="opt" value="1"> (Radi
Select / Dropdown	<select><option value="a">A</option></select>
Textarea	<textarea rows="4" cols="50"></textarea>
Label Binding	<label for="username">User:</label> (Matches inp
Submit Button	<button type="submit">Submit</button> or <input

HTML5 MEDIA & IFRAMES

ELEMENT	SYNTAX / KEY ATTRIBUTES
Image	
Video	<video controls poster="img.jpg"><source src="v.
Audio	<audio controls autoplay muted><source src="a.mp
Iframe	<iframe src="page.html" sandbox allowfullscreen

CSS3 IMPLEMENTATION METHODS

METHOD	SYNTAX EXAMPLE	BEST F
Inline	<p style="color: red;">	Quick t (Low mainta
Internal	<style> p { color: red; } </style>	Single custom
External	<link rel="stylesheet" href="style.css">	Best pr reusab

HTML5 LISTS & HYPERLINKS

TYPE	SYNTAX & EXAMPLE
------	------------------

Unordered List	<code>Item</code> (Bullet points)
----------------	---

Ordered List	<code><ol reversed start="1">Item</code>
--------------	--

Definition List	<code><dl><dt>Term</dt><dd>Def</dd></dl></code>
-----------------	---

External Link	<code>Link</code>
---------------	--

Internal Jump	<code>Jump to ID</code>
---------------	---

Mailto Link	<code>Email</code>
-------------	--

HTML5 TABLES & ATTRIBUTES

```
<table> <caption>Student Grades</caption> <thead>
<tr><th scope="col">Name</th><th colspan="2">Score</th></tr> </thead> <tbody> <tr><td>Marionne</td><td rowspan="2">95</td></tr> </tbody> </table>
```

CSS3 SELECTORS & COMBINATORS

SELECTOR	SYNTAX	DESCRIPTION
Universal	<code>*</code>	Targets all elements on page
Element / Tag	<code>p, div, h1</code>	Targets specific HTML tags
Class	<code>.btn</code>	Targets elements with <code>class="btn"</code>
ID	<code>#header</code>	Targets single element with <code>id="header"</code>
Descendant	<code>A B</code>	All <code>B</code> inside <code>A</code> at any depth
Direct Child	<code>A > B</code>	Only direct children <code>B</code> inside <code>A</code>
Adjacent Sibling	<code>A + B</code>	First <code>B</code> immediately following <code>A</code>
General Sibling	<code>A ~ B</code>	All sibling <code>B</code> elements following <code>A</code>


CSS3 SPECIFICITY HIERARCHY

!important > **Inline Style** > **ID (#)** > **Class (.)** / **Pseudo-class** > **Element (tag)**

CSS3 LAYOUT, STYLING & ADVANCED RULES

Box Model, Flexbox, Grid, Colors, Typography & Responsive Design

CSS3 BOX MODEL ARCHITECTURE

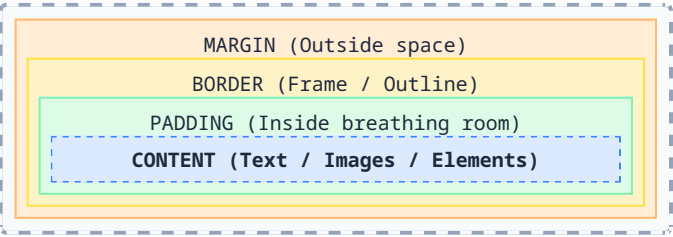

```
/* Standard Box Sizing Reset (Mandatory Best Practice) */ *, *::before, *::after { box-sizing: border-box; /* Includes padding & border in total width */ } .element { width: 300px; padding: 15px; /* Top/Right/Bottom/Left */ border: 2px solid #7d0606; margin: 20px auto; /* Center horizontally */ }
```

CSS3 DISPLAY & POSITIONING

PROPERTY	VALUES & BEHAVIOR
<code>display</code>	<code>block</code> , <code>inline</code> , <code>inline-block</code> , <code>none</code> , <code>flex</code> , <code>grid</code>
<code>position: static</code>	Default flow behavior. Top/left/z-index have no effect.
<code>position: relative</code>	Positioned relative to its normal flow position.
<code>position: absolute</code>	Positioned relative to closest non-static ancestor.
<code>position: fixed</code>	Positioned relative to viewport browser window.
<code>position: sticky</code>	Toggles between relative and fixed on scroll.
<code>z-index</code>	Controls stack order depth (higher integer = on top)

CSS3 FLEXBOX LAYOUT CHEAT SHEET

```
/* Flex Container Properties */ .flex-container { display: flex; flex-direction: row | row-reverse | column | column-reverse; justify-content: flex-start | center | space-between | space-around; align-items: stretch | center | flex-start | flex-end; flex-wrap: nowrap | wrap | wrap-reverse; gap: 1rem; } /* Flex Child Item Properties */ .flex-item { flex: 1 0 auto; /* flex-grow | flex-shrink | flex-basis */ align-self: center | flex-end; }
```

CSS3 GRID LAYOUT CHEAT SHEET

```
/* Grid Container Properties */ .grid-container { display: grid; grid-template-columns: 1fr 1fr 1fr; /* 3 Equal Columns */ grid-template-columns: repeat(auto-fit, minmax(250px, 1fr)); gap: 1.5rem; } /* Grid Item Spanning */ .grid-item-wide { grid-column: span 2; }
```

CSS3 COLOR FORMATS & BACKGROUNDS

FORMAT	SYNTAX EXAMPLE
Keyword	<code>color: red;</code>
Hexadecimal	<code>color: #7d0606;</code>
RGB / RGBA	<code>color: rgba(125, 6, 6, 0.8);</code>
HSL / HSLA	<code>color: hsla(0, 91%, 26%, 1);</code>
Gradient	<code>background: linear-gradient(90deg, #b32e2c, #...);</code>

CSS3 TYPOGRAPHY & FORMATTING

```
body { font-family: "Lucida Sans", Arial, sans-serif; font-size: 16px; /* 1rem = 16px default */ font-weight: 700; /* normal=400, bold=700 */ line-height: 1.6; text-align: center | left | justify; text-transform: uppercase | capitalize; text-decoration: none | underline; letter-spacing: 1px; }
```

CSS3 RESPONSIVE MEDIA QUERIES

```
/* Desktop First Breakpoint */ @media screen and (max-width: 768px) { .two-column-layout { grid-template-columns: 1fr; /* Stack vertically on mobile */ } .site-header { padding: 1rem; } } /* Mobile First Breakpoint */ @media screen and (min-width: 1024px) { .container { max-width: 1200px; } }
```

CSS3 PSEUDO-CLASSES & PSEUDO-ELEMENTS

SELECTOR	TRIGGER STATE / TARGETED PART
<code>a:hover</code>	Mouse hovers over element
<code>input:focus</code>	Element receives keyboard/mouse focus
<code>button:active</code>	Element actively being clicked
<code>li:nth-child(odd)</code>	Styles alternate list items (even/odd/numbers)
<code>p::before</code>	Inserts generated content before paragraph
<code>p::after</code>	Inserts generated content after paragraph

IDE & DEV IDE NUANCES & LIVE SERVER

CONCEPT	KEY NUANCE / TIP
Live Server	Auto-refreshes browser on file save (skips compilation).
VS Code Emmet	Type <code>!</code> + Tab to instantly generate HTML5 boilerplate.
Class Shortcut	Type <code>.card</code> + Tab → <code><div class="card"></div></code>
Quirks Mode	Caused by omitting <code><!DOCTYPE html></code> at document top.