blacklistDiscovery

Service Description

Service ID: *"blacklistDiscovery"*

Abstract
This document describes the `blacklistDiscovery` service, version 1.0.0, produced by the Blacklist support system of Arrowhead (documentation edition 5.3.0).

Contents

1 Documentation edition and implementation scope **3**

2 Overview **3**
2.1 Significant Prior Art . . . 3
2.2 How This Service Is Meant to Be Used . . . 3
2.3 Important Delimitations and Dependencies . . . 3

3 Service Interface **4**
3.1 operation check . . . 4
3.2 operation lookup . . . 4

4 Information Model **5**
4.1 struct BlacklistEntry . . . 5
4.2 struct BlacklistEntryListResponse . . . 5
4.3 Primitives . . . 5

5 References **6**

6 Revision History **7**
6.1 Amendments . . . 7
6.2 Quality Assurance . . . 7

1 Documentation edition and implementation scope

This is the 5.3.0 documentation edition, dated 2026-11-09. It carries forward the system and service contracts from the retained 5.2.2 documentation and identifies the current primary implementation sources. The former `documentation/v5.2.2` folder is retained unchanged.

Document version 5.3.0 is distinct from executable, dependency, registered system/service and wire-contract versions. Values still defined by the source (including 5.2.2 artefact versions, 1.0.0 service versions and `SysMonitor-AMQP-IDD-5.2.2` payload identifiers) are preserved. This documentation update does not change runtime behaviour or establish a new implementation release. Historical verification statements describe the tests recorded in the inherited baseline; this revision validates document compilation and references.

2 Overview

This document describes the `blacklistDiscovery` service, which provides checking whether a system is blacklisted in the local cloud, and listing the requester's own active entries. It is produced by the Blacklist system [1] in service version 1.0.0.

The rest of this document is organized as follows. In Section 3, we describe the abstract message operations provided by the service. In Section 4, we end the document by presenting the data types used by the mentioned operations. The concrete interfaces are specified in the HTTP/TLS/JSON IDD [2] and the MQTT/TLS/JSON IDD [3].

2.1 Significant Prior Art

Blacklist is new in Arrowhead 5; in 4.x systems were excluded only by removing their certificates or authorization rules.

2.2 How This Service Is Meant to Be Used

The blacklist filter of the common library calls `check` for every request it receives when `enable.blacklist.filter=true`; DynamicServiceOrchestration uses the Blacklist to remove blacklisted candidates. A system can call `lookup` to see the entries about itself.

2.3 Important Delimitations and Dependencies

The service only answers; enforcement is done by the systems' blacklist filters. With `force.blacklist.filter=true` a system refuses requests while the Blacklist is unreachable. Core systems in `blacklist.check.exclude.list` are not checked.

3 Service Interface

This section describes the interfaces to the `blacklistDiscovery` service. In particular, each subsection names an abstract operation, an input type and an output type, in that order. The input type is named inside parentheses, while the output type is preceded by a colon. Input and output types are only denoted when accepted or returned, respectively, by the interface in question.

All abstract data types named in this section are defined in Section 4.

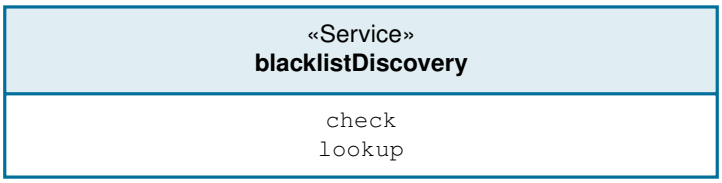


Figure 1: SysML-style block of the `blacklistDiscovery` service and its operations.

The following interface operations are available.

3.1 operation check (Name) : Boolean

Returns true if the named system has an active blacklist entry. The system name fills the `{systemName}` placeholder of the registered path.

3.2 operation lookup () : BlacklistEntryListResponse

Returns the active entries about the requester.

4 Information Model

Here, all data objects that can be part of the `blacklistDiscovery` service are listed in alphabetic order. Note that each subsection, which describes one type of object, begins with the *struct* keyword, which is used to denote a collection of named fields, each with its own data type. As a complement to the explicitly defined types in this section, there is also a list of implicit primitive types in Section 4.3, which are used to represent things like hashes and identifiers.

4.1 struct BlacklistEntry

A blacklist entry.

Field	Type	Description
systemName	Name	The blacklisted system.
createdBy	Name	System that created the entry.
revokedBy	String	System that inactivated the entry, if any.
createdAt	DateTime	UTC time of creation.
updatedAt	DateTime	UTC time of the last change.
reason	String	Reason of the blacklisting.
expiresAt	DateTime	Expiry of the entry; no value means permanent.
active	Boolean	Whether the entry is in force.

4.2 struct BlacklistEntryListResponse

List of blacklist entries.

Field	Type	Description
entries	List<BlacklistEntry>	Matching records of the current page.
count	Number	Total number of matching records (all pages).

4.3 Primitives

Types and structures mentioned throughout this document that are assumed to be available to implementations of this service. The concrete interpretations of each of these types and structures must be provided by any IDD document claiming to implement this service.

Type	Description
Boolean	One out of `true` or `false`.
DateTime	Pinpoints a specific moment in time (UTC).
List	An *array* of a known number of items, each having type A.
Name	A string identifier that is intended to be both human and machine-readable.
Number	An integer number.
String	A chain of characters.

5 References

[1] J. Delsing, “Blacklist – System Description,” Eclipse Arrowhead, SysD 5.3.0, 2026, ah5-Blacklist-java-spring/documentation/v5.3.0/Blacklist-v5.3.0-SysD.pdf.

[2] ——, “blacklistDiscovery HTTP/TLS/JSON – Interface Design Description (Blacklist),” Eclipse Arrowhead, IDD 5.3.0, 2026, blacklist-v5.3.0-blacklistDiscovery-HTTP-IDD.pdf.

[3] ——, “blacklistDiscovery MQTT/TLS/JSON – Interface Design Description (Blacklist),” Eclipse Arrowhead, IDD 5.3.0, 2026, blacklist-v5.3.0-blacklistDiscovery-MQTT-IDD.pdf.

6 Revision History

6.1 Amendments

No.	Date	Version	Subject of Amendments	Author
1	2026-10-22	5.2.2	Document created from the Arrowhead LaTeX templates for the 5.2.2 Java Spring implementation, including the local extensions of this workspace.	Jerker Delsing
2	2026-10-30	5.2.2	Checked against the primary Java source tree (Eclipse-Arrowhead-java): services, operations, paths and data models unchanged.	Claude Opus 5.5 (draft)
3	2026-11-09	5.3.0	New documentation edition; primary-source references and Go/Rust implementation scope; 5.2.2 retained.	Documentation maintenance

6.2 Quality Assurance

No.	Date	Version	Approved by
1		5.3.0	