gateTunnelKey

Service Description

Service ID: *"gateTunnelKey"*

Abstract
This document describes the `gateTunnelKey` service, version 5.2.2, produced by the GateTunnel support system of Arrowhead 5.2.2.

Contents

1 Overview **3**
1.1 Significant Prior Art . . . 3
1.2 How This Service Is Meant to Be Used . . . 3
1.3 Important Delimitations and Dependencies . . . 3

2 Service Interface **4**
2.1 operation public-key . . . 4

3 Information Model **5**
3.1 struct PublicKey . . . 5
3.2 Primitives . . . 5

4 References **6**

5 Revision History **7**
5.1 Amendments . . . 7
5.2 Quality Assurance . . . 7

1 Overview

This document describes the `gateTunnelKey` service, which provides publication of the GateTunnel's public key. It is produced by the GateTunnel system [1] in service version 5.2.2.

The rest of this document is organized as follows. In Section 2, we describe the abstract message operations provided by the service. In Section 3, we end the document by presenting the data types used by the mentioned operations. The concrete interface is specified in the HTTP/TLS/JSON IDD [2].

1.1 Significant Prior Art

Successor of the Arrowhead 4.6 Gateway public-key endpoint.

1.2 How This Service Is Meant to Be Used

Peers and tools read the key of the GateTunnel certificate.

1.3 Important Delimitations and Dependencies

2 Service Interface

This section describes the interfaces to the `gateTunnelKey` service. In particular, each subsection names an abstract operation, an input type and an output type, in that order. The input type is named inside parentheses, while the output type is preceded by a colon. Input and output types are only denoted when accepted or returned, respectively, by the interface in question.

All abstract data types named in this section are defined in Section 3.

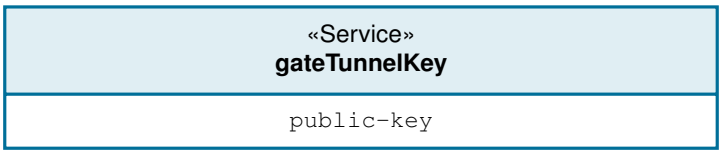

Figure 1: SysML-style block of the `gateTunnelKey` service and its operations.

The following interface operations are available.

2.1 operation public-key () : PublicKey

Returns the public key of the GateTunnel certificate.

3 Information Model

Here, all data objects that can be part of the `gateTunnelKey` service are listed in alphabetic order. Note that each subsection, which describes one type of object, begins with the *struct* keyword, which is used to denote a collection of named fields, each with its own data type. As a complement to the explicitly defined types in this section, there is also a list of implicit primitive types in Section 3.2, which are used to represent things like hashes and identifiers.

3.1 struct PublicKey

Field	Type	Description
algorithm	String	Key algorithm.
format	String	`X.509`.
publicKey	String	Public key of the GateTunnel certificate, Base64.

3.2 Primitives

Types and structures mentioned throughout this document that are assumed to be available to implementations of this service. The concrete interpretations of each of these types and structures must be provided by any IDD document claiming to implement this service.

Type	Description
String	A chain of characters.

4 References

[1] J. Delsing, “GateTunnel – System Description,” Eclipse Arrowhead, SysD 5.2.2, 2026, ah5-GateTunnel-java-spring/documentation/v5.2.2/GateTunnel-v5.2.2-SysD.pdf.

[2] ——, “gateTunnelKey HTTP/TLS/JSON – Interface Design Description (GateTunnel),” Eclipse Arrowhead, IDD 5.2.2, 2026, gateTunnel-v5.2.2-gateTunnelKey-HTTP-IDD.pdf.

5 Revision History

5.1 Amendments

No.	Date	Version	Subject of Amendments	Author
1	2026-10-22	5.2.2	Document created from the Arrowhead LaTeX templates for the 5.2.2 Java Spring implementation, including the local extensions of this workspace.	Jerker Delsing
2	2026-10-30	5.2.2	Checked against the primary Java source tree (Eclipse-Arrowhead-java): services, operations, paths and data models unchanged.	Claude Opus 5.5 (draft)

5.2 Quality Assurance

No.	Date	Version	Approved by
1		5.2.2	