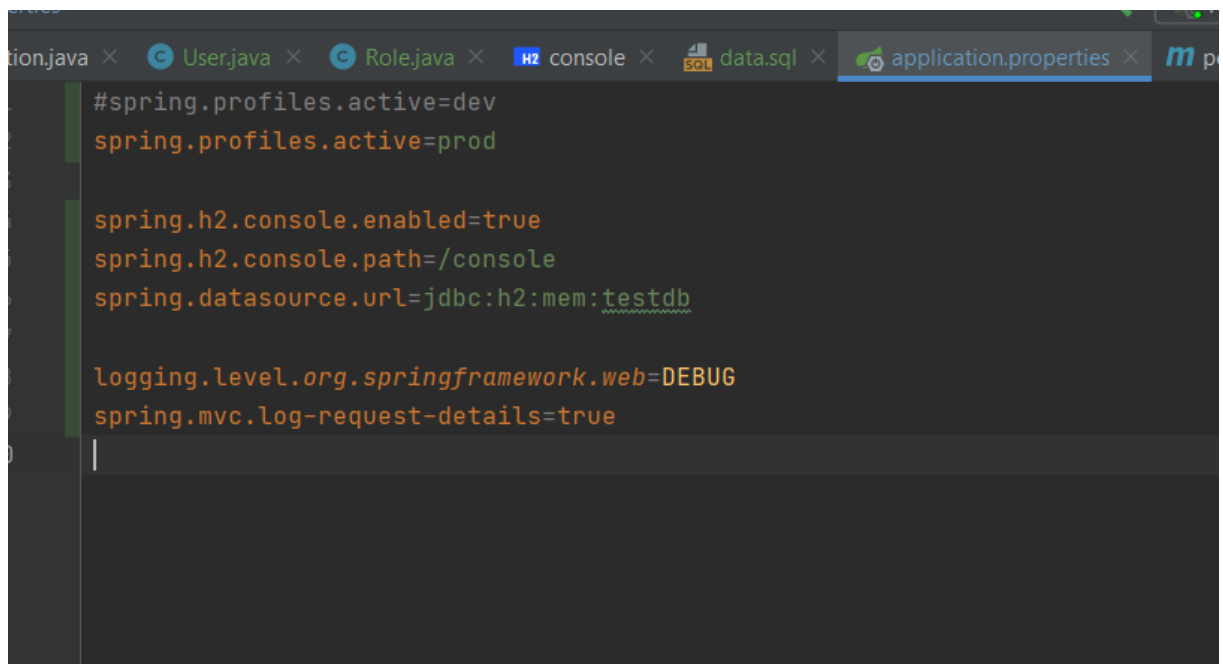



Configuration de H2 en mode in memory avec spring boot



A screenshot of an IDE showing the 'application.properties' file. The file contains configuration for Spring Boot, including active profiles, H2 console settings, data source URL, and logging levels. The tabs at the top include 'User.java', 'Role.java', 'H2 console', 'data.sql', and 'application.properties'.

```
#spring.profiles.active=dev
spring.profiles.active=prod

spring.h2.console.enabled=true
spring.h2.console.path=/console
spring.datasource.url=jdbc:h2:mem:testdb

logging.level.org.springframework.web=DEBUG
spring.mvc.log-request-details=true
```

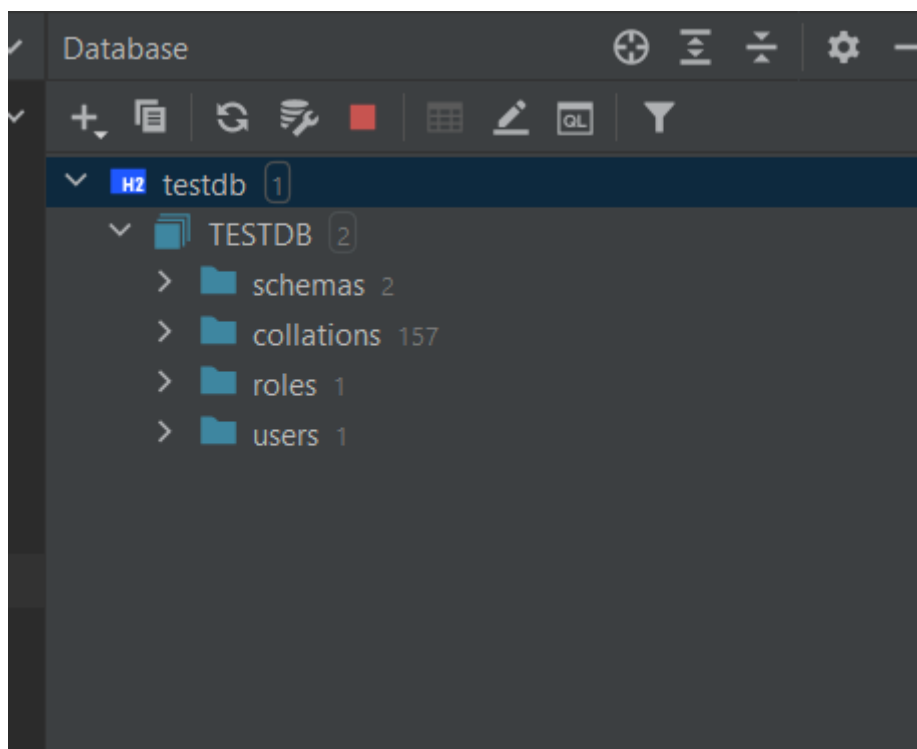

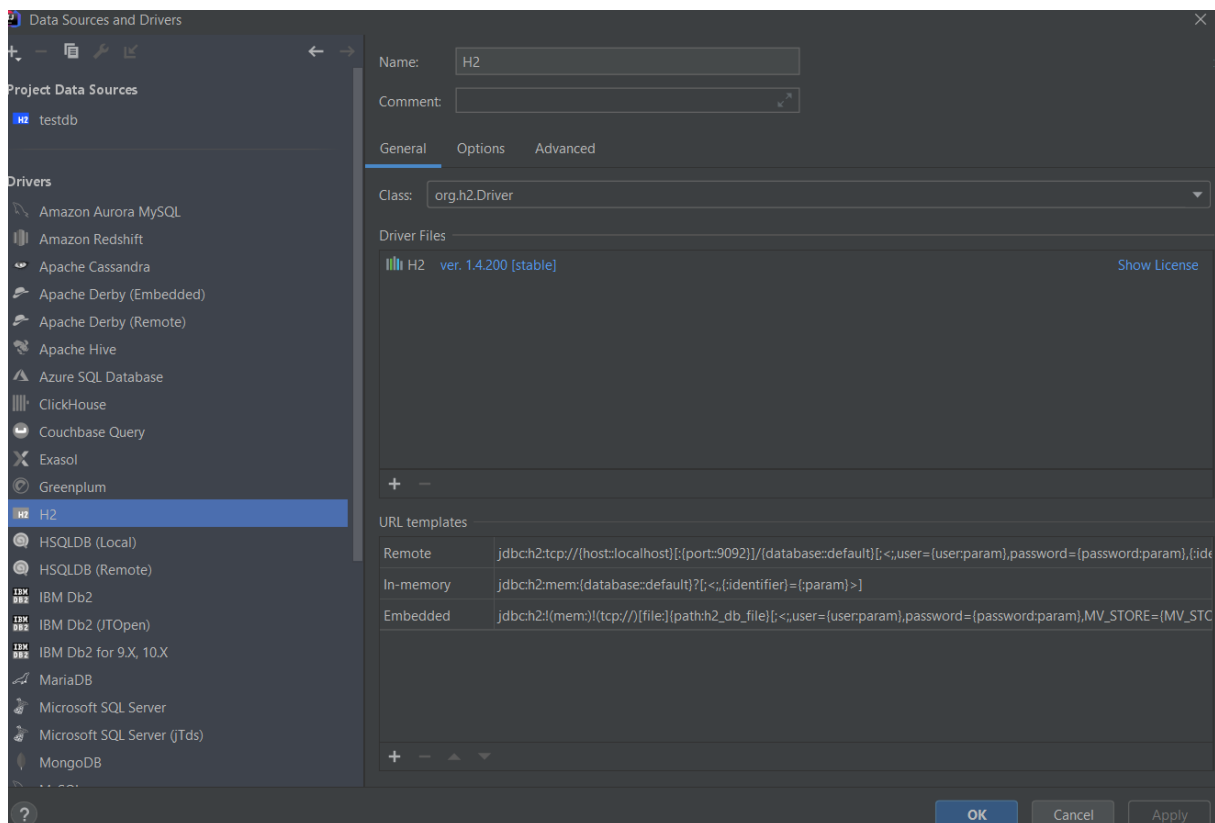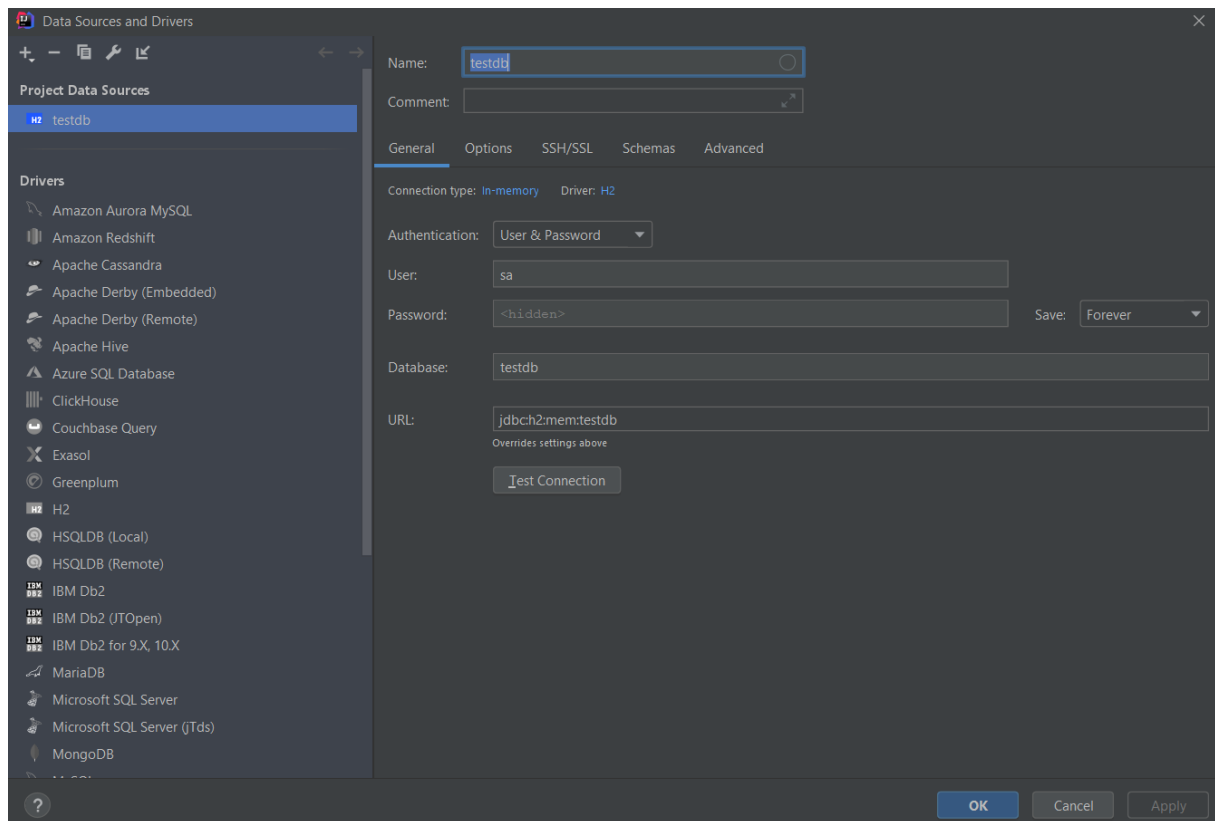

URL d'administration h2

<http://localhost:8080/console/>

login : sa

password(set empty) :