

Splunk- Set up Server to send logs

Monday, September 7, 2026 10:41 AM

Objective: Downloaded the Universal Forwarder and installed it on my Gen10 HP Server. Test Windows events sending to Splunk.

Server: 10.147.64.30 /27
Splunk: 10.147.62.10 /28

Server information: 10.147.64.30

Item	Value
OS Name	Microsoft Windows Server 2016 Standard
Version	10.0.14393 Build 14393
Other OS Description	Not Available
OS Manufacturer	Microsoft Corporation
System Name	PHVDXQ1320C78
System Manufacturer	HPE
System Model	ProLiant DL360 Gen10
System Type	x64-based PC
System SKU	R4X05A
Processor	Intel(R) Xeon(R) Silver 4210R CPU @ 2.40GHz, 2394 Mhz, 10 Core(s), 20 Logic...
BIOS Version/Date	HPE U32, 2/11/2020

Successful installation: Universal Forwarder install



Wireshark test: Mirroring the port to see traffic from 9997 after installation. Troubleshooting the TCP handshake.

tcp.port==9997

No.	Time	Source	Destination	Protocol	Length	Info
	2026-09...	10.0.0.8	10.147.62.10	TCP	62	[TCP Retransmission] 49818 → 9997 [SYN] Seq=0 Win=8192 Len=0 MSS=1460 SACK_PERM
	2026-09...	10.0.0.8	10.147.62.10	TCP	66	49823 → 9997 [SYN, ECE, CWR] Seq=0 Win=8192 Len=0 MSS=1460 WS=256 SACK_PERM
	2026-09...	10.0.0.8	10.147.62.10	TCP	66	[TCP Retransmission] 49823 → 9997 [SYN, ECE, CWR] Seq=0 Win=8192 Len=0 MSS=1460 WS=256
	2026-09...	10.0.0.8	10.147.62.10	TCP	62	[TCP Retransmission] 49823 → 9997 [SYN] Seq=0 Win=8192 Len=0 MSS=1460 SACK_PERM
	2026-09...	10.0.0.8	10.147.62.10	TCP	66	49824 → 9997 [SYN, ECE, CWR] Seq=0 Win=8192 Len=0 MSS=1460 WS=256 SACK_PERM
	2026-09...	10.0.0.8	10.147.62.10	TCP	66	[TCP Retransmission] 49824 → 9997 [SYN, ECE, CWR] Seq=0 Win=8192 Len=0 MSS=1460 WS=256
	2026-09...	10.0.0.8	10.147.62.10	TCP	62	[TCP Retransmission] 49824 → 9997 [SYN] Seq=0 Win=8192 Len=0 MSS=1460 SACK_PERM
	2026-09...	10.0.0.8	10.147.62.10	TCP	66	49825 → 9997 [SYN, ECE, CWR] Seq=0 Win=8192 Len=0 MSS=1460 WS=256 SACK_PERM
	2026-09...	10.0.0.8	10.147.62.10	TCP	66	[TCP Retransmission] 49825 → 9997 [SYN, ECE, CWR] Seq=0 Win=8192 Len=0 MSS=1460 WS=256
	2026-09...	10.0.0.8	10.147.62.10	TCP	62	[TCP Retransmission] 49825 → 9997 [SYN] Seq=0 Win=8192 Len=0 MSS=1460 SACK_PERM

Setting up Splunk for port 9997 on Splunk interface
Setting>Forwarding and Receiving

Receive data

Configure this instance to receive data forwarded from other instances.

Type	Actions
Configure receiving	+ Add new

Clicking "Configure Receiving" > enter port 9997

Add new

[Forwarding and receiving](#) > [Receive data](#) > [Add new](#)

Add new

Forwarding and receiving » Receive data » Add new

Configure receiving

Set up this Splunk instance to receive data from forwarder(s).

Listen on this port *

9997

For example, 9997 will receive data on TCP port 9997.

Cancel

Save


Splunk Laptop: Issue with Splunk laptop seeing a connection: pings are working but Port is not.

```
ComputerName      : 10.147.64.30
RemoteAddress     : 10.147.64.30
RemotePort        : 9997
InterfaceAlias    : Ethernet
SourceAddress     : 10.147.62.10
PingSucceeded     : True
PingReplyDetails (RTT) : 0 ms
TcpTestSucceeded  : False
```

Server: Enabled a inbound port on the windows firewall - After adding the inbound rule for port 9997 on Windows. Wireshark is showing an TCP acknowledgment

Name	Group	Profile	Enabled	Action	Override	Progra
Splunk 9997		All	Yes	Allow	No	Any

Wireshark confirmation that TCP port 9997 is communication with Splunk Server.

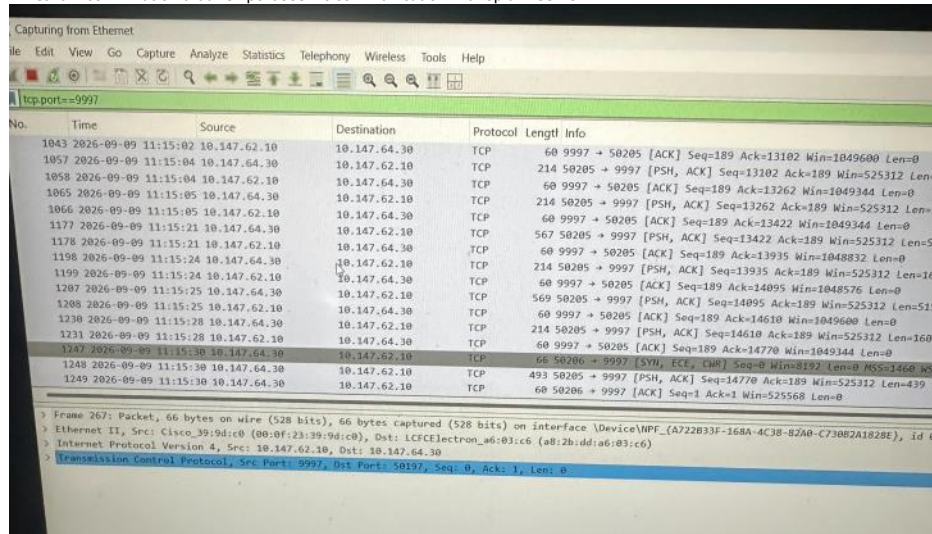

Validation that restart/stopping DHCP generates Splunk message

```

> 8/29/26 08/29/2026 02:49:44.314 AM
2:49:44.314 AM LogName=System
EventCode=7036
EventType=4
ComputerName=PHMXQ1320C78.lab.local
SourceName=Microsoft-Windows-Service Control Manager
Type=Information
RecordNumber=56784
Keywords=Classic
TaskCategory=None
OpCode=The operation completed successfully.
Message=The Network Setup Service service entered the stopped state.
Collapse Server on 10.147.84.30
host = PHMXQ1320C78 source = WinEventLog:System sourcetype = WinEventLog:System
splunk_server = YY363504

```

Separate DHCP service stop event

```

> 8/28/26 08/28/2026 08:29:53.695 PM
8:29:53.695 PM LogName=System
EventCode=1056
EventType=3
ComputerName=PHMXQ1320C78.lab.local
SourceName=Microsoft-Windows-DHCP-Server
Type=Warning
RecordNumber=57159
Keywords=Classic
TaskCategory=None
OpCode=Info
Message=The DHCP service has detected that it is running on a DC and has no credentials configured f
or use with Dynamic DNS registrations initiated by the DHCP service. This is not a recommended sec
urity configuration. Credentials for Dynamic DNS registrations may be configured using the command
line "netsh dhcp server set dnscredentials" or via the DHCP Administrative tool.
Collapse
host = PHMXQ1320C78 source = WinEventLog:System sourcetype = WinEventLog:System
splunk_server = YY363504
> 8/28/26 08/28/2026 08:29:53.632 PM

```