


VM Setup / New subnet setup - Troubleshooting


Saturday, August 8, 2026



11:25 PM


After connecting to the internet and restarting the installation. It has completed

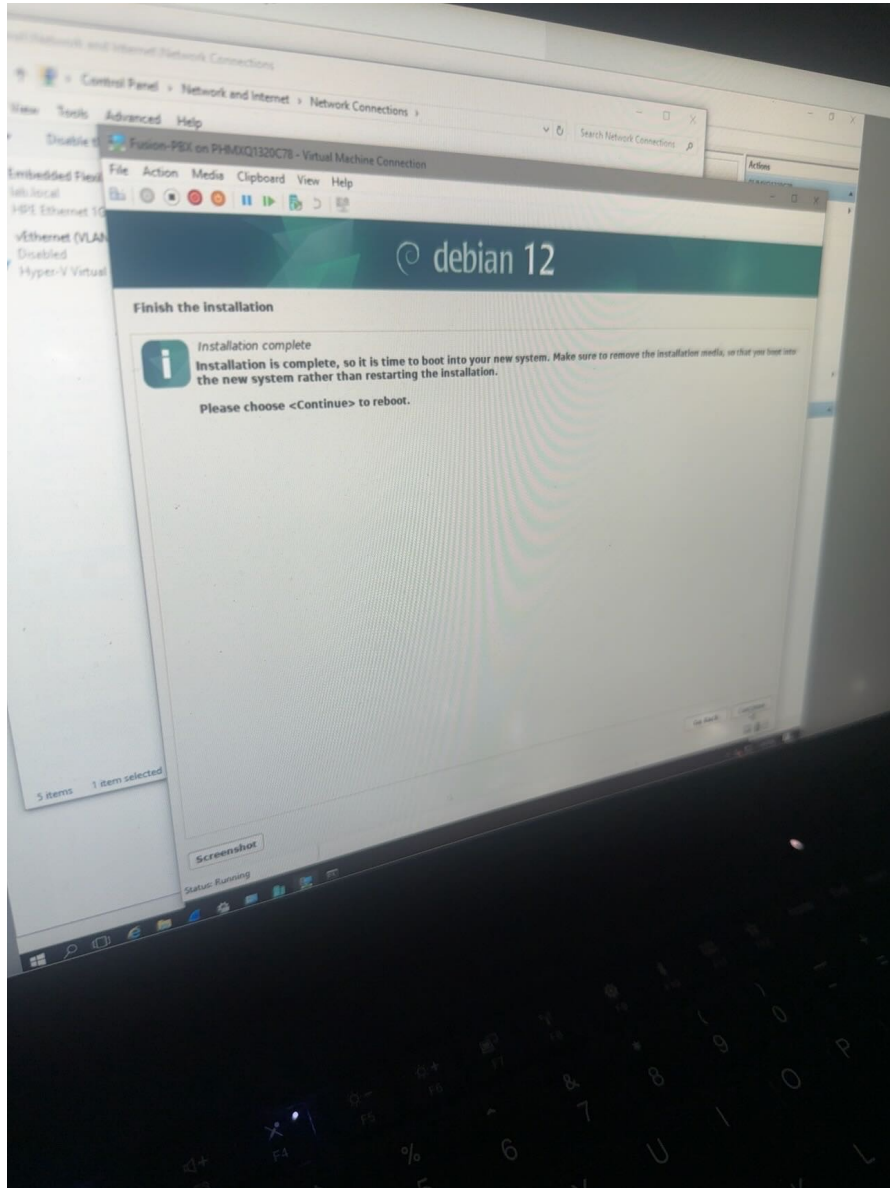


Hyper-V VM Settings

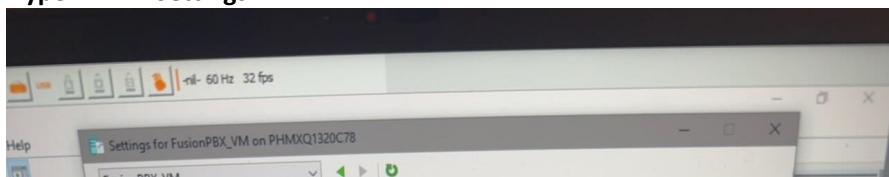

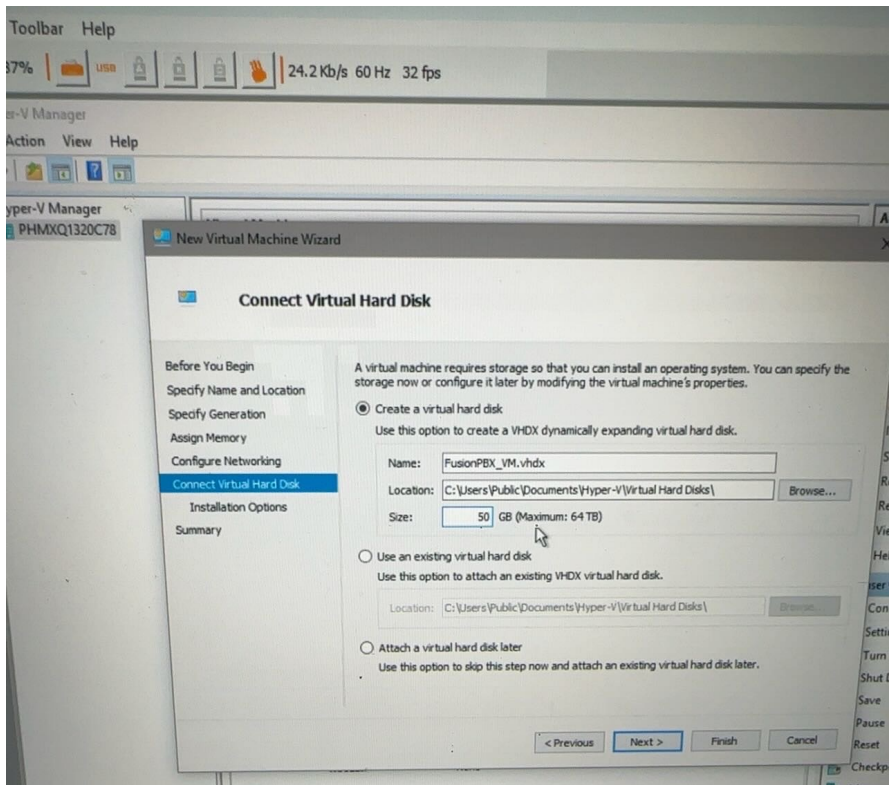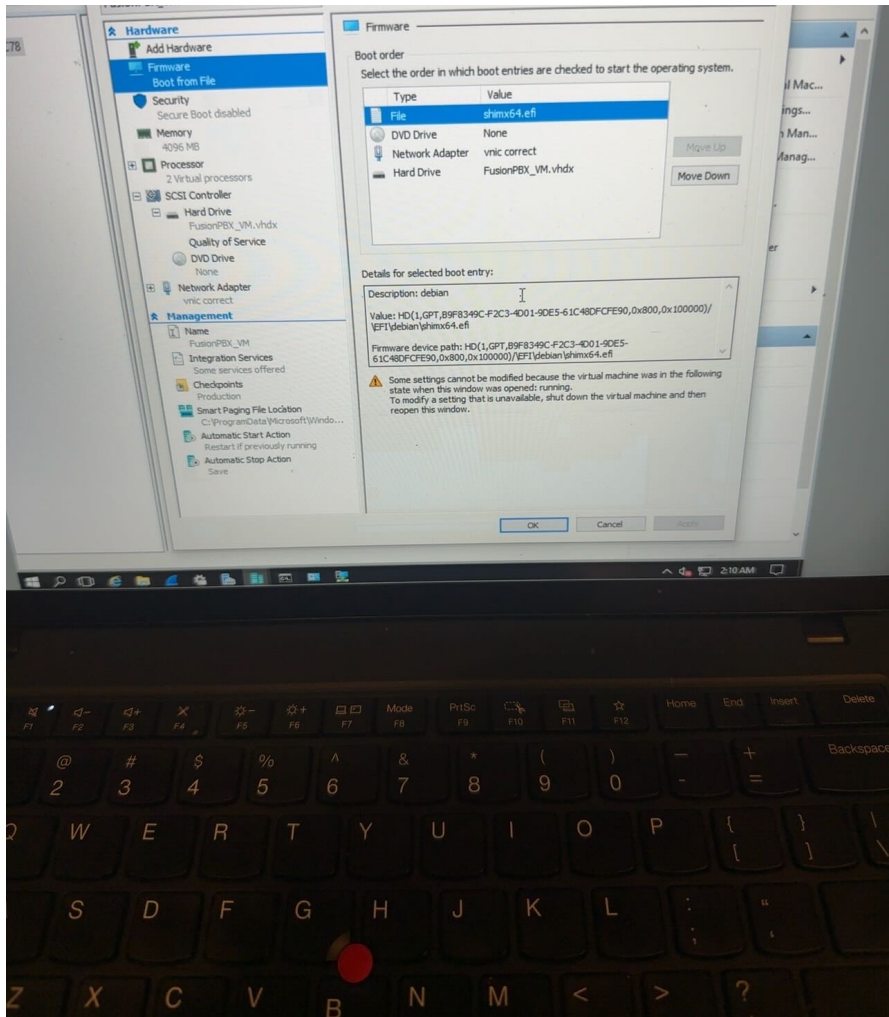

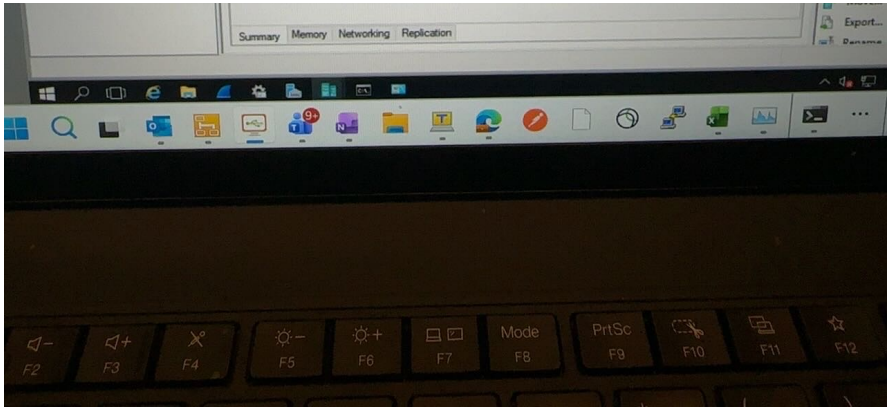

Using DHCP, when connecting to my home router to get internet access. To finish the install for Debian 12

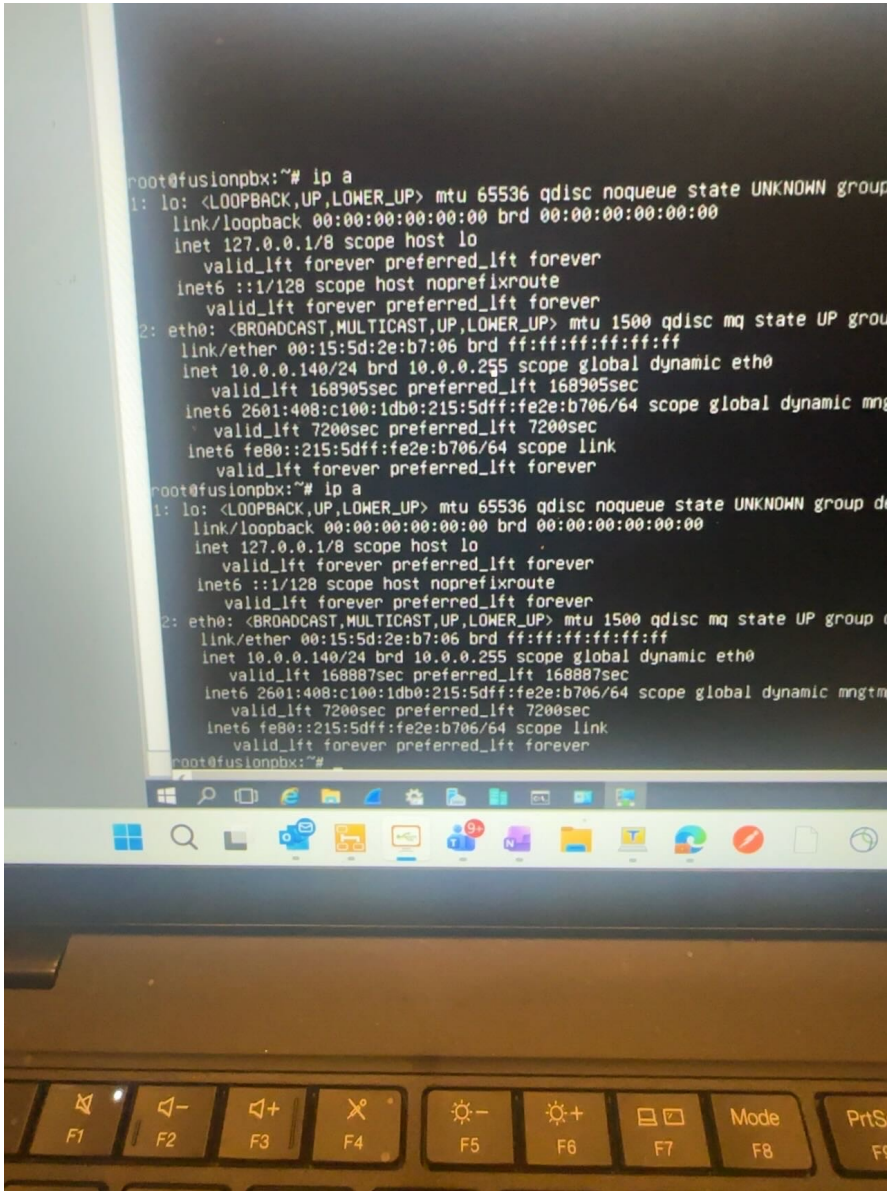


```
10.147.59.1 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 0.975 ms
rtt min/avg/max/mdev = 0.975/1.395/1.649/0.274 ms
fusionpbx@fusionpbx:~$ ping -c 4 10.147.59.50
PING 10.147.59.50 (10.147.59.50) 56(84) bytes of data.
--- 10.147.59.50 ping statistics ---
4 packets transmitted, 0 received, 100% packet loss, time 0.975 ms
fusionpbx@fusionpbx:~$ hostname
fusionpbx
fusionpbx@fusionpbx:~$ grep -i domain /etc/fusionpbx/conf
fusionpbx@fusionpbx:~$ sudo - postgres psql fusionpbx
[sudo] password for fusionpbx:
fusionpbx is not in the sudoers file.
This incident has been reported to the administrator.
fusionpbx@fusionpbx:~$ sudo - postgres psql fusionpbx
[sudo] password for fusionpbx:
fusionpbx is not in the sudoers file.
This incident has been reported to the administrator.
fusionpbx@fusionpbx:~$ su -
Password:
root@fusionpbx:~# sudo -u postgres psql fusionpbx
psql (18.4 (Debian 18.4-1.pgdg12+1))
Type "help" for help.

root@fusionpbx:~# SELECT domain_name FROM v_domains;
 domain_name
-----
10.0.0.140
(1 row)

root@fusionpbx:~#
```

Setting this address as static and connecting back to my home lab to avoid an addressing issues with FusionPBX. Creating a DHCP scope and new SVI for this 10.0.0.0 /24 subnet below.

```
# This file describes the network interfaces
# and how to activate them. For more informa
```


```
source /etc/network/interfaces.d/*

# The loopback network interface
auto lo
iface lo inet loopback


# The primary network interface
allow-hotplug eth0
iface eth0 inet static
    address 10.0.0.140
    netmask 255.255.255.0
    gateway 10.0.0.1
    dns-nameservers 8.8.8.8
```

Setting up a DHCP pool on the Router for testing purposes. Eventually the Server will work as the DHCP server for the Phones.

```
!
!
!
aaa session-id common
switch 1 provision ws-c3750-48ts
system mtu routing 1998
vtp domain ccnp
vtp mode off
!
track 1 interface FastEthernet1/0/23 line-protocol
ip routing
no ip domain-lookup
ip domain-name ccnp
ip dhcp excluded-address 10.0.0.1 10.0.0.5
!
ip dhcp pool newvoice
network 10.0.0.0 255.255.255.0
default-router 10.0.0.1
dns-server 8.8.8.8
```

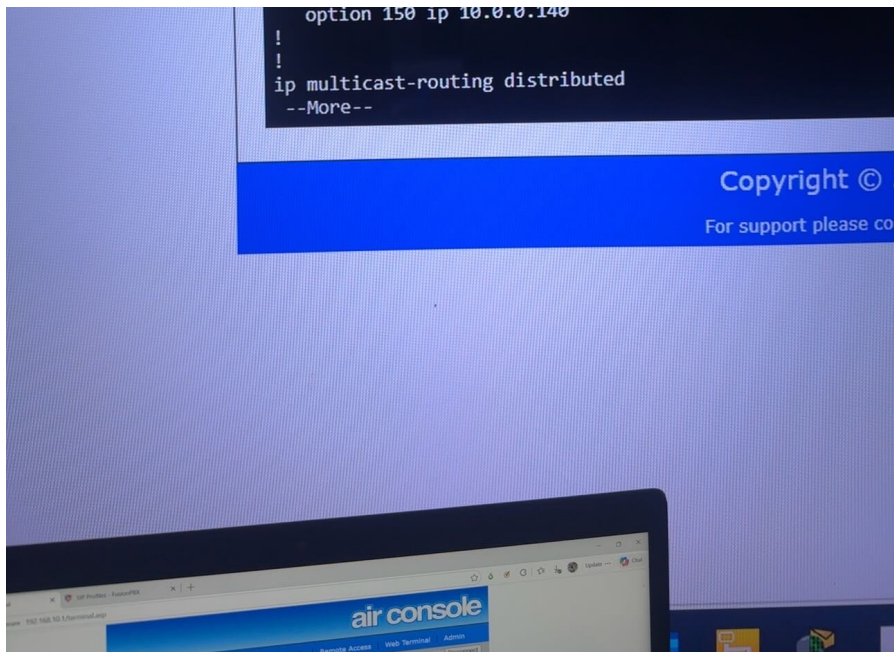

Adding DNS just for best practices>

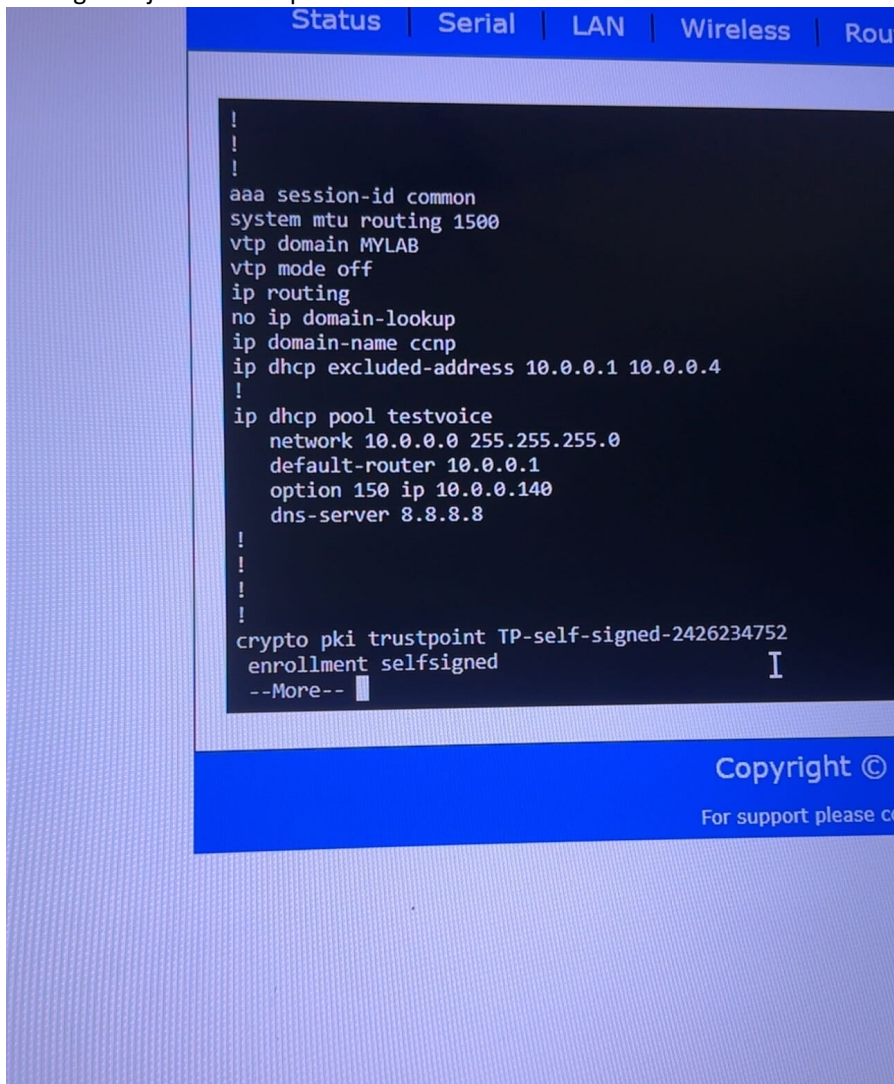



Setting up a SVI for VLAN 10. This is for testing to make sure the phone grab an IP and config file from TFTP. After test moving DHCP and TFTP to the server.

