# **Autonomous Mobile Robot**

Jerrin Bright<sup>1</sup>

<sup>1</sup>School of Mechanical Engineering

Vellore Institute of Technology, Chennai, India

**Abstract:** The work is a mini project built for learning the basics of SLAM using ROS scripts in Gazebo and RViz for visualization of our script codes. Initial testing was done using the Turtlebot Burger robot, followed by using a custom built URDF model. In this work, we will start with the introduction of the Turtlebot, how to install it, how to simulate in ROS environments. Then we will experiment different types of Lidar based SLAM techniques followed by making a custom URDFs differential robot and experimenting Gmapping with it.

Keywords: Lidar-SLAM; Gmapping; AMCL; ROS; URDF

### I. Introduction, Installations

Turtlebot is a small programmable mobile robot used for educational purposes. There are a lot of types of Turtlebot available. Some of them includes burger, waffle pi, etc. Its core tech includes SLAM, Navigation and Manipulation. It comes with an inbuilt Lidar.

#### **Installation of Turtlebot:**

```
git clone <a href="https://github.com/ROBOTIS-GIT/turtlebot3_msgs.git">https://github.com/ROBOTIS-GIT/turtlebot3_msgs.git</a> git clone <a href="https://github.com/ROBOTIS-GIT/turtlebot3_simulations.git">https://github.com/ROBOTIS-GIT/turtlebot3_simulations.git</a>
```

We will use Burger model here. So, to set burger model, do the following, export TURTLEBOT3\_MODEL=burger

```
Or can be set via,

gedit ~/.bashrc

export TURTLEBOT3_MODEL=burger (Add this at the end of the script)

Then reload the bash file via,

source ~/.bashrc
```

Two types of SLAM techniques are used here- Gmapping and Karto SLAM.

In **Gmapping**, particle filter is used and data from the robot and the pose of the robot is fused to create the 2D grid map. ROS is leveraged here using the slam\_gmapping node to generate the 2d occupancy grid map using the fusion of laser and the estimated pose data. Wheel Odometry is used to test if new scans are required and also as an initial guess for the 2D mapping. **Karto SLAM** is generally used to map and navigate in unstructured environments. Hector\_mapping node is used in generate the map here. One major advantage of hector SLAM is that odometry is not required whereby we can prevent errors as a result of slippage of the wheels.

# **II. SLAM Implementation**

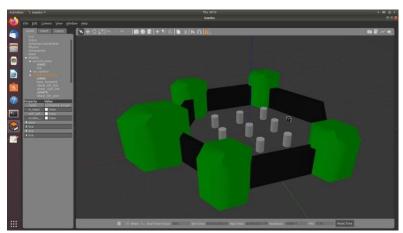


Figure 1. Turtlebot in Gazebo Simulator

### Start Gazebo,

roslaunch turtlebot3\_gazebo turtlebot3\_world.launch

## Start SLAM,

roslaunch turtlebot3\_slam turtlebot3\_slam.launch slam\_methods:=gmapping

# For Autonomous Mapping,

roslaunch turtlebot3\_gazebo turtlebot3\_simulation.launch

## For Manual Teleop Mapping,

roslaunch turtlebot3\_teleop\_turtlebot3\_teleop\_key.launch

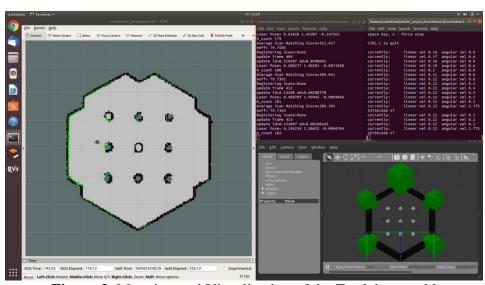


Figure 2. Mapping and Visualization of the Turtlebot world

To save the map,

rosrun map\_server map\_saver -f ~/map

The YAML and PGM file of the map generated after the above-mentioned command.

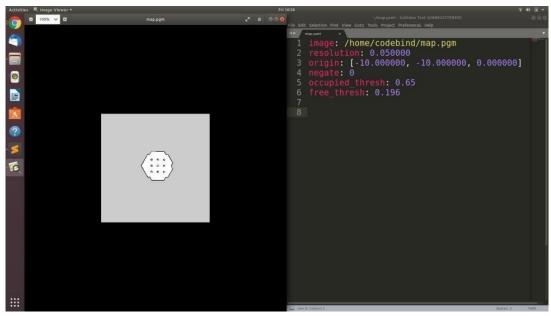
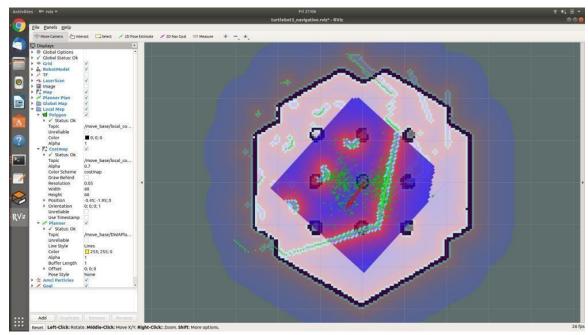


Figure 3. Map generated after mapping

After saving, to launch for navigation,

roslaunch turtlebot3\_navigation turtlebot3\_navigation.launch map\_file:=\$HOME/map.yaml



**Figure 4.** Navigation using AMCL

Fig. 4 is the navigation RViz window, where navigation will take place avoiding the obstacles autonomously when a particular 2D point is marked.

### **Hector SLAM**

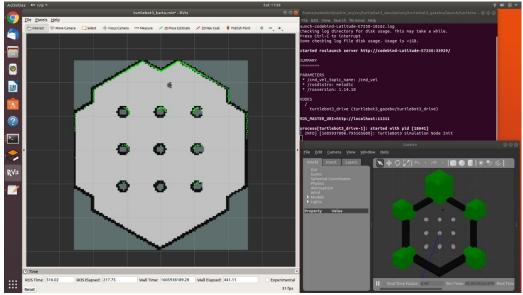


Figure 5. Karto SLAM Mapping

Got very similar results, but surpasses Gmapping technique comparatively in terms of the map quality.

# **II. Custom SLAM Implementation**

Used m2wr robot and did custom mapping with it and saved using the map\_server. The steps involved are very similar to the turtlebot3

- Robot with differential drive, wheels and caster is designed.
- URDF files are made from Solidworks using plugins.
- Then, added Lidar plugins and URDF in the custom bot.
- Wrote codes to launch my robot in gazebo and RViz.
- Obstacle avoiding code was written for autonomous mapping.
- Tweaking the Gmapping code based on our topic list.
- Then, launching the Gmapping code along with gazebo env.
- Launching the obstacle avoiding code for navigation.
- Once the whole world is mapped, save it.

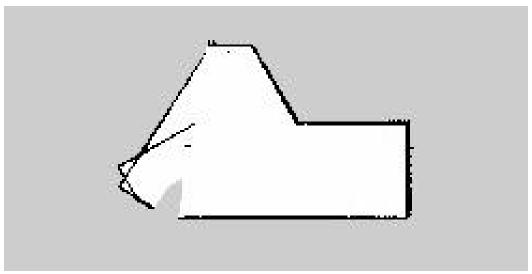


Figure 6. Map obtained from Custom URDF

#### III. Source Code

GitHub Repository: <a href="https://github.com/jerriebright/M2WR-SLAM-ROS">https://github.com/jerriebright/M2WR-SLAM-ROS</a>

The Repo consists of the m2wr URDF, launch files for Gmapping and spawning the m2wr in our environment, custom worlds and the map folder where all the maps generated will be stored.

### IV. References

- [1]. <a href="https://www.youtube.com/watch?v=tUm6MRGYam8">https://www.youtube.com/watch?v=tUm6MRGYam8</a>
- $\hbox{[2].} \underline{https://github.com/StevenShiChina/books/blob/master/Mastering\%20ROS\%20for\%20Robotics\%20Programming.pdf}$
- [3]. https://www.theconstructsim.com/ros-projects-exploring-ros-using-2-wheeled-robot-part-1/
- [4]. http://gazebosim.org/tutorials?cat=build\_world&tut=building\_editor
- [5]. <a href="http://wiki.ros.org/urdf/XML">http://wiki.ros.org/urdf/XML</a>