


# 建立metasploitable

郭益華


https://sourceforge.net/projects/metasploitable/

Home / Browse Open Source / Security / Metasploitable



# Metasploitable



Metasploitable is an intentionally vulnerable Linux virtual machine  
Brought to you by: [rapid7user](#)



★★★★★ 8 Reviews


Downloads: 12,987 This Week









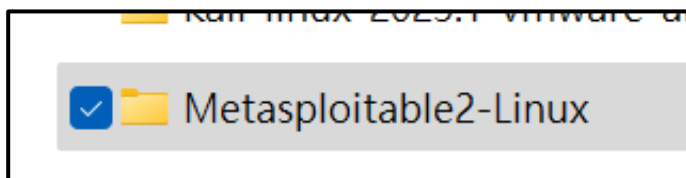

Last Update: 2019-08-19

 **Download**  [Get Updates](#) [Share This](#)


Summary	Files	Reviews	Support
This is Metasploitable2 (Linux)			

# 下載完畢-檔案為VMDK資料夾



	Metasploitable.nvram	2023/4/25 上午 09:45	NVRAM 檔案	9 KB
	Metasploitable.scoreboard	2023/4/25 上午 09:49	SCOREBOARD 檔案	8 KB
	Metasploitable	2023/4/25 上午 10:06	Virtual Machine Dis...	1,880,576 KB
	 Metasploitable.vmsd	2023/4/25 上午 09:33	VMSD 檔案	0 KB
	Metasploitable	2023/4/25 上午 10:07	VMware virtual mac...	4 KB
	Metasploitable.vmx	2023/4/25 上午 10:07	VMXF 檔案	1 KB
	Metasploitable-1.scoreboard	2023/4/25 上午 09:34	SCOREBOARD 檔案	8 KB
	vmware	2023/4/25 上午 10:07	文字文件	126 KB
	vmware-0	2023/4/25 上午 09:45	文字文件	172 KB

# 檔案直接載入至 Vmware 即可啟動

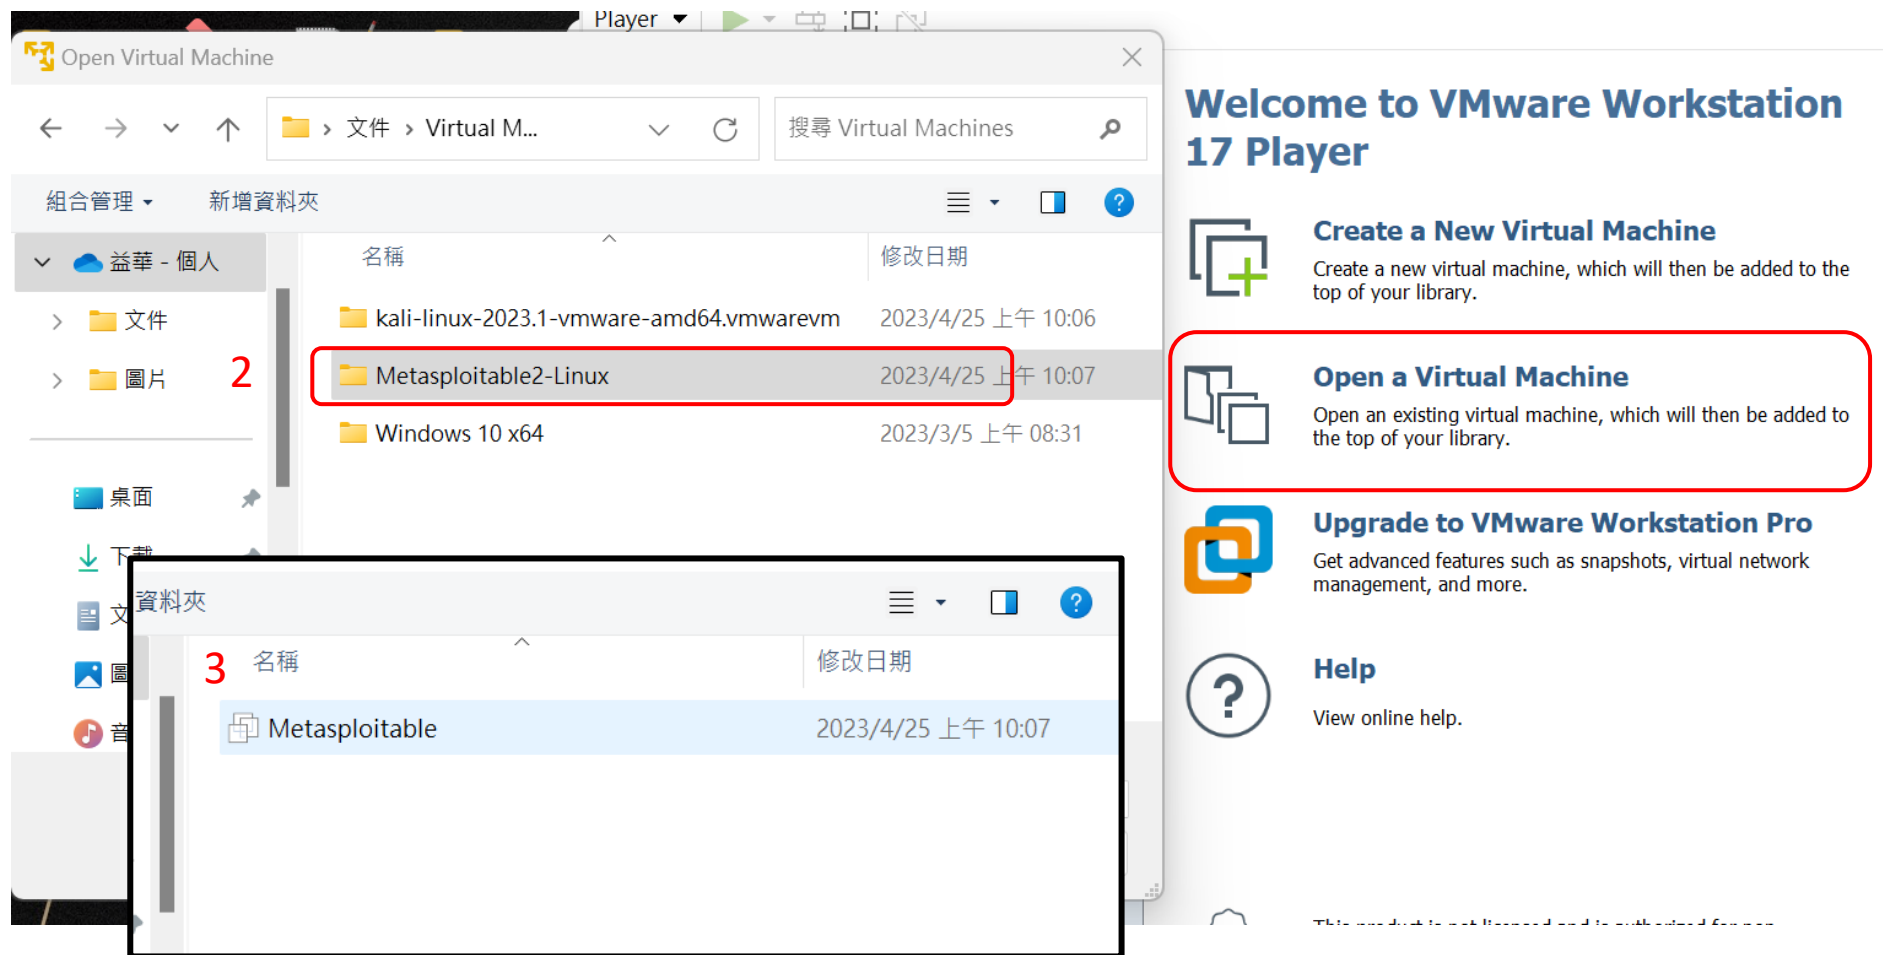

# 啟動 metasploitable 虛擬機畫面

## 1. 登入成功畫面

```
* Starting deferred execution scheduler atd [ OK ]
* Starting periodic command scheduler crond [ OK ]
* Starting Tomcat servlet engine tomcat5.5 [ OK ]
* Starting web server apache2 [ OK ]
* Running local boot scripts (/etc/rc.local)
nohup: appending output to 'nohup.out'
nohup: appending output to 'nohup.out' [ OK ]

Warning: Never expose this VM to an untrusted network!
Contact: msfdev[at]metasploit.com
Login with msfadmin/msfadmin to get started

metasploitable login:
```

預設帳號與密碼皆為:  
Login: msfadmin  
Password: msfadmin

## 2. 登入成功畫面

```
Metasploitable2-Linux - VMware Workstation 17 Player (Non-comm - □ ×
Player ▾ || ▾ ▾ ▾ ▾
Warning: Never expose this VM to an untrusted network!
Contact: msfdev[at]metasploit.com
Login with msfadmin/msfadmin to get started

metasploitable login: msfadmin
Password:
Last login: Mon Apr 24 21:39:26 EDT 2023 on tty1
Linux metasploitable 2.6.24-16-server #1 SMP Thu Apr 10 13:58:00 UTC 2008 i686

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

To access official Ubuntu documentation, please visit:
http://help.ubuntu.com/
No mail.
msfadmin@metasploitable:~$ _
```

如果鼠標卡在裡面  
輸入:  
Esc + Ctrl + Alt 即可解除

# 輸入指令: ifconfig 查詢IP位址

net addr:  
即為此虛擬機IP位址


每台電腦都會不一樣，  
勿照抄

```
To access official Ubuntu documentation, please visit:
http://help.ubuntu.com/
No mail.
msfadmin@metasploitable:~$ ifconfig
eth0      Link encap:Ethernet  HWaddr 00:0c:29:5c:fa:4c
          inet addr:192.168.10.131  Bcast:192.168.10.255  Mask:255.255.255.0
          inet6 addr: fe80::20c:29ff:fe5c:fa4c/64 Scope:Link
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:105 errors:0 dropped:0 overruns:0 frame:0
          TX packets:90 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:8304 (8.1 KB)  TX bytes:10917 (10.6 KB)
          Interrupt:17 Base address:0x2000


lo        Link encap:Local Loopback
          inet addr:127.0.0.1  Mask:255.0.0.0
          inet6 addr: ::1/128 Scope:Host
          UP LOOPBACK RUNNING  MTU:16436  Metric:1
          RX packets:118 errors:0 dropped:0 overruns:0 frame:0
          TX packets:118 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:0
          RX bytes:31841 (31.0 KB)  TX bytes:31841 (31.0 KB)

msfadmin@metasploitable:~$
```

# 接著開啟 Kali 虛擬機

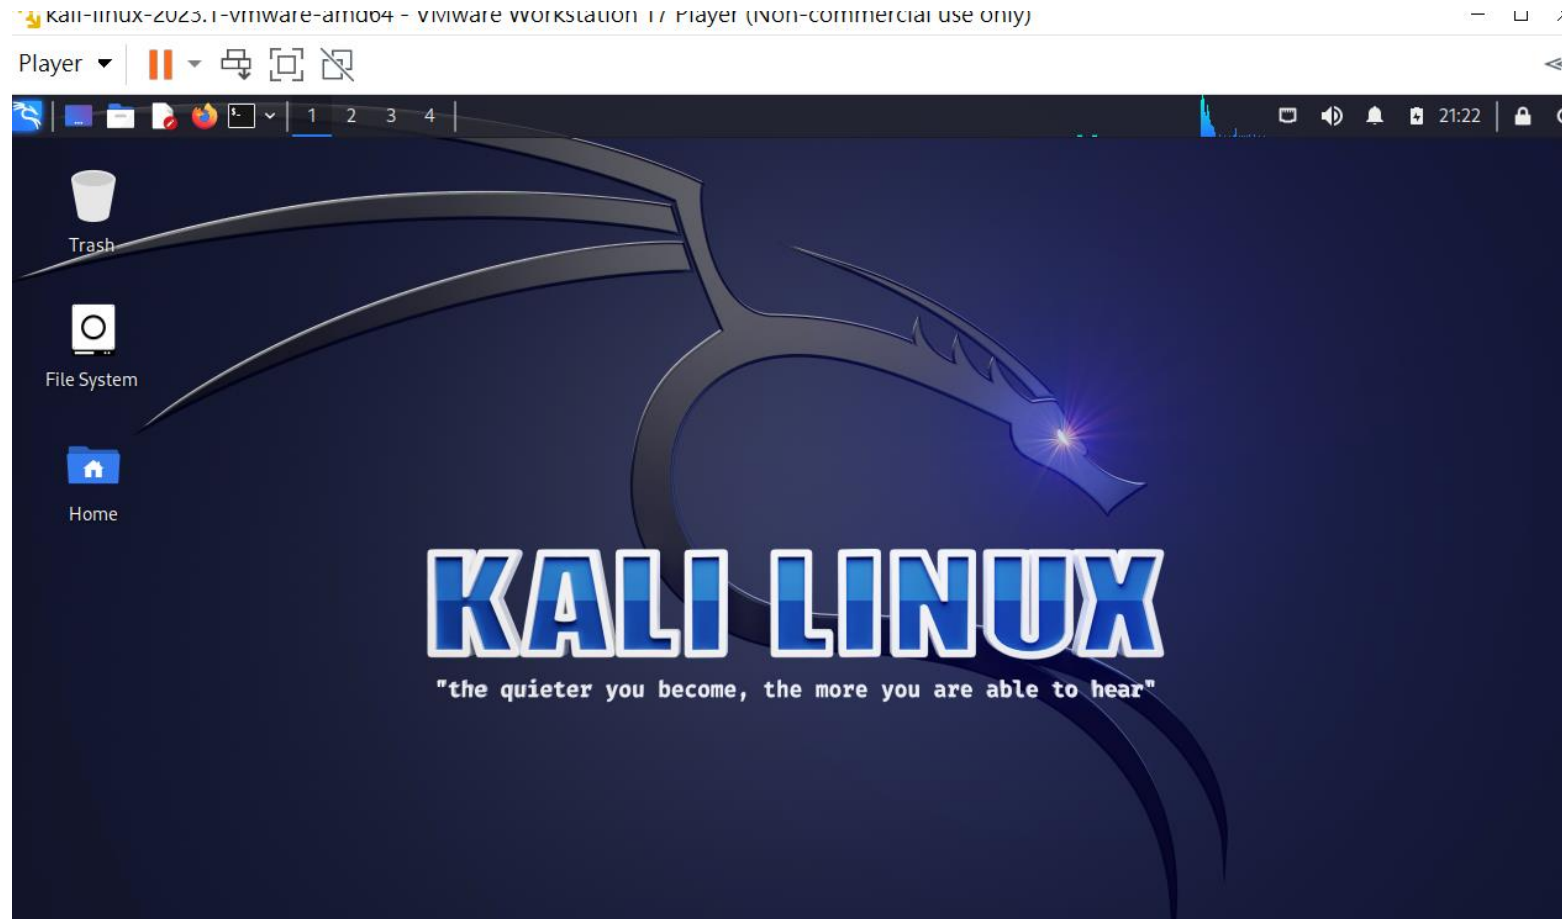

# 於瀏覽器中輸入 metasploitable 虛擬機 IP位址 192.168.10.131

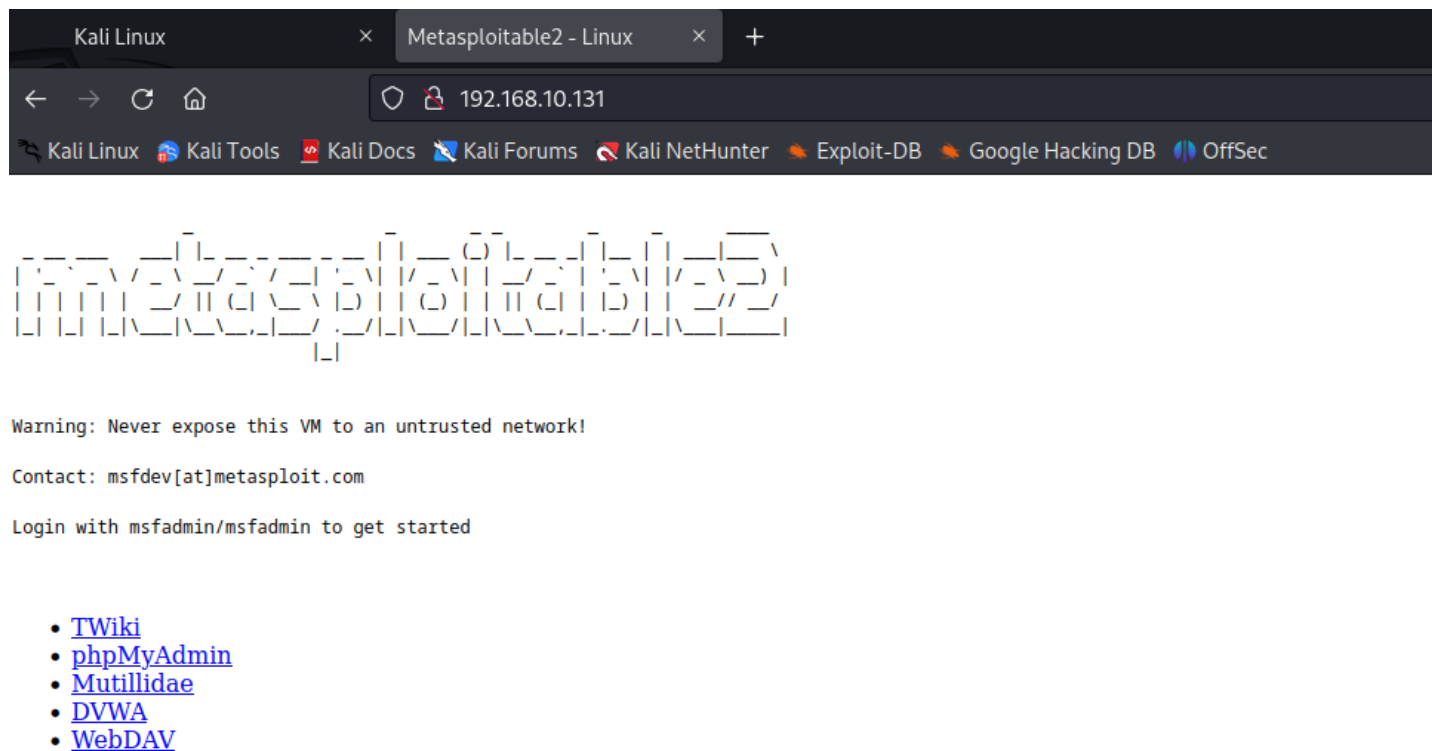

此畫面即為成功建置  
往後可利用此方式進行滲透  
測試等實作練習



**End**