

General Specifications

Step Angle------1.8° ±5%

Insulation Resistant------500V DC 100MΩ Min

Insulation Strength-----50Hz 1Minute 500V Min

Ambient Temperature -----20 □~+50 □

Temperature Rise------80 ☐ Max.


Radial Play-----0.02mm Max.

End Play-----0.1-0.3mm

Electrical Specifications

Model	Phase	Current Resistance		电感	Max.Static	Weight	Overall Dimension			
	Number	(A)	(Ω)	(mH)	torque (kg.cm)	(kg)	L0(mm)	L1(mm)	Connection Diagram	MPJA Stock#
57BYGH006	4	0.34	71	90	4.4	0.42	41	22	wdg.B	17454-MS
57BYGH008	4	2.0	1.4	1.2	4.2	0.42	41	21	wdg.B	18686-MS
57BYGH213	4	1.0	6.2	10	9.0	0.65	54	21	wdg.B	17455-MS
57BYGH405A	4	3.0	1.2	2.4	21	1.30	82	21	wdg.B	17456-MS
57BYGH303	4	2.3	2.5	5.3	16	0.65	76	21	wdg.B	18189-MS
57BYGH317	4	2.5	1.8	3.03	18	1.10	76	21	wdg.B	18687-MS

Mechanical Dimensions

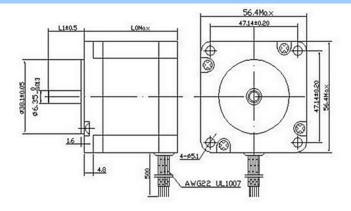

Wiring Diagram

