PC No.	MATL	FINISH	WIDTH	LENGTH	THK	WEIGHT
II-D-6192-01	16GACR	ANSI61	5.99	19.00	0.060	1.98
II-D-6192-02	16GACR	ANSI61	5.99	19.00	0.060	1.98 ▲

FOR SIEMENS INTERNAL USE ONLY

INSIDE BEND RADII, FLAT PATTERN "LENGTH" AND "WIDTH" ARE BASED UPON TOOLING USED IN SIEMENS IS-1610.

NOTE:
1. 16GA STEEL SHEET MATERIAL PER IS-6903-02 AND IS-1601.
2. ANSI 61 FINISH PER IS-1900.
3. ALL HOLE DIAMETER DIMENSION TOLERANCES ARE ± .003 UNLESS OTHERWISE SPECIFIED.
4. BURRS SHALL NOT EXCEED 8% OF MATERIAL THICKNESS, MAX.
5. PART SHALL NOT BE SUFFICIENTLY SHARP TO CAUSE RISK OF INJURY TO PERSONS IN NORMAL MAINTENANCE OR USE.
6. ALL TABS ARE TO BE REMOVED FOR PARTS MADE ON TURRET PRESSES.
7. "◊" DESIGNATES CRITICAL TO QUALITY FEATURES. REFER TO THE CURRENT SIEMENS SI EP NA (OR SUCCESSOR) PPAP HANDBOOK FOR ADDITIONAL INFORMATION AND REQUIREMENTS.
8. "▲" INDICATES DRAWING CHANGE SINCE LAST REVISION.
9. DIMENSIONS AND TOLERANCES PER ASME Y14.5 - 2009.
10. PART MUST BE RoHS COMPLIANT PER LATEST RoHS DIRECTIVE REVISION. IT IS THE RESPONSIBILITY OF MANUFACTURER TO ENSURE THE PART (OR ASSEMBLY) MEET THE RoHS REQUIREMENTS.

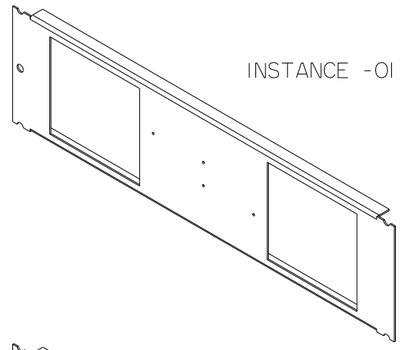

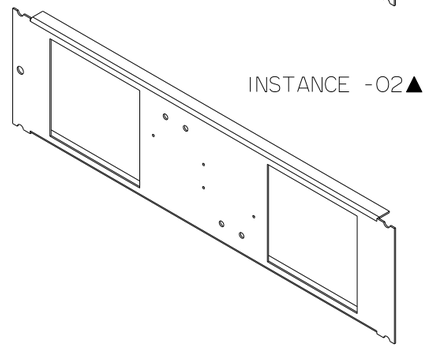

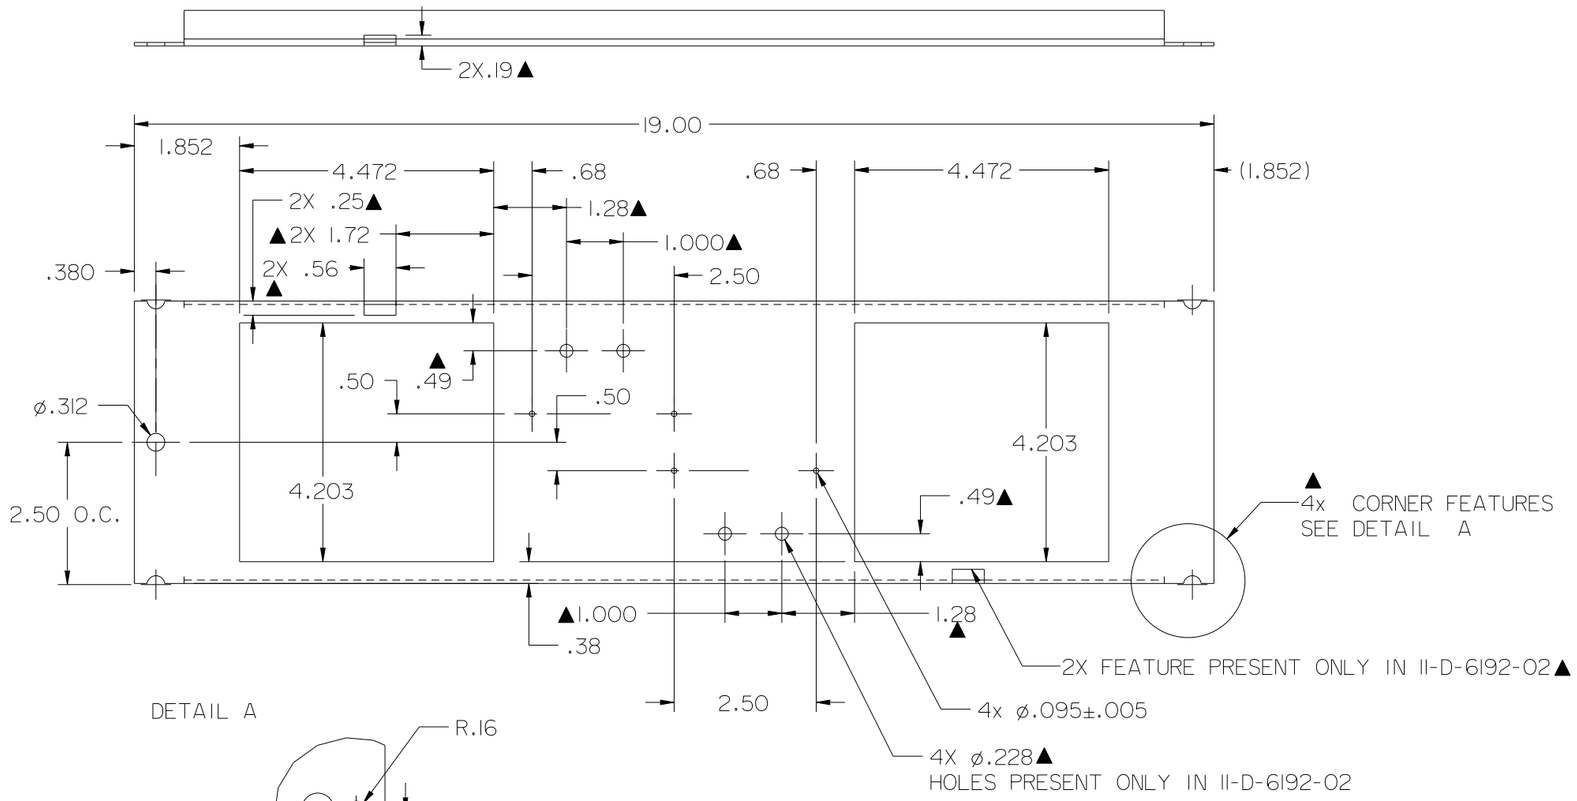



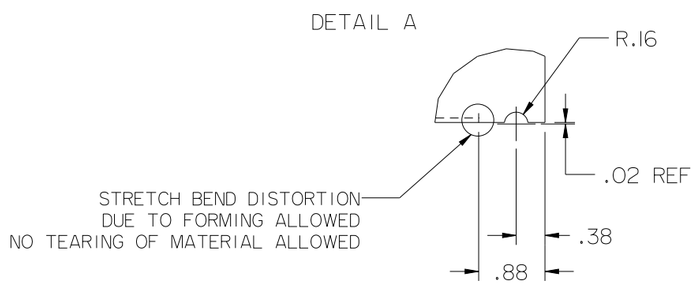

DESIGN CONTROL FOR THIS DOCUMENT MUST BE THROUGH SI EP NA R&D SYSTEMS PRODUCT DEVELOPMENT ENGINEERING OR SUCCESSOR.

Revisions:	Tolerances: .XX ± .030, .XXX ± .015, Angular ± 2° Units are in inches.	Confidential - property of **Siemens Industry, Inc.** Norcross, GA	5" 3VA52/61/62 COVER PLATE P4/P5 3VA 250A-TMTU 150/250A-ETU	Dwg No II-D-6192	Rev 01
IE-439N 12/06/21			Dwn: EGA 07/23/18 Chk: RHR 10/03/18	Apvd: RHR 10/05/18	Sht 1 of 1