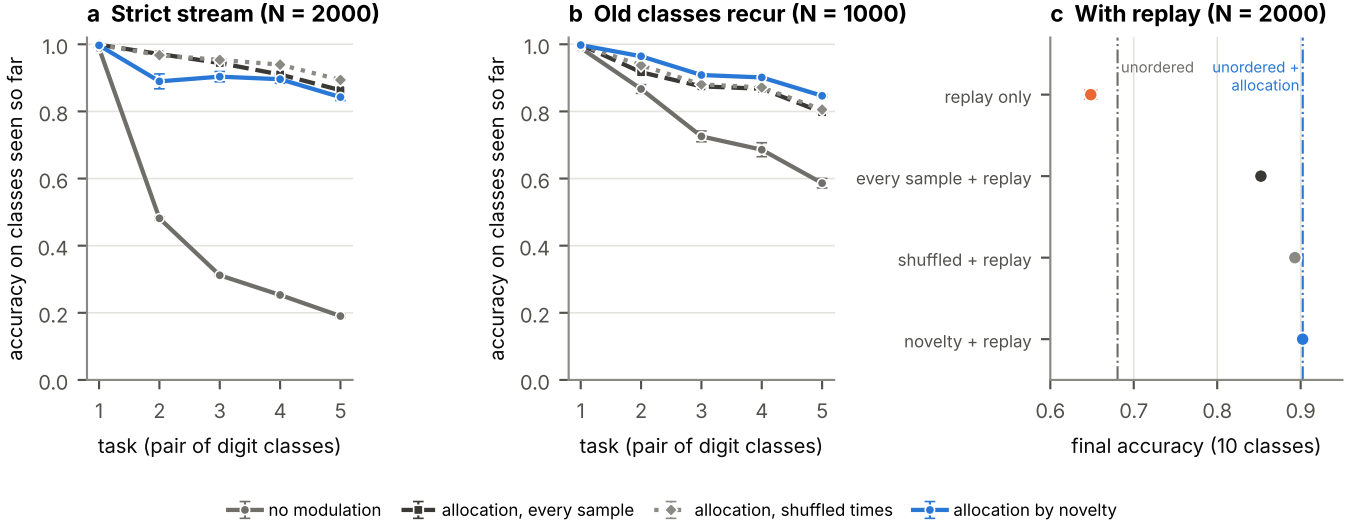
a Strict stream (N = 2000)
b Old classes recur (N = 1000)
c With replay (N = 2000)
accuracy on classes seen so far
task (pair of digit classes)
unordered
unordered + allocation
replay only
every sample + replay
shuffled + replay
novelty + replay
final accuracy (10 classes)
no modulation
allocation, every sample
allocation, shuffled times
allocation by novelty