

Creación de Asistente Digital IA en OCI

I. Crear política de IA en el tenant

Navegamos a Identity & Security -> Policies

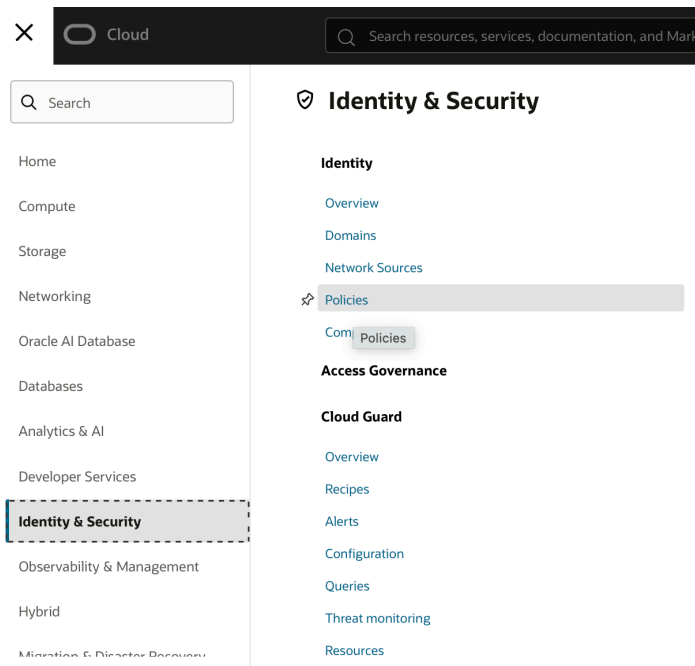

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

Confidential – Oracle Internal

Create Policy -> Crear una nueva política en el compartiment **root**,

Poner Nombre, Descripción y seleccionar Show manual editor

Poner las siguientes instrucciones:

Allow any-user to inspect buckets in tenancy

Allow any-user to read objects in tenancy

Allow any-user to use database-tools-connections in tenancy

Allow any-user to read database-tools-family in tenancy

Allow any-user to read secret-family in tenancy

Allow any-user to {BUCKET_INSPECT, BUCKET_READ, OBJECT_INSPECT, OBJECT_READ, OBJECT_CREATE, OBJECT_OVERWRITE, PAR_MANAGE} in tenancy

Create Policy

Name
IA

Description
IA

Compartment
credia (root)

Policy Builder

Hide manual editor

Allow any-user to inspect buckets in tenancy
Allow any-user to read objects in tenancy
Allow any-user to use database-tools-connections in tenancy
Allow any-user to read database-tools-family in tenancy
Allow any-user to read secret-family in tenancy
Allow any-user to {BUCKET_INSPECT, BUCKET_READ, OBJECT_INSPECT, OBJECT_READ, OBJECT_CREATE, OBJECT_OVERWRITE, PAR_MANAGE} in tenancy

▼ **Tags**


Add tags to organize your resources. [What can I do with tagging?](#)

Cancel Create

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

II. Creación de Compartment

Navegamos a Identity & Security -> Compartments

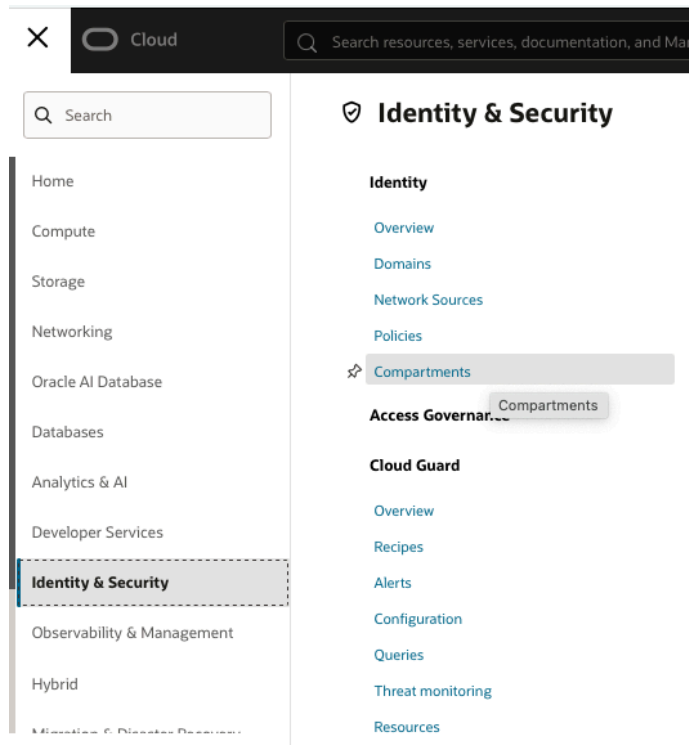


Create compartment -> Poner Nombre y Descripción, usar este compartment para crear todos los recursos de este laboratorio.

A screenshot of the 'Create compartment' form in the Oracle Cloud console. The form has a title 'Create compartment' at the top. It contains three input fields: 'Name' with the value 'IA', 'Description' with the value 'IA', and 'Parent compartment' with a dropdown menu showing 'credia (root)'. Below these fields is a section titled 'Tags' with a collapse icon. It includes a link 'What can I do with tagging?' and the text 'No items to display'. There is an 'Add tag' button. At the bottom right, there are two buttons: 'Cancel' and 'Create compartment'.


By Jeffrey Vargas – Jeffrey.vargas@oracle.com

III. Creación de VCN

Navegamos a Networking -> Virtual Cloud Networks

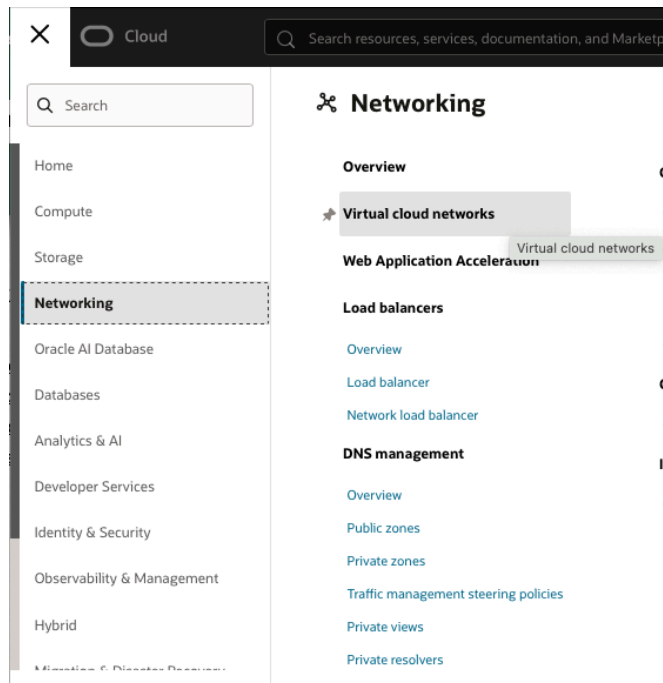

Crear una nueva VCN a partir del Wizard y dejamos los valores por defecto

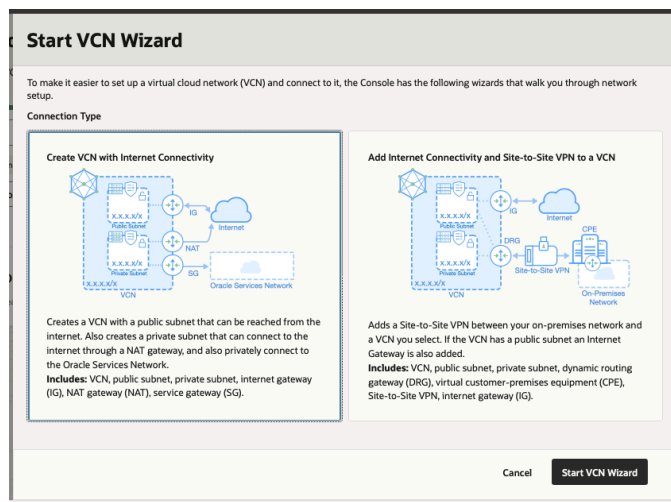

Poner Nombre y crear.

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

Una vez creada la VCN entrar a la lista de seguridad de la sub red pública y habilitar los puertos TCP 80 y 8501

← VCN

Default Security List for VCN Available

Security List

Instance traffic is controlled by firewall rules on each Instance in addition to this Security List

Details **Security rules** Tags

Content body

Ingress Rules

Search and Filter Search

Add Ingress Rules Actions

☐	Stateless	Source	IP Protocol	Source Port Range	Destination Port Range	Type and Code	Allows	Description
☐	No	0.0.0.0/0	TCP	All	22		TCP traffic for ports: 22 SSH Remote Login Protocol	...
☐	No	0.0.0.0/0	ICMP			3, 4	ICMP traffic for: 3, 4 Destination Unreachable: Fragmentation Needed and Don't Fragment was Set	...
☐	No	10.0.0.0/16	ICMP			3	ICMP traffic for: 3 Destination Unreachable	...
☒	No	0.0.0.0/0	TCP	All	80		TCP traffic for ports: 80	...
☒	No	0.0.0.0/0	TCP	All	8501		TCP traffic for ports: 8501	...

Page 1 of 1 (1 - 5 of 5 total items) Items per page 25

IV. Creación del Bucket

Navegamos a Storage -> Buckets

Search

Home

Compute

Storage

Networking

Oracle AI Database

Databases

Analytics & AI

Developer Services

Identity & Security

Observability & Management

Hybrid

Monitor & Diagnostics

Storage

Block Storage

- Block Volumes
- Block Volume Backups
- Block Volume Replicas
- Volume Groups
- Volume Group Backups
- Volume Group Replicas
- Backup Policies

File Storage

- File Systems
- Mount Targets

Lustre File Storage

- Lustre File Systems

Object Storage & Archive Storage

- Buckets
- Private Endpoints Buckets

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

Create bucket -> La creación puede realizarse con los parámetros por defecto, solo se debe de agregar el nombre.

Este Bucket contendrá el sitio web que descargaremos y subiremos posteriormente.

Create Bucket

[Help](#)

Bucket Name

Default Storage Tier

☒ Standard

☐ Archive

The default storage tier for a bucket can only be specified during creation. Once set, you cannot change the storage tier in which a bucket resides. [Learn more about storage tiers](#)

☐ Enable Auto-Tiering

Automatically move infrequently accessed objects from the Standard tier to less expensive storage. [Learn more](#)

☐ Enable Object Versioning

Create an object version when a new object is uploaded, an existing object is overwritten, or when an object is deleted. [Learn more](#)

☐ Emit Object Events

Create automation based on object state changes using the [Events Service](#).

☐ Uncommitted Multipart Uploads Cleanup

Create a lifecycle rule to automatically delete uncommitted multipart uploads older than 7 days. [Learn more](#)

Encryption

☒ Encrypt using Oracle managed keys

Leaves all encryption-related matters to Oracle.

☐ Encrypt using customer-managed keys

Requires a valid key from a vault that you have access to. [Learn more](#)

Resource logging

Enable resource logging to allow resource tracking, troubleshooting, and data insights

☐ Resource logging disabled

Tabs

Create [Cancel](#)

V. Creación de Máquina Virtual en OCI

Crear una máquina virtual con sistema operativo OL9, procesador Intel o AMD y en una subred pública que tenga salida a los puertos 80 y 8501

Configuración en la lista de seguridad de la subred pública:

Ingresar a la máquina virtual con el comando ssh

```
ssh -i llave.key opc@PublicIP
```

Realizar la instalación dentro de la maquina:

Lo primero que realizaremos es la instalación y configuración del OCI CLI

Cualquier duda de instalación referenciar a este link:

<https://docs.oracle.com/es-ww/iaas/Content/API/SDKDocs/cliinstall.htm>

Instalar CLI

```
sudo dnf -y install oraclelinux-developer-release-el9
sudo dnf install python39-oci-cli
```

Validamos la instalación: oci -v

```
oci -v
```

Realizamos la configuración:

```
oci setup config
```

Probamos que traiga nuestro Object storage namespace

```
oci os ns get
```

VI. Descargar el Sitio:

Se identifica la página web principal y a través del comando wget se descarga el sitio.

Nota: Podría ser que el sitio este protegido en ese caso tendríamos que pensar en un plan B como descargar los archivos htmls y PDFs manualmente de las páginas de interés o modificar esta instrucción.

Página de ejemplo: <https://www.mycustomer.com>

```
cd $HOME

wget --recursive --level=3 --no-parent --adjust-extension --convert-links --domains=
www.grupomutual.fi.cr, grupomutual.fi.cr --
reject="jpg,jpeg,png,gif,svg,webp,ico,css,js,woff,woff2,ttf,mp4,avi,pdf" --header="Accept:
text/html" --header="Accept-Language: es-CR,es;q=0.9,en;q=0.8" --user-agent="Mozilla/5.0 (Windows
NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/115.0 Safari/537.36" --execute
robots=off --directory-prefix=html https://www.grupomutual.fi.cr/
```

Notas:

- Las partes marcadas en amarillo son las que deben ser sustituidas por el nuevo sitio web a trabajar.
- El sitio quedara en la ruta /home/opc/html

```
[opc@chat ~]$ pwdx.html
/home/opc
[opc@chat ~]$ ls
html
[opc@chat ~]$ cd html/
[opc@chat html]$ ls
mycustomer.com
[opc@chat html]$ cd mycustomer.com/
```

- Sacar una copia del index.html para ser modificada después y dejarlo en la ruta /home/opc/

```
[opc@chat ~]$ pwdx.html
/home/opc
[opc@chat ~]$ ls
html index.html
[opc@chat ~]$
```

VII. Cargar sitio web al Bucket.

El comando para cargar en modo bulk el sitio a OCI es:

```
cd $HOME  
  
oci os object bulk-upload --bucket-name Bucket-MyCustomer --src-dir  
/home/opc/html/ --namespace axhxyz2qo8xt
```

Notas:



- Las partes marcadas en amarillo son las que deben ser sustituidas por los valores de su ambiente
- Validar una vez terminado el comando que en el bucket los archivos hayan sido cargados exitosamente.

VIII. Creación del Knowledge Base para nuestro agente.


Una vez que el sitio ya se encuentre cargado en nuestro Bucket procederemos a crear el Knowledge Base.

Nota: Se puede dejar creando este componente y avanzar con el tutorial.

Menu: Analytics & AI -> Generative AI Agents -> Knowledge Bases

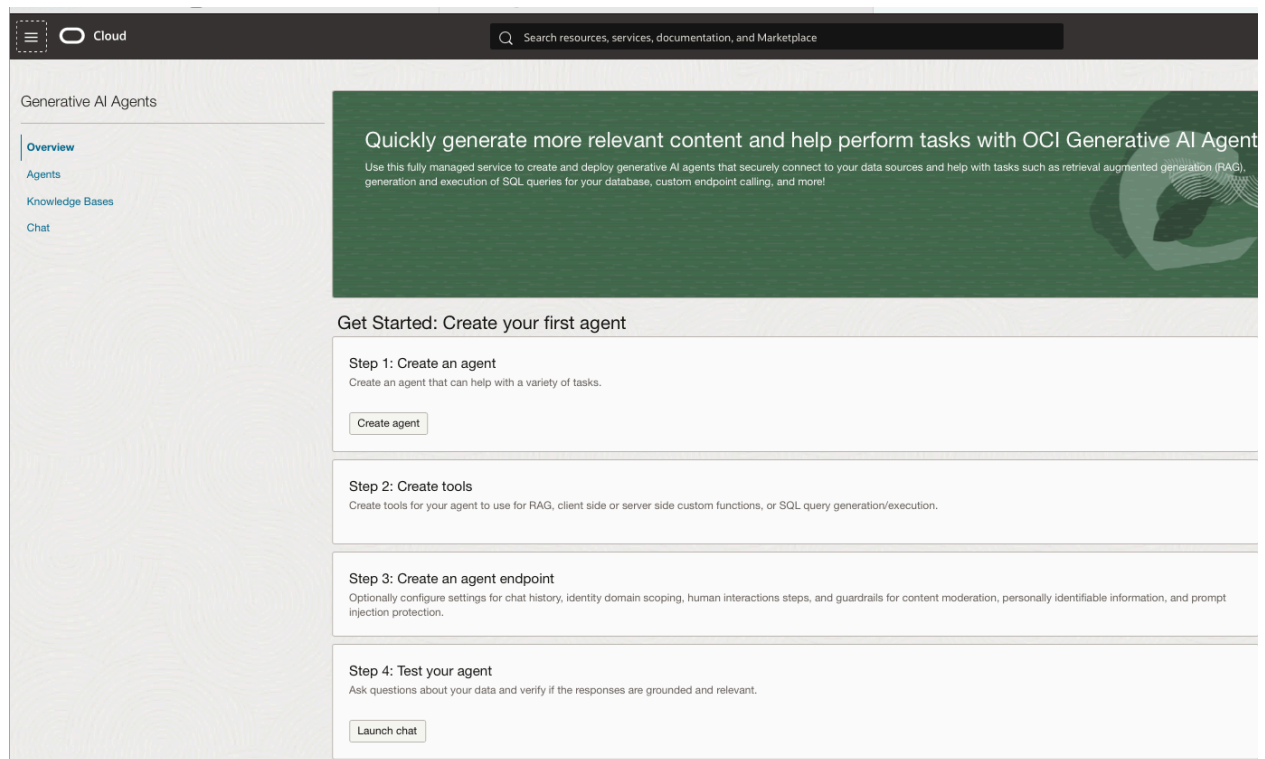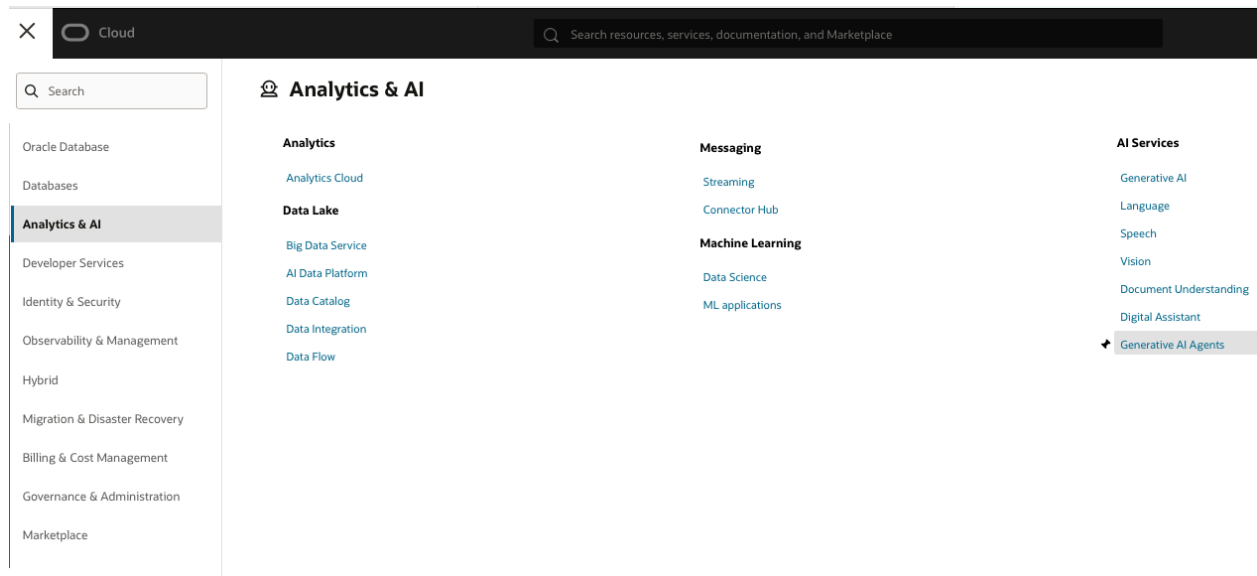

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

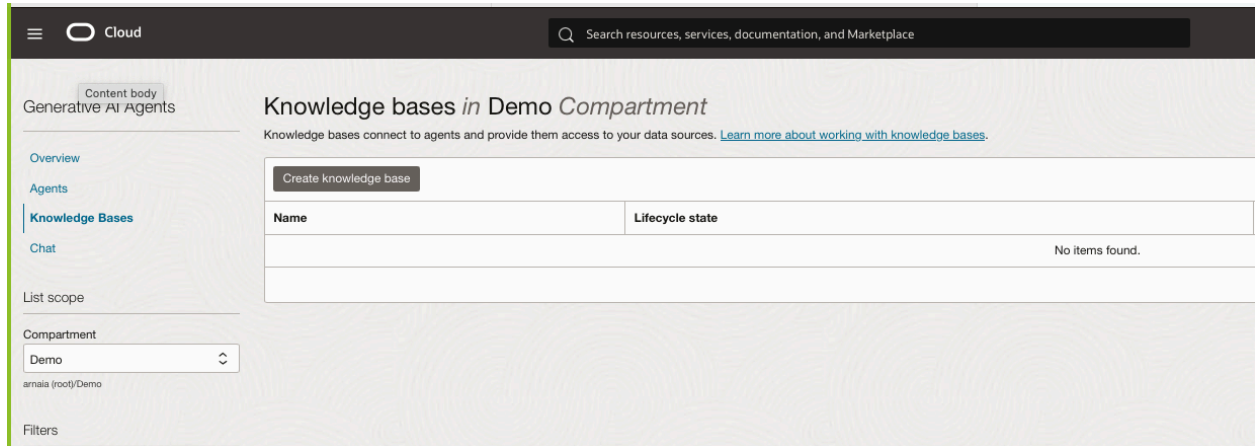

En la creación debemos de introducir un nombre, importante que el Data storage type sea Object storage, marcar el check de Enable hybrid search y definir el data source

The screenshot shows the 'New knowledge base' form in the Oracle Cloud console. The form includes the following fields and sections:

- Name:** A text input field containing 'KnowledgeBase-MyCustomed'.
- Compartment:** A dropdown menu set to 'Demo'.
- Description:** An optional text area.
- Data store type:** A dropdown menu set to 'Object storage'.
- Enable hybrid search:** A checked checkbox.
- Data sources:** A section containing a 'Specify data source' button and a table with columns 'Name', 'Type', and 'Bucket name'. The table is currently empty with the message 'No items found.' and a pagination indicator 'Showing 0 items < 1 of 1 >'.
- Automatically start ingestion job for above data sources:** An unchecked checkbox.
- Buttons:** 'Create' and 'Cancel' buttons at the bottom.

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

Confidential – Oracle Internal

En el data source poner:

Un nombre, habilitar Enable multi-modal parsing, seleccionar el Bucket creado anteriormente, habilitar Select all in bucket y crear

Specify data source

 Information ingested into the knowledge base is securely stored and used as reference context when the Agent generates responses. The ingestion process does not attempt to identify, filter, or remove personal information from the input.

Name

DS-MyCustomer

Description *Optional*

☒ Enable multi-modal parsing 

Data bucket

Select bucket in **Demo** [\(Change compartment\)](#)

Bucket-MyCustomer

Select directories and/or individual files inside the Object Storage bucket name specified above. Content indexing is supported for the following file types: PDF, TXT, HTML, JSON, MD

☒ Select all in bucket 

Search by prefix

☐	Object prefixes	Time updated
☐	Contacto.html	Sat, 20 Sep 2025 14:16:35 GMT
☐	Directores.html	Sat, 20 Sep 2025 14:16:36 GMT
☐	Directorio.html	Sat, 20 Sep 2025 14:16:35 GMT
☐	Estadisticas.html	Sat, 20 Sep 2025 14:16:35 GMT

Create

[Cancel](#)

Cloud

Search resources, services, documentation, and Marketplace

US Midwest (Chicago)

New knowledge base

Create a knowledge base that either imports content into a retrieval-augmented generation (RAG) system or uses your own data store.

Name

KnowledgeBase-MyCustomer

Compartment

Demo

joechat (root)/Demo

Description *Optional*

Data store type

Object storage

☒ Enable hybrid search 

Data sources

Specify data source

Name	Type	Bucket name
DS-MyCustomer	Object Storage	Bucket-MyCustomer

Showing 1 item < 1 of 1 >

☒ Automatically start ingestion job for above data sources 

[Show tagging options](#)

Create

[Cancel](#)

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

Confidential – Oracle Internal

IX. Creación del Agente:

Nota Importante: El Knowledge Bases no será relacionado al agente en este momento, ya que eso se hará a través del código al igual que las instrucciones del ruteo; Además, se puede dejar creando este componente y avanzar con el tutorial.

En la primera página se debe de agregar el nombre y darle Next

Create agent

1 Basic information

2 Add tool

3 Setup agent endpoint

4 Review and create

Basic information

Create an agent and optionally add a knowledge base to connect the agent to. You can also add a knowledge base to the agent after you create the agent.

Name

Agent-MyCustomel

Compartment

Demo

joechat (root)/Demo

Description Optional?

A short description of what this agent does

Welcome message Optional? ⓘ

Hi user, I am AI assistant. I can help you with the things like answering questions, and providing information. How can I help you?

Routing instructions Optional? ⓘ

Always invoke the RAG tool first

[Show tagging options](#)

Previous

Next

Cancel

Segunda página dejarla así y Next

Create agent

Content body

1 Basic information

2 Add tool

3 Setup agent endpoint

4 Review and create

Tools

Create tools for your agent to use for RAG, client side or server side custom functions, or SQL query generation/execution.

Add tool

Name	Tool type	Description
No items found.		

Previous

Next

Cancel

Terms of Use and Privacy

Cookie Preferences

Tercera página dejarla igual y Next

Create agent

Content body

1 Basic information

2 Setup agent endpoint

3 Review and create

Setup agent endpoint

Configure settings for Human-in-the-loop and guardrails. Additional endpoint setup options can be configured on the endpoint creation page.

☒ Automatically create an endpoint for this agent

Enable human in the loop

Disabled

Guardrails

Specify guardrails for content moderation, prompt injection (PI) protection and personally identifiable information (PII) protection.

Content moderation

Choose whether to apply the content moderation feature to input and output. Content moderation aims to remove toxic or violent content from responses. It is recommended to use content moderation.

Input

Disable

Keeps the input prompt as is, without aiming to remove any toxic or violent content from the input.

Block

Aims to detect and remove content that it finds toxic or violent from the input (recommended).

Inform

Does not filter explicit content from the input, but aims to notify if it finds certain content to be toxic or violent from the input.

Output

Disable

Outputs explicit content, without aiming to remove toxic or violent content from the response.

Block

Aims to detect and remove content that it finds toxic or violent from the response (recommended).

Inform

Outputs explicit content and aims to notify if it finds toxic or violent content in the response.

Prompt injection (PI) protection

Choose whether to help prevent malicious inputs from manipulating system behaviour/responses or not. It is recommended to use prompt injection protection.

Disable

Allows unrestricted input.

Block

Helps prevent malicious inputs from manipulating responses (recommended).

Inform

Allows unrestricted input and aims to notify when the input seems malicious.

Previous

Next

Cancel

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

Confidential – Oracle Internal

Cuarta página crear agente y aceptar política

Create agent

1 Basic information

2 Add tool

3 Setup agent endpoint

4 Review and create

Basic information

Name: Agent-MyCustomer
Compartment: ...2644ier6jq [Show](#) [Copy](#)
Description:
Welcome message:
Routing instructions:

Setup agent endpoint

Enable human in the loop: disable
Content moderation on input: disable
Content moderation on output: disable
Prompt injection (PI) protection: disable
Personally identifiable information (PII) protection on input: disable
Personally identifiable information (PII) protection on output: disable

Previous

Next

Create agent

Cancel

Content body

Llama 3 License Agreement and Acceptable Use Policy

Use of the Llama 3 models requires you to agree to the Llama 3 license agreement and acceptable use policy (the "Llama 3 License Agreement and AUP") provided below. By clicking **I accept** below or by using or distributing any portion or element of the Llama materials (as defined in the Llama3 License Agreement and AUP), you acknowledge you have read and agree to be bound by the [Llama 3 License Agreement and AUP](#). In addition, by clicking **I accept** below or by using or distributing any portion or element of the Llama materials, you acknowledge and agree that the terms of the agreement are a part of the Oracle Service Specifications, to which you have previously agreed under the terms of your order placed with Oracle.

☒ I have read and accept the terms of the [Llama 3 License Agreement and AUP](#).

Submit

Cancel

Content

tion on input: disable

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

Confidential – Oracle Internal

X. Configuración de la Aplicación

Para esta parte nos devolvemos a la máquina virtual previamente creada

Ingresar a la máquina virtual con el comando ssh

```
ssh -i llave.key opc@PublicIP
```


Configurar Networking

```
sudo firewall-cmd --permanent --add-port=8501/tcp
sudo firewall-cmd --reload
```

Descargar la aplicación desde github

```
cd $HOME
wget https://github.com/jevargascr/OCI_AI_Digital_Agent/archive/refs/heads/main.zip
unzip main.zip -d temp
mv temp/OCI_AI_Digital_Agent-main/* .
rm -rf temp
rm main.zip
rm README.md
```

Nuestro directorio \$HOME se debería de ver así

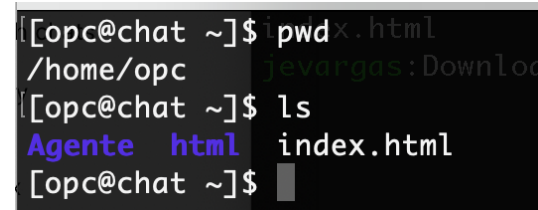A terminal window screenshot showing the command 'ls' being executed in the home directory of the 'opc' user. The output shows a directory named 'Agente' and a file named 'index.html'.

```
[opc@chat ~]$ pwd
/home/opc
[opc@chat ~]$ ls
Agente  html  index.html
[opc@chat ~]$
```

Instalación de Python 11

```
sudo dnf -y update
sudo dnf install -y python3.11 python3.11-devel
```

Creación ambiente virtual

```
cd $HOME
cd Agente
/usr/bin/python3.11 -m venv IA-VEENV
source IA-VEENV/bin/activate
```

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

Validar que las versiones sean la 11

```
python -V
```

```
pip -V
```

```
(IA-ENV) [opc@chat Agente]$ pwd
/home/opc/Agente
(IA-ENV) [opc@chat Agente]$ python -V
Python 3.11.11
(IA-ENV) [opc@chat Agente]$ pip -V
pip 25.2 from /home/opc/Agente/IA-ENV/lib64/python3.11/site-packages/pip (python 3.11)
(IA-ENV) [opc@chat Agente]$
```

Instalar actualizaciones y requisitos

```
cd $HOME/Agente/
```

```
python -m pip install --upgrade pip
```

```
pip install -r requirements.txt
```

Se debe de editar el archivo config_agent.py que se encuentra dentro de la carpeta UI para sustituir estos valores:

```
knowledge_base_id=
agent_endpoint_id=
```

```
from oci.addons.adk import Agent, AgentClient, tool
from oci.addons.adk.tool.prebuilt import AgenticRagTool
import random

# 1. Definiciones del agente
client = AgentClient(
    auth_type="api_key",
    profile="DEFAULT",
    region="us-chicago-1",
)

knowledge_base_id = "ocid1.genaiagentknowledgebase.oc1.us-chicago-1.amaaaaaciwb2paawb4hrwdo5ptipldvqsswsbofl7b2lpc72qkrm7deydx"
rag_tool = AgenticRagTool(
    name="Running RAG tool",
    description="Retrieve authoritative answers to customer FAQs about the bank's products, fees, eligibility, processes, service channels, and policies from the bank's knowledge base.",
    knowledge_base_ids=[knowledge_base_id],
)

# Create a local agent object with the client, instructions, and tools
# You also need agent endpoint id. To obtain that, follow Step 1
agent = Agent(
    client=client,
    agent_endpoint_id="ocid1.genaiagentendpoint.oc1.us-chicago-1.amaaaaaciwb2paaxh43y3g5xbzzctzh7zubzbmnpbxevv6j2sorgw46vd",
    instructions="""You are a banking virtual assistant. Always use the RAG tool as your primary and authoritative source to answer customer FAQs about the bank's products, fees, eligibility, processes (open/apply/cancel), digital channels, hours, and policies.
    - Language: with a professional and friendly tone.
    - Accuracy: prefer the most recent documents; when dates or validity are present, state them. Do not invent information.
    - When uncertain: if confidence is low or the answer is not in the knowledge base, say so clearly and provide official contact options (e.g., website, call center).
    - Safety: never ask for or process sensitive data (account/card numbers, PIN/CVV, passwords, OTP). Do not access or imply access to personal accounts.
    """
)
```

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

Notas:

El knowledge_base_id es el OCID de nuestra base de datos de conocimiento y en OCI se encuentra en Menu: Analytics & AI -> Generative AI Agents -> Knowledge Bases -> OCID

Knowledge bases

KnowledgeBase-MyCustomer

KB

ACTIVE

Edit

Move resource

Add tags

Delete

Knowledge base information

Tags

General

Features

Name: KnowledgeBase-MyCustomer

Descriptions: -

OCID: [ocid1.gensagentknowledgebase.oc1-us-chicago-1.amaaaaaaciwb2paawb4hrwdo5ptlpldvqsswb-ol7b2lpc72qkrm7deydx](#) [Hide](#) [Copy](#)

Compartment: [...2644ier6jq](#) [Show](#) [Copy](#)

Created by: default/jeffrey.vargas@oracle.com

Time created: Sat, 20 Sep 2025 13:10:07 GMT

Type: Service managed

Size: 602.86 MB

Total ingested files: 3667

Enable hybrid search: true

Resources

Data sources

Metadata

Work requests

Tag filters

[add](#) | [clear](#)

no tag filters applied

Data sources

Specify data source

Name	Lifecycle state	Time created	
DS-MyCustomer	● Active	Sat, 20 Sep 2025 13:10:07 GMT	⋮

Showing 1 item < 1 of 1 >

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

El agent_endpoint_id es el OCID del Endpoint de nuestro agente y en OCI se encuentra en Menu: Analytics & AI -> Generative AI Agents -> Agents -> Endpoint -> OCID

Agents > Agent-MyCustomer

Agent-MyCustomer

Launch chat Edit Move resource Add tags Delete

Agent information Tags

Name: Agent-MyCustomer
Description: -
OCID: ...mx3qaswfa [Show](#) [Copy](#)
Welcome message: -
Routing instructions: -

Compartment: ...2644ier6jq [Show](#) [Copy](#)
Created by: default/jeffrey.vargas@oracle.com
Time created: Sat, 20 Sep 2025 13:10:37 GMT

Resources

Endpoints

Tools

Work requests

List scope

Compartment

Demo

Endpoints in Demo Compartment

Create endpoint

Name	Lifecycle state	Time created
genaiagentendpoint20250920131038	Active	Sat, 20 Sep 2025 13:10:38 GMT

Showing 1 item < 1 of 1 >

Agents > Agent-MyCustomer > genaiagentendpoint20250920131038

genaiagentendpoint20250920131038

Launch chat Edit Move resource Add tags Delete

Endpoint information Tags

Name: genaiagentendpoint20250920131038
Description: Automatically created agent endpoint
OCID: ocid1.genaiagentendpoint.oc1-us-chicago-1.amaaaaaaciwb2paaxh43y3g5xbzzctzh7zubzbnrpbxevv6jn2sorgw46va [Hide](#) [Copy](#)
Compartment: ...2644ier6jq [Show](#) [Copy](#)
Content moderation mode on input: disable
Content moderation mode on output: disable
Prompt injection mode: disable
Personally identifiable information (PII) protection on input: disable
Personally identifiable information (PII) protection on output: disable

Enable trace: true
Enable citation: true
Enable session: true
Enable multi-language: false
Enable human in the loop: false
Idle timeout in seconds: 3600
Created by: default/jeffrey.vargas@oracle.com
Time created: Sat, 20 Sep 2025 13:10:38 GMT

Resources

Metrics

Work requests

Start time: Sep 20, 2025 13:25:37 UTC

End time: Sep 20, 2025 14:25:37 UTC

Quick selects: Last hour

Reset charts

Number of calls

Interval: Auto

Statistic: Count

Options

Total processing time (ms)

Interval: Auto

Statistic: Mean

Options

No data for this time range.

Editor

```
cd $HOME/Agente/UI/  
vi config_agente.py
```

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

Correr la aplicación y probar que el bot funciona


Nota: Antes de ejecutar la app garantizarse que la creación del Agent y Knowledge base hayan finalizado y que se completara el proceso de carga de la base de datos de conocimiento (el Ingestion job debe de estar Completado).

The screenshot shows the Oracle Cloud console interface. At the top, there's a search bar and navigation links. The main content area displays the 'DS-MyCustomer' data source, which is marked as 'ACTIVE'. Below this, there's a section for 'Ingestion jobs' with a table listing the job status, ingested files, failed files, and ignored files. The table shows one job, 'gencagentdataingestionjob20250920131008', which is 'Completed, with failures'.


Name	Job status	Ingested file(s)	Failed file(s)	Ignored file(s)	Time created
gencagentdataingestionjob20250920131008	Completed, with failures	3668	0	4550	Sat, Sep 20, 2025 at 13:10:08 UTC

Prueba Inicial

```
cd $HOME/Agente/UI/  
streamlit run app.py
```

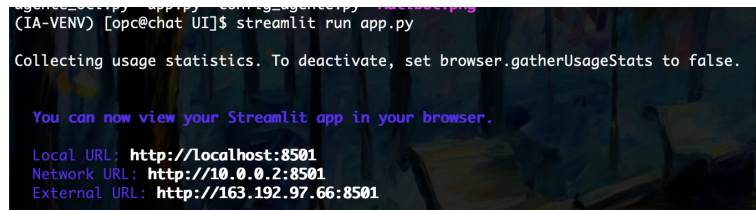

Abrir dirección Externa, se debería de ver así (inicia con un proceso de instalación tener paciencia)

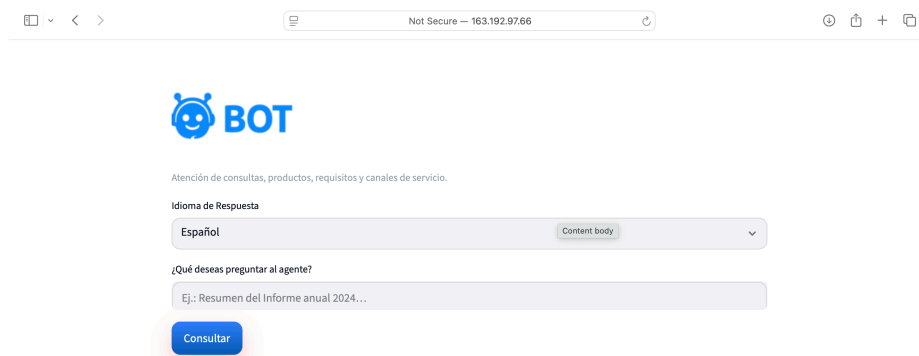

By Jeffrey Vargas – Jeffrey.vargas@oracle.com

Una vez que el Bot sea probado lo podemos correr y que se mantenga corriendo, aunque se termine la sesión, se deja un archivo de log que puede ser consultado después

```
cd $HOME/Agente/UI/  
nohup streamlit run app.py > streamlit.log 2>&1 &
```

En caso de necesitar matar el proceso

```
cd $HOME/Agente/UI/  
pkill -f "streamlit run app.py"  
rm streamlit.log
```

XI. Configuración del Sitio Web

La idea principal es poder embeber nuestro asistente digital en una copia local de la página principal de nuestro cliente, recordemos que en pasos anteriores habíamos realizado una copia en \$HOME

Modificación del index.html

Se debe de modificar el index.html

```
cd $HOME
vi index.html
```

Agregar este código justo antes de cerrar el body, pero antes modificar lo que está en amarillo por la dirección publica de su máquina virtual.

```
<!-- Estilos para el botón flotante y el panel -->
<style>
  :root {
    --asistente-scale: 0.9; /* Escala general del botón y panel (ajústala libremente) */
  }

  /* Contenedor del panel flotante (iframe) */
  #asistente-container {
    display: none;
    position: fixed;
    right: calc(28px * var(--asistente-scale));
    bottom: calc(95px * var(--asistente-scale)); /* ♦ Se coloca justo encima del botón */
    width: calc(450px * var(--asistente-scale)); /* ← ancho del iframe */
    height: calc(650px * var(--asistente-scale)); /* ← alto del iframe */
    background: #fff;
    border: 1px solid #ccc;
    border-radius: 16px;
    box-shadow: 0 6px 25px rgba(0, 0, 0, 0.25);
    z-index: 2147483646;
    overflow: hidden;
  }

  #asistente-iframe {
    width: 100%;
    height: 100%;
    border: none;
  }

  /* Botón flotante */
  #asistente-launcher {
    position: fixed;
```

```

    bottom: calc(28px * var(--asistente-scale));
    right: calc(28px * var(--asistente-scale));
    z-index: 2147483647;
    background: linear-gradient(145deg, #0055B8 0%, #0072E3 100%);
    color: #fff;
    font-weight: 700;
    font-size: calc(18px * var(--asistente-scale));
    padding: calc(18px * var(--asistente-scale)) calc(30px * var(--asistente-scale));
    border: none;
    border-radius: calc(50px * var(--asistente-scale));
    cursor: pointer;
    box-shadow: 0 6px 20px rgba(0, 85, 184, 0.35);
    transition: all 0.25s ease;
    font-family: system-ui, -apple-system, Segoe UI, Roboto, Ubuntu, Arial;
}

#asistente-launcher:hover {
    transform: scale(1.06);
    box-shadow: 0 10px 25px rgba(0, 85, 184, 0.45);
    background: linear-gradient(145deg, #0072E3 0%, #0093FF 100%);
}
</style>
<!-- Contenedor del iframe oculto -->
<div id="asistente-container">
    <iframe id="asistente-iframe" src=""></iframe>
</div>

<!-- Botón flotante (emoji correcto en UTF-8; alternativa con entity: &#129302;) -->
<button id="asistente-launcher" onclick="toggleAsistente()">🤖 Asistente Digital</button>
<!-- Lógica para mostrar/ocultar el iframe -->
<script>
    function toggleAsistente() {
        const container = document.getElementById("asistente-container");
        const iframe = document.getElementById("asistente-iframe");
        const visible = container.style.display !== "none" && container.style.display !== "";
        if (!visible) {
            // Cambia la URL a tu destino (Open WebUI o tu runner embebido)
            iframe.src = "http://localhost:8501";
            container.style.display = "block";
        } else {
            container.style.display = "none";
            iframe.src = ""; // libera recursos
        }
    }
}
</script>

```

Habilitation de Networking

```
sudo firewall-cmd --permanent --add-port=8080/tcp  
sudo firewall-cmd --permanent --add-service=http  
sudo firewall-cmd --reload
```

Instalación de webserver nginx

```
sudo dnf install -y nginx  
sudo systemctl enable --now nginx  
sudo mkdir -p /etc/nginx/conf.d
```

Copiar este comando como un solo bloque

```
sudo tee /etc/nginx/conf.d/misitio.conf > /dev/null <<'NGINX'  
server {  
    listen 80;  
    server_name _;  
  
    root /var/www/misitio;  
    index index.html;  
  
    location / {  
        try_files $uri $uri/ =404;  
    }  
  
    # Proxy a Streamlit en /app/  
    location /app/ {  
        proxy_pass http://127.0.0.1:8501/;  
        proxy_http_version 1.1;  
        proxy_set_header Upgrade $http_upgrade;  
        proxy_set_header Connection "upgrade";  
        proxy_set_header Host $host;  
        proxy_set_header X-Forwarded-Proto $scheme;  
        proxy_set_header X-Forwarded-For $remote_addr;  
        proxy_read_timeout 86400;  
    }  
}  
NGINX
```

Continuar con la configuración

```
sudo mkdir -p /var/www/misitio
sudo cp index.html /var/www/misitio/index.html
sudo semanage fcontext -a -t httpd_sys_content_t '/var/www/misitio(/.*)?' || true
sudo restorecon -Rv /var/www/misitio
sudo nginx -t
sudo systemctl restart nginx
sudo systemctl status nginx
```

Probar con la IP publica:

<http://64.181.201.189>



By Jeffrey Vargas – Jeffrey.vargas@oracle.com