Are Diffusion Language Models Good Database Analysts?

Peixian Ma[1,2], **Xialie Zhuang**[3], **Jiantao Tan**[4], **Changlun Li**[1,2], **Ruirui Chen**[5], **Chengwei Qin**[1]

[1]HKUST(GZ) [2]Paradoox AI [3]UCAS [4]SYSU [5]A*STAR

pma929@connect.hkust-gz.edu.cn

arXiv:2605.27791v2 [cs.DB] 13 Oct 2026

Abstract

Diffusion Language Models (DLMs) enable iterative global refinement, but their effectiveness in Natural Language to SQL (NL2SQL) remains unclear because heterogeneous architectures and evaluation setups hinder fair comparison with autoregressive (AR) models. Their iterative denoising process permits sequence-wide revision, offering a different way to handle the long-range structural dependencies in SQL. We present a systematic study of DLM-based NL2SQL under a unified framework that standardizes generation and execution across DLM architectures. We further introduce SQL-D1, an agentic inference framework combining database-aware retrieval, multi-trajectory denoising, execution-guided verification, and selection based on execution denotations. Across diverse benchmark settings, strong DLMs are competitive with some open-source AR models and offer flexible trade-offs between efficiency and accuracy, although they still trail the strongest AR systems on difficult queries. Test-time scaling yields substantial gains, whereas standard supervised fine-tuning yields unstable outcomes across the evaluated DLMs. Stronger model variants exhibit fewer schema-grounding errors, but failures involving complex clauses and query nesting persist. These results clarify the capabilities and limitations of DLMs for database analysis and provide a standardized foundation for future work. Our code is available at https://anonymous.4open.science/r/SQL-D1-82DF.

1 Introduction

Natural Language to SQL (NL2SQL) serves as a crucial bridge for evaluating the database analysis capabilities of language models (Liu et al., 2024; Hong et al., 2024). While recent progress driven by large language models (LLMs) has significantly enhanced generation accuracy and schema comprehension (Gao et al., 2023; Li et al., 2025a; Pourreza et al., 2024; Ma et al., 2025a), these systems primarily rely on the autoregressive (AR) paradigm. Given that SQL is a highly structured and non-linear language, the rigid left-to-right decoding process of AR models makes them particularly susceptible to sequential error propagation. Errors introduced early in the generation process often accumulate throughout the sequence. The lack of mechanisms for global structural revision ultimately limits the effectiveness of AR models in performing complex database analysis tasks.

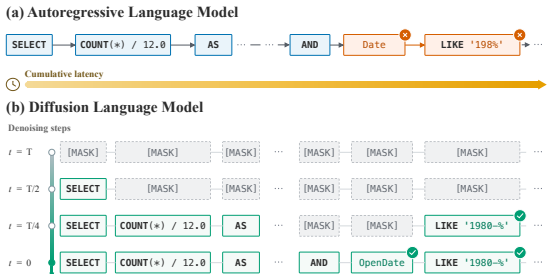

Figure 1: Demonstration of our work. While AR models decode left-to-right and risk sequential error propagation, DLMs perform iterative global denoising. Whether this non-autoregressive refinement translates into a net advantage in database analysis is the core empirical question investigated in this work.

Recently, diffusion language models (DLMs) have emerged as a promising alternative to unidirectional decoding (Li et al., 2025b; Arriola et al., 2025; Nie et al., 2025b). As shown in Figure 1, DLMs replace unidirectional decoding with an iterative denoising process, enabling global refinement of sequence representations through multiple parallelizable steps. This mechanism *may* help NL2SQL by allowing models to revise semantic inconsistencies and grounding errors across the query, but whether the potential translates into a net advantage over AR models is an empirical question. Leading DLMs (Nie et al., 2025b; Liu et al., 2025; Ye et al., 2025; Bie et al., 2025, 2026) have demonstrated per-

formance comparable to LLMs in mathematics and code generation. Consequently, a systematic investigation into whether these models can effectively address structural challenges in database reasoning represents a significant research direction.

Despite this considerable potential, the application of DLMs to the NL2SQL domain is currently hindered by the absence of a standardized evaluation infrastructure. The DLM ecosystem remains highly fragmented, encompassing divergent methodologies such as discrete diffusion, continuous diffusion, and mask reconstruction. These approaches are associated with different training objectives, decoding procedures, and sampling strategies. This heterogeneity creates a substantial methodological gap, preventing equitable and quantitative comparisons among various diffusion architectures and traditional AR baselines. It also impedes the direct adaptation of established AR-centric enhancement techniques to the diffusion paradigm. Therefore, without unified evaluation protocols and a specialized integration framework, the true capability boundaries and practical viability of DLMs for structured database analysis remain unclear.

To address these challenges and research gaps, we aim to answer the following research questions:

- ***Q1:*** How do DLMs perform relative to AR models in NL2SQL tasks?
- ***Q2:*** How can we improve performance of DLMs in NL2SQL tasks?
- ***Q3:*** What are the distinctive failure modes and scaling behaviors of DLMs in structured generation?

Takeaways. In summary, our work makes the following contributions and provides takeaways:

(i) DLMs demonstrate highly competitive performance and structural robustness in database analysis tasks. Advanced DLMs, such as LLaDA2.1-mini, achieve state-of-the-art execution accuracy among non-autoregressive models, surpassing comparable autoregressive baselines.

(ii) DLMs demonstrate significant performance improvements through test-time scaling and provide a flexible balance between computational efficiency and accuracy.

(iii) Agentic coordination effectively unleashes the latent potential of DLMs, driving substantial accuracy gains across primary benchmarks.

(iv) Supervised fine-tuning methods exhibit instability when applied to DLMs on NL2SQL tasks, leading to inconsistent performance gains.

(v) Scaling up model size substantially reduces grounding errors in conditions and tables. However, structural errors in complex clauses and query nesting persist across various diffusion architectures.

Contributions. In summary, our work makes the following contributions and provides takeaways:

(i) **Unified NL2SQL evaluation framework across diverse DLMs**: We establish a unified evaluation framework for DLM-based NL2SQL, defining rigorous protocols for cross-benchmark comparison. This standardization enables a systematic, quantitative assessment of DLM capability boundaries in structured database analysis under consistent generation and execution environments.

(ii) **Agentic DLM-based NL2SQL system**: We introduce `SQL-D1`, a novel synthesis framework that integrates database-aware context engineering, test-time scaling, and agentic optimization to enable more robust and effective NL2SQL reasoning with DLMs.

(iii) **Empirical analysis and takeaways of DLM-based NL2SQL**: We provide critical insights into the test-time scaling potential, post-training instability, and primary failure modes of DLMs, formalizing structured takeaways that characterize the efficiency-accuracy trade-offs and structural robustness of diffusion architectures.

2 Methodology

2.1 Overview

As illustrated in Figure 2, the unified evaluation framework standardizes interactions among users, databases, and heterogeneous DLM architectures through three integrated modules. The system employs a dual-track inference pipeline supporting both direct model-based generation and a structured agentic workflow comprising retrieval, generation, verification, and selection. The process concludes with a comprehensive evaluation engine that performs functional verification via SQL execution and provides fine-grained diagnostic analysis of error typologies.

2.2 `SQL-D1`: Agentic NL2SQL with DLMs

Building on agentic NL2SQL systems for AR models (Pourreza et al., 2024; Wang et al., 2024, 2025), `SQL-D1` organizes DLM-based SQL generation into four stages: retrieval, generation, verifica-

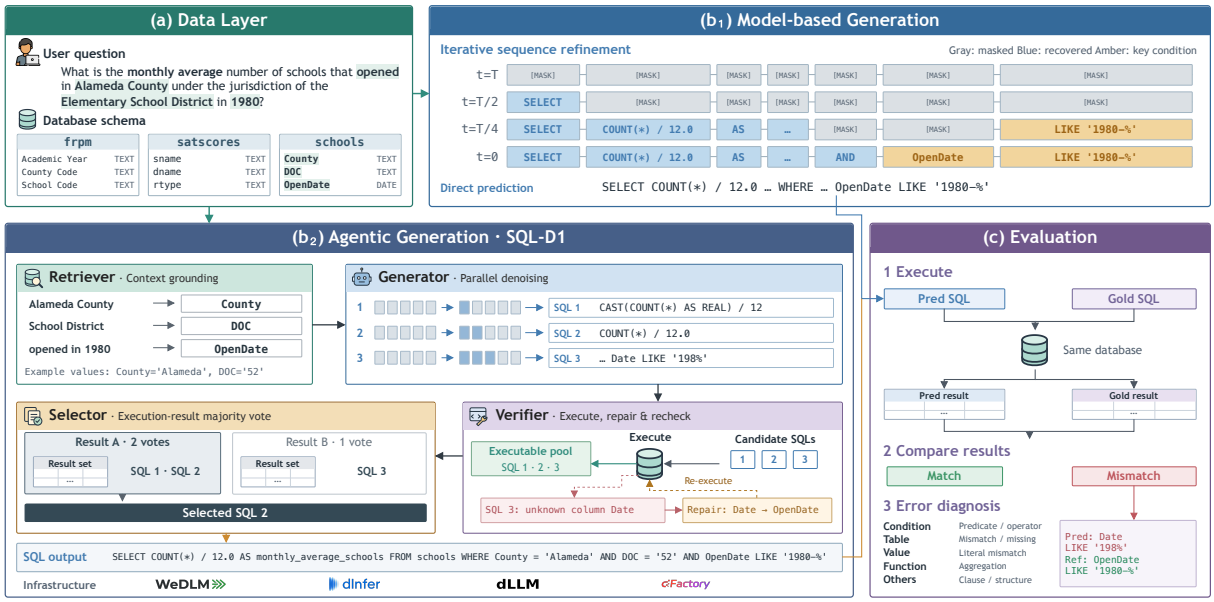

Figure 2: Overview of the proposed DLM-based NL2SQL framework. The framework comprises (a) a data layer, (b_1) direct model-based generation, (b_2) SQL-D1 agentic generation with retrieval, parallel denoising, execution-guided verification, and selection based on execution denotations, and (c) execution-based evaluation with fine-grained error diagnosis.

Agent	Input	Output	Exec.
A_r	Question and current-database schema	Grounded context with one example value per field	No
A_g	Grounded context and question	k candidate SQLs from multi-trajectory denoising	No
A_v	Candidates and execution feedback	Repaired or filtered executable candidates	Yes
A_s	Executable candidates and denotations	One SQL (majority denotation; shortest-SQL tie-break)	Yes

Table 1: Input/output of SQL-D1 agents. Exec. indicates whether the agent runs SQL against the database.

tion, and selection. The retriever provides database-specific context, and the generator produces candidate queries through multiple independent denoising trajectories. The verifier uses execution feedback to identify and, when possible, repair queries that fail to execute. The selector then groups executable candidates by execution result and selects a final query. Table 1 summarizes the inputs and outputs of the four agents.

Retriever A_r. The Retriever constructs database-specific context using the schema of the database associated with each question. It augments the schema metadata with one representative value per field, selected offline from that database. The same context construction procedure is applied to the DLM and AR models in the main comparison.

Generator A_g. Conditioned on the retrieved context, the Generator performs test-time scaling by launching multiple concurrent denoising trajectories rather than a single left-to-right decode. This design uses the parallelizable refinement of DLMs and the high variance of single-pass diffusion generation. The resulting candidate pool is passed to verification and selection under a controllable inference budget.

Verifier A_v. The Verifier introduces an agentic correction loop designed to ensure the formal validity and semantic alignment of the generated candidates. It leverages a feedback-driven mechanism to iteratively diagnose and rectify potential structural inconsistencies or execution failures. By transforming raw candidates into executable queries through targeted refinement, the Verifier bridges the gap between probabilistic generation and the deterministic requirements of SQL execution.

Selector A_s. The Selector aggregates executable candidates by execution denotation rather than by exact SQL string match. The most frequent denotation group is selected; ties among equal-frequency groups are broken by choosing the shortest SQL. Non-executable candidates do not vote. This rule is consistent with EX as the primary metric and reduces variance across denoising trajectories.

Models	Spider (Dev)		Spider (Test)		BIRD (Dev)		Spider-DK		Spider-Syn		Spider-Realistic	
	Gre	Maj	Gre	Maj	Gre	Maj	Gre	Maj	Gre	Maj	Gre	Maj
Diffusion Language Models												
Dream-7B	49.8	54.2	51.0	53.2	13.1	19.4	34.0	45.4	48.9	53.9	46.0	51.2
DreamCoder-7B	47.0	54.2	47.2	52.5	25.7	29.9	27.9	36.1	31.1	43.7	28.9	39.2
DiffuCoder-7B	48.9	66.0	51.3	63.7	35.4	37.8	41.2	56.8	49.8	65.4	47.6	63.2
WeDLM-7B	60.9	70.3	67.0	73.7	39.7	43.6	45.5	56.3	60.9	66.4	51.2	59.3
WeDLM-8B	66.6	73.1	68.0	72.9	**51.4**	53.0	**54.0**	61.7	**69.3**	72.9	63.0	66.1
LLaDA-8B	50.2	60.6	52.6	61.9	24.0	33.6	43.2	55.3	51.2	61.4	48.0	58.9
LLaDA-1.5-8B	51.1	61.1	51.9	62.7	26.6	33.8	42.8	52.0	59.9	62.1	49.0	58.1
LLaDA2.0-mini	68.2	**74.8**	71.1	78.1	48.2	55.5	53.3	**67.7**	69.2	75.4	62.0	**74.6**
LLaDA2.1-mini	**68.5**	74.6	**71.4**	**78.6**	48.8	**58.7**	52.5	67.5	68.7	**76.3**	**63.8**	72.2
Autoregressive Language Models												
GPT-4-Turbo	72.4	72.2	83.4	84.2	**62.0**	63.6	72.3	72.1	62.9	63.5	67.5	68.3
GPT-4o	70.9	70.7	83.2	84.9	61.9	64.0	72.9	73.5	59.6	62.3	66.5	66.7
DeepSeek-Coder-6.7B	63.2	63.2	70.5	73.2	43.1	48.0	60.9	64.1	49.9	51.7	58.7	58.9
Qwen2.5-7B	65.4	68.9	76.8	82.6	46.9	56.4	63.7	71.8	54.2	60.0	56.7	63.6
Qwen2.5-Coder-7B	73.4	77.1	82.2	85.6	50.9	58.2	67.5	73.6	63.1	66.9	66.7	70.5
Qwen3-8B-Thinking	-	-	-	-	49.1	51.8	-	-	-	-	-	-
Qwen2.5-14B	66.5	69.7	82.0	84.0	56.7	62.1	72.3	74.0	58.1	60.7	62.4	65.2
Qwen2.5-Coder-14B	**78.1**	**80.6**	**86.6**	**88.0**	61.5	**66.1**	**73.6**	**77.8**	**68.2**	**69.3**	**76.2**	**74.2**

Table 2: Performance comparison of DLMs and AR models on main NL2SQL benchmarks. **Gre** refers to greedy search, **Maj** refers to majority voting by 8 candidates. Overall inference settings are kept the same for all models. Within DLMs and AR models, the best and second-best results are in **bold** and underlined, respectively.

3 Experiments

3.1 Experimental Setup

Benchmark Settings. We conduct our experiments on six main NL2SQL benchmarks, including Spider (Yu et al., 2018), BIRD (Li et al., 2023b), Spider-DK (Gan et al., 2021b), Spider-Syn (Gan et al., 2021a), and Spider-Realistic (Deng et al., 2020). Detailed descriptions of these benchmarks are provided in Appendix B.

Metric & Baselines. To ensure fair comparisons, we adhere to the standard evaluation metric established in prior works. Specifically, we use execution accuracy (EX) as the primary metric across all benchmarks. We compare DLM families (Dream, DiffuCoder, WeDLM, LLaDA) against several AR model baselines on the main NL2SQL benchmarks. Detailed models of these baselines are provided in Table 2, Appendix B.2 and Appendix B.3.

Environment. All experiments in this study are conducted on a server running Ubuntu 22.04. This server is equipped with an Intel(R) Xeon(R) Platinum 8358 CPU @ 2.60 GHz, 512 GB of system memory, and 8 A100-80GB GPUs.

3.2 Main Results

Q1: How do DLMs perform relative to AR models in NL2SQL tasks? We first compare DLMs and AR models on the main NL2SQL benchmarks.

Overall Performance Comparison. Table 2 summarizes performance across diverse benchmarks. A primary observation is the rapid ascent of DLM capabilities, particularly within the LLaDA2 and WeDLM families. LLaDA2.1-mini attains the best EX among the evaluated DLMs, reaching 78.6% Maj@8 on Spider-Test. A gap remains relative to high-end AR models such as GPT-4-Turbo (84.2%). Notably, under the same zero-shot prompting configuration, LLaDA2.1-mini (58.7%) outperforms several representative open-source AR models on the BIRD benchmark, such as Qwen2.5-Coder-7B (58.2%), Qwen2.5-7B (56.4%), and Qwen3-8B-Thinking (51.8%).

The robustness of DLMs is further demonstrated by their performance on schema-perturbed and domain-specific variants. On Spider-DK and Spider-Realistic, LLaDA2.1-mini achieves competitive accuracies of 67.5% and 72.2%, respectively. These benchmarks introduce domain and schema variations, making them effective tests of whether a model relies on superficial lexical matching. LLaDA2.1-mini remains competitive on these variants, demonstrating robust performance under domain and schema variations.

Complexity Analysis. Table 3 provides a fine-grained breakdown of execution accuracy by

Models	Sim.	Mod.	Chall.	All
Diffusion Language Models				
Dream-7B	27.9	7.1	4.1	19.4
DreamCoder-7B	38.5	17.9	13.1	29.9
DiffuCoder-7B	46.5	24.4	24.8	37.8
LLaDA-8B	44.7	17.2	15.9	33.6
LLaDA-1.5-8B	44.7	17.0	17.9	33.8
WeDLM-7B	52.5	30.6	27.6	43.6
WeDLM-8B	60.8	42.2	37.9	53.0
LLaDA2.0-mini	62.4	45.7	42.8	55.5
LLaDA2.1-mini	64.5	50.2	49.0	58.7
Specific NL2SQL Methods				
CodeS-15B	65.8	48.8	42.4	58.5
DAIL-SQL	63.0	45.6	43.1	55.9
SuperSQL	66.9	46.5	43.8	58.5

Table 3: Execution accuracy (%) of different complexity levels on BIRD-Dev dataset. **Sim.** refers to Simple, **Mod.** refers to Moderate, **Chall.** refers to Challenging.

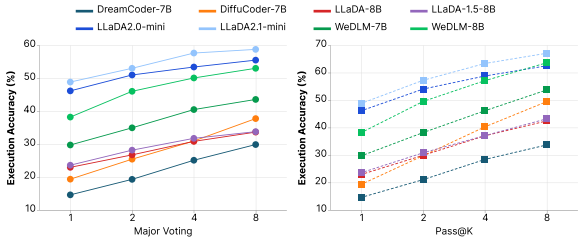

Figure 3: Performance comparison of DLMs with different test-time scaling strategies (**left**: majority voting, **right**: pass@k) on BIRD-Dev dataset.

complexity level on BIRD-Dev. LLaDA2.1-mini demonstrates remarkable consistency, achieving 49.0% on challenging queries, surpassing specialized NL2SQL methods such as CodeS-15B (42.4%) and DAIL-SQL (43.1%). Despite these gains, a performance ceiling remains when compared to top-tier models such as Qwen2.5-Coder-14B (88.0% on Spider-Test). This gap is most pronounced in extremely complex reasoning tasks, indicating that while DLMs are formidable contenders, further scaling and structural optimizations are required to reach the leading performance of autoregressive LLMs.

Takeaway 1. Strong DLMs are competitive with some AR models, while still trailing the strongest AR systems on difficult queries.

Q2: How can we improve performance of DLMs in NL2SQL tasks? We further investigate the potential of DLMs in NL2SQL tasks by analyzing the impact of test-time scaling, the integration of an agentic framework, and the training strategies.

Analysis of Test-time Scaling & Efficiency. To further investigate the potential of DLMs in NL2SQL tasks, we analyze the impact of test-time scaling on performance. As illustrated in Figure 3, all DLMs exhibit a significant and sustained upward trend in performance as the number of sampled candidates k increases. For instance, WeDLM-8B achieves a pass@8 score of 63.6% on the BIRD-Dev set, representing an improvement of over 25 percentage points compared to its pass@1 accuracy of 38.2%. With the majority voting strategy, the performance of LLaDA2.1-mini increases steadily from 48.8% to 58.7% at $k = 8$. This robust scaling effect demonstrates that DLMs can effectively mitigate the stochasticity of single-pass generation by increasing the computational budget during inference. Furthermore, the substantial gap between pass@k and Maj@k highlights the considerable upper bound potential of DLMs. With the integration of more sophisticated re-ranking mechanisms, their performance is poised to approach, and perhaps even exceed, that of leading AR models.

Figure 4 illustrates the efficiency and execution accuracy trade-offs of various DLMs, where the WeDLM and LLaDA2 series clearly define the Pareto frontier for the DLM-based NL2SQL system. Specifically, the WeDLM series exhibits exceptional inference efficiency, achieving a single-pass latency of approximately 0.2 seconds per query, which is nearly 30 times faster than the LLaDA2 series. In contrast, the LLaDA2 series delivers the highest execution accuracy among all evaluated DLMs, reaching 78.6% on Spider-Test and 58.7% on BIRD-Dev, albeit at a higher computational cost per pass. This versatile trade-off between ultra-low latency and high-fidelity generation underscores the competitive advantage of DLMs across diverse real-time application scenarios. Consequently, our subsequent analyses concentrate on these two model families to further characterize their reasoning capabilities and failure modes.

Additionally, we present a budget-matched DLM vs. AR test-time scaling comparison in Appendix C.1, a matched `SQL-D1` ablation on an AR backbone in Appendix C.2, and a comparison of efficiency, execution accuracy, and diffusion rendering hyperparameters on BIRD-Dev in Appendices C.4 and C.5.

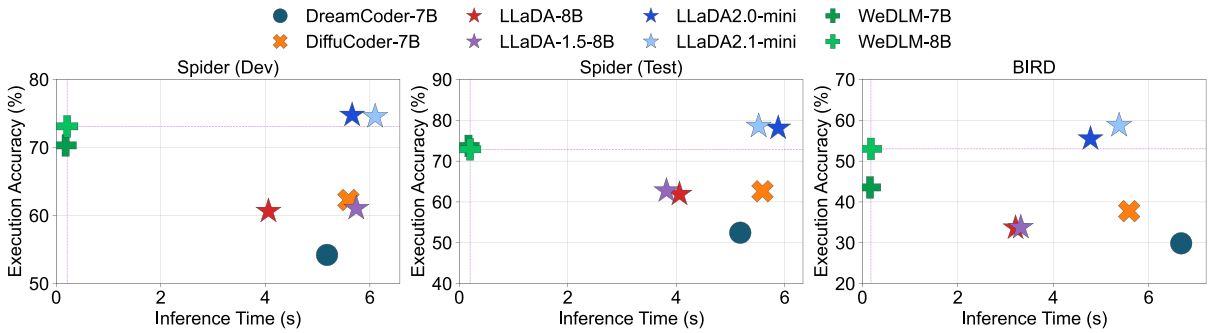

Figure 4: Efficiency and execution accuracy trade-offs of DLMs on Spider-Dev (**left**), Spider-Test (**middle**), and BIRD-Dev (**right**) datasets.

	Spider (Dev)	Spider (Test)	BIRD (Dev)	Spider-DK	Spider-Syn	Spider-Realistic
WeDLM-7B	58.6	56.7	38.4	42.5	59.6	50.1
- w/ Retriever A_r / DB Retrieval	60.9	67.0	39.7	45.5	60.9	51.2
- w/ Verifier (A_r + A_g + A_v)	70.5	73.9	44.1	-	-	-
- w/ Selector (A_r + A_g + A_s)	70.7	74.3	44.6	-	-	-
- w/ SQL-D1 (A_r + A_g + A_v + A_s)	**70.8**	**74.6**	**45.0**	**62.0**	**70.6**	**64.8**
WeDLM-8B	63.1	66.3	46.1	53.0	66.7	59.9
- w/ Retriever A_r / DB Retrieval	66.6	68.0	51.4	54.0	69.3	63.0
- w/ Verifier (A_r + A_g + A_v)	73.9	74.6	53.8	-	-	-
- w/ Selector (A_r + A_g + A_s)	74.4	74.9	54.5	-	-	-
- w/ SQL-D1 (A_r + A_g + A_v + A_s)	**75.0**	**75.2**	**54.9**	**67.8**	**74.2**	**70.5**

Table 4: Ablation study of SQL-D1 on main benchmarks. Baseline results are reported by greedy search generation.

Takeaway 2. DLMs demonstrate significant performance gains through test-time scaling and offer a versatile trade-off between efficiency and accuracy, with the WeDLM and LLaDA2 series establishing the Pareto frontier for diffusion-based NL2SQL reasoning.

Analysis of SQL-D1. Table 4 presents the ablation results for the SQL-D1 framework, evaluating the contributions of each agentic module across multiple benchmarks. The results indicate that the integration of database-aware retrieval, iterative verification, and robust selection strategies consistently yields performance gains, with the full configuration substantially outperforming the baselines. Specifically, the execution accuracy for WeDLM-7B and WeDLM-8B increases to 70.8% and 75.0% on Spider-Dev, respectively, and a similar upward trend is observed on the BIRD-Dev dataset. These results suggest that the structured coordination of specialized agents effectively reduces the stochasticity inherent in diffusion-based generation and improves the structural grounding necessary for precise SQL generation.

The integration of the Retriever (A_r) offers a consistent baseline improvement by grounding the diffusion process in accurate schema metadata and database literals. The most significant gains, however, emerge with the introduction of the Verifier (A_v) and Selector (A_s), which utilize test-time scaling and iterative refinement. The agentic correction loop in A_v effectively addresses structural and execution failures, while the robust aggregation in A_s stabilizes the output by selecting the most consistent query from the diverse candidate pool.

Notably, SQL-D1 demonstrates robust performance on challenging variants such as Spider-DK and Spider-Realistic. For example, on Spider-DK, the framework boosts WeDLM-7B's performance from 42.5% to 62.0%, an improvement of nearly 20 percentage points. This result indicates that the structured agentic pipeline is especially effective at addressing domain-specific knowledge gaps and linguistic variations that often hinder monolithic models. The combination of grounded retrieval, di-

Models	EX (%) / Δ (%)
WeDLM-7B-Instruct	39.7
- w/ SFT (BIRD-Train-9K)	40.2 (↑ 0.5)
WeDLM-8B-Instruct	51.4
- w/ SFT (BIRD-Train-9K)	49.3 (↓ 2.1)
LLaDA2.0-mini	48.2
- w/ SFT (BIRD-Train-9K)	46.4 (↓ 1.8)

Table 5: SFT ablation of WeDLM and LLaDA2.0-mini on BIRD-Dev. Overall results are reported with greedy search generation.

verse exploration, and feedback-driven refinement ultimately enables DLMs to reach new levels of precision in complex NL2SQL tasks.

Takeaway 3. The SQL-D1 framework demonstrates that agentic coordination, which combines grounded retrieval, test-time scaling, and iterative refinement, effectively unlocks the latent potential of DLMs in NL2SQL tasks and delivers significant performance improvements as well as enhanced robustness across diverse and challenging database scenarios.

Analysis of Training Strategies. Table 5 presents the impact of post-training strategies on DLM performance. We conduct Supervised Fine-Tuning (SFT) using the BIRD-Train-9K dataset on several representative models to assess their responsiveness to domain-specific tuning. The experimental results indicate that the current post-training paradigm for DLMs is notably unstable when compared with established protocols for autoregressive models. For example, WeDLM-7B-Instruct achieves only a marginal increase of 0.5% in execution accuracy, while both WeDLM-8B-Instruct and LLaDA2.0-mini exhibit performance degradation, decreasing by 2.1% and 1.8%, respectively. These findings suggest that direct SFT on database-specific datasets may unintentionally disrupt the internal representations or the denoising trajectories acquired during the initial training process. The observed inconsistencies emphasize the need for further research into specialized post-training methodologies that are better aligned with the iterative generation mechanism of DLMs. The development of robust alignment and fine-tuning techniques remains a primary challenge for improving the domain-specific reasoning capabilities

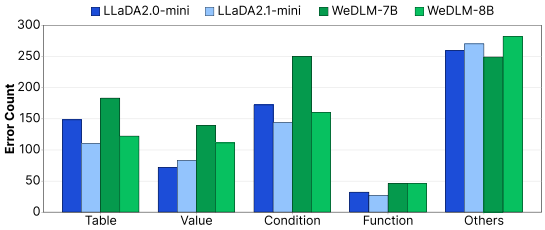

Figure 5: Error distribution of LLaDA2 and WeDLM series models on BIRD-Dev dataset.

of diffusion-based language models in NL2SQL tasks.

Takeaway 4. The instability and inconsistent performance outcomes of conventional supervised fine-tuning on DLMs underscore the critical need for specialized post-training methodologies that are specifically aligned with the iterative denoising mechanisms of diffusion language models.

Q3: What are the distinctive failure modes and scaling behaviors of DLMs in structured generation? We further investigate the failure modes and scaling behaviors of DLMs in structured generation by conducting a fine-grained error analysis.

Error Analysis. To better understand the failure modes of DLMs in structured reasoning and identify specific areas for improvement, we conduct a fine-grained error analysis. We specifically compare the diagnostic behavior of the LLaDA2 and WeDLM series models to uncover how different diffusion architectures handle complex SQL generation. We categorize the errors of DLMs in NL2SQL tasks into five categories: **Table** (e.g., *table mismatch*, *table missing*), **Value** (e.g., *value mismatch*), **Condition** (e.g., *attribute error*, *operator error*), **Function** (e.g., *incorrect use of aggregate functions like SUM, AVG*), and **Others** (e.g., *clause missing*).

Figure 5 demonstrates the distribution of errors across these categories. As illustrated, **Condition** and **Table** errors constitute the primary failure modes for both model families. This distribution highlights the challenges of precise schema linking and complex predicate formulation in a non-autoregressive setting. Specifically, WeDLM-7B exhibits the highest frequency of **Condition** (250) and **Table** (183) errors. These counts are significantly mitigated in WeDLM-8B (160 and 122, respectively), suggesting that increased model scale and refined training objectives improve struc-

tural grounding by enhancing the mapping of natural language intents to database entities. The LLaDA2 series demonstrates superior performance in handling **Value** mapping, where LLaDA2.0-mini incurs only 72 such errors compared to 139 for WeDLM-7B. Furthermore, the transition from LLaDA2.0 to LLaDA2.1-mini yields a notable reduction in **Table** errors (from 148 to 110), indicating an enhanced capability in discerning relevant database entities during the iterative denoising process. The prevalence of **Others** errors across all models is particularly telling because these failures predominantly involve missing structural clauses and incorrect subquery nesting. These specific failure modes provide direct evidence of the difficulty that DLMs face in maintaining the global structural coherence and long-range dependencies required for complex SQL generation. Additionally, we provide a detailed error taxonomy and case study in Appendix D.

Takeaway 5. Condition and Table errors constitute the primary failure modes for DLMs and are significantly mitigated by increased model scale; however, structural failures related to clauses and nesting do not exhibit corresponding improvements with increased model capacity.

4 Related Work

Diffusion Language Models. DLMs advance language modeling by replacing autoregressive decoding with iterative sequence or block refinement, incorporating masked denoising and discrete diffusion formulations (Arriola et al., 2025; Li et al., 2025b; Yu et al., 2025; Mounier and Idehpour, 2025; von Rütte et al., 2025; Yang et al., 2026c; Zhang et al., 2026). Recent work further explores scaling DLMs through adaptation from AR models (Gong et al., 2025). Leading models such as LLaDA (Nie et al., 2025b), Dream (Ye et al., 2025), and WeDLM (Liu et al., 2025) demonstrate that global denoising can match or surpass sequential generation in structured domains including mathematics and code (Nie et al., 2025a; Ni et al., 2025; Zhang et al., 2025). Nevertheless, the DLM ecosystem remains fragmented due to divergent training objectives and sampling strategies, which hinders standardized evaluation across models (Liu et al., 2025; Ma et al., 2025b; Zhou et al., 2026). To address this issue, this work introduces a unified framework that standardizes generation and execution protocols, thereby enabling the first systematic characterization of capability boundaries and diagnostic behaviors for diffusion models in structured database analysis.

Natural Language to SQL. NL2SQL serves as a primary benchmark for evaluating database reasoning capabilities (Liu et al., 2024; Hong et al., 2024). The field has evolved from specialized encoders to large language models (Dong et al., 2023; Li et al., 2024a; Pourreza and Rafiei, 2024), with a focus on generation accuracy (Li et al., 2024b, 2025a; Xie et al., 2025a; Ma et al., 2025a; Qin et al., 2024; Soni et al., 2026; Yang et al., 2026a), schema comprehension (Li et al., 2023a; Gao et al., 2024; Maamari et al., 2024; Tan et al., 2026; Nan et al., 2026), and executable semantic alignment (Gao et al., 2023; Ma et al., 2024; Yang et al., 2026b). Recent developments in agentic pipelines have enabled integration of test-time scaling and tool utilization within NL2SQL workflows (Pourreza et al., 2024; Yuan et al., 2025; Lyu et al., 2025; Wang et al., 2025; Cai et al., 2026). Existing agentic designs primarily target AR models. We study how retrieval, generation, verification, and selection interact with iterative denoising in DLM-based NL2SQL. Current evaluation protocols still primarily address autoregressive architectures (Rajkumar et al., 2022). This work therefore standardizes evaluation for DLMs, integrates `SQL-D1` as an inference-time system, and analyzes fine-grained error typologies.

5 Conclusion

In this work, we establish a unified framework for systematically evaluating DLMs in NL2SQL. Strong DLMs are competitive with some open-source AR models and offer flexible trade-offs between efficiency and accuracy, while still trailing the strongest AR systems on difficult queries. The `SQL-D1` framework further improves execution accuracy through database-aware retrieval and execution-grounded test-time scaling, with matched ablations showing similar full-pipeline gains on an AR backbone. Despite fewer schema-grounding errors in stronger model variants, persistent structural errors and unstable SFT outcomes highlight the need for optimization methods tailored to iterative denoising.

Limitations

Dialect Constraints. The current scope of our empirical evaluation is primarily restricted to the SQLite dialect, which serves as the foundational environment for the proposed unified protocol. Although SQLite is widely utilized for benchmarking structured reasoning tasks, we recognize that other database systems may present distinct syntactic and execution challenges. We are committed to an iterative development process that aims to broaden the compatibility of our framework across a more diverse range of database management systems in future versions.

Post-training. Our post-training analysis evaluates standard SFT on BIRD-Train-9K and reveals unstable performance across the evaluated DLMs. Developing DLM-specific post-training methods remains an important direction for future work.

Model Coverage. This work focuses on a specific selection of representative DLM architectures. As the field of DLM is undergoing rapid advancement, certain newly released models have not yet been included in our current analysis. We view this study as an evolving effort and intend to incorporate the latest developments in the DLM ecosystem through continuous iterations of our suite to provide a more comprehensive evaluation.

Ethical Considerations

The deployment of DLM-based NL2SQL systems involves critical considerations regarding data security and algorithmic bias. While our study utilizes public benchmarks, real-world applications must implement robust access control and sanitization to prevent unauthorized data exposure or malicious SQL injections. Furthermore, DLMs may inherit biases from training data, potentially leading to disparate performance across different domains or linguistic styles, which necessitates careful validation in diverse realistic database environments.

References

Marianne Arriola, Aaron Gokaslan, Justin T Chiu, Jiaqi Han, Zhihan Yang, Zhixuan Qi, Subham Sekhar Sahoo, and Volodymyr Kuleshov. 2025. Interpolating autoregressive and discrete denoising diffusion language models. In *The Thirteenth International Conference on Learning Representations*.

Tiwei Bie, Maosong Cao, Xiang Cao, Bingsen Chen, Fuyuan Chen, Kun Chen, Lun Du, Daozhuo Feng, Haibo Feng, Mingliang Gong, Zhuocheng Gong, Yanmei Gu, Jian Guan, Kaiyuan Guan, Hongliang He, Zenan Huang, Juyong Jiang, Zhonghui Jiang, Zhenzhong Lan, and 31 others. 2026. Llada2.1: Speeding up text diffusion via token editing. *Preprint*, arXiv:2602.08676.

Tiwei Bie, Maosong Cao, Kun Chen, Lun Du, Mingliang Gong, Zhuochen Gong, Yanmei Gu, Jiaqi Hu, Zenan Huang, Zhenzhong Lan, Chengxi Li, Chongxuan Li, Jianguo Li, Zehuan Li, Huabin Liu, Ling Liu, Guoshan Lu, Xiaocheng Lu, Yuxin Ma, and 12 others. 2025. Llada2.0: Scaling up diffusion language models to 100b. *Preprint*, arXiv:2512.15745.

Qifeng Cai, Hao Liang, Chang Xu, Tao Xie, Wentao Zhang, and Bin Cui. 2026. Text2sql-flow: A robust sql-aware data augmentation framework for text-to-sql. *arXiv preprint arXiv:2511.10192v4*.

Xiang Deng, Ahmed Hassan Awadallah, Christopher Meek, Oleksandr Polozov, Huan Sun, and Matthew Richardson. 2020. Structure-grounded pretraining for text-to-sql. *arXiv preprint arXiv:2010.12773*.

Xuemei Dong, Chao Zhang, Yuhang Ge, Yuren Mao, Yunjun Gao, Jinshu Lin, Dongfang Lou, and 1 others. 2023. C3: Zero-shot text-to-sql with chatgpt. *arXiv preprint arXiv:2307.07306*.

Yujian Gan, Xinyun Chen, Qiuping Huang, Matthew Purver, John R. Woodward, Jinxia Xie, and Pengsheng Huang. 2021a. Towards robustness of text-to-SQL models against synonym substitution. pages 2505–2515, Online. Association for Computational Linguistics.

Yujian Gan, Xinyun Chen, and Matthew Purver. 2021b. Exploring underexplored limitations of cross-domain text-to-sql generalization. *Preprint*, arXiv:2109.05157.

Dawei Gao, Haibin Wang, Yaliang Li, Xiuyu Sun, Yichen Qian, Bolin Ding, and Jingren Zhou. 2023. Text-to-sql empowered by large language models: A benchmark evaluation. *CoRR*, abs/2308.15363.

Yingqi Gao, Yifu Liu, Xiaoxia Li, Xiaorong Shi, Yin Zhu, Yiming Wang, Shiqi Li, Wei Li, Yuntao Hong, Zhiling Luo, and 1 others. 2024. Xiyan-sql: A multi-generator ensemble framework for text-to-sql. *arXiv e-prints*, pages arXiv–2411.

Shansan Gong, Shivam Agarwal, Yizhe Zhang, Jiacheng Ye, Lin Zheng, Mukai Li, Chenxin An, Peilin Zhao, Wei Bi, Jiawei Han, Hao Peng, and Lingpeng Kong. 2025. Scaling diffusion language models via adaptation from autoregressive models. In *The Thirteenth International Conference on Learning Representations*.

Daya Guo, Qihao Zhu, Dejian Yang, Zhenda Xie, Kai Dong, Wentao Zhang, Guanting Chen, Xiao Bi, Yifan Wu, YK Li, and 1 others. 2024. Deepseek-coder: when the large language model meets programming–the rise of code intelligence. *arXiv preprint arXiv:2401.14196*.

Zijin Hong, Zheng Yuan, Qinggang Zhang, Hao Chen, Junnan Dong, Feiran Huang, and Xiao Huang. 2024. Next-generation database interfaces: A survey of llm-based text-to-sql. *arXiv preprint arXiv:2406.08426*.

Binyuan Hui, Jian Yang, Zeyu Cui, Jiaxi Yang, Dayiheng Liu, Lei Zhang, Tianyu Liu, Jiajun Zhang, Bowen Yu, Keming Lu, and 1 others. 2024. Qwen2. 5-coder technical report. *arXiv preprint arXiv:2409.12186*.

inclusionAI. 2026. dfactory: Easy and efficient dllm fine-tuning.

Boyan Li, Yuyu Luo, Chengliang Chai, Guoliang Li, and Nan Tang. 2024a. The dawn of natural language to sql: are we fully ready? *arXiv preprint arXiv:2406.01265*.

Haoyang Li, Shang Wu, Xiaokang Zhang, Xinmei Huang, Jing Zhang, Fuxin Jiang, Shuai Wang, Tieying Zhang, Jianjun Chen, Rui Shi, and 1 others. 2025a. Omnisql: Synthesizing high-quality text-to-sql data at scale. *arXiv preprint arXiv:2503.02240*.

Haoyang Li, Jing Zhang, Cuiping Li, and Hong Chen. 2023a. Resdsql: Decoupling schema linking and skeleton parsing for text-to-sql. In *AAAI*.

Haoyang Li, Jing Zhang, Hanbing Liu, Ju Fan, Xiaokang Zhang, Jun Zhu, Renjie Wei, Hongyan Pan, Cuiping Li, and Hong Chen. 2024b. Codes: Towards building open-source language models for text-to-sql. *Proceedings of the ACM on Management of Data*, 2(3):1–28.

Jinyang Li, Binyuan Hui, Ge Qu, Binhua Li, Jiaxi Yang, Bowen Li, Bailin Wang, Bowen Qin, Ruiying Geng, Nan Huo, Xuanhe Zhou, Chenhao Ma, Guoliang Li, Kevin C. C. Chang, Fei Huang, Reynold Cheng, and Yongbin Li. 2023b. Can llm already serve as a database interface? a big bench for large-scale database grounded text-to-sqls. *Preprint*, arXiv:2305.03111.

Tianyi Li, Mingda Chen, Bowei Guo, and Zhiqiang Shen. 2025b. A survey on diffusion language models. *arXiv preprint arXiv:2508.10875*.

Aiwei Liu, Minghua He, Shaoxun Zeng, Linhao Zhang, Chuhan Wu, Wei Jia, Yuan Liu, Yang Yu, Xiao Zhou, and Jie Zhou. 2025. Wedlm: Reconciling diffusion language models with standard causal attention for fast inference. *arXiv preprint arXiv:2512.22737*.

Xinyu Liu, Shuyu Shen, Boyan Li, Peixian Ma, Runzhi Jiang, Yuyu Luo, Yuxin Zhang, Ju Fan, Guoliang Li, and Nan Tang. 2024. A survey of NL2SQL with large language models: Where are we, and where are we going? *CoRR*, abs/2408.05109.

Shuai Lyu, Haoran Luo, Zhonghong Ou, Yifan Zhu, Xiaoran Shang, Yang Qin, and Meina Song. 2025. Sql-o1: A self-reward heuristic dynamic search method for text-to-sql. *arXiv preprint arXiv:2502.11741*.

Peixian Ma, Boyan Li, Runzhi Jiang, Ju Fan, Nan Tang, and Yuyu Luo. 2024. A plug-and-play natural language rewriter for natural language to sql. *arXiv preprint arXiv:2412.17068*.

Peixian Ma, Xialie Zhuang, Chengjin Xu, Xuhui Jiang, Ran Chen, and Jian Guo. 2025a. Sql-r1: Training natural language to sql reasoning model by reinforcement learning. In *Advances in Neural Information Processing Systems*, volume 38, pages 174505–174537. Curran Associates, Inc.

Yuxin Ma, Lun Du, Lanning Wei, Kun Chen, Qian Xu, Kangyu Wang, Guofeng Feng, Guoshan Lu, Lin Liu, Xiaojing Qi, Xinyuan Zhang, Zhen Tao, Haibo Feng, Ziyun Jiang, Ying Xu, Zenan Huang, Yihong Zhuang, Haokai Xu, Jiaqi Hu, and 4 others. 2025b. dinfer: An efficient inference framework for diffusion language models. *arXiv preprint arXiv:2510.08666*.

Karime Maamari, Fadhil Abubaker, Daniel Jaroslawicz, and Amine Mhedhbi. 2024. The death of schema linking? text-to-sql in the age of well-reasoned language models. *arXiv preprint arXiv:2408.07702*.

Nikita Mounier and Parsa Idehpour. 2025. Review, remask, refine (r3): Process-guided block diffusion for text generation. *Preprint*, arXiv:2507.08018.

Yafeng Nan, Haifeng Sun, Zirui Zhuang, Qi Qi, Guojun Chu, Jianxin Liao, Dan Pei, and Jingyu Wang. 2026. Diver: A robust text-to-sql system with dynamic interactive value linking and evidence reasoning. *Proceedings of the ACM on Management of Data*, 4(1):1–24.

Jinjie Ni, Qian Liu, Chao Du, Longxu Dou, Hang Yan, Zili Wang, Tianyu Pang, and Michael Qizhe Shieh. 2025. Training optimal large diffusion language models. *Preprint*, arXiv:2510.03280.

Shen Nie, Fengqi Zhu, Chao Du, Tianyu Pang, Qian Liu, Guangtao Zeng, Min Lin, and Chongxuan Li. 2025a. Scaling up masked diffusion models on text. *Preprint*, arXiv:2410.18514.

Shen Nie, Fengqi Zhu, Zebin You, Xiaolu Zhang, Jingyang Ou, Jun Hu, Jun Zhou, Yankai Lin, Ji-Rong Wen, and Chongxuan Li. 2025b. Large language diffusion models. *arXiv preprint arXiv:2502.09992*.

OpenAI. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*.

Mohammadreza Pourreza, Hailong Li, Ruoxi Sun, Yeounoh Chung, Shayan Talaei, Gaurav Tarlok Kakkar, Yu Gan, Amin Saberi, Fatma Ozcan, and Sercan O Arik. 2024. Chase-sql: Multi-path reasoning and preference optimized candidate selection in text-to-sql. *arXiv preprint arXiv:2410.01943*.

Mohammadreza Pourreza and Davood Rafiei. 2024. Dts-sql: Decomposed text-to-sql with small large language models. *arXiv preprint arXiv:2402.01117*.

Yang Qin, Chao Chen, Zhihang Fu, Ze Chen, Dezhong Peng, Peng Hu, and Jieping Ye. 2024. Route: Robust multitask tuning and collaboration for text-to-sql. *arXiv preprint arXiv:2412.10138*.

Nitarshan Rajkumar, Raymond Li, and Dzmitry Bahdanau. 2022. Evaluating the text-to-sql capabilities of large language models. *arXiv preprint arXiv:2204.00498*.

Chinmay Soni, Shivam Chourasia, Gaurav Kumar, and Hitesh Kapoor. 2026. Schema on the inside: A two-phase fine-tuning method for high-efficiency text-to-sql at scale. *Proceedings of the AAAI Conference on Artificial Intelligence*, 40(47):40110–40117.

Shayan Talaei, Mohammadreza Pourreza, Yu-Chen Chang, Azalia Mirhoseini, and Amin Saberi. 2024. Chess: Contextual harnessing for efficient sql synthesis. *arXiv preprint arXiv:2405.16755*.

Zhao Tan, Xiping Liu, Qing Shu, Qizhi Wan, Dexi Liu, and Changxuan Wan. 2026. Leaf-sql: Level-wise exploration with adaptive fine-graining for text-to-sql skeleton prediction. In *Proceedings of the 42nd IEEE International Conference on Data Engineering (ICDE)*.

Dimitri von Rütte, Janis Fluri, Yuhui Ding, Antonio Orvieto, Bernhard Schölkopf, and Thomas Hofmann. 2025. Generalized interpolating discrete diffusion. *Preprint*, arXiv:2503.04482.

Bing Wang, Changyu Ren, Jian Yang, Xinnian Liang, Jiaqi Bai, Linzheng Chai, Zhao Yan, Qian-Wen Zhang, Di Yin, Xing Sun, and Zhoujun Li. 2024. Mac-sql: A multi-agent collaborative framework for text-to-sql. *Preprint*, arXiv:2312.11242.

Pengfei Wang, Baolin Sun, Xuemei Dong, Yaxun Dai, Hongwei Yuan, Mengdie Chu, Yingqi Gao, Xiang Qi, Peng Zhang, and Ying Yan. 2025. Agentar-scale-sql: Advancing text-to-sql through orchestrated test-time scaling. *arXiv preprint arXiv:2509.24403*.

Xiangjin Xie, Guangwei Xu, Lingyan Zhao, and Ruijie Guo. 2025a. Opensearch-sql: Enhancing text-to-sql with dynamic few-shot and consistency alignment. *arXiv preprint arXiv:2502.14913*.

Zhihui Xie, Jiacheng Ye, Lin Zheng, Jiahui Gao, Jingwei Dong, Zirui Wu, Xueliang Zhao, Shansan Gong, Xin Jiang, Zhenguo Li, and 1 others. 2025b. Dreamcoder 7b: An open diffusion language model for code. *arXiv preprint arXiv:2509.01142*.

An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, and 1 others. 2025. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*.

Haolin Yang, Jipeng Zhang, Zhitao He, Alexander Zhou, and Yi R. Fung. 2026a. Mars-sql: A multi-agent reinforcement learning framework for text-to-sql. *Preprint*, arXiv:2511.01008.

Jiaxi Yang, Binyuan Hui, Min Yang, Jian Yang, Junyang Lin, and Chang Zhou. 2024. Synthesizing text-to-sql data from weak and strong llms. *arXiv preprint arXiv:2408.03256*.

Zerui Yang, Weichuan Wang, Yanwei Xu, Linqi Song, Yudai Matsuda, Wei Han, and Bo Bai. 2026b. Memo-sql: Structured decomposition and experience-driven self-correction for training-free nl2sql. *Preprint*, arXiv:2601.10011.

Zhihan Yang, Wei Guo, Shuibai Zhang, Subham Sekhar Sahoo, Yongxin Chen, Arash Vahdat, Morteza Mardani, and John Thickstun. 2026c. Continuous diffusion scales competitively with discrete diffusion for language. *Preprint*, arXiv:2605.18530.

Jiacheng Ye, Zhihui Xie, Lin Zheng, Jiahui Gao, Zirui Wu, Xin Jiang, Zhenguo Li, and Lingpeng Kong. 2025. Dream 7b: Diffusion large language models. *arXiv preprint arXiv:2508.15487*.

Runpeng Yu, Qi Li, and Xinchao Wang. 2025. Discrete diffusion in large language and multimodal models: A survey. *arXiv preprint arXiv:2506.13759*.

Tao Yu, Rui Zhang, Kai Yang, Michihiro Yasunaga, Dongxu Wang, Zifan Li, James Ma, Irene Li, Qingning Yao, Shanelle Roman, Zilin Zhang, and Dragomir Radev. 2018. Spider: A large-scale human-labeled dataset for complex and cross-domain semantic parsing and text-to-sql task. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, Brussels, Belgium. Association for Computational Linguistics.

Shuozhi Yuan, Liming Chen, Miaomiao Yuan, Jin Zhao, Haoran Peng, and Wenming Guo. 2025. Mcts-sql: An effective framework for text-to-sql with monte carlo tree search. *arXiv preprint arXiv:2501.16607*.

Shuibai Zhang, Fred Zhangzhi Peng, Yiheng Zhang, Jin Pan, and Grigorios G Chrysos. 2025. Corrective diffusion language models. *arXiv preprint arXiv:2512.15596*.

Shuibai Zhang, Caspian Zhuang, Chihan Cui, Zhihan Yang, Fred Zhangzhi Peng, Yanxin Zhang, Haoyue Bai, Zack Jia, Yang Zhou, Guanhua Chen, and Ming Liu. 2026. Expert-choice routing enables adaptive computation in diffusion language models. *Preprint*, arXiv:2604.01622.

Zhanhui Zhou, Lingjie Chen, Hanghang Tong, and Dawn Song. 2026. dllm: Simple diffusion language modeling. *Preprint*, arXiv:2602.22661.

Fengqi Zhu, Rongzhen Wang, Shen Nie, Xiaolu Zhang, Chunwei Wu, Jun Hu, Jun Zhou, Jianfei Chen, Yankai Lin, Ji-Rong Wen, and 1 others. 2025. Llada 1.5: Variance-reduced preference optimization for large language diffusion models. *arXiv preprint arXiv:2505.19223*.

A Prompt Template

System Prompt for SQL Generation

```
You are a data science expert. Below, you
are provided with a database schema and a
natural language question. Your task is to
 understand the schema and generate a
valid SQL query to answer the question.

Database Engine:
{db_engine}

Database Schema:
{schema}
This schema describes the database's
structure, including tables, columns,
primary keys, foreign keys, and any
relevant relationships or constraints.

Question:
{question}

Instructions:
- Make sure you only output the
information that is asked in the question.
 If the question asks for a specific
column, make sure to only include that
column in the SELECT clause, nothing more.
- The generated query should return all of
 the information asked in the question
without any missing or extra information.
- Before generating the final SQL query,
please think through the steps of how to
write the query.
- Note that while the reasoning process
and SQL query need to be enclosed within <
answer> </answer> tag, this should not
affect the quality of the SQL generation.
- The answer must contain the SQL query
within ```sql ``` tags.


Output Format:
<answer>
-- Your reasoning process here
```sql
-- Your SQL query
```
</answer>

Take a deep breath and think step by step
to find the correct SQL query.
```

B Additional Experiment Settings

In this section, we provide detailed descriptions of the evaluation settings for the DLMs. Section B.1 provides the details of evaluation benchmarks. Section B.2 summarizes the key configuration parameters of the evaluated DLMs. Section B.3 provides the settings of the LLM baselines. Section B.4 provides the implementation details of the evaluation settings.

B.1 Detailed Benchmark Settings

Our evaluation spans six prominent NL2SQL benchmarks to provide a multi-dimensional assessment of DLM capabilities. **Spider** serves as the primary cross-domain benchmark, comprising 10,181 questions and 5,693 unique SQL queries across 200 databases; we evaluate on its Dev and Test sets. **BIRD** introduces large-scale, real-world challenges with 12,751 NL2SQL pairs across 95 databases from 37 domains, emphasizing database-grounded reasoning and execution efficiency. To further investigate model robustness, we incorporate three specialized variants of Spider: **Spider-DK** (535 questions, 10 databases) evaluates the integration of domain-specific knowledge, **Spider-Syn** (1,034 questions, 20 databases) tests resilience against linguistic variations through synonym substitution, and **Spider-Realistic** (508 questions, 20 databases) provides a more challenging setting by removing explicit schema mentions from natural language questions. Together, these benchmarks characterize the performance of DLMs across varying levels of structural complexity, linguistic diversity, and domain-specific requirements.

Regarding the licensing and usage of these benchmarks, we strictly adhere to the protocols defined by the original authors. The **Spider** dataset and its robustness variants, including **Spider-DK**, **Spider-Syn**, and **Spider-Realistic**, are distributed under the Creative Commons Attribution-ShareAlike 4.0 International (CC BY-SA 4.0) license. The **BIRD** benchmark is released under the Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International (CC BY-NC-SA 4.0) license. All datasets are utilized exclusively for academic research purposes with appropriate attribution to the respective creators.

B.2 Description of DLMs

The core architectural configurations and inference frameworks for the evaluated DLMs are consolidated in Table 6. To further elucidate the technical foundations of these models, we provide a detailed characterization of the structural nuances and generation dynamics for each model family as follows:

LLaDA Series. We organize the evaluated LLaDA models into two product lines that share masked denoising diffusion and parallel token refinement at inference, but correspond to different model generations. The first line comprises **LLaDA-8B** (Nie et al., 2025b) and **LLaDA-1.5-**

Model	Params	Diffusion Paradigm	Inference Framework
Dream-7B	7B	Discrete mask diffusion	`dLLM`
DreamCoder-7B	7B	Discrete mask diffusion	`dLLM`
DiffuCoder-7B	7B	Block diffusion	`dLLM`
LLaDA-8B	8B	Masked denoising diffusion	`dLLM`
LLaDA-1.5-8B	8B	Masked denoising diffusion	`dLLM`
LLaDA2.0-mini	16B (MoE)	Masked denoising diffusion	`dinfer/dFactory`
LLaDA2.1-mini	16B (MoE)	Masked denoising diffusion	`dinfer/dFactory`
WeDLM-7B	7B	Discrete diffusion	`WeDLM`
WeDLM-8B	8B	Discrete diffusion	`WeDLM`

Table 6: Diffusion Language Models used in this work and their key configuration parameters.

8B (Zhu et al., 2025), both at 8B scale, which form the earlier LLaDA family used in our study. The second line comprises **LLaDA2.0-mini** (Bie et al., 2025) and **LLaDA2.1-mini** (Bie et al., 2026), which constitute the LLaDA 2.x series. These models adopt a Mixture-of-Experts (MoE) architecture with 16B total parameters and approximately 1.4B active parameters per token, representing a significant update in scaling and efficiency relative to the earlier 8B checkpoints. Across both lines, decoding proceeds through iterative denoising over the full sequence rather than strict left-to-right autoregression, which supports global consistency and is well suited to structured generation tasks such as NL2SQL. The earlier LLaDA checkpoints are supported by the `dLLM` framework, whereas the LLaDA 2.x series is deployed using the `dinfer` and `dFactory` engines.

Dream and DreamCoder Series. Dream-7B (Ye et al., 2025) and DreamCoder-7B (Xie et al., 2025b) employ a discrete mask diffusion approach. These models treat text generation as a refinement process where tokens are progressively unmasked and denoised. This paradigm is well-suited for long-range dependency modeling and iterative structural improvement in SQL queries. Both models in this series are integrated into the `dLLM` inference framework to support efficient iterative refinement.

WeDLM Series. The WeDLM family (7B and 8B) (Liu et al., 2025) utilizes a discrete diffusion framework with a specialized hybrid decoding strategy. These models combine iterative denoising with a reranking mechanism to ensure that the final output is both semantically accurate and syntactically valid. WeDLM serves as the primary backbone for our `SQL-D1` agentic framework. The inference for the WeDLM series is powered by the dedicated `WeDLM` framework.

DiffuCoder. DiffuCoder-7B represents the block diffusion paradigm, where text is refined in contiguous blocks rather than individual tokens. This approach aims to capture local structural constraints more effectively, which is beneficial for the rigid syntax of database queries. DiffuCoder-7B is executed within the `dLLM` framework, leveraging its support for block-based sequence refinement.

B.3 Description of AR Baselines

To provide a comprehensive performance benchmark for DLMs, we include a diverse set of AR baselines from previous works (Li et al., 2025a; Ma et al., 2025a). These include leading proprietary models such as **GPT-4-Turbo** and **GPT-4o** (OpenAI, 2023), as well as representative open-source models across different scales and specializations, including **Qwen2.5** series (7B and 14B) (Hui et al., 2024), **Qwen2.5-Coder** (Hui et al., 2024), **DeepSeek-Coder-6.7B** (DSC) (Guo et al., 2024), **Qwen3-8B-Thinking** (Yang et al., 2025) to characterize the performance gap between current DLMs and the most advanced sequential generation paradigms in the NL2SQL domain. All AR baselines are evaluated with the same retrieval-augmented context and, where applicable, the same verification and selection budgets as the corresponding DLM runs, as specified in Table 2.

B.4 Implementation Details

In our experimental setup, we calibrate the inference parameters for each DLM family by building upon the official configurations provided by the respective authors. To enhance the robustness of

	Spider (Dev)	Spider (Test)	BIRD (Dev)	Spider-DK	Spider-Syn	Spider-Realistic
Dream-7B	52.5	52.1	18.8	42.4	52.4	48.0
- w/ DB Retrieval	54.2	53.2	19.4	45.4	53.9	51.2
DreamCoder-7B	52.1	50.2	27.9	31.6	38.7	29.3
- w/ DB Retrieval	54.2	52.5	29.9	36.1	43.7	39.2
DiffuCoder-7B	62.3	62.6	36.2	54.6	63.2	54.5
- w/ DB Retrieval	66.0	63.7	37.8	56.8	65.4	63.2
LLaDA-8B	60.1	59.9	33.2	53.6	60.1	53.0
- w/ DB Retrieval	60.6	61.9	33.6	55.3	61.4	58.9
LLaDA-1.5-8B	60.8	60.3	33.3	48.7	61.1	52.4
- w/ DB Retrieval	61.1	62.7	33.8	52.0	62.1	58.1
LLaDA2.0-mini	73.0	75.9	54.2	60.0	73.1	65.5
- w/ DB Retrieval	74.8	78.1	55.5	67.7	75.4	74.6
LLaDA2.1-mini	72.0	74.8	54.4	61.1	74.0	69.1
- w/ DB Retrieval	74.6	78.6	58.7	67.5	76.3	72.2

Table 7: Ablation study of database content retrieval on main NL2SQL benchmarks.

structured reasoning, these baseline settings are further refined to accommodate the specific demands of the NL2SQL task. A uniform sampling temperature of 0.8 is applied to all models to enable multi-path exploratory reasoning, thereby facilitating the generation of a diverse candidate pool.

Majority voting and pass@k are computed from execution denotations. Non-executable candidates are excluded from voting. If multiple denotation groups share the highest frequency, we select the shortest SQL as a deterministic tie-breaker. Database retrieval is restricted to the current database; for each schema field we inject exactly one offline representative example value together with schema metadata. The same retrieval setting is used for DLM and AR models in the main comparison.

Regarding the training configuration for the WeDLM series, we perform supervised fine-tuning (SFT) on the BIRD training set. The model is trained for 5 epochs with a peak learning rate of 3.0×10^{-6}, utilizing a cosine decay schedule and a 5% warmup phase. Architectural hyperparameters include a block size of 32. For the LLaDA2 series, our training protocol adheres to the official configurations established within the `dFactory` framework (inclusionAI, 2026), which includes block-diffusion fine-tuning and specialized Mixture-of-Experts (MoE) optimization strategies. All experiments are conducted using `bf16` mixed precision to ensure numerical stability.

To facilitate inference, each NL2SQL data sample is transformed into a structured pair of input and output sequences. The input sequence integrates natural language questions with their corresponding database schemas represented in the Data Definition Language (DDL) format. Following established practices (Talaei et al., 2024; Li et al., 2025a; Yang et al., 2024; Rajkumar et al., 2022), this DDL schema is augmented with supplementary annotations, including column attribute descriptions and representative database values. Representative value annotations are included at inference.

C Additional Results and Analysis

In this section, we provide additional results and analyses of DLM-based NL2SQL systems. Section C.1 compares DLM and AR models under budget-matched test-time scaling. Section C.2 evaluates `SQL-D1` on an AR backbone. Section C.3 examines the impact of database content retrieval. Section C.4 compares inference efficiency and execution accuracy with AR baselines. Section C.5 analyzes the impact of diffusion rendering parameters.

C.1 Budget-Matched Test-time Scaling

Table 8 compares LLaDA2.1-mini and Qwen2.5-Coder-7B under the same prompt, retrieval context, candidate budget, and execution-based voting rule, with $k{=}1$ as greedy decoding. Under this matched setting, LLaDA2.1-mini shows a steeper Maj@k gain than Qwen2.5-Coder-7B ($+8.8$ / $+9.9$ versus $+5.6$ / $+7.3$ at $k{=}4$ / 8). The same trend appears in Table 2: on Spider-Test, LLaDA2.1-mini improves from 71.4 to 78.6 ($+7.2$), while Qwen2.5-Coder-7B improves from 82.2 to 85.6 ($+3.4$). Relative to greedy decoding, LLaDA2.1-mini also obtains a larger coverage lift to pass@8 (48.8 to 67.1, $+18.3$) than Qwen2.5-Coder-7B (50.9 to 66.1, $+15.2$). WeDLM-8B behaves differently: its Maj@8 gain is small ($+1.6$), while the pass@8$-$Maj@8 gap is the largest among the three models (10.6 versus 7.9 for Qwen2.5-Coder-7B and 8.3 for LLaDA2.1-mini), suggesting remaining headroom for better selection under high-variance diffusion generation.

C.2 `SQL-D1` on an AR Backbone

Table 9 reports a matched `SQL-D1` ablation on BIRD-Dev for WeDLM-7B, WeDLM-8B, and Qwen2.5-7B under the same module definitions. The greedy baseline in this table excludes retrieval, matching the first row of Table 4; greedy scores in Table 2 include retrieval and correspond to the Retriever row. `SQL-D1` improves both backbones: the full-pipeline gain is $+8.8$ for WeDLM-8B and $+8.7$ for Qwen2.5-7B, and WeDLM-8B attains a slightly higher full-pipeline EX (54.9 vs. 53.2). The larger single-pass variance of diffusion generation continues to benefit from retrieval, verification, and selection, as further reflected by the scaling gaps in Appendix C.1.

C.3 Impact of Database Content Retrieval

Table 7 provides a comprehensive ablation analysis investigating the influence of database content retrieval across diverse DLM architectures and benchmarks. The empirical evidence demonstrates that the integration of database content retrieval consistently enhances performance across all evaluated models, highlighting the importance of grounded contextual information for diffusion-based NL2SQL reasoning. Notably, the LLaDA2 series shows substantial improvements, with LLaDA2.1-mini exhibiting an execution accuracy gain of 3.8% on Spider-Test and 4.3% on BIRD-Dev. Furthermore, the Dream and Diffu-Coder series exhibit a robust response to the inclusion of database literals, particularly on more complex benchmarks such as Spider-Realistic. These observations suggest that explicit database content effectively alleviates the schema linking difficulties inherent in the non-autoregressive generation process, thereby facilitating a more precise alignment between natural language queries and the underlying database distributions.

C.4 Efficiency vs. AR Baselines

Table 10 provides a comparative analysis of inference efficiency, computational cost, and execution accuracy between DLMs and representative autoregressive baselines on the BIRD-Dev dataset. The results demonstrate that DLMs have achieved significant potential in the NL2SQL task, with the WeDLM series exhibiting exceptional efficiency profiles. Specifically, WeDLM-8B achieves a latency of 0.18 seconds, substantially lower than the 0.28 seconds of Qwen2.5-7B, while using a comparable token budget (2.2K vs. 2.1K) and maintaining a competitive execution accuracy of 53.0%. Furthermore, LLaDA2.1-mini reaches the best EX among the evaluated DLMs (58.7%), surpassing the reasoning-enhanced Qwen3-8B-Thinking (51.8%) and performing on par with Qwen2.5-Coder-7B (58.2%). These findings highlight that the WeDLM architecture, by leveraging inference infrastructure partially compatible with traditional LLMs, successfully bridges the gap between high-speed non-autoregressive generation and the precision required for complex database reasoning. The versatile trade-offs offered by these diffusion architectures provide a compelling alternative to sequential generation paradigms in real-time application scenarios.

C.5 Impact of Diffusion Rendering Parameters

Figure 6 investigates how inference-time diffusion rendering hyperparameters shape the coupling between execution accuracy and inference efficiency on BIRD-Dev. Rendering governs the amount of context exposed and processed at each denoising step: an overly narrow rendering budget may leave relevant schema and question context underspecified, whereas an excessively wide budget expands the rendered span and materially increases per-query computation. Across the two strongest DLM families in our study, this tension manifests in distinct but consistent patterns.

Model	Gre	Maj@4	Maj@8	Δ Maj@8	pass@8	pass@8−Maj@8
LLaDA2.1-mini	48.8	57.6	58.7	+9.9	67.1	8.3
Qwen2.5-Coder-7B	50.9	56.5	58.2	+7.3	66.1	7.9
WeDLM-8B	51.4	–	53.0	+1.6	63.6	10.6

Table 8: Budget-matched test-time scaling on BIRD-Dev (EX %). All models use the same prompt, retrieval context, and execution-based majority voting. k=1 corresponds to greedy decoding. Δ Maj@8 is the gain relative to greedy. Maj@4 is not reported for WeDLM-8B.

Setting	WeDLM-7B	WeDLM-8B	Qwen2.5-7B
Greedy baseline	38.4	46.1	44.5
+ Retriever A_r / DB Retrieval	39.7	51.4	46.9
+ Verifier (A_r + A_g + A_v)	44.1	53.8	51.5
+ Selector (A_r + A_g + A_s)	44.6	54.5	52.4
+ SQL-D1 (A_r + A_g + A_v + A_s)	**45.0**	**54.9**	**53.2**
Delta (full SQL-D1 minus Greedy)	+6.6	+8.8	+8.7

Table 9: SQL-D1 ablation on BIRD-Dev (EX %) under matched module definitions for DLM and AR backbones. The greedy baseline excludes retrieval, consistent with the first row of Table 4. Greedy scores in Table 2 include retrieval and correspond to the Retriever row. Delta is full SQL-D1 minus the greedy baseline.

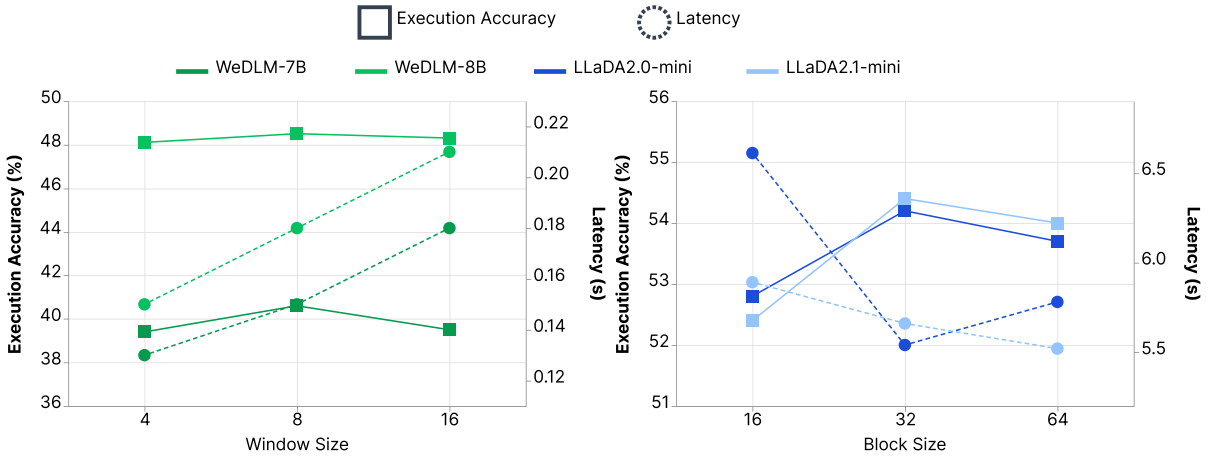

Figure 6: Impact of diffusion rendering hyperparameters on execution accuracy and inference latency on BIRD-Dev (**left**: window size for WeDLM; **right**: block size for LLaDA2). Solid lines with square markers denote execution accuracy (left axis); dashed lines with circle markers denote latency (right axis).

Models	Latency (s)	Token (K)	EX (%)
Autoregressive Language Models			
Qwen2.5-7B	0.28	2.1	56.4
Qwen2.5-Coder-7B	0.31	2.5	58.2
Qwen3-8B-Thinking	1.02	5.6	51.8
Diffusion Language Models			
WeDLM-7B	0.14	1.7	43.6
WeDLM-8B	0.18	2.2	53.0
LLaDA2.0-mini	5.54	3.6	55.5
LLaDA2.1-mini	5.66	3.9	58.7

Table 10: Efficiency and execution accuracy trade-offs of DLMs on BIRD-Dev datasets.

For the WeDLM series (**left**), we sweep the context window size from 4 to 16. Execution accuracy is comparatively insensitive to this range for WeDLM-8B, which remains between 48.1% and 48.5%, yet WeDLM-7B improves from 39.4% at window size 4 to a peak of 40.6% at window size 8 before reverting to 39.5% at window size 16, indicating that a moderately expanded window is beneficial whereas further expansion yields no additional gain. By contrast, inference latency increases monotonically with window size for both models, from 0.13 s to 0.18 s on WeDLM-7B and from 0.15 s to 0.21 s on WeDLM-8B, confirming that richer rendering primarily purchases latency rather than accuracy once the window is sufficiently large. For the LLaDA2 series (**right**),

Category	Error Type	Description
Table	Table Mismatch	Selection of incorrect tables from the database schema.
	Table Missing	Omission of essential tables required for the query.
Value	Value Mismatch	Incorrect extraction, formatting, or alignment of database literals (e.g., strings, dates) with the natural language evidence.
Condition	Attribute Error	Selection of incorrect columns within `WHERE` or `HAVING` clauses.
	Operator Error	Use of incorrect logical (e.g., `AND` vs. `OR`) or comparison operators (e.g., > vs. <).
Function	Aggregation Error	Incorrect application, omission, or selection of aggregate functions such as `SUM`, `AVG`, or `COUNT`.
Others	Clause Missing	Absence of critical structural components such as `GROUP BY`, `ORDER BY`, or `LIMIT`.
	Structural Error	Incorrect formulation of complex nested queries and subqueries.

Table 11: Taxonomy of errors exhibited by DLMs in NL2SQL tasks, categorized into five primary failure modes.

block size exerts a stronger influence on accuracy. Both LLaDA2.0-mini and LLaDA2.1-mini attain their highest execution accuracy at block size 32 (54.2% and 54.4%, respectively), improving over the smaller block setting at 16 (52.8% and 52.4%) while exhibiting slight degradation at block size 64 (53.7% and 54.0%). Latency responses differ across variants: LLaDA2.0-mini is slowest at block size 16 (6.61 s) and fastest at block size 32 (5.54 s), whereas LLaDA2.1-mini shows a steady reduction in latency as block size grows, from 5.89 s at 16 to 5.52 s at 64. Together, these curves suggest that insufficient rendering can suppress accuracy, while additional rendering beyond an architecture-dependent sweet spot chiefly inflates inference time with diminishing returns on execution accuracy.

D Error Case Study

Building upon the fine-grained failure-mode analysis in Section 3 and the distributional summary in Figure 5, this section supplements aggregate error statistics with interpretable, question-level post-mortems of DLM-generated SQL. The exposition adheres to the established five-category taxonomy detailed in Table 11, which provides a structured classification of failure modes spanning schema grounding, semantic alignment, and structural integrity. This framework foregrounds prototypical errors through a side-by-side presentation of model outputs, succinct diagnostic commentary, and corrected formulations when such contrasts clarify the intended query semantics.

D.1 Table Error

Case 1: Table Mismatch Error

Question. How many negative comments did Neil McGuigan get in his posts?

Predicted SQL.

```
SELECT COUNT(*)
FROM comments c
JOIN users u ON c.UserId = u.Id
WHERE c.Score < 60
AND u.DisplayName = 'Neil McGuigan'
```

Issue. *The query counts comments made by Neil McGuigan, but the NL query asks for negative comments on his posts. The join should be on PostId to posts, not on UserId to users. This is a Table Mismatch error because the wrong table is joined (users instead of posts). This is a* ***Table*** *error.*

Corrected SQL.

```
SELECT COUNT(T3.Id)
FROM users AS T1
INNER JOIN posts AS T2
        ON T1.Id = T2.OwnerUserId
INNER JOIN comments AS T3
        ON T2.Id = T3.PostId
WHERE T1.DisplayName = 'Neil McGuigan'
       AND T3.Score < 60
```

D.2 Value Error

Case 2: Value Mismatch Error

Question. Give the names of the schools with the percent eligible for free meals in K-12 is more than 0.1 and test takers whose test score is greater than or equal to 1500?

Predicted SQL.

```
SELECT s.sname
FROM frpm f JOIN satscores s ON
     f.CDSCode = s.cds
WHERE f.
      `Percent (%) Eligible Free (K-12)`
       > 0.1
AND s.NumGE1500 >= 1500 ✗
```

Issue. *The query uses 's.NumGE1500 >= 1500' to filter schools with test scores >= 1500, but 'NumGE1500' is the count of students scoring >= 1500, not the test score itself. The correct condition should involve the average scores or a derived condition. This is a value mismatch error because the value used in the condition is incorrect.*

Corrected SQL.

```
SELECT T2.`School Name`
FROM satscores AS T1
INNER JOIN frpm AS T2 ON
           T1.cds = T2.CDSCode
WHERE CAST(T2.`Free Meal Count (K-12)`
      AS REAL)
         / T2.`Enrollment (K-12)`
         > 0.1
AND T1.NumGE1500 > 0
```

D.3 Condition Error

Case 3: Attribute Mismatch Error

Question. Which active district has the highest average score in Reading?

Predicted SQL.

```
SELECT s.District ✗
FROM satscores s
JOIN schools sch ON s.cds = sch.CDSCode
WHERE sch.StatusType = 'Active'
GROUP BY s.District ✗
ORDER BY AVG(s.AvgScrRead) DESC
LIMIT 1
```

Issue. *The query uses s.District in the* `SELECT` *and* `GROUP BY` *clauses, but the satscores table does not have a 'District' column; it has 'dname' for district name. This is an attribute mismatch error, which is a* ***Condition*** *error.*

Corrected SQL.

```
SELECT T1.District ✓
FROM schools AS T1 ✓
INNER JOIN satscores AS T2 ON
           T1.CDSCode = T2.cds
WHERE T1.StatusType = 'Active'
ORDER BY T2.AvgScrRead DESC
LIMIT 1
```

Case 4: Explicit Condition Missing

Question. In which country was the first European Grand Prix hosted? Name the circuit and location.

Predicted SQL.

```
SELECT c.country, c.name, c.location
FROM races r JOIN circuits c
     ON r.circuitId = c.circuitId
WHERE r.year = (
      SELECT MIN(year)
      FROM races)
```

Issue. *The query correctly identifies the first European Grand Prix by using MIN(year) but fails to filter for races named 'European Grand Prix'. The condition r.year = (SELECT MIN(year) FROM races) selects the earliest race overall, not specifically the first European Grand Prix. This is an Explicit Condition Missing error because the required condition to filter by race name is missing.*

Corrected SQL.

```
SELECT T1.country, T1.location
FROM circuits AS T1
INNER JOIN races AS T2
      ON T2.circuitID = T1.circuitId
WHERE T2.name = 'European Grand Prix' ✓
ORDER BY T2.year ASC
LIMIT 1
```

D.4 Function Error

Case 5: Function Error

Question. What is the average fastest lap time of Lewis Hamilton?

Predicted SQL.

```
SELECT AVG(
   STRFTIME('%s', r.fastestLapTime))
   AS average_fastest_lap_time_seconds
FROM results r
JOIN drivers d
    ON r.driverId = d.driverId
WHERE d.forename = 'Lewis'
    AND d.surname = 'Hamilton'
```

Issue. *The SQL query uses STRFTIME('%s', r.fastestLapTime) to convert the fastest lap time to seconds, but the evidence states the time is recorded in 'MM:SS.mmm' format. STRFTIME('%s') expects a time in 'HH:MM:SS' format and will return NULL or incorrect results for 'MM:SS.mmm'. The correct approach would be to parse the minutes and seconds separately, e.g., using SUBSTR and CAST. This is a Date/Time Function error.*

Corrected SQL.

```
SELECT AVG(
  CAST(SUBSTR( ✓
    T2.fastestLapTime, 1,
   INSTR(T2.fastestLapTime, ':') - 1)
    AS INTEGER) * 60 +
  CAST(SUBSTR( ✓
    T2.fastestLapTime,
   INSTR(T2.fastestLapTime, ':') + 1)
    AS REAL))
FROM drivers AS T1
INNER JOIN results AS T2
ON T1.driverId = T2.driverId
WHERE T1.surname = 'Hamilton'
  AND T1.forename = 'Lewis'
```