```
C:\cmder
λ cd C:\Users\programista\Desktop\4Ct\JakubMoliński\projektowanieoprogramowania-4ct\28.01.2026

C:\Users\programista\Desktop\4Ct\JakubMoliński\projektowanieoprogramowania-4ct\28.01.2026 (main -> origin)
λ ng new projekt2 --standalone=false
✔ Which stylesheet system would you like to use? CSS              [ https://developer.mozilla.org/docs/Web/CSS
✔ Do you want to enable Server-Side Rendering (SSR) and Static Site Generation (SSG/Prerendering)? No
✔ Which AI tools do you want to configure with Angular best practices? https://angular.dev/ai/develop-with-ai None
CREATE projekt2/angular.json (2245 bytes)
CREATE projekt2/package.json (955 bytes)
CREATE projekt2/README.md (1520 bytes)
CREATE projekt2/tsconfig.json (990 bytes)
CREATE projekt2/.editorconfig (331 bytes)
CREATE projekt2/.gitignore (666 bytes)
CREATE projekt2/tsconfig.app.json (444 bytes)
CREATE projekt2/tsconfig.spec.json (451 bytes)
CREATE projekt2/.vscode/extensions.json (134 bytes)
CREATE projekt2/.vscode/launch.json (490 bytes)
CREATE projekt2/.vscode/mcp.json (188 bytes)
CREATE projekt2/.vscode/tasks.json (1020 bytes)
CREATE projekt2/src/main.ts (205 bytes)
CREATE projekt2/src/index.html (307 bytes)
CREATE projekt2/src/styles.css (81 bytes)
CREATE projekt2/src/app/app-routing-module.ts (255 bytes)
CREATE projekt2/src/app/app-module.ts (457 bytes)
CREATE projekt2/src/app/app.spec.ts (832 bytes)
CREATE projekt2/src/app/app.ts (247 bytes)
CREATE projekt2/src/app/app.css (0 bytes)
CREATE projekt2/src/app/app.html (20446 bytes)
CREATE projekt2/public/favicon.ico (15086 bytes)
✔ Packages installed successfully.
    Directory is already under version control. Skipping initialization of git.

C:\Users\programista\Desktop\4Ct\JakubMoliński\projektowanieoprogramowania-4ct\28.01.2026 (main -> origin)
λ cd projekt2

C:\Users\programista\Desktop\4Ct\JakubMoliński\projektowanieoprogramowania-4ct\28.01.2026\projekt2 (main -> origin)
λ ng g c components/poletrojkata
CREATE src/app/components/poletrojkata/poletrojkata.spec.ts (601 bytes)
CREATE src/app/components/poletrojkata/poletrojkata.ts (227 bytes)
CREATE src/app/components/poletrojkata/poletrojkata.css (0 bytes)
CREATE src/app/components/poletrojkata/poletrojkata.html (28 bytes)
UPDATE src/app/app-module.ts (548 bytes)

C:\Users\programista\Desktop\4Ct\JakubMoliński\projektowanieoprogramowania-4ct\28.01.2026\projekt2 (main -> origin)
λ ng g c components/polerombu
CREATE src/app/components/polerombu/polerombu.spec.ts (580 bytes)
CREATE src/app/components/polerombu/polerombu.ts (215 bytes)
CREATE src/app/components/polerombu/polerombu.css (0 bytes)
CREATE src/app/components/polerombu/polerombu.html (25 bytes)
UPDATE src/app/app-module.ts (627 bytes)

C:\Users\programista\Desktop\4Ct\JakubMoliński\projektowanieoprogramowania-4ct\28.01.2026\projekt2 (main -> origin)
λ ng g c components/poletrapeza
CREATE src/app/components/poletrapeza/poletrapeza.spec.ts (594 bytes)
CREATE src/app/components/poletrapeza/poletrapeza.ts (223 bytes)
CREATE src/app/components/poletrapeza/poletrapeza.css (0 bytes)
CREATE src/app/components/poletrapeza/poletrapeza.html (27 bytes)
UPDATE src/app/app-module.ts (714 bytes)

C:\Users\programista\Desktop\4Ct\JakubMoliński\projektowanieoprogramowania-4ct\28.01.2026\projekt2 (main -> origin)
λ ng g c components/poleprostowaka
CREATE src/app/components/poleprostowaka/poleprostowaka.spec.ts (615 bytes)
CREATE src/app/components/poleprostowaka/poleprostowaka.ts (235 bytes)
CREATE src/app/components/poleprostowaka/poleprostowaka.css (0 bytes)
CREATE src/app/components/poleprostowaka/poleprostowaka.html (30 bytes)
UPDATE src/app/app-module.ts (813 bytes)

C:\Users\programista\Desktop\4Ct\JakubMoliński\projektowanieoprogramowania-4ct\28.01.2026\projekt2 (main -> origin)
λ code .
```

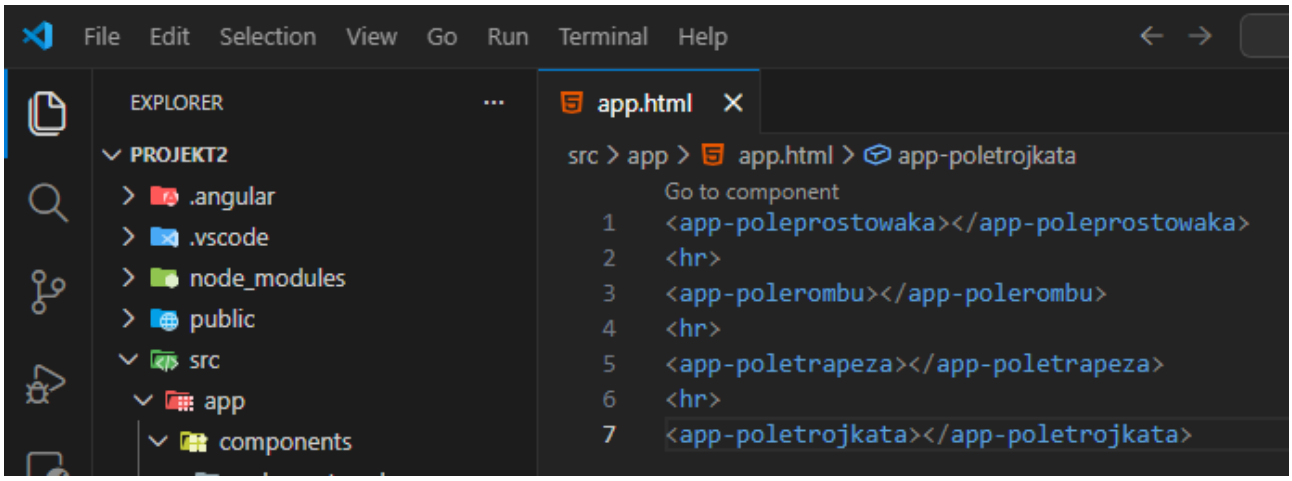

File Edit Selection View Go Run Terminal Help projekt2

EXPLORER

PROJEKT2
- .angular
- .vscode
- node_modules
- public
- src
  - app
    - components
      - poleprostowaka
        - poleprostowaka.css
        - poleprostowaka.html
        - poleprostowaka.spec.ts
        - poleprostowaka.ts
      - polerombu
        - polerombu.css
        - polerombu.html

app.html | poleprostowaka.css

src > app > components > poleprostowaka > poleprostowaka.css > .Pola

```
.Pola{
    width: 500px;
    margin-top: 15px;
    margin-left: auto;
    margin-right: auto;
    border: 1px solid green;
    border-radius: 20px;
    text-align: center;
    padding: 15px;

}
.wynik{
font-family: 'Lucida Sans', 'Lucida Sans Regular', 'Lucida Grande', 'Lucida Sans Unicode', Geneva, Verdana, sans-serif;
    color: red;
    font-size: 20pt;
}
```

File Edit Selection View Go Run Terminal Help projekt2

EXPLORER

PROJEKT2
- .angular
- .vscode
- node_modules
- public
- src
  - app
    - components
      - poleprostowaka
        - poleprostowaka.css
        - poleprostowaka.html
        - poleprostowaka.spec.ts
        - poleprostowaka.ts

app.html | poleprostowaka.html

src > app > components > poleprostowaka > poleprostowaka.html > div.Pola > h3

Go to component

```
<div class="Pola">
    <h3>{{title}}</h3>
    <input type="number" #liczba1 placeholder="podaj a">
    <input type="number" #liczba2 placeholder="podaj b">
    <button (click)="Pole(+liczba1.value, +liczba2.value)" >Oblicz Pole</button>
    <p class="wynik">{{Pole(+liczba1.value, +liczba2.value)}}</p>
</div>
```

File Edit Selection View Go Run Terminal Help

EXPLORER

PROJEKT2
- .angular
- .vscode
- node_modules
- public
- src
  - app
    - components
      - poleprostowaka
        - poleprostowaka.css
        - poleprostowaka.html
        - poleprostowaka.spec.ts
        - poleprostowaka.ts
      - polerombu
        - polerombu.css

app.html | poleprostowaka.ts

src > app > components > poleprostowaka > poleprostowaka.ts > Poleprostowaka > Pole

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-poleprostowaka',
  standalone: false,
  templateUrl: './poleprostowaka.html',
  styleUrl: './poleprostowaka.css',
})
export class Poleprostowaka {
title: string = 'Pole Prostokata'

Pole(a: number, b:number):number{
  return a * b;
}
}
```

File Edit Selection View Go Run Terminal Help

EXPLORER

PROJEKT2
- .angular
- .vscode
- node_modules
- public
- src
  - app
    - components
      - poleprostowaka
      - polerombu
        - polerombu.css
        - polerombu.html
        - polerombu.spec.ts

app.html | polerombu.html

src > app > components > polerombu > polerombu.html > div.Pola

Go to component

```
<div class="Pola">
    <h3>{{title}}</h3>
    <input type="number" #liczba1 placeholder="podaj a">
    <input type="number" #liczba2 placeholder="podaj h">
    <button (click)="Pole(+liczba1.value, +liczba2.value)" >Oblicz Pole</button>
    <p class="wynik">{{Pole(+liczba1.value, +liczba2.value)}}</p>
</div>
```

File Edit Selection View Go Run Terminal Help

EXPLORER

PROJEKT2
- .angular
- .vscode
- node_modules
- public
- src
  - app
    - components
      - poleprostowaka
      - polerombu
        - polerombu.css
        - polerombu.html
        - polerombu.spec.ts
        - polerombu.ts
      - poletrapeza

app.html | polerombu.ts

src > app > components > polerombu > polerombu.ts > Polerombu > Pole

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-polerombu',
  standalone: false,
  templateUrl: './polerombu.html',
  styleUrl: './polerombu.css',
})
export class Polerombu {
title: string = 'Pole Rombu'

Pole(a: number, h:number):number{
return a * h;
}
}
```

File Edit Selection View Go Run Terminal Help

EXPLORER

PROJEKT2
- .angular
- .vscode
- node_modules
- public
- src
  - app
    - components
      - poleprostowaka
      - polerombu
      - poletrapeza
        - poletrapeza.css
        - poletrapeza.html
        - poletrapeza.spec.ts

app.html | poletrapeza.html

src > app > components > poletrapeza > poletrapeza.html > ...

Go to component

```
<div class="Pola">
    <h3>{{title}}</h3>
    <input type="number" #liczba1 placeholder="podaj a">
    <input type="number" #liczba2 placeholder="podaj b">
    <input type="number" #liczba3 placeholder="podaj h">
    <button (click)="Pole(+liczba1.value, +liczba2.value, +liczba3.value)" >Oblicz Pole</button>
    <p class="wynik">{{Pole(+liczba1.value, +liczba2.value, +liczba3.value)}}</p>
</div>
```

File Edit Selection View Go Run Terminal Help

EXPLORER

PROJEKT2
- .angular
- .vscode
- node_modules
- public
- src
  - app
    - components
      - poleprostowaka
      - polerombu
      - poletrapeza
        - poletrapeza.css
        - poletrapeza.html
        - poletrapeza.spec.ts
        - poletrapeza.ts
      - poletrojkata

app.html | poletrapeza.ts

src > app > components > poletrapeza > poletrapeza.ts > ...

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-poletrapeza',
  standalone: false,
  templateUrl: './poletrapeza.html',
  styleUrl: './poletrapeza.css',
})
export class Poletrapeza {
title: string = 'Pole Trapeza'

Pole(a: number, b:number, h:number):number{
  return ((a + b) * h ) /2;
}
}
```

File Edit Selection View Go Run Terminal Help

EXPLORER

PROJEKT2
- .angular
- .vscode
- node_modules
- public
- src
  - app
    - components
      - poleprostowaka
      - polerombu
      - poletrapeza
      - poletrojkata
        - poletrojkata.css
        - poletrojkata.html
        - poletrojkata.spec.ts

app.html | poletrojkata.html

src > app > components > poletrojkata > poletrojkata.html > div.Pola

Go to component

```
<div class="Pola">
    <h3>{{title}}</h3>
    <input type="number" #liczba1 placeholder="podaj a">
    <input type="number" #liczba2 placeholder="podaj h">
    <button (click)="Pole(+liczba1.value, +liczba2.value)" >Oblicz Pole</button>
    <p class="wynik">{{Pole(+liczba1.value, +liczba2.value)}}</p>
</div>
```

File Edit Selection View Go Run Terminal Help

EXPLORER

PROJEKT2
- .angular
- .vscode
- node_modules
- public
- src
  - app
    - components
      - poleprostowaka
      - polerombu
      - poletrapeza
      - poletrojkata
        - poletrojkata.css
        - poletrojkata.html
        - poletrojkata.spec.ts
        - poletrojkata.ts
    - app-module.ts

app.html | poletrojkata.ts

src > app > components > poletrojkata > poletrojkata.ts > ...

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-poletrojkata',
  standalone: false,
  templateUrl: './poletrojkata.html',
  styleUrl: './poletrojkata.css',
})
export class Poletrojkata {
title: string = 'Pole Trojkata'

Pole(a: number, h:number):number{
  return a * h/2;
}
}
```

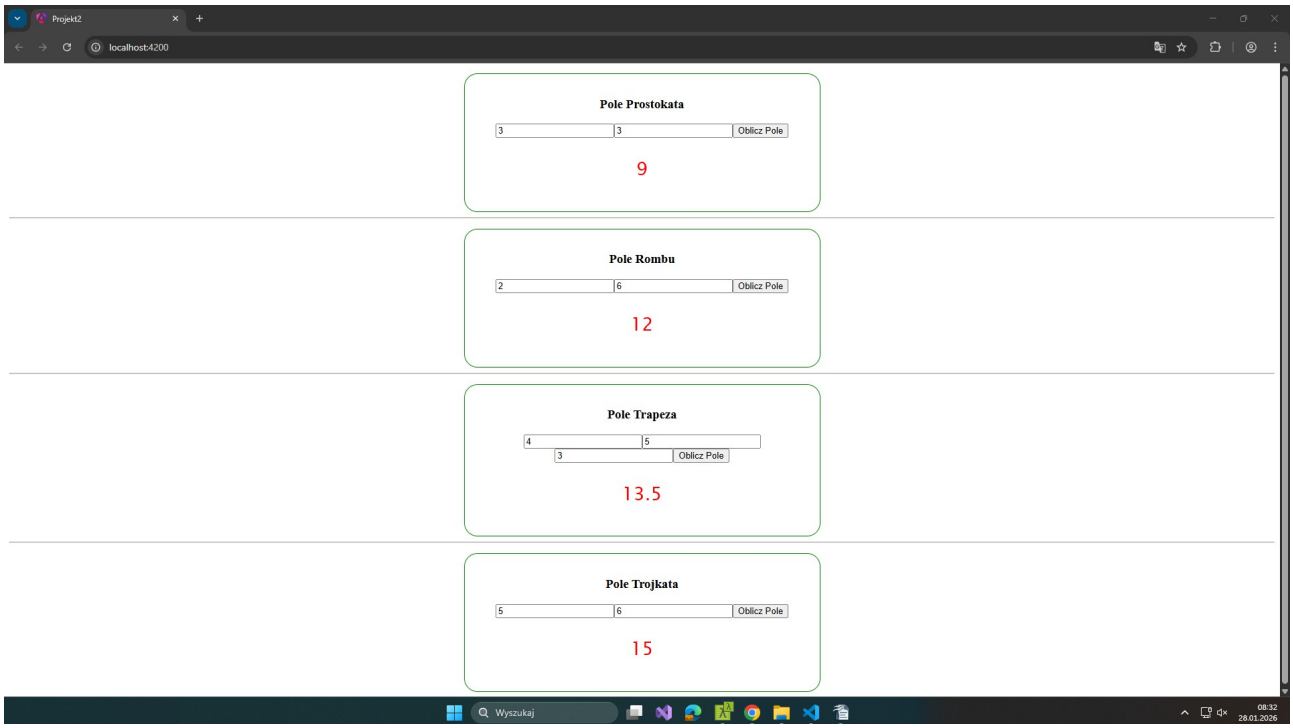
Projekt2
localhost:4200
Pole Prostokata
3
3
Oblicz Pole
9
Pole Rombu
2
6
Oblicz Pole
12
Pole Trapeza
4
5
3
Oblicz Pole
13.5
Pole Trojkata
5
6
Oblicz Pole
15
Wyszukaj
08:32
28.01.2026

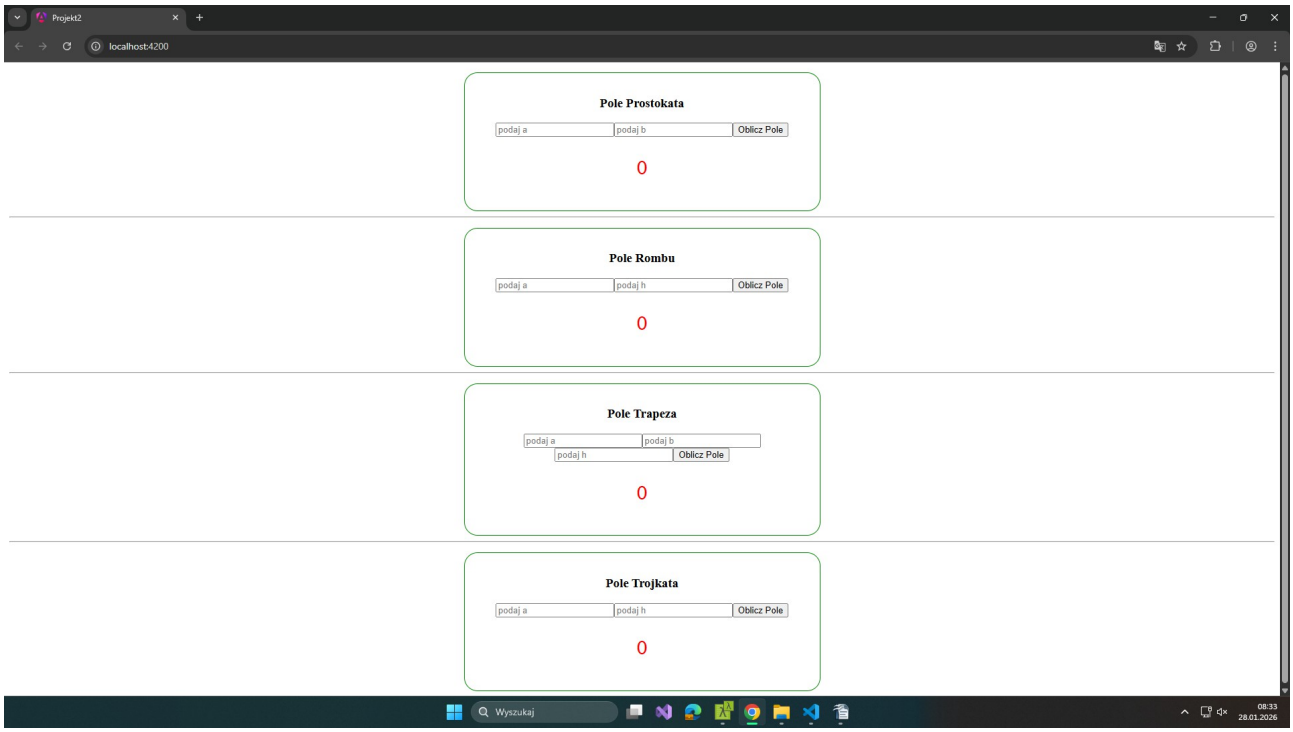
Projekt2
localhost:4200
Pole Prostokata
podaj a
podaj b
Oblicz Pole
0
Pole Rombu
podaj a
podaj h
Oblicz Pole
0
Pole Trapeza
podaj a
podaj b
podaj h
Oblicz Pole
0
Pole Trojkata
podaj a
podaj h
Oblicz Pole
0
Wyszukaj
08:33
28.01.2026