


Video VLMs should not pay for the same visual state twice

Same anti-recomputation family, different denominators and validation gates

1

STATELESS


recompute frames



pay again

STATEFUL


process changes

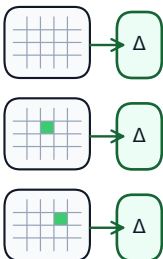

reuse state


2

Codecs already do this

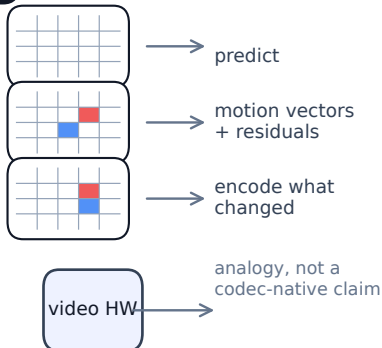

3


VLMs often throw state away

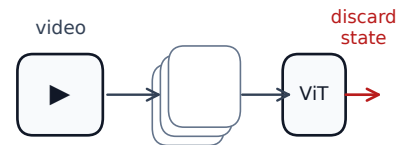

rediscover the same scene on the next query

4


C-PERSIST: ingest once

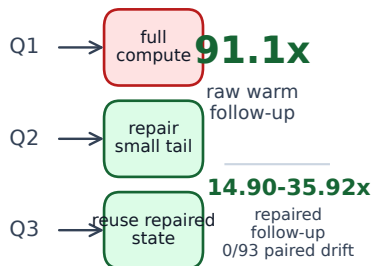

first query still pays the ingest cost

5

C-VISION: skip real vision work

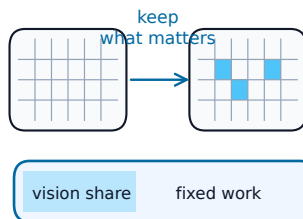

Gemma 32f short: 1.316x, 0/20 drift

Qwen boundary: 1.032x aggregate/format

C-CEILING: stage share caps E2E

6

Toward state-update streams

frames (pixels)



candidate C-STREAM checked mixed bundle

not a fourth headline yet