


# CS 349 Midterm Review

## Background & History

- **User interface:**


- The place where a person expresses intention to an artifact, and the artifact presents feedback to the person
- The way people (mental model) and technology (system model) interact
- Represented as MVC:

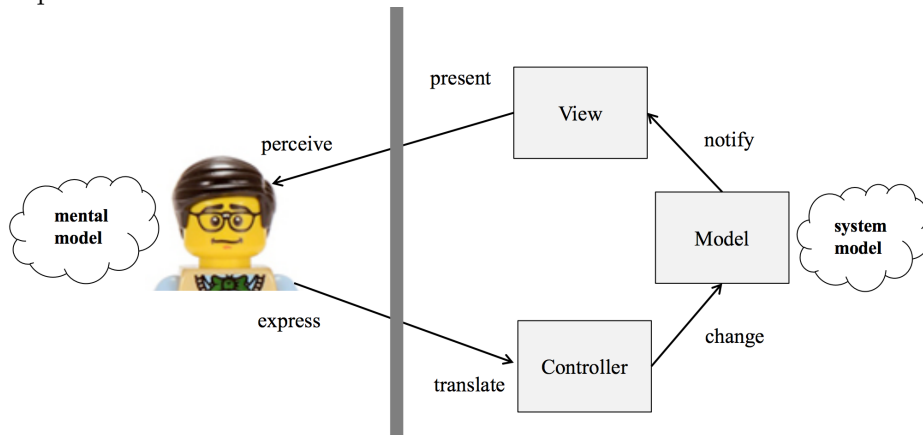


- **Interface:** external presentation (visual, physical, auditory) to the user
  - e.g. controls
- **Interaction:** actions invoked by user and corresponding responses (behaviour)
  - e.g. action and dialog
- Batch interfaces (1945-1965)
  - Sets of instructions fed via punch cards
  - Only used by highly trained individuals
- Conversationalist interface (1965-1985+)
  - Text-based feedback and input
  - I/O is in system language, not task language
  - Vannevar Bush – conceptualized the memex, a desk with integrated display, input, and data storage
  - Ivan Sutherland – created the Sketchpad, an early graphical interface with a light pen and direct manipulation
  - Douglas Engelbart – invented the mouse, introduced copy/paste
  - Alan Kay – worked on the Xerox Star, first commercial computer with GUI
- Graphic user interface (1984+)
  - Hardware interface: high resolution & refresh graphics display, keyboard, and pointing device
  - WIMP interface: windows, icons, menus, and pointer
  - Benefits of GUI:
    - Keeps the user in control
    - Emphasize recognition (discovery of options) over recall (memorizing commands)
    - Uses metaphor; makes interaction language closer to user's language

## Windowing Systems & X11

- **Windowing system:** provides input, output, and window management capabilities to the OS
- **X Windows (X11):**
  - Standard windowing system for Unix-based systems
- X11 architecture
  - **X Client** handles all application logic
  - **X Server** handles all user input & display output
  - There may be many clients – each client is an application; server draws all clients onto one screen and reads all input

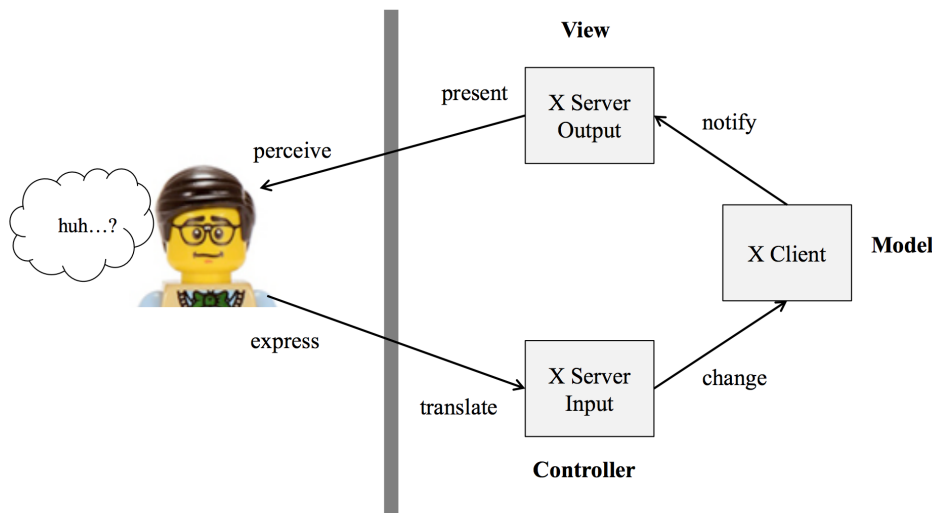


- Structure of an X program (application is run on the X client):
  - Perform client initialization
  - Connect to X server (e.g. `XOpenDisplay()`, `XCreateWindow()`)
  - Perform X related initialization (e.g. create graphic contexts with `XCreateGC()`; put window on the screen with `XMapRaised()`)
  - Event loop
    - Get next event from server (e.g. `XNextEvent()`)
    - Handle event (e.g. `XLookupKeysym()`)
    - Send draw request to server (e.g. flush output buffer with `XFlush()`)
  - Close down connection to X server (e.g. `XCloseDisplay()`)
  - Perform client cleanup
- X11 is a **base windowing system**:

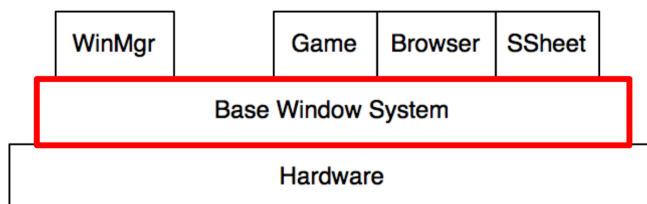

- A standard/protocol for creating windows, low-level graphical output, and user input

- Does not specify the style of each application's UI
- Provides each application with a window and manages its access
- Each application (only) owns a canvas; shielded from details such as visibility, other windows, etc.
- Some design goals of X11/BWS:
  - Supports multiple overlapping & resizable windows
  - A display may have multiple screens (e.g. monitors) and a window may span multiple screens
  - High-performance, high-quality text, 2D graphic & imaging
- **Window manager:**
  - Provides interactive components (e.g. menus, close button, resizing)
  - The WM owns each application's window itself (while application owns the canvas)
    - i.e. application developers usually cannot change the window style
  - Separation of the WM from the BWS enables many alternative “look and feels”

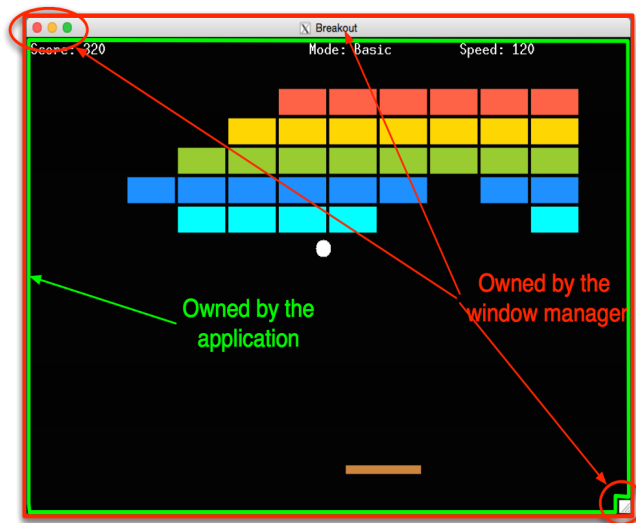

- **Drawing**
  - Three conceptual drawing models:
    - Pixel (e.g. images)
    - Stroke (e.g. lines, outlines of shapes)
    - Region (e.g. text, filled shapes)
  - X11 uses graphics contexts to store drawing options/parameters – stored on X server
  - **Clipping**: exposing only a particular region (specified by a mask) of an underlying image
  - Implementation in X11:
    - `XSetClipMask()`, `XSetClipRectangles()`
    - Only exposed area is repainted
  - **Painter's Algorithm**: draw shapes in layers from back to front to create composite shapes
  - Implementation in X11:
    - `Drawable` class with abstract `paint()` method
    - Implement `paint()` in each subclass


- Draw list of `Displayables` from back to front, clear screen on every repaint
- **Events & animation**
  - Objective: need to map input from real-world devices to actions within a system
  - **Event-driven programming:** flow of program is determined by events such as user input (key press, mouse click, input focus change) or sensor/timer events
  - Implementation in X11:
    - Use `XSelectInput()` and event masks (e.g. `KeyPressMask` etc.) to register for types of events
    - Use `XNextEvent()` to dequeue the next event; may block if no events
      - ◇ Use `XPending()` to check for # of events before dequeuing
    - Should dequeue *all events* before repainting to avoid input lag
    - Should subtract time spent in event loop from `sleep()` to maintain consistent FPS
    - Should draw all images to a *buffer* (`XCreatePixmap()`), then copy the buffer onto the screen in one go (`XCopyArea()`) (aka. double buffering)
      - ◇ Avoids displaying an intermediate image (i.e. flickering)

## Widgets & Events

- **Widgets:** parts of an interface that have their own behaviour
  - Control their own appearance; receive and handle their own events
  - Widgets toolkit defines a set of GUI components
  - Design goals:
    - Complete – covers wide range of functionality
    - Consistent – look-and-feel across components
    - Customizable – developers can extend functionality
  - Consistent behaviour of components helps users anticipate how the interface will react, and promotes easier *discoverability* of features

<b>Heavyweight widgets:</b> <ul style="list-style-type: none"><li>• Wrappers around OS's native GUI &amp; windowing system</li><li>• e.g. Java AWT</li></ul>	<b>Lightweight widgets:</b> <ul style="list-style-type: none"><li>• OS provides top-level window in which widgets are drawn</li><li>• Toolkit is responsible to passing events to widgets</li></ul>
Advantages: <ul style="list-style-type: none"><li>• Events passed directly to OS/BWS</li><li>• Preserves the OS look-and-feel</li></ul>	Advantages: <ul style="list-style-type: none"><li>• Consistent look-and-feel across platforms</li><li>• Consistent widget set across platforms</li><li>• Allows for highly optimized widgets</li></ul>
Disadvantages: <ul style="list-style-type: none"><li>• OS-specific programming</li><li>• Small set of common widgets across different platforms</li></ul>	Disadvantages: <ul style="list-style-type: none"><li>• May appear “non-native”</li></ul>

- Widgets as logical input devices
  - Characteristics:
    - Model manipulated by the widget (e.g. number, text)
    - Events generated by the widget (e.g. changed)
    - Properties (behaviour and appearance) of the widget (e.g. colour, size, allowed values)

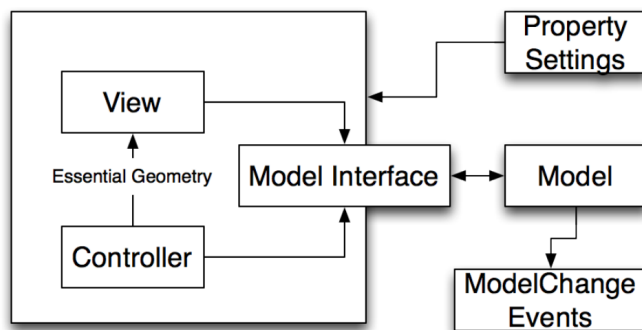

- Model is abstracted into an interface/abstract class for more code reuse and customizability
  - Interface may provide many accessors, mutators & event-firing functions to be implemented by the custom widgets, allowing for easy manipulation of custom data
- Essential geometry is computed by the view; controller interacts with it
  - Mapping mouse position/action to some behaviour or concept in the model

- e.g. mouse position → scrollbar region/position
- Examples of widgets and their characteristics:
  - e.g. button
    - ◊ Model = *none*; events = *push*; properties = *label, size, colour etc.*
  - e.g. radio button
    - ◊ Model = *Boolean*; events = *changed*; properties = *size, colour etc.*
  - e.g. text field
    - ◊ Model = *string*; events = *changed, selection*; properties = *optional formatters, font etc.*
- Special value widgets: colour picker, calendar etc.
- Event dispatch → event handling → notifying view & windowing system
- **Event dispatch**: dequeuing events from event queue and pushing to appropriate applications
- **Interactor tree** – hierarchy of containers and their nested widgets
- **Positional dispatch** – input sent to widget under mouse cursor location
  - Bottom-up dispatch:
    - Event is routed to leaf (lowest) widget in interactor tree
    - Widget can process the event or pass to its parent
    - e.g. widget belongs in a group/container – may be better for container to handle the event
    - Advantage: event does not have to traverse through entire tree to arrive at widget
  - Top-down dispatch:
    - Event is routed to highest-level node that contains mouse cursor
    - Widget can process the event or pass to child component
    - Advantages:
      - ◊ Parent widget can enforce policies (e.g. make children view-only)
      - ◊ Easy event logging (as it traverses down through the tree)
- **Focus dispatch** – events dispatched to widget that has keyboard/mouse focus
  - At most one widget each can be in keyboard & mouse focus at a given time
  - Focus dispatch also needs positional dispatch to change focus (i.e. mouse click)
  - Accelerator keys (i.e. keyboard shortcuts) can bypass focus dispatch – they're handled before widget receives events

**Heavyweight toolkits:**

- BWS has visibility to all widgets
- Can use top-down or bottom-up dispatch

**Lightweight toolkits:**

- BWS only has visibility to application window
- Toolkit dispatches event to widget
- Can only use top-down dispatch

- **Event handling**: interpreting events in widget's application code
  - Event loop & switch statement (X11):
    - All events are consumed in one event loop
    - Switch statement selects the appropriate code for each event (`switch (event.type) ...`)
    - Downsides: switch statement needs to encompass every type of event (too many!)
  - Inheritance binding (Java, OS X):

- Events are dispatched to base widget class with predefined event handling methods (default behaviour)
- Child widget overrides methods with custom behaviour
- Downsides:
  - ◇ Event handling code in application logic (child widget) – no separation of concerns
  - ◇ Difficult to add new events
- Listener binding (Java):
  - Interface binding – widget class implements event listener interfaces
 

```
public class A implements Listener { // implement all methods }
```
  - Object binding – widget class holds listener objects (implement listener interface as a nested class)
    - ◇ Event handling & application code are decoupled
 


```
this.addListener(new Listener() { // implement all methods });
```
  - Adapter pattern – widget class holds adapter objects (class with boilerplate implementations)
    - ◇ Custom adapter only needs to extend methods that are used
 

```
this.addListener(new ListenerAdapter() { // override some methods });
```
- Delegate binding (.NET):
  - Delegates “point” to a method (or methods); invoking delegate calls all associated methods
 

```
delegate = object.Method1; delegate += object.Method2; delegate(args);
```

## Layouts

- **Dynamic layout** – maximize use of available of space by widgets, while maintaining consistency & visual quality of spatial layout
  - May adjust location, size, visibility & look-and-feel of widgets
- **Adaptive/responsive layout** – changing spatial layout & swapping widgets to adapt to different device sizes
- Widgets may define constraints for size (e.g. min, preferred, max), position (e.g. anchors)
  - Use layout managers to size & position child widgets
- Composite pattern – group/container of widgets and individual widgets are treated uniformly
  - Widgets are organized in a tree hierarchy
- Strategy pattern – abstract out the algorithm so that it can be changed at run-time
  - Layout manager can employ different layout strategies
- Types of layouts:
  - Fixed – widgets have fixed size & position
    - e.g. set `LayoutManager` to null
  - Intrinsic size – parent widget's size depends on contained widgets
    - Bottom-up algorithm – query each child widget for preferred size, then set size for parent
    - e.g. `FlowLayout`
  - Variable intrinsic size – widget size depends on both parent and contained widgets
    - Bottom-up & top-down algorithm
    - e.g. `BoxLayout`, `GridBagLayout`, `BorderLayout`
  - Struts and Springs – layout specified by constraints and anchors
    - Strut widgets are fixed in size; spring/glue widgets stretch to fill space
    - e.g. `SpringLayout`

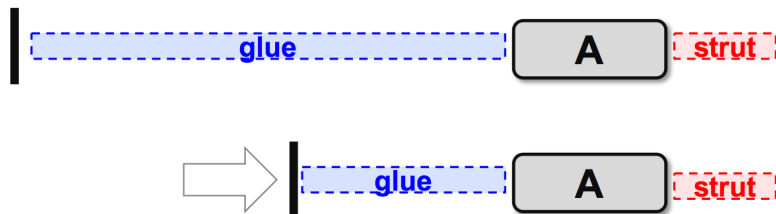




## Graphics & Transformations

- **2D graphics:**

- Model – mathematical representation of an image/object & its properties
- Rendering – using the properties to create an image to be displayed on the screen
- Image – the rendered model



- Shape model – contains data needed to draw a shape (array of points, colour, border width etc.)
- Selection paradigms:
  - Click selection (for lines) – find closest line segment to mouse position
    - Check distance from mouse to each line segment using vector projection
    - Count as “selection” for distance under a certain threshold
  - Click selection (for closed shapes) – check if mouse position is within shape
    - For complex polygons, draw a ray extending from the point & count the # of intersections with the polygon’s boundary
    - If odd # of intersections, the point is within the polygon; if even #, it is not
  - Alternate approaches (not covered): rubberband rectangle, lasso
- **Note:** origin is located at the top-left when discussing graphics & transformations
- **Affine transformations:**
  - **Translation:** add scalar to  $x$  and/or  $y$  component
    - Can’t be done using  $2 \times 2$  matrix
  - **Scaling:** multiply  $x$  and/or  $y$  components by scalars

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} s_x & 0 \\ 0 & s_y \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$

- **Rotation** (about the origin):  $x' = x \cos(\Theta) - y \sin(\Theta)$ ,  $y' = x \sin(\Theta) + y \cos(\Theta)$

$$\begin{bmatrix} x' \\ y' \end{bmatrix} = \begin{bmatrix} x \cos(\Theta) & -y \sin(\Theta) \\ x \sin(\Theta) & y \cos(\Theta) \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix}$$


- Solution for translation: homogeneous coordinates
  - $[x, y, w]$  represents a point at  $[x/w, y/w]$ ; i.e. a scaling factor for coordinates
- Order of operations: scale  $\rightarrow$  rotate  $\rightarrow$  translate
  - $x' = s_x(x \cos(\Theta) - y \sin(\Theta)) + t_x$
  - $y' = s_y(x \sin(\Theta) + y \cos(\Theta)) + t_y$
  - Since scaling & rotation are about the origin, should translate to origin first, and translate back after scaling/rotation
- **Affine transformation matrix:** calculates all transformations using  $3 \times 3$  matrix

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & t_x \\ 0 & 1 & t_y \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \cos(\Theta) & -y \sin(\Theta) & 0 \\ x \sin(\Theta) & y \cos(\Theta) & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} s_x & 0 & 0 \\ 0 & s_y & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$


- Transformations are applied right to left  $\leftarrow$
- **Scene graph** – each component has a transformation matrix & draws its child components relative to itself

## Model-View-Controller

- MVC – multiple views *loosely coupled* with the underlying data model
  - Developed for Smalltalk-80 by Trygve Reenskaug
  - Tight coupling of data & presentation prevents easy modification and extension
  - Separation of concerns enables:
    - Alternate forms of interaction/presentation with the same data
    - Multiple, simultaneous views of data
    - Easy testing of data manipulations that are independent of the UI
  - View & controller can access the model through its interface; model only knows about the view
    - Controller → (notifies) → Model
    - View → (queries) → Model
    - Model → (updates) → View
    - Controller & view are tightly coupled in practice:

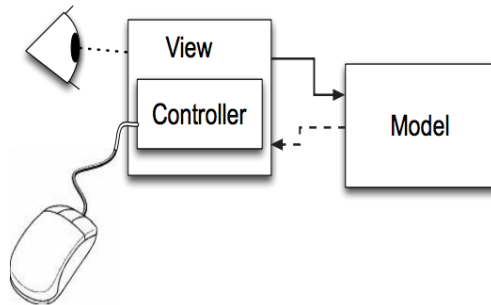

- MVC is an instance of the **observer pattern**
  - Allows objects to communicate without knowing each others' specific types

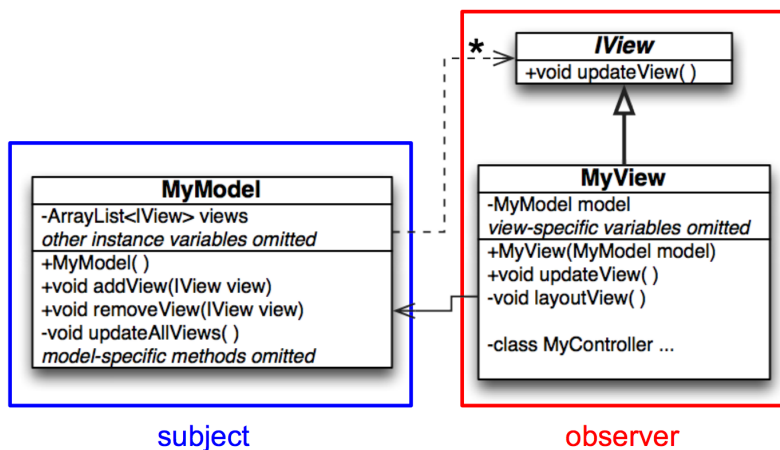

- In Java, the view implements `Observer` (like `IView`); model extends `Observable`

## Input

- Computer input can be classified by sensing method (e.g. mechanical, motion, contact), continuous vs. discrete, degrees of freedom
- Devices are mostly focused on text & positional input
- **Text input**
  - QWERTY has many *perceived* problems:
    - Many common combinations require inefficient finger movements
    - Most typing is done with left hand
    - Most typing is *not* done on the home row
  - Dvorak attempts to address these problems, but actual difference in speed is discernible
  - Portability (smaller, lower-profile keys) of keyboards also interfere with typing performance
  - Soft/virtual keyboards lack haptic feedback, but improves aesthetics – good for when the amount of input is limited
- **Positional input**
  - Isometric (force) vs. isotonic (displacement) sensing
    - Device senses displacement (mouse) or force (joystick)
  - Position vs. rate control
    - Change in input device maps to change in position (mouse) or speed (joystick)
    - Usually, isometric → rate, isotonic → position
  - Absolute vs. relative position
    - 1:1 mapping between input & output position (touchscreen) or non-1:1 mapping (mouse)
  - Direct vs. indirect contact
    - Input takes place on the same surface as output (touchscreen) or on a different surface (mouse)
  - Dimensions sensed – 1 (dial) vs. 2 (mouse) vs. 3 (Wiimote)