


CS 349 Midterm Review

Background & History

- **User interface:**


- The place where a person expresses intention to an artifact, and the artifact presents feedback to the person
- The way people (mental model) and technology (system model) interact
- Represented as MVC:

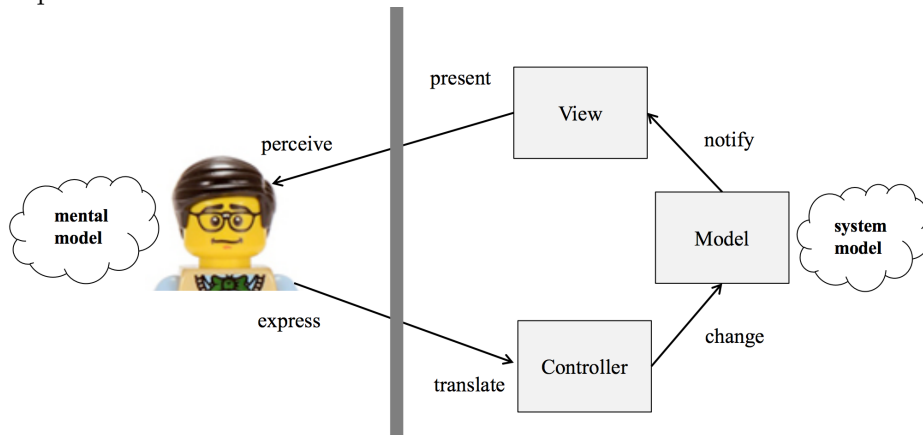


- **Interface:** external presentation (visual, physical, auditory) to the user
 - e.g. controls
- **Interaction:** actions invoked by user and corresponding responses (behaviour)
 - e.g. action and dialog
- Batch interfaces (1945-1965)
 - Sets of instructions fed via punch cards
 - Only used by highly trained individuals
- Conversationalist interface (1965-1985+)
 - Text-based feedback and input
 - I/O is in system language, not task language
 - Vannevar Bush – created the memex, a desk with integrated display, input, and data storage
 - Ivan Sutherland – created the Sketchpad, an early graphical interface with a light pen and direct manipulation
 - Douglas Engelbart – invented the mouse, introduced copy/paste
 - Alan Kay – worked on the Xerox Star, first commercial computer with GUI
- Graphic user interface (1984+)
 - Hardware interface: high resolution & refresh graphics display, keyboard, and pointing device
 - WIMP interface: windows, icons, menus, and pointer
 - Benefits of GUI:
 - Keeps the user in control
 - Emphasize recognition (discovery of options) over recall (memorizing commands)
 - Uses metaphor; makes interaction language closer to user's language

Windowing Systems & X11

- **Windowing system:** provides input, output, and window management capabilities to the OS
- **X Windows (X11):**
 - Standard windowing system for Unix-based systems
- X11 architecture
 - **X Client** handles all application logic
 - **X Server** handles all user input & display output
 - There may be many clients – each client is an application; server draws all clients onto one screen and reads all input

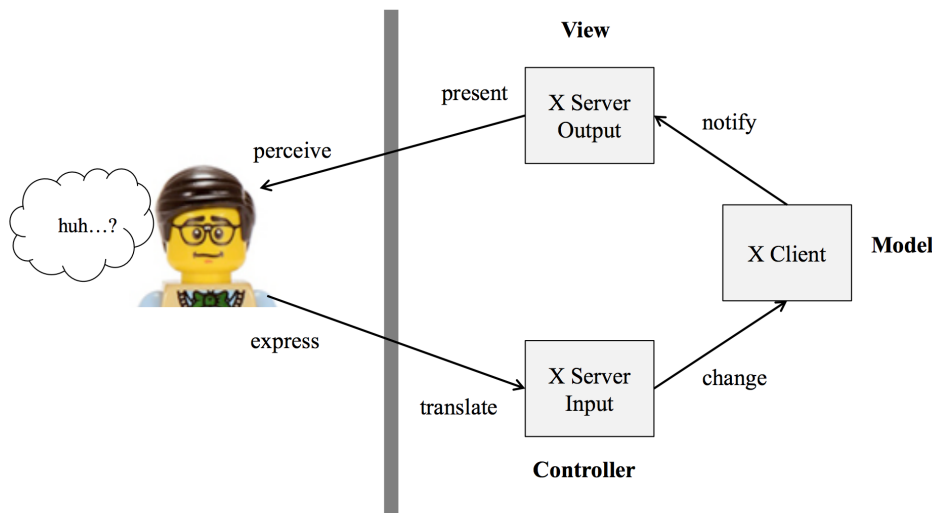


- Structure of an X program (application is run on the X client):
 - Perform client initialization
 - Connect to X server
 - Perform X related initialization
 - Event loop (get next event from server, handle event, send draw request to server)
 - Close down connection to X server
 - Perform client cleanup
- X11 is a **base windowing system**:

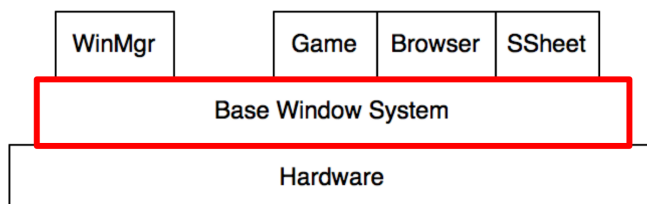

- A standard/protocol for creating windows, low-level graphical output, and user input
- Does not specify the style of each application's UI
- Provides each application with a window and manages its access
- Each application (only) owns a canvas; shielded from details such as visibility, other windows, etc.

- Some design goals of X11/BWS:
 - Supports multiple overlapping & resizable windows
 - A display may have multiple screens (e.g. monitors) and a window may span multiple screens
 - High-performance, high-quality text, 2D graphic & imaging
- **Window manager:**
 - Provides interactive components (e.g. menus, close button)
 - The WM owns each application's window itself (while application owns the canvas)
 - i.e. application developers usually cannot change the window style
 - Separation of the WM from the BWS enables many alternative “look and feels”

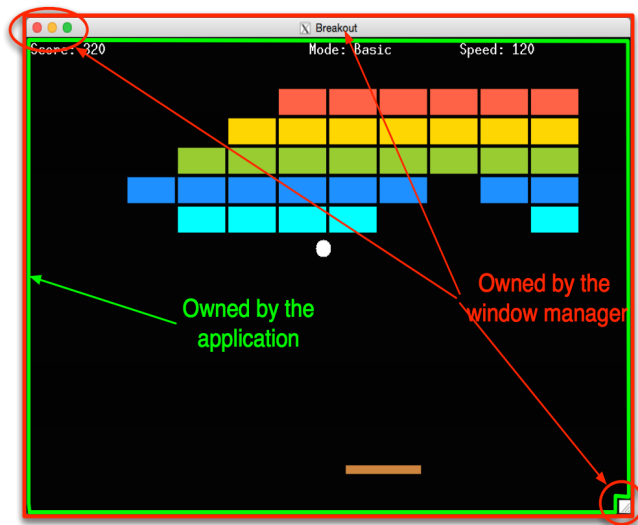

- **Drawing**
 - Three conceptual drawing models:
 - Pixel (e.g. images)
 - Stroke (e.g. lines, outlines of shapes)
 - Region (e.g. text, filled shapes)
 - X11 uses graphics contexts to store drawing options/parameters – stored on X server

Java

•