



Universiteit Utrecht

summerschool
UTRECHT

Diffusion in Networks

Jiamin Ou

Summer School: Network Science

Day 5, Afternoon Session

2025

The Savage Season of 1964 That Made Mississippi Burn
and Made America a Democracy



Bruce Watson Author of SACCO AND VANZETTI

FREEDOM SUMMER



Memberships of civil rights activists in 1964- “Freedom Summer” :
Despite the fact that weak ties offered an obvious advantage for rapidly increasing the movement’s exposure, memberships **grew primarily through recruitment networks composed of strong ties.**

The spread of personal hygiene behaviour is much slower than COVID. Why?


Spread of COVID

VS

Spread of hand-washing, mask-wearing and other behaviours

Cumulative confirmed COVID-19 cases by world region

7-day rolling average. Due to limited testing, the number of confirmed cases is lower than the true number of infections.

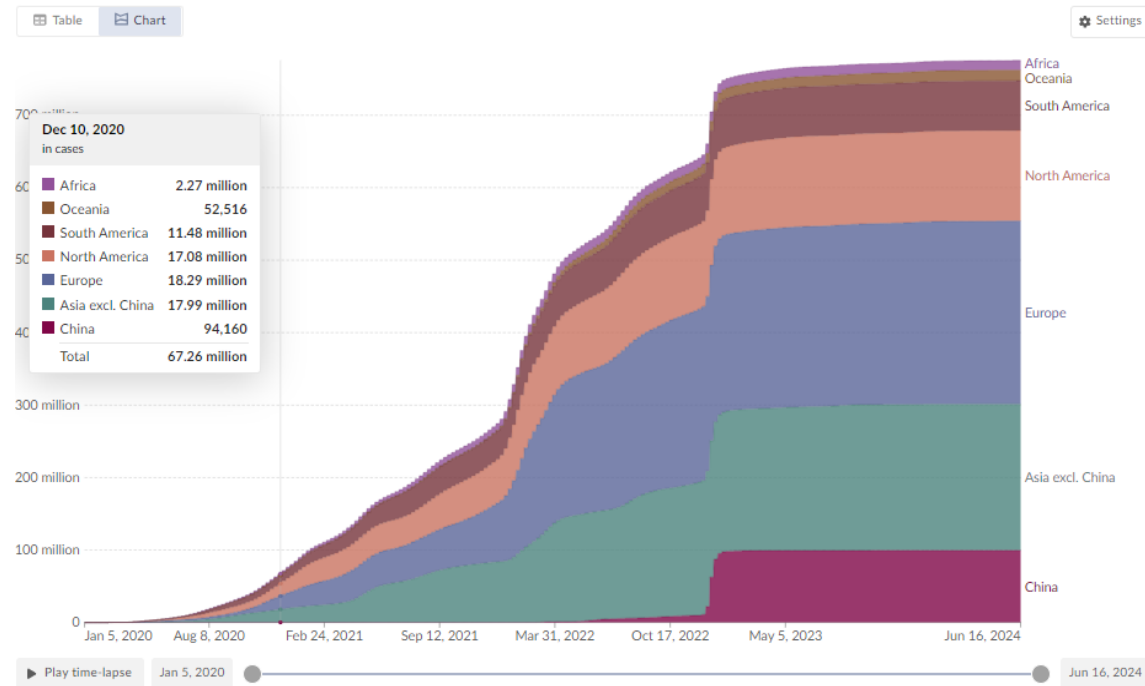



Nicholas Christakis: The hidden influence of social networks


The Human Superorganism



Share

Happiness Clusters

SOCIAL NETWORKS

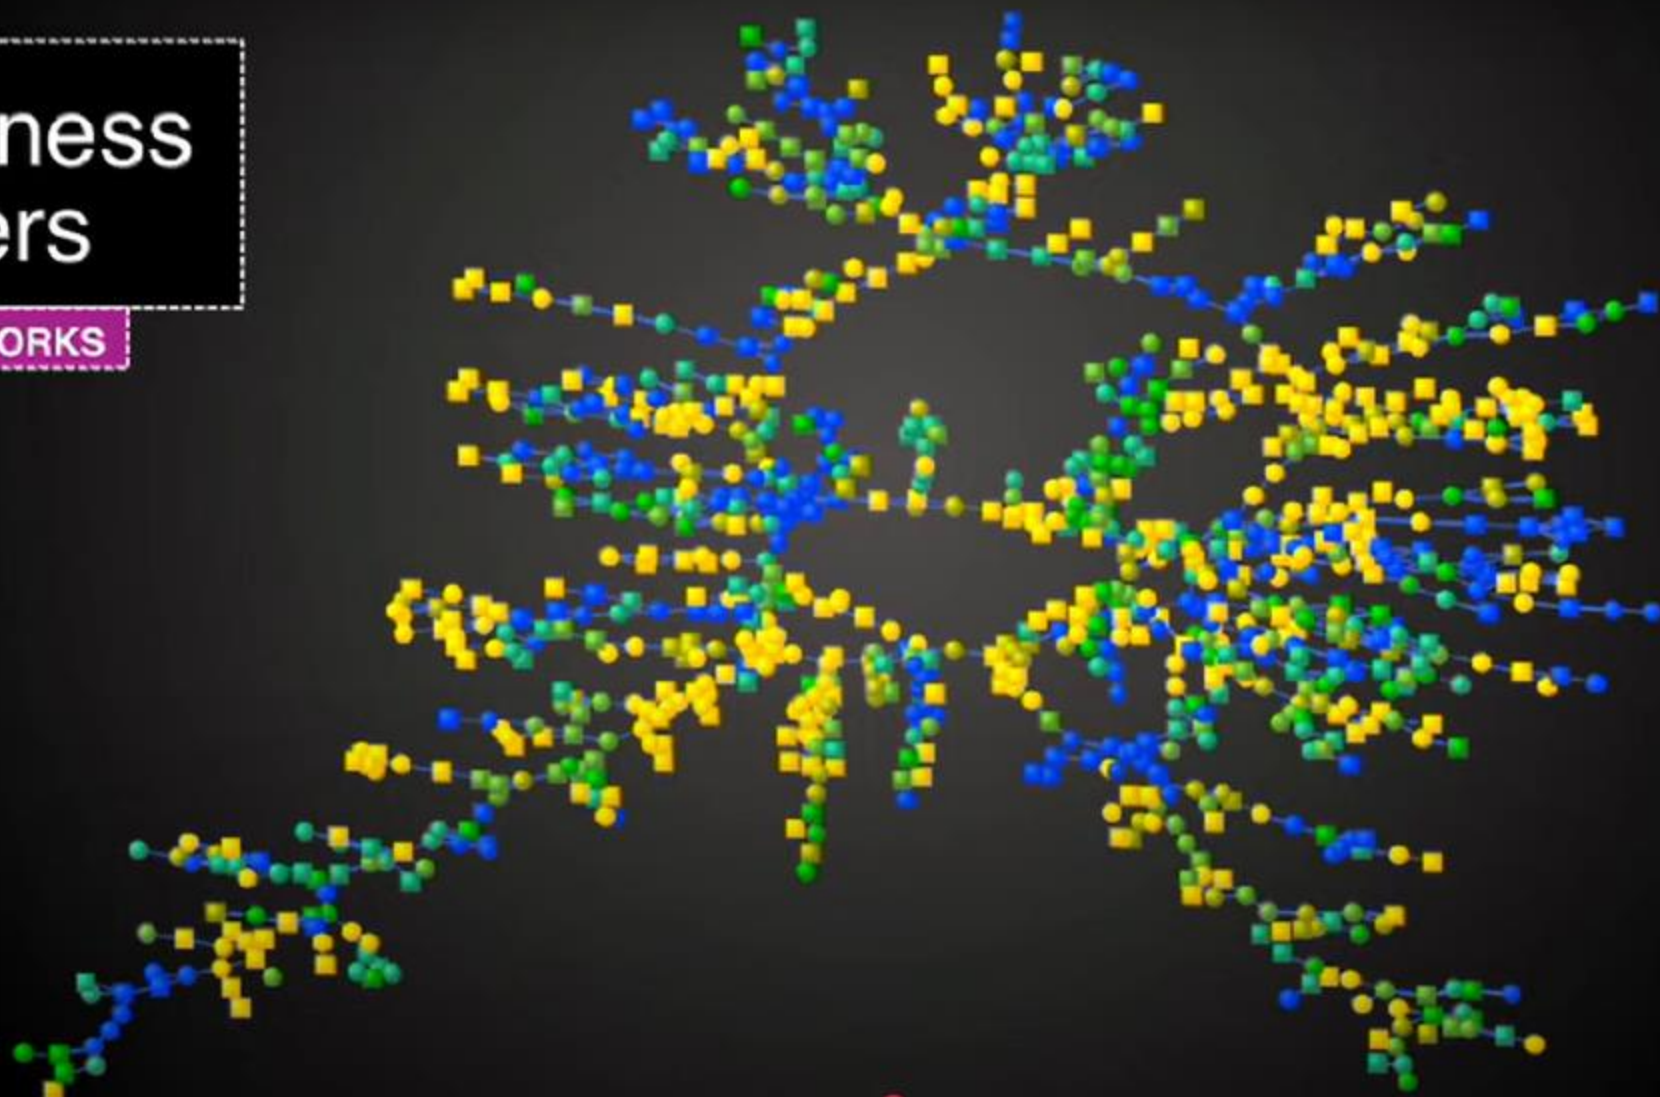

MORE VIDEOS

Today's programme

- **Simple contagion**

Mechanism and the strength of 'weak ties'

- **Diffusion model for simple contagion**

Independent cascade model and other variants

- **Complex contagion**


Mechanism and the strength of 'strong ties'

- **Diffusion model for complex contagion**

Threshold model and seeding

Mechanism of complex contagion


- Multiple (and credible) sources are required for transmission

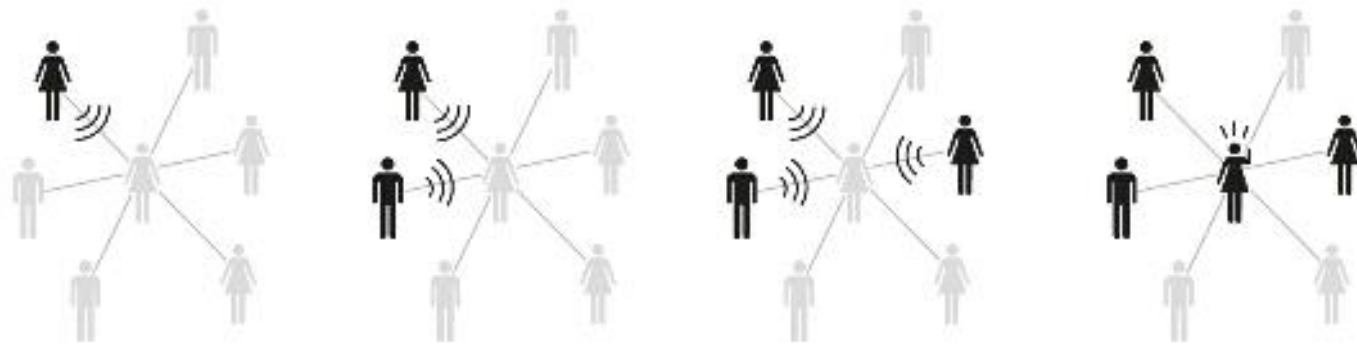

Examples

- Change of diet
- High-risk social movements
- Other risky/costly behaviours


Recall for simple contagion:

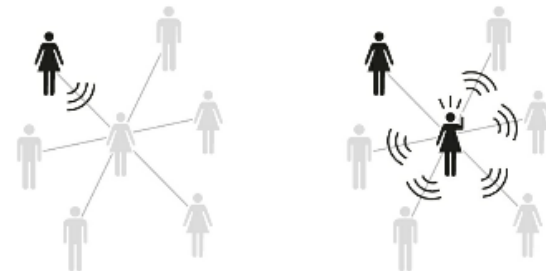

Demonstration of complex contagion in a small network

Bob is now considering joining an illegal climate change protest
(*High-risk social movement*)

1st round: Bob

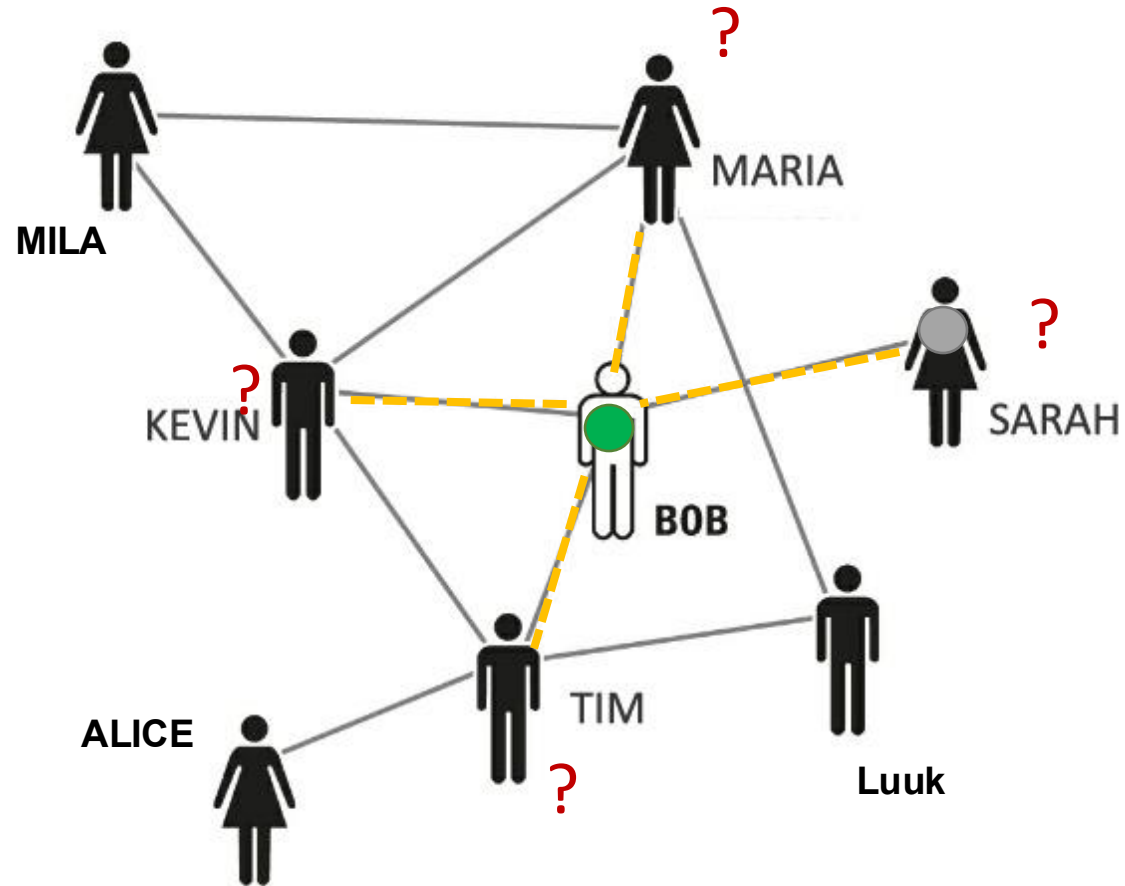


Demonstration of complex contagion in a small network

Bob is now considering joining an illegal climate change protest

(High-risk social movement)

1st round: Bob

2nd round: Bob → Kevin, Maria, Tim, Sarah

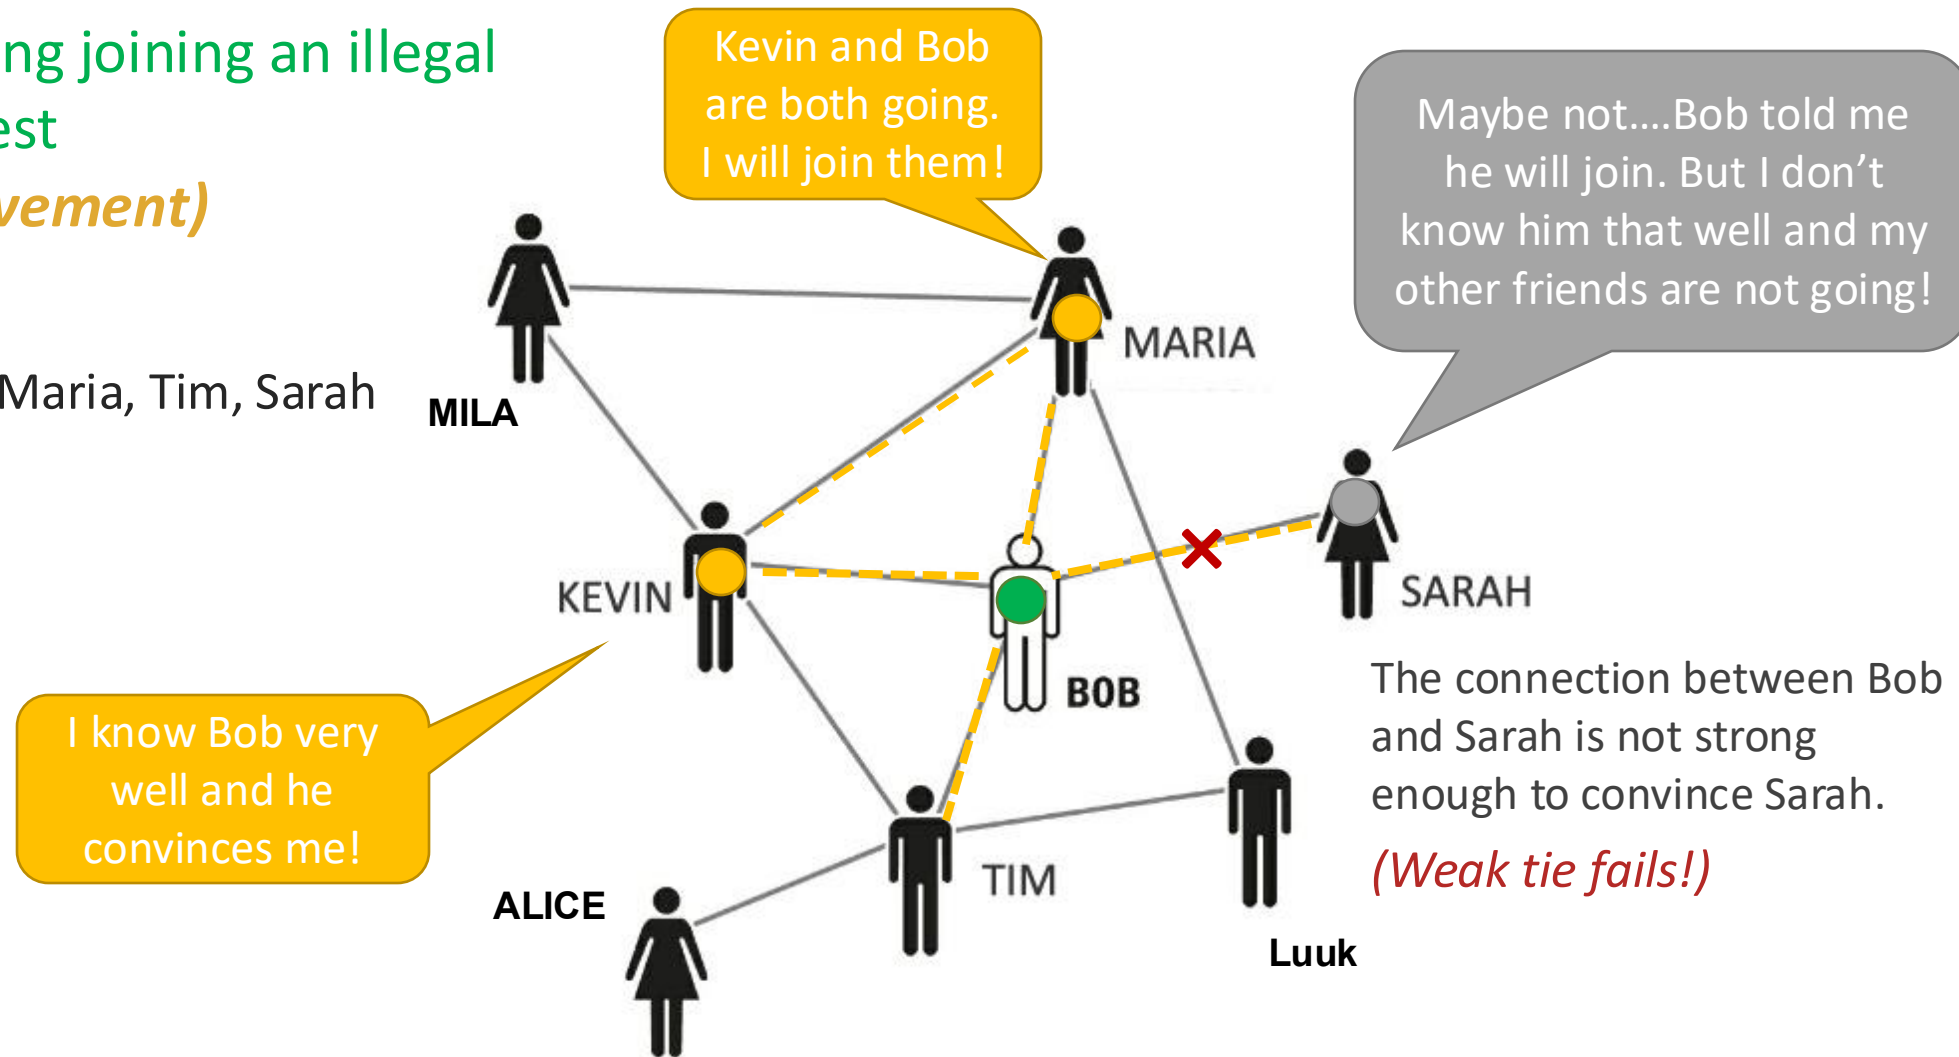

Thanks to the redundancy of strong ties, Kevin, Maria and Tim have multiple sources to confirm the credibility of the behavior and support each other.

Complex Contagions and the Weakness of Long Ties, Centola & Macy, 2007


Complex contagions depend primarily on the width of the bridges across a network, not just their length.




Damon Centola
<https://www.damoncentola.com/>

Width of a bridge decides the diffusion of complex behavior


- The **width of a bridge** between two communities is defined as the **number of overlapping ties** between them.

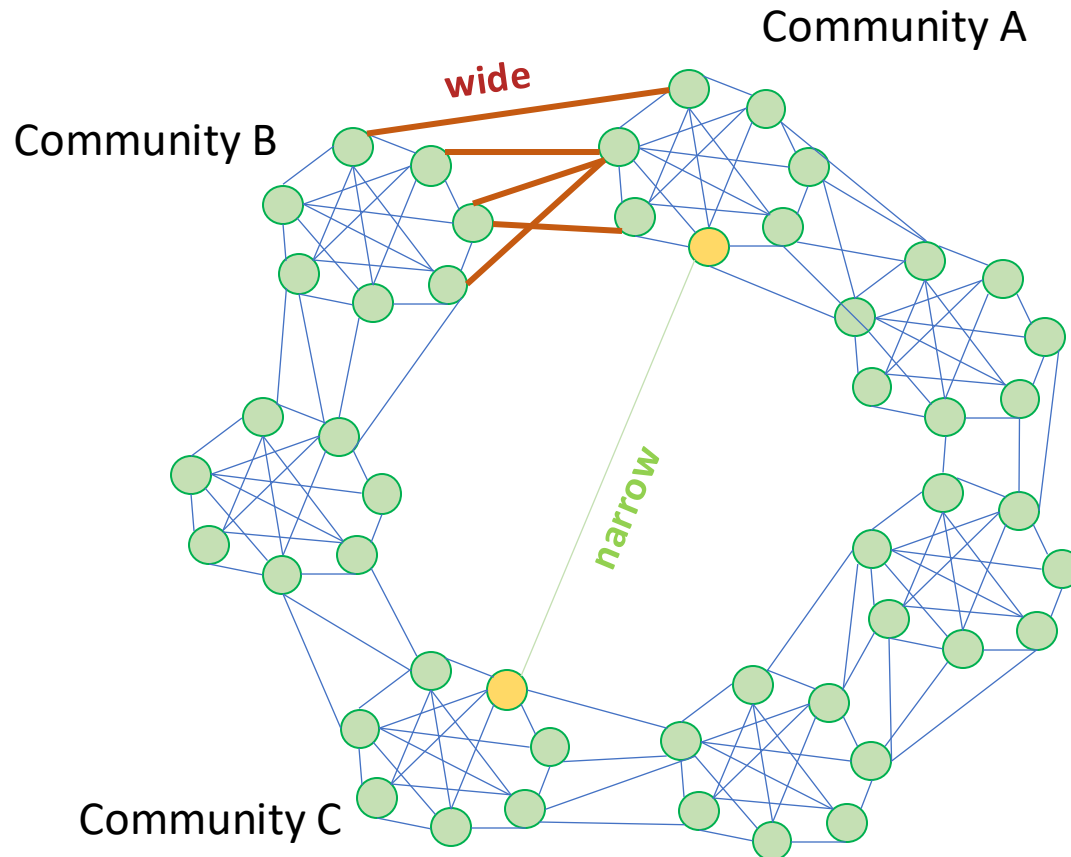

Diffusion of simple and complex contagion in the same network

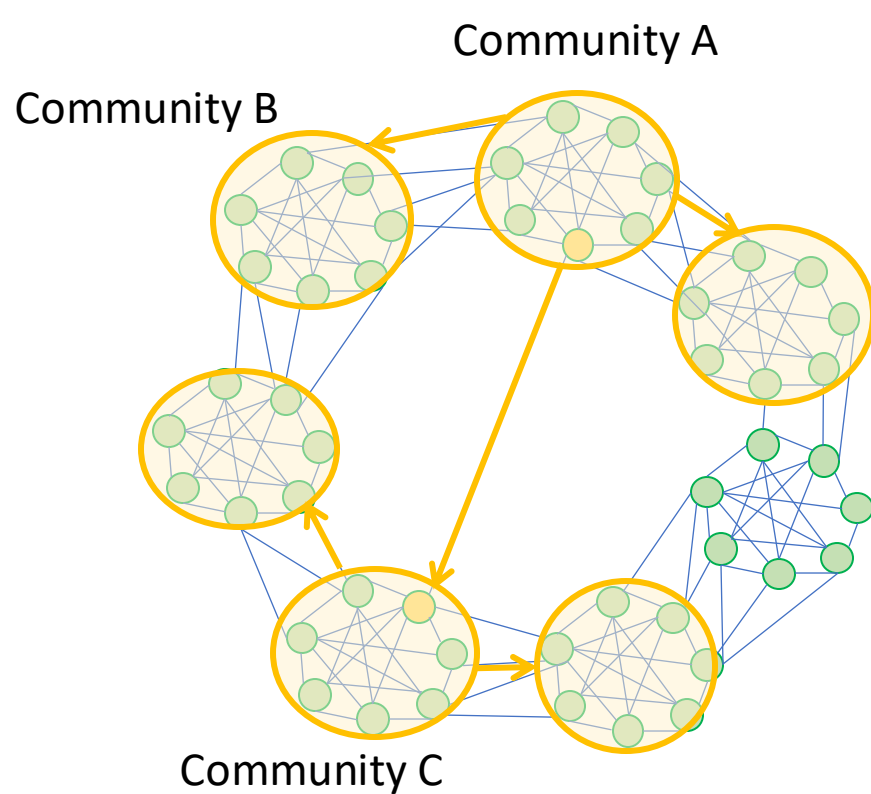

Under **simple contagion**, the only tie between A and C **can** spread the rumor/virus to Community C and thus fasten the diffusion process.

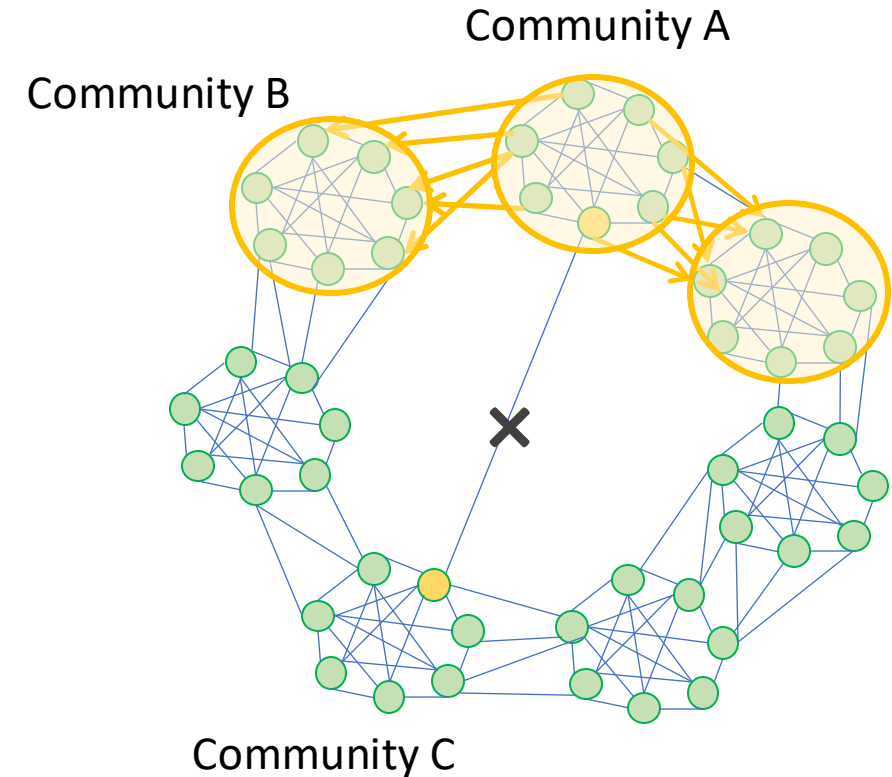

Under **complex contagion**, the only tie between A and C **cannot** spread the new norm to Community C;

Complex contagion can only spread through multiple connections ("wide bridge") between nearby communities.



Nicholas Christakis: The hidden influence of social networks


The Human Superorganism



Share

Happiness Clusters

SOCIAL NETWORKS

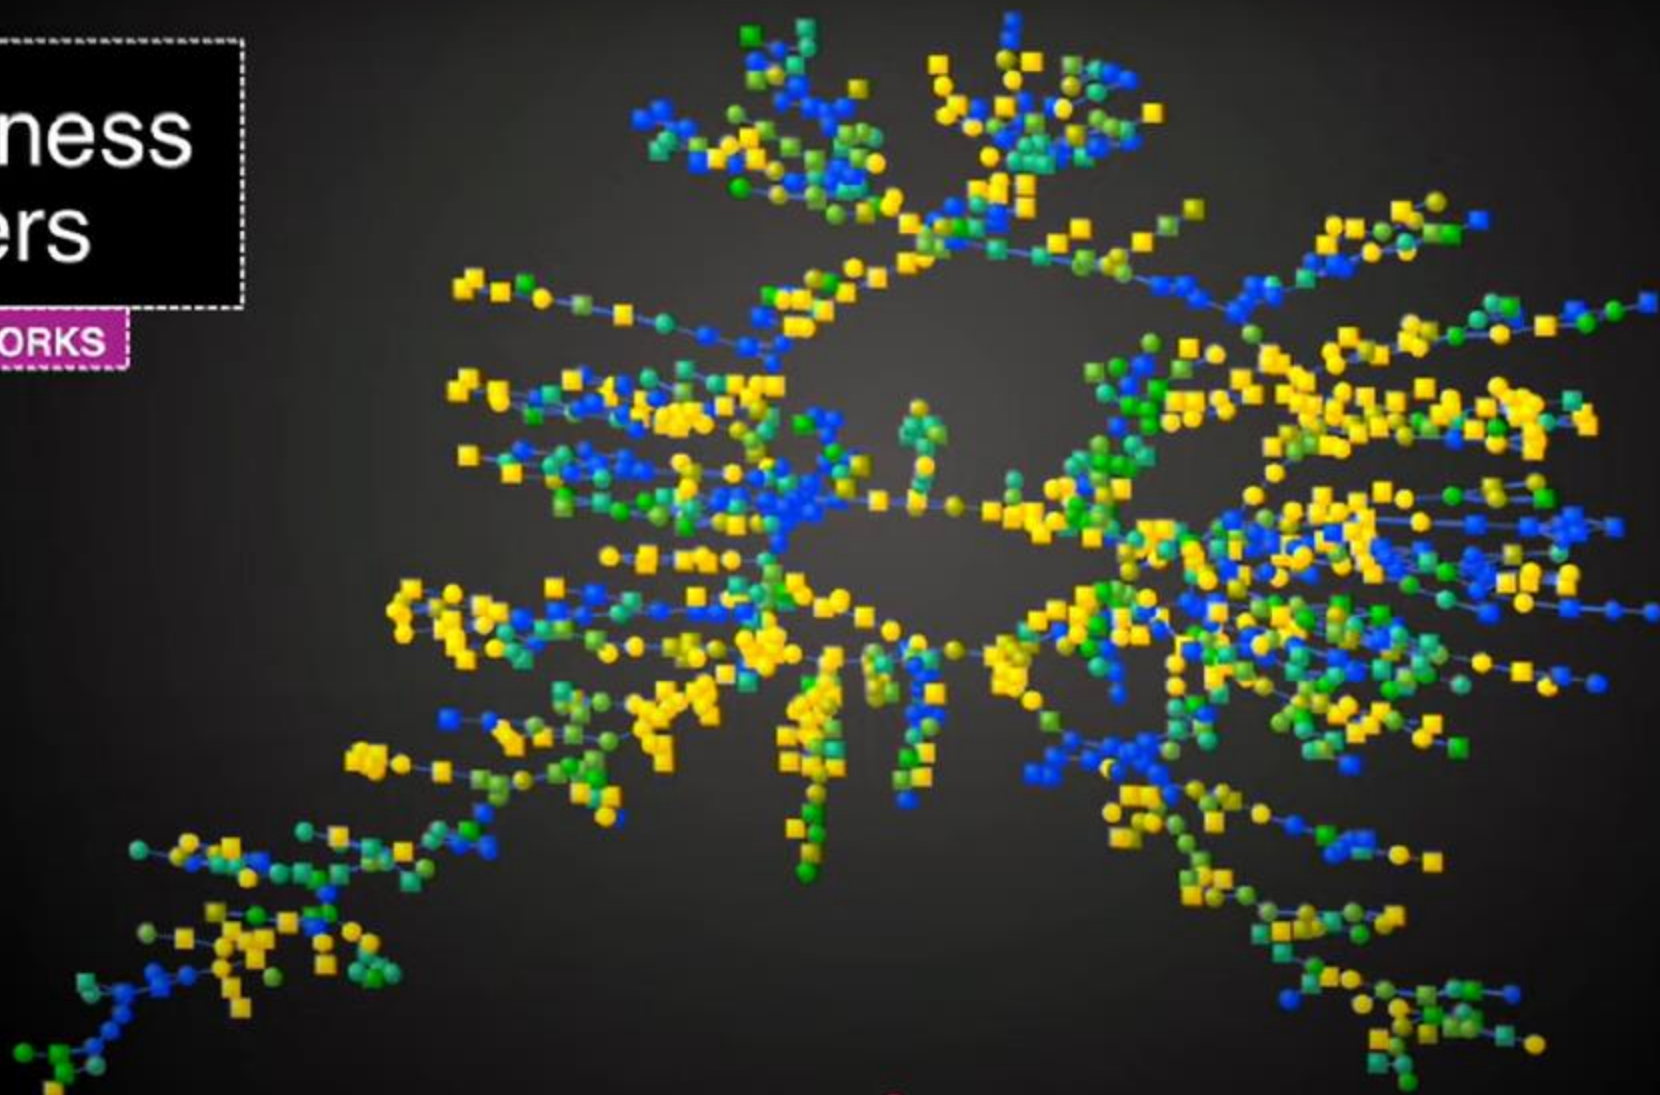

MORE VIDEOS

Today's programme

- **Simple contagion**

Mechanism and the strength of 'weak ties'

- **Diffusion model for simple contagion**

Independent cascade model and other variants

- **Complex contagion**

Mechanism and the strength of 'strong ties'

- **Diffusion model for complex contagion**

Threshold model and seeding



How to translate the complex contagion theory into
numerical models?



Translate complex contagion into numerical models by “*Threshold*”

Threshold Models of Collective Behavior¹

Mark Granovetter

State University of New York at Stony Brook

Threshold: To adopt a new behavior, an individual needs to be convinced by *an absolute number* or *a fraction* of his/her social contacts (e.g., the riskier the behavior the higher the threshold)



Formalization of a threshold model


- Node i can have two states — active ($S_i = 1$) and inactive ($S_i = 0$); once activated, will remain active all the time.
- Imagine node i has a **fractional threshold** defined as θ_i , $0 \leq \theta_i \leq 1$
- Imagine node i has n direct neighbors.
- At each time step t , calculate the weighted status of node i 's neighbors:

$$w_i(t) = \frac{\text{Number of activated neighbors of node } i \text{ at time } t}{n}$$

$p_i(t)$ is the chance for node i to adopt the behavior at time step t :

$$p_i(t) = 1 \mid w_i(t) \geq \theta_i$$

$$p_i(t) = 0 \mid w_i(t) < \theta_i$$

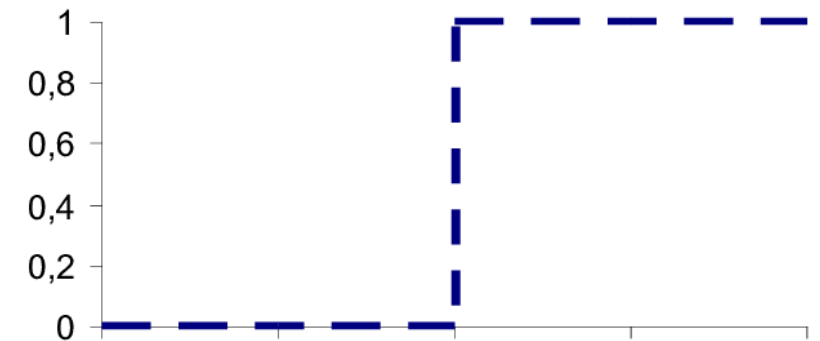

- Stop when all the nodes are activated or the number of activated nodes is saturated.


Today's programme

- **Simple contagion**
Mechanism and the strength of 'weak ties'
- **Diffusion model for simple contagion**
Independent cascade model and other variants
- **Complex contagion**
Mechanism and the strength of 'strong ties'
- **Diffusion model for complex contagion**
Threshold model and seeding




Influencer marketing industry: around \$16.4bn in 2022


Almost half of marketers spent more than 20% of their budget on influencer posts

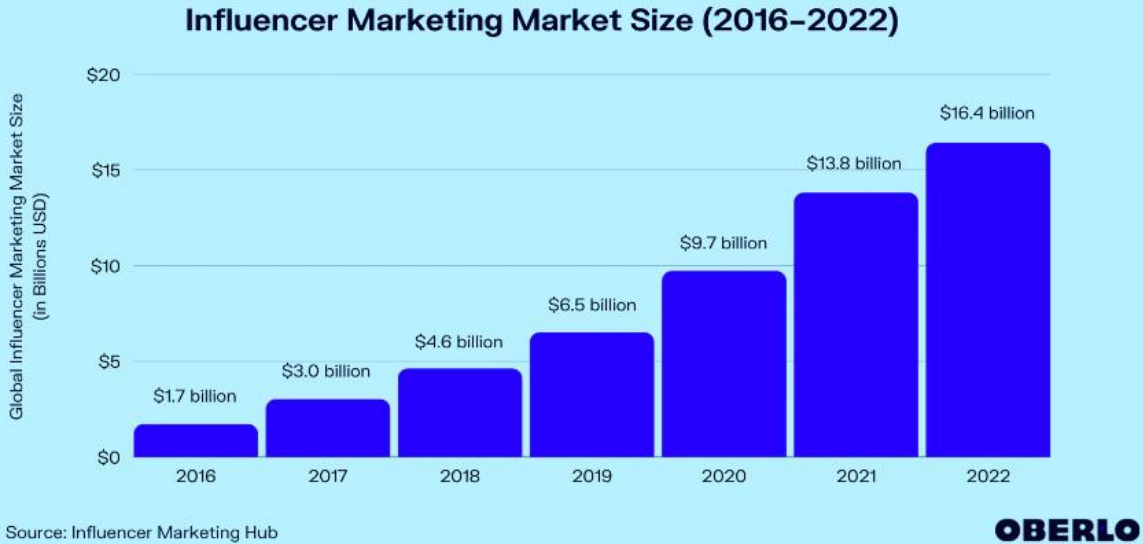

Are the ones with most followers
always the best brand ambassadors?

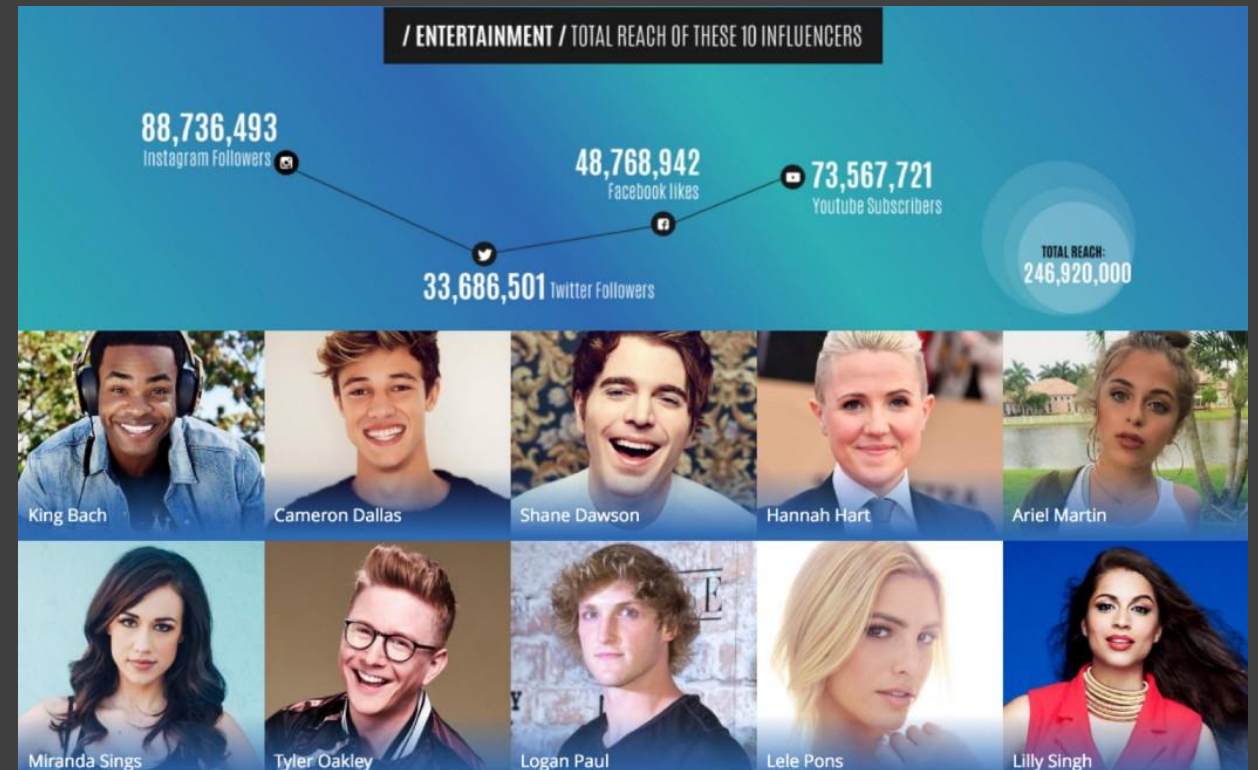

Seeding: To find out a small set of influential nodes for activation/immunization

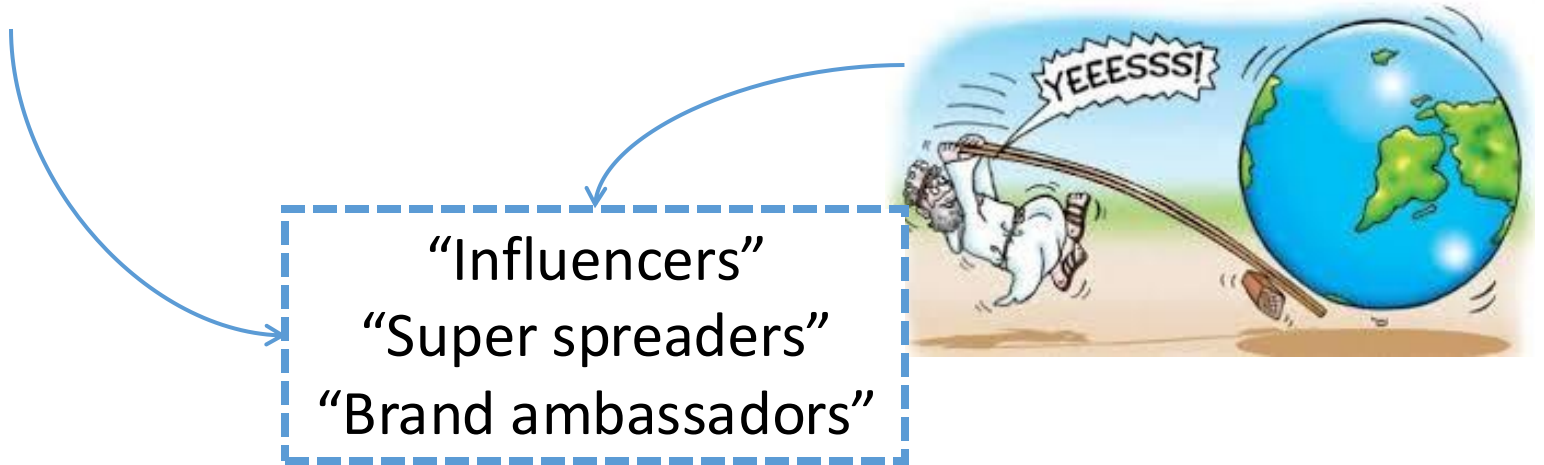

Finding out this set of influential nodes is an influence maximization problem (IMP)

- Given a network $G(V, E)$ with V and E respectively being the set of nodes and the set of links, there exists a function $f(S)$ from a subset $S \subseteq V$ to a real number
- Influence maximization problem (IMP): To find a set S of a given size k (usually, $k \ll n = |V|$) that maximizes/minimizes $f(S)$.

Example of $f(S)$:

With limited marketing budget, to find a small group of customers to offer discounts to eventually maximize total sales $\rightarrow f(S)$: the number of people who use the product

Obtaining an exact solution of IMP is very challenging

$f(S)$: For a network of 60 people, to find out 5 people as the “seeds” to maximize the diffusion

- The number of possible combinations is $\binom{60}{5} = 27,307,560$;
- Run the threshold model for 27 million times to find out which combination has the best outcome.

Using centrality heuristics to approximate the exact solution

Centrality heuristics:

- To rank all nodes according to their degrees or other centrality measures and pick up the k top-ranking nodes
- Naive but widely used due to simplicity (or used as references for other advanced algorithms)


Top- k nodes from different measures:

Degree centrality; Local Rank
(Neighbourhood-based)

Closeness centrality; Betweenness centrality (Path-based)

Eigenvector centrality (Position-based)

The choice of centrality heuristics depends on contagion mechanism

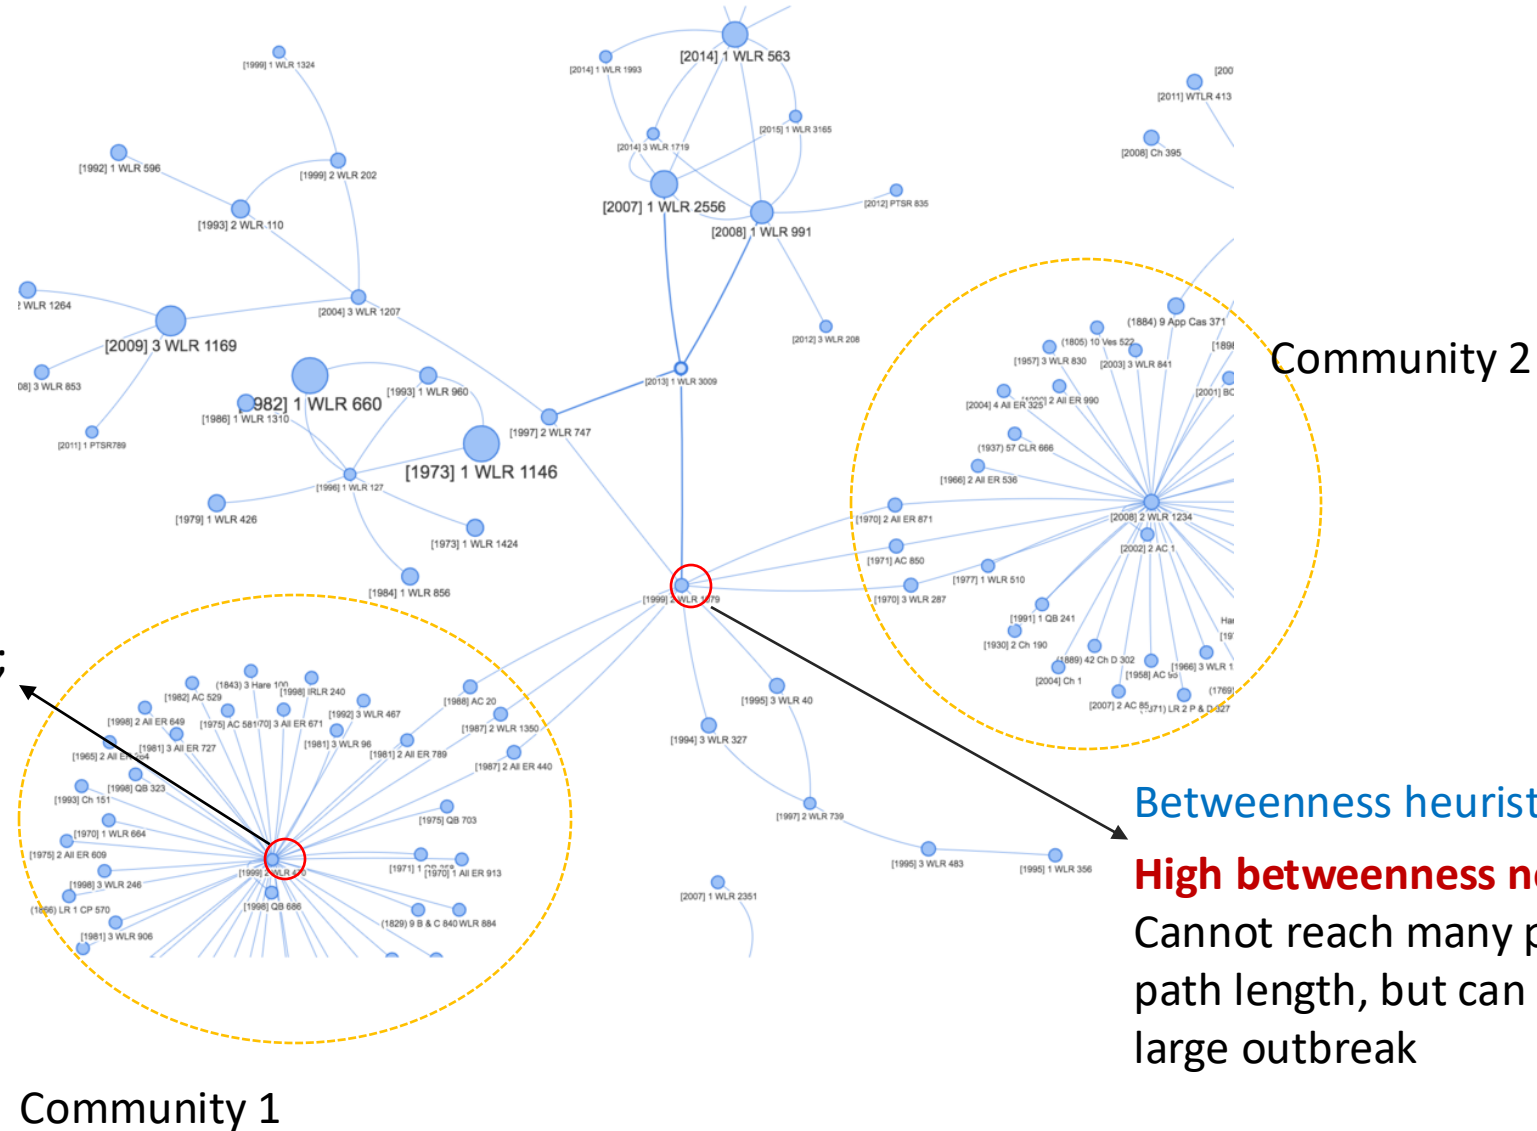

Other sophisticated algorithms inspired by centrality heuristics

(Top- k nodes: sometimes inefficient since nodes of highest centrality may be highly clustered)

- **High Degree Adaptive (HDA)**: First choose the node of the largest degree, then recalculate the degree of nodes after every step of node removal;
- **Top- k spreaders from different communities**: Network is divided into many communities by community detection algorithm. Then all communities are ranked in decreasing order according to their sizes. The first spreader is selected from the largest community according to a certain centrality index (e.g., to choose the node with the highest degree). Similarly, the node with the largest centrality index in the second largest community and having no edges incident to the previous communities.
- **LocalRank**: Consider the number of neighbors within path length 4

Using greedy algorithm to approximate the exact solution

For a network of 60 people, in order to find out 5 people as the “seeds” to maximize the diffusion, try $\binom{60}{5} = 27,307,560$ times



Only try
 $60+59+58+57+56=290$ times

Add nodes **one by one** to the target set, ensuring that each addition brings the largest increase of ***influence*** to the previous set (maximize the incremental influence)

- k is the number of size of the seed set S ;
- Start with an empty set of $S = \{\}$;
- At each time step, scan all nodes to find the **one** v that maximizes $f(S \cup \{v\})$ and then updates S by including v
- After k time steps, one gets the target set S containing k influential nodes.

Reduce the computational time by considering the incremental spread of the k nodes individually rather than combined

Approximation guarantee of greedy algorithm

- Greedy algorithm approximates to the optimum S^* within a factor of around 60% or more in most cases: A seed set whose spread will be at least 60% of the spread of the optimal seed set.

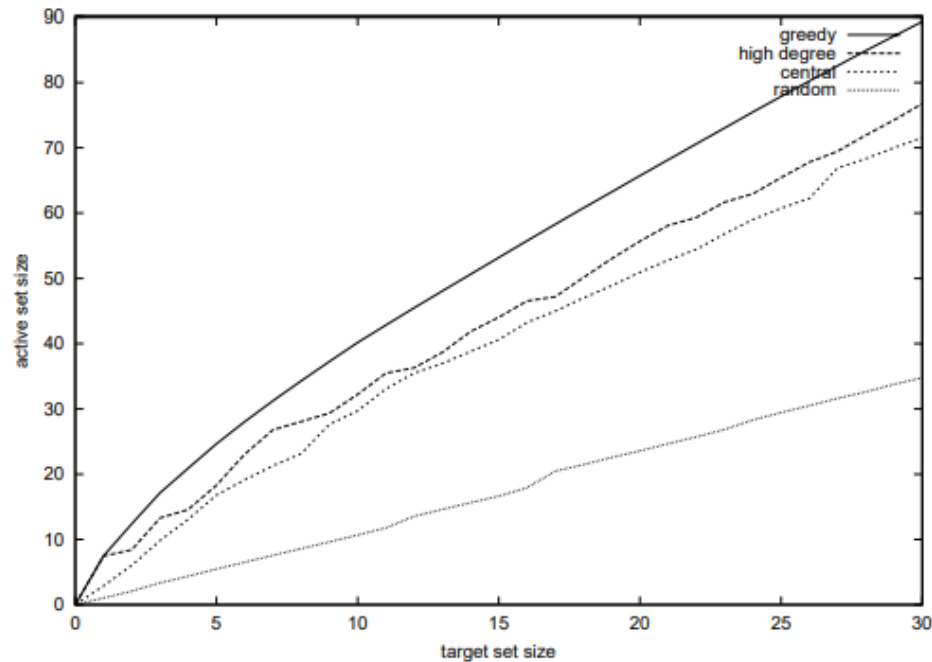


Figure 3: Independent cascade model with probability 1%

- Cost-effective lazy forward (CELf) algorithm: Improve greedy algorithm to further reduce the computational time.

Ending remarks

See the world as a web of people, and harness the power of influence through connections.

Let us know how you feel about this summer school