

TTIC 31220 Final Project: Toward a Reduced-Form Factor Portfolio

Kabir Sawhney, Joseph Denby

{ksawhney, jgdenby}@uchicago.edu

Abstract

This is the layout specification and template definition for the INTERSPEECH 2016 Conference, which will be held in San Francisco, California during September 8-12, 2016. This template has been generated from previous INTERSPEECH templates. The format is essentially the one used for IEEE ICASSP conferences. The maximum number of pages is 5. The 5th page may be used exclusively for references. Index terms should be included as shown below.

Index Terms: speech recognition, human-computer interaction, computational paralinguistics

1. Introduction

The returns on different financial assets are influenced by a similar set of underlying risks, including macroeconomic and market risks. In financial theory, the return of any given asset can be represented as a linear combination of returns these risks plus an error term. However, there is no consensus set of risk factors, and a great deal of research has gone into studying what the appropriate set of risk factors are from which asset returns are constructed.

Some researchers have applied linear dimensionality reduction techniques to large factor universes, with a focus on linear PCA, to statistically derive latent factor representations. The goal of our project is to extend this work using non-linear dimensionality reduction, with a focus on the techniques learned in the course.

To study this question, we found a set of factors designed to replicate returns to macroeconomic and financial market risks over time. We applied dimensionality reduction to this data, then used the lower-dimensional representation as an input to a linear regression model with stock returns as the response variable. We found that, when seeking to predict returns on the broad equity market and individual stocks, non-linear dimensionality reduction generally did not perform better than linear PCA or our theoretically-constructed benchmark.

2. Related Work

The inspiration for our project came from Kozak, Nagel, and Santosh (2017) [1], who argued that reduced-form factor models tend to perform well empirically in predicting asset prices. In their paper, the authors use linear PCA to derive a low-dimensional factor representation, from a set of factors defined by Novy-Marx and Velikov (2015) [2]. Then, they show that the principal components derived from their analysis perform about as well as their benchmark, the Fama-French three-factor model [3], in explaining the variation in returns on the portfolios they examined.

Other authors have applied PCA to a variety of different types of financial data. A'it-Sahalia and Xiu (2015) [4] apply

PCA to high-frequency data, analyzing the covariance structure of the constituents of the S&P 100 Index on a microsecond-by-microsecond level. Yang (2015) [5] applied linear PCA to the returns of the Australian stock market index and its constituents, with a focus on deriving explanations for which risk factor each principal component represented.

In our review, we found linear PCA being applied to a very wide range of different data sets and research problems, but did not find any analysis which sought to apply any other dimensionality reduction technique. The explanation for this gap seems to be the difficulty of interpretation when using non-linear techniques – principal components derived using the eigenvector method generally have a theoretical analogue, while components derived using other methods don't necessarily lend themselves easily to interpretation.

3. Methods

Our basic methodology was to apply various representation learning techniques to a set of portfolio risk factor dimensions, use the low dimensional representations to train linear regression models predicting the returns of various stocks, and compare the techniques using the R^2 value of each resulting regression model. We use R^2 as our metric as it is easily interpretable as a means of comparison between linear regression models and is a standard metric in the relevant literature (e.g., [1]).

We used a set of 24 monthly risk factors between July 1963 and December 2013 sourced from Novy-Marx and Velikov (2015) [2], a dataset used widely in financial analysis literatures; definitions for each factor are provided in the referenced paper.

Our target data consisted of monthly stock returns for Procter & Gamble, United Technologies, Exxon-Mobil, 3M, and IBM, in addition to monthly returns for the S&P 500 index, all between July 1963 and December 2013. We opted for a collection of individual stocks instead of solely the index because the Fama-French model includes overall market returns as a factor, making it unsuitable for comparison with other methods. We picked these companies for their size and longstanding history on the stock market; they have enough returns data to allow for robust analysis using our representation methods.

An initial consideration in our analysis concerned the potential presence of autocorrelation in either of our datasets. This is often an issue in financial analysis, particularly when dealing with data at fine levels of temporal granularity (e.g., daily, hourly returns). However, brief analysis on our datasets revealed that autocorrelation was largely a non-issue; lagged returns did not produce any significant gains when included as predictors in our regression models.

Our set of representation learning techniques incorporated a broad range of nonlinear methods: Kernel PCA with RBF and polynomial kernel functions, Isomap, and spectral embed-

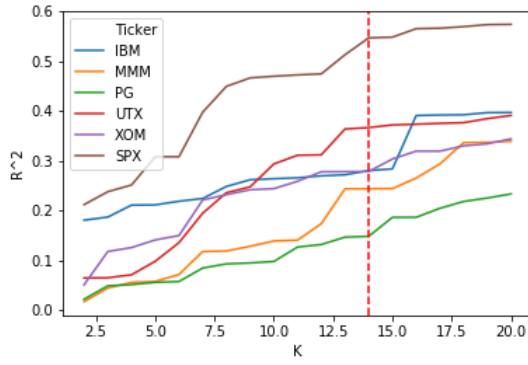


Figure 1: Tuning Components for Linear PCA.

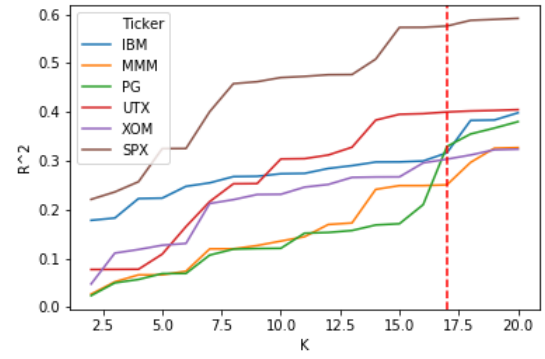


Figure 3: Tuning Components for RBF KPCA.

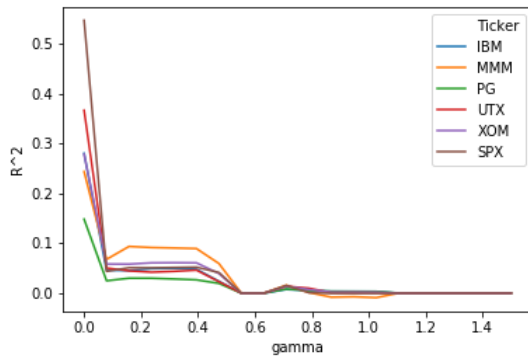


Figure 2: Tuning Gamma for RBF KPCA.

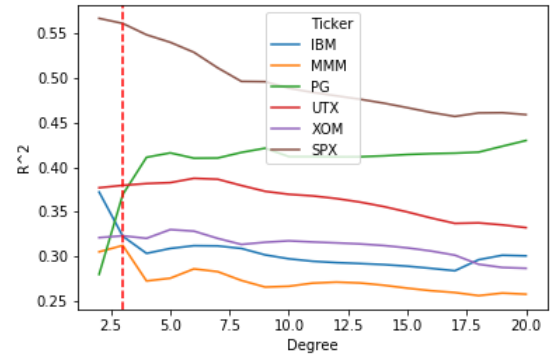


Figure 4: Tuning Degree for polynomial KPCA.

ding using Laplacian eigenmaps. By means of comparison, we also used a standard linear PCA model. Additionally, we trained linear regression models using the three-factor Fama-French dataset to get a sense of how our learned representations perform relative to a widely-used benchmark.

To train and evaluate our representation learning models, we split our dataset into training, development, and test sets (50%/25%/25%). Our split was done in time to simulate how this analysis would apply to real-world prediction settings; predicting future returns can only incorporate past data.

We tuned hyperparameters for each method by varying the value and plotting the resulting linear regression model's R^2 value for each stock's development set. For most hyperparameters, we decided on values by picking whatever configuration resulted in the largest R^2 result (i.e., which representation produced the best linear regression model.) However, when picking the number of components, we aimed for a middle value that produced good results while still reducing dimensionality by a non-trivial amount. Our decisions for these hyperparameters were done qualitatively by observing resulting R^2 plots; we looked for a 'knee' in the collective stock trajectories suggesting diminishing returns in performance with increased components.

4. Results

Our linear PCA representation appeared to yield optimal performance with 14 components (Figure 1), producing R^2 between

.1 and .35 for each individual stock.

Kernel PCA with the RBF kernel performed best with $\gamma \approx 0$ (Figure 2), with R^2 falling precipitously with increased regularization. Following this, the RBF Kernel representation with 17 components appeared to yield optimal performance (Figure 3), producing R^2 between .2 and .55.

Kernel PCA with the RBF and polynomial kernels performed approximately the same. The polynomial kernel yielded optimal performance with a 3rd degree polynomial (Figure 4), but performance was nearly identical to the RBF Kernel with varying component values (Figure 5.)

Our Isomap implementation used a K nearest neighbors graph construction; tuning yielded consensus optimal performance with $K = 24$ (Figure 6). Our Isomap representation performance appeared to level with 12 components (Figure 7), producing R^2 values between .1 and .35.

Our spectral embedding method performed eigendecomposition on a graph Laplacian matrix constructed via K nearest neighbors. Tuning the number of nearest neighbors (for graph construction) yielded a consensus optimum at $K = 70$ (Figure 8.) With this implementation, performance appeared to reach a consensus optimum with 12 components (Figure 9.)

Figure 10 plots the R^2 values for linear regression models trained using the optimal configuring of each representation learning method predicting each ticker. From this, we see that the two Kernel PCA methods yield optimal performance for every stock, but only marginally better than linear PCA on whole.

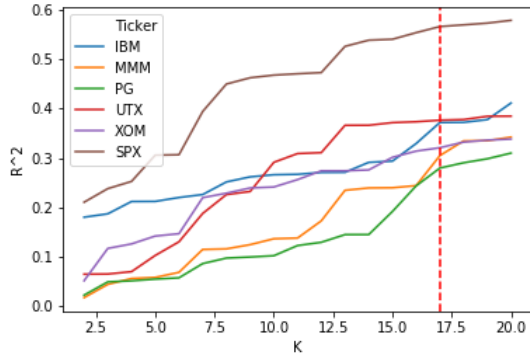


Figure 5: Tuning Components for polynomial KPCA.

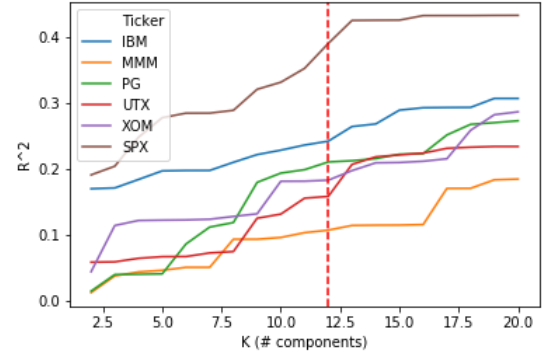


Figure 7: Tuning Components for Isomap.

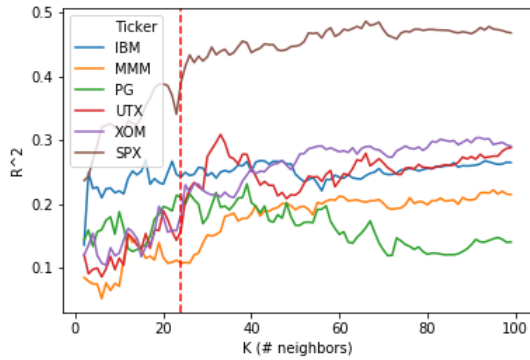


Figure 6: Tuning Nearest Neighbors for Isomap.

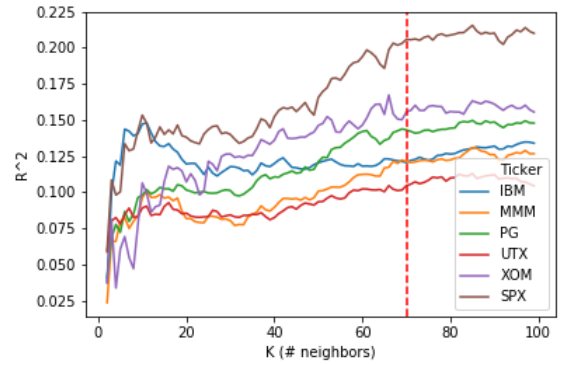


Figure 8: Tuning Nearest Neighbors for Spectral Embedding.

Isomap yields worse performance on every stock except 3M, and spectral embedding yields by far the worst performance of any representation learning method. Finally, the Fama-French five-factor model outperforms all low-dimensional representations for 3M and United Technologies, approximately matches performance for Exxon-Mobil, and underperforms most methods for IBM and Procter & Gamble. See Table 1 for complete results.

5. Discussion

Our main finding was that, for deriving a low-dimensional factor model to predict monthly returns on individual stocks, non-linear dimensionality reduction approaches do not offer an advantage over linear PCA. For the six assets we tested, in only one case did a non-linear approach have a better R^2 on the test set than the linear approach, when the derived factors using

Isomap performed slightly better than linear PCA on the return data for Procter & Gamble. Among the non-linear techniques we tested, we got the best performance using kernel PCA with the radial basis function kernel, followed by Isomap. We also tested spectral embedding, but got very poor linear regression results with that method.

A surprising finding was that improvement in R^2 on the validation set leveled off at a relatively high number of principal components. For all of our dimensionality reduction methods, we chose 14-18 components for our latent representation after tuning however, most existing research in the field has found that the latent dimensionality for factor analysis should be a relatively small number, and certainly less than 10. As described above, we chose to focus on individual stocks, while most existing research focuses on portfolios and market indices because individual stocks are more variable, it requires more components to accurately predict returns. We saw this result in our analysis, as the number of principal components to get good performance on the S&P 500 was lower than the number for individual stocks.

Comparing our results to those using the Fama-French three-factor model, our results were mixed. For two of the stocks, Fama-French performed much better than empirical results derived using PCA; for two others, Fama-French performed much better; and for the last one, our PCA representations outperformed. However, given that our lower-dimensional representation had components in the teens compared to three

Table 1: R^2 results on test dataset. **Bold** indicates best result.

Method	IBM	MMM	PG	UTX	XOM	SPX
FF5	0.350	0.409	0.107	0.494	0.207	0.986
LinearPCA	0.451	0.182	0.234	0.383	0.210	0.570
RBF.KPCA	0.478	0.186	0.234	0.391	0.236	0.577
Poly.KPCA	0.478	0.186	0.234	0.391	0.236	0.577
Isomap	0.406	0.209	0.160	0.371	0.217	0.514
SpectralEmbedding	0.081	0.082	0.116	0.081	0.085	0.142

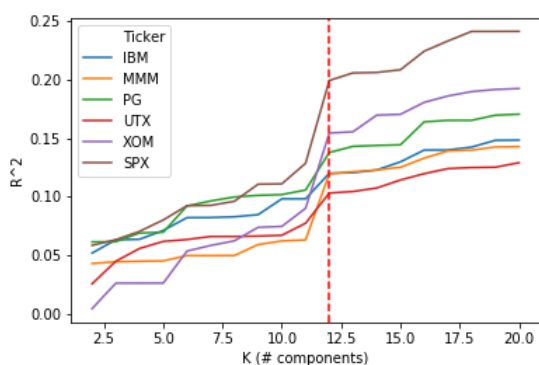


Figure 9: Tuning Components for Spectral Embedding.

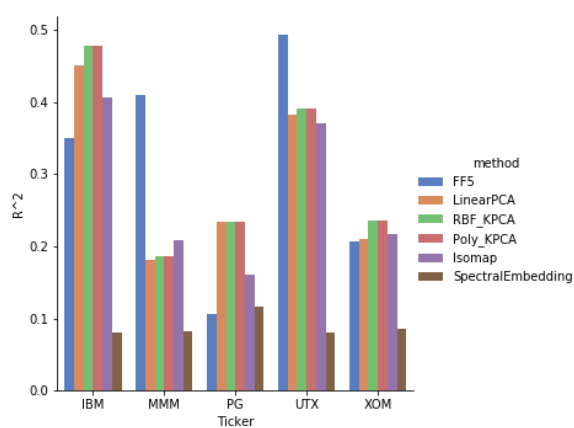


Figure 10: Test Results by Ticker and Method.

for Fama-French, it is safe to conclude that their theoretically-derived model is better than our empirically-derived one, at least when using the Novy-Marx and Velikov data as the underlying set.

The factor model approach does not seem to work well for predicting individual stock returns, at least when using monthly returns data. Both our models and the Fama-French three-factor model generally could not explain more than 40% of the variation in the data, and often much less than that. As discussed in a previous section, we chose to focus on individual stock returns because we didn't find any existing work in applying these models to individual companies, and whether they could be applicable would be of interest to market participants. Based on these results, it makes sense for researchers to focus on broader indices and portfolios, as individual stocks appear to have too much variation to be well represented by any manageably sized model.

The result of not getting an improvement in explanatory power using non-linear methods is evidence in favor of the idea that the fundamental relationship among different risk factors is linear. We would expect to see significant improvement in performance when using non-linear dimensionality reduction if our data lies in a non-linear subspace or manifold, and would expect the opposite if our data naturally lies close to a linear subspace. This result may be an explanation for why linear PCA is the overwhelming choice of technique for dimensionality reduction

in the literature - it is possible that researchers have previously tried the non-linear approach but found that factor data can generally be well represented by a linear subspace.

6. Future Work

The most frequent piece of feedback we got on our results throughout the project was on determining a qualitative interpretation of our learned representations, both linear and non-linear. This question is definitely of interest, as it would be very useful to know which factors or groups of factors (whether market-driven, macroeconomic, etc.) had more influence on returns for different companies. However, we found that conducting this analysis might have taken more analytical effort than the project itself even getting to a starting point would require a great deal of exploratory analysis on a variety of different potential underlying risk factors. We think this question could be an interesting extension of our work, especially in exploring whether there is the possibility of deriving an explanation for learned non-linear representations. One of the reasons why we believe non-linear techniques are underrepresented in the literature is precisely because it is very challenging to interpret learned non-linear representations.

Another extension of our work could be to repeat the same analysis, but with a different set of underlying factors and/or with more frequent data. As mentioned in our introduction, different authors have proposed a wide range of different factor bases to predict financial asset returns, and we only analyzed one in this project. It also would have been interesting to see if we could have gotten different results if we had data on a more frequent time scale. Most of the papers we reviewed used daily or intraday price data, but we were not able to get access to this level of detail.

7. Acknowledgements

KS wrote the proposal and update. KS sourced the data. JGD and KS imported and cleaned the data. JGD built the representation learning and regression pipelines, performed tuning experiments, and produced plots and tables. JGD and KS prepared the presentation and wrote up the final report. Thanks to Bowen Shi and Karen Livescu for their input and guidance!

8. References

- [1] S. B. Davis and P. Mermelstein, “Comparison of parametric representation for monosyllabic word recognition in continuously spoken sentences,” *IEEE Transactions on Acoustics, Speech and Signal Processing*, vol. 28, no. 4, pp. 357–366, 1980.
- [2] L. R. Rabiner, “A tutorial on hidden Markov models and selected applications in speech recognition,” *Proceedings of the IEEE*, vol. 77, no. 2, pp. 257–286, 1989.
- [3] T. Hastie, R. Tibshirani, and J. Friedman, *The Elements of Statistical Learning – Data Mining, Inference, and Prediction*. New York: Springer, 2009.
- [4] F. Lastname1, F. Lastname2, and F. Lastname3, “Title of your INTERSPEECH 2016 publication,” in *INTERSPEECH 2016 – 16th Annual Conference of the International Speech Communication Association, September 8-12, San Francisco, California, USA, Proceedings*, 2016, pp. 100–104.