What Did You Say? A Web-Based Validation of a Speech-In-Noise Task

Jason Geller
Beonline 2021

Closed vs. Open-Set Tasks

- Open-set

PLAY

Closed vs. Open-Set Tasks

- Closed-set
  - Fall
  - *Ball*
  - Shawl
  - Wall

Issues

- Sentence based (open-set) tasks are generally preferred as they are the most ecologically valid
- However:
  - Open-set tasks are difficult to use experimentally
    - Engages a whole host of processes not related to speech perception
- We need a closed-set task that better approximates everyday listening situations
  - Lexical competition
  - Talker variability

Iowa Test of Consonant Perception

- 4-AFC closed-set (single word) SiN task
  - 120 target words
  - Spoken by 4 speakers (2 women)
  - Minimal pair foils differing by first consonant
- All analysis scripts, materials, and data are available on our OSF page.

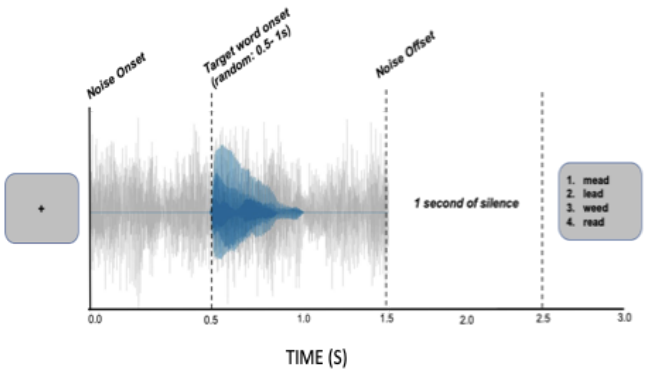

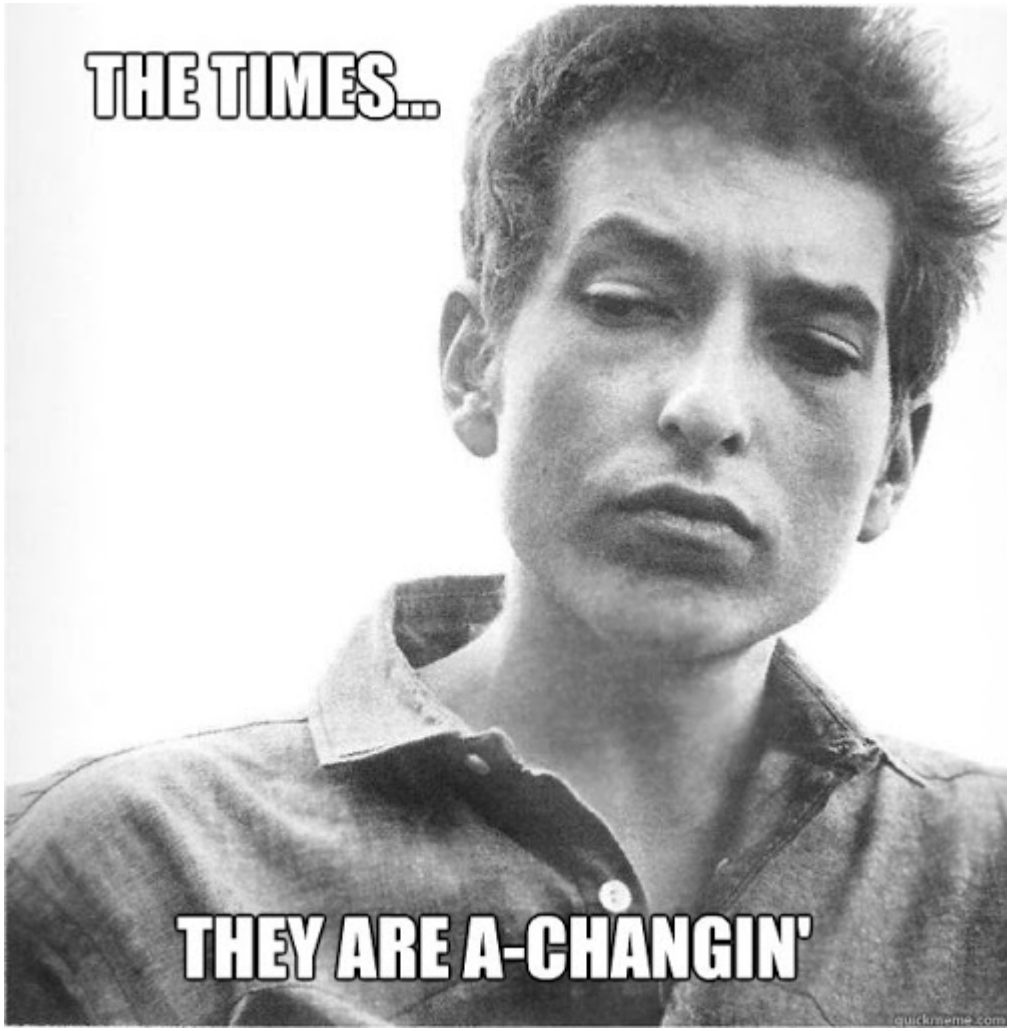
THE TIMES...
THEY ARE A-CHANGIN'
quickmeme.com

Procedure

- Two sessions (1 week apart)
  - Used Gorilla and Prolific

Procedure

- Session 1 (N=199)

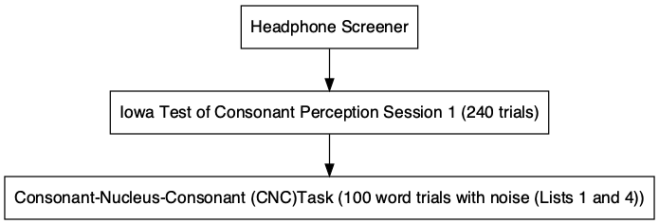

- Session 2 (N = 98)

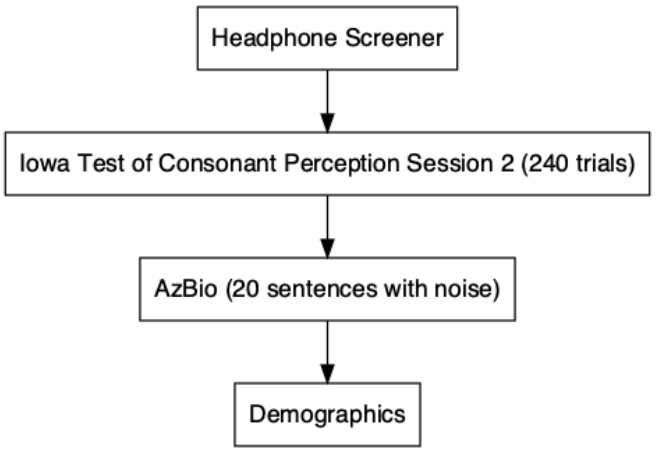

Procedure

- Let's try it out!

https://app.gorilla.sc/openmaterials/97811

Reliability

- Test-Retest
  - ICC = .8

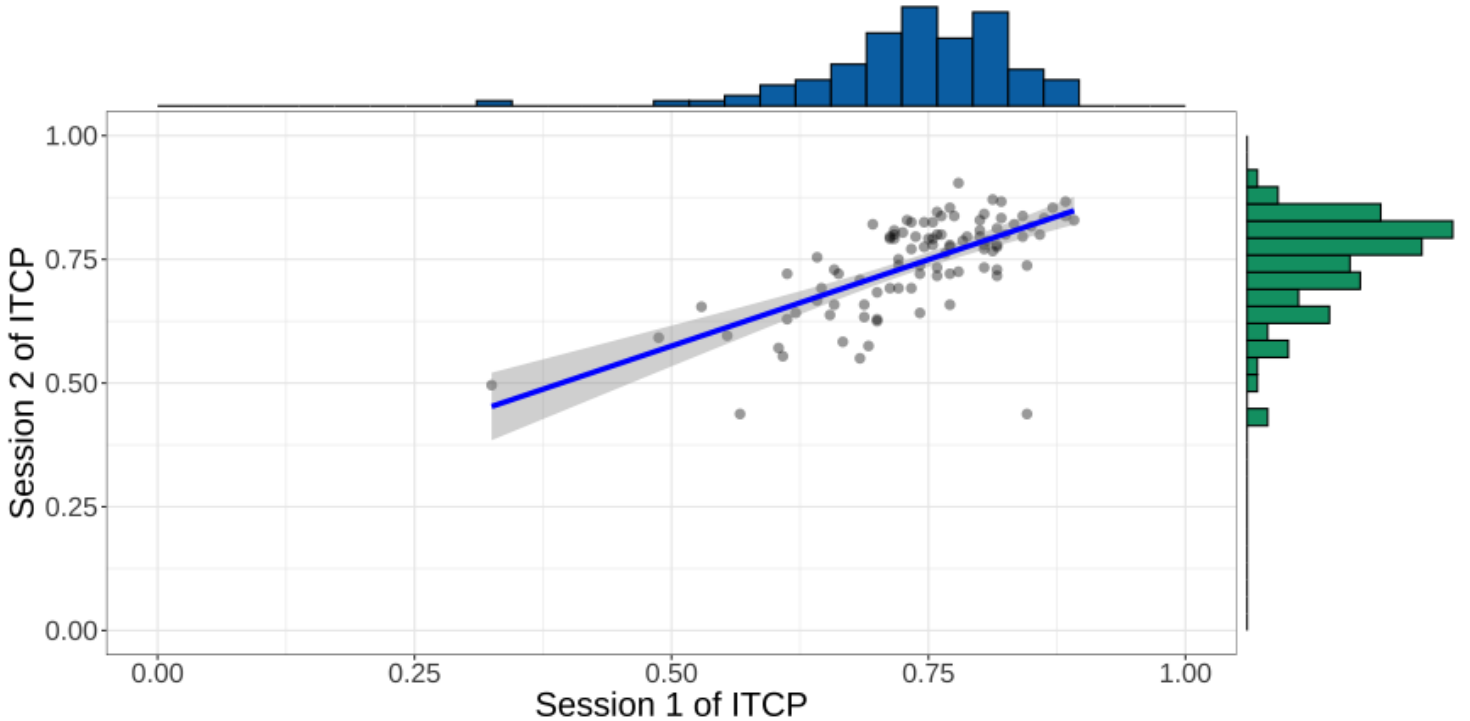

Validity

- Session 1 of ITCP and CNC

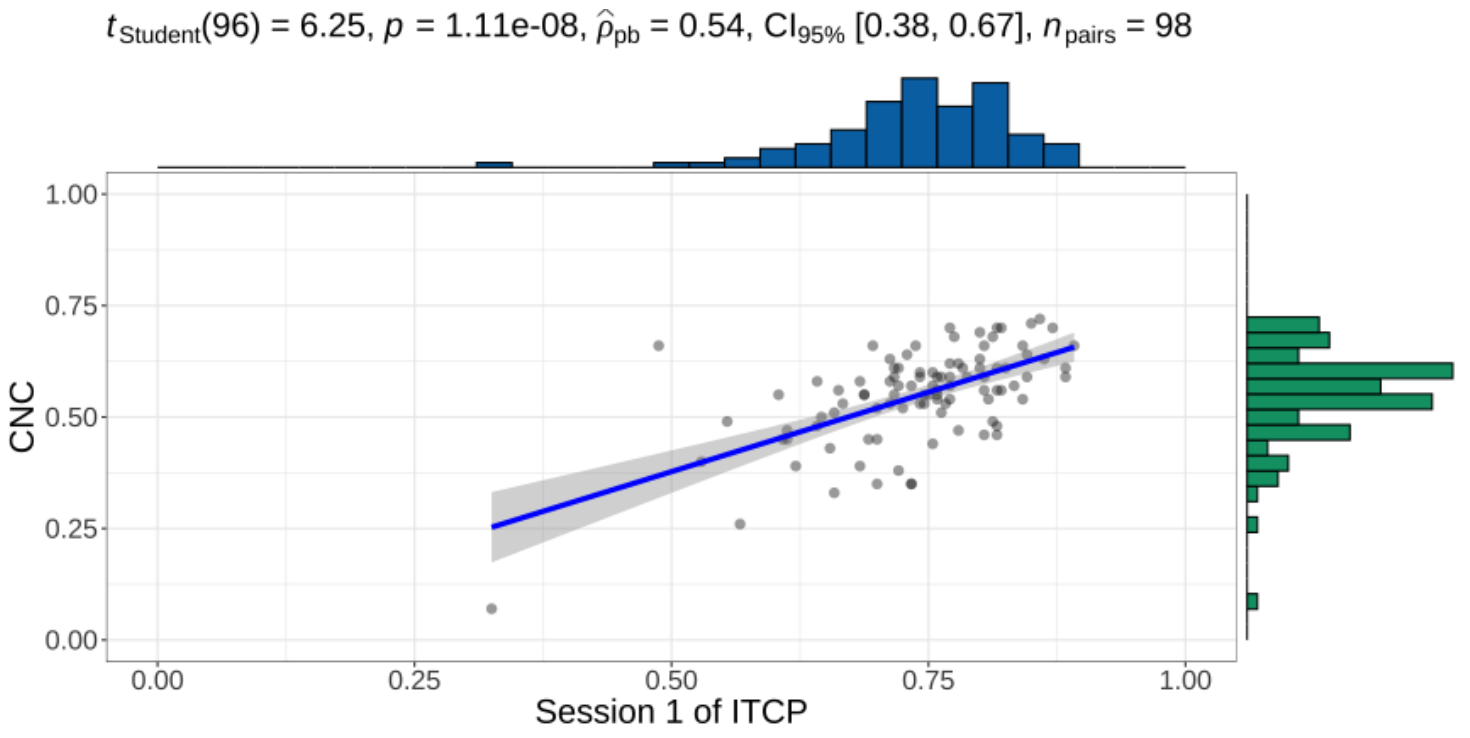

Validity

- Session 1 of ITCP and AzBio

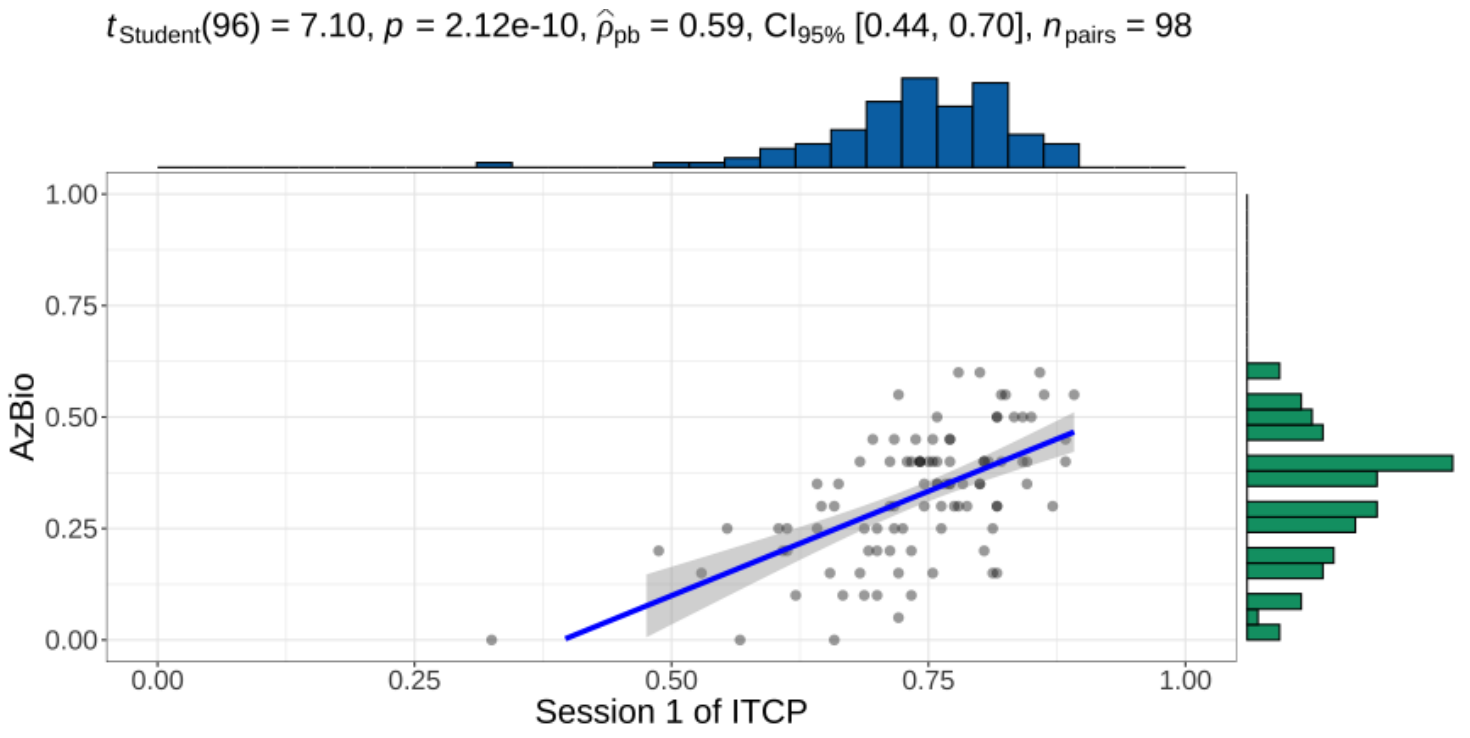

Future

- Validate in lab
    - We have data from 50 participants and data look comparable.
- Can we use this type of online testing for patients (e.g., cochlear implant patients)

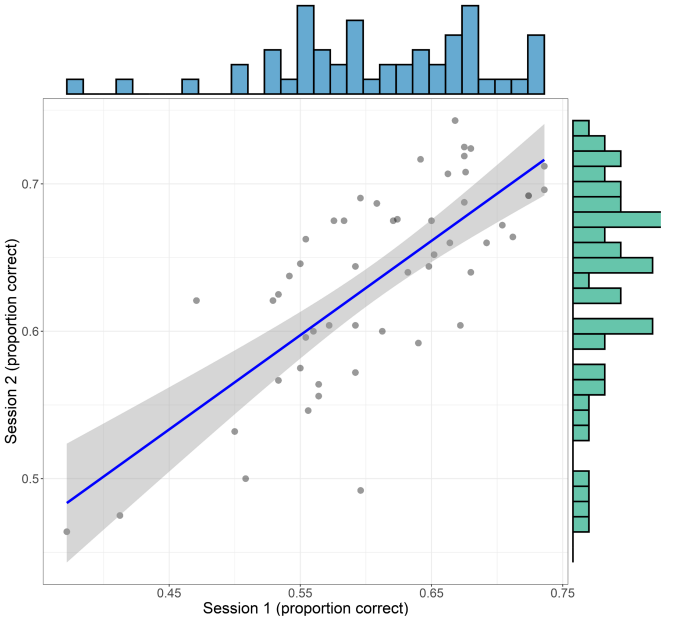

What Future Me Learned From Past Me

- Give bonuses for completing second session - *set up separate studies on recruitment platform.*
- Be explicit in your study description.
- Email subjects multiple times to remind them of an upcoming session.
- Try to make experiment length reasonable

Thank You

@jgeller_phd