

Deep Gradient Flow Methods for Option Pricing in Diffusion Models

Finance Research Day

Jasper Rou

December 15, 2023

Joint work with Antonis Papapantoleon & Emmanuil Georgoulis

Feynman-Kac formula:

$$\frac{\partial u}{\partial t} + \sum_{i,j=0}^n a^{ij} \frac{\partial^2 u}{\partial x_i \partial x_j} - \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} - ru = 0,$$

$$u(T) = \Phi(S_T)$$

Feynman-Kac formula:

$$\frac{\partial u}{\partial t} + \sum_{i,j=0}^n a^{ij} \frac{\partial^2 u}{\partial x_i \partial x_j} - \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} - ru = 0,$$

$$u(T) = \Phi(S_T)$$

Can we solve this PDE using a neural network?

Deep Galerkin Method

$$\frac{\partial u}{\partial t} + \sum_{i,j=0}^n a^{ij} \frac{\partial^2 u}{\partial x_i \partial x_j} - \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} - ru = 0,$$
$$u(T) = \Phi(S_T)$$

Deep Galerkin Method

$$\frac{\partial u}{\partial t} + \sum_{i,j=0}^n a^{ij} \frac{\partial^2 u}{\partial x_i \partial x_j} - \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} - ru = 0,$$
$$u(T) = \Phi(S_T)$$

Minimize

$$\left\| \frac{\partial u}{\partial t} + \sum_{i,j=0}^n a^{ij} \frac{\partial^2 u}{\partial x_i \partial x_j} - \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} - ru \right\|_{[0,T] \times \Omega}^2 + \|u(T) - \Phi(S_T)\|_{\Omega}^2.$$

Deep Galerkin Method

$$\frac{\partial u}{\partial t} + \sum_{i,j=0}^n a^{ij} \frac{\partial^2 u}{\partial x_i \partial x_j} - \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} - ru = 0,$$
$$u(T) = \Phi(S_T)$$

Minimize

$$\left\| \frac{\partial u}{\partial t} + \sum_{i,j=0}^n a^{ij} \frac{\partial^2 u}{\partial x_i \partial x_j} - \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} - ru \right\|_{[0,T] \times \Omega}^2 + \|u(T) - \Phi(S_T)\|_{\Omega}^2.$$

Issue: Taking second derivative makes training in high dimensions slow

Splitting method

$$\frac{\partial u}{\partial t} = - \sum_{i,j=0}^n a^{ij} \frac{\partial^2 u}{\partial x_i \partial x_j} + \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} + ru$$

Splitting method

$$\begin{aligned}\frac{\partial u}{\partial t} &= - \sum_{i,j=0}^n a^{ij} \frac{\partial^2 u}{\partial x_i \partial x_j} + \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} + ru \\ &= - \sum_{i,j=0}^n \frac{\partial}{\partial x_j} \left(a^{ij} \frac{\partial u}{\partial x_i} \right) + \sum_{i,j=0}^n \frac{\partial a^{ij}}{\partial x_j} \frac{\partial u}{\partial x_i} + \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} + ru\end{aligned}$$

Splitting method

$$\begin{aligned}\frac{\partial u}{\partial t} &= - \sum_{i,j=0}^n a^{ij} \frac{\partial^2 u}{\partial x_i \partial x_j} + \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} + ru \\&= - \sum_{i,j=0}^n \frac{\partial}{\partial x_j} \left(a^{ij} \frac{\partial u}{\partial x_i} \right) + \sum_{i,j=0}^n \frac{\partial a^{ij}}{\partial x_j} \frac{\partial u}{\partial x_i} + \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} + ru \\&= - \sum_{i,j=0}^n \frac{\partial}{\partial x_j} \left(a^{ij} \frac{\partial u}{\partial x_i} \right) + \sum_{i=0}^n \left(b^i + \sum_{j=0}^n \frac{\partial a^{ij}}{\partial x_j} \right) \frac{\partial u}{\partial x_i} + ru.\end{aligned}$$

Splitting method

$$\begin{aligned}\frac{\partial u}{\partial t} &= - \sum_{i,j=0}^n a^{ij} \frac{\partial^2 u}{\partial x_i \partial x_j} + \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} + ru \\&= - \sum_{i,j=0}^n \frac{\partial}{\partial x_j} \left(a^{ij} \frac{\partial u}{\partial x_i} \right) + \sum_{i,j=0}^n \frac{\partial a^{ij}}{\partial x_j} \frac{\partial u}{\partial x_i} + \sum_{i=0}^n b^i \frac{\partial u}{\partial x_i} + ru \\&= - \sum_{i,j=0}^n \frac{\partial}{\partial x_j} \left(a^{ij} \frac{\partial u}{\partial x_i} \right) + \sum_{i=0}^n \left(b^i + \sum_{j=0}^n \frac{\partial a^{ij}}{\partial x_j} \right) \frac{\partial u}{\partial x_i} + ru. \\&= -\nabla \cdot (A \nabla u) + ru + F(u), \\F(u) &= \mathbf{b} \cdot \nabla u.\end{aligned}$$

Example: Heston model

$$\begin{aligned}dS_t &= rS_t dt + \sqrt{V_t} S_t dW_t, & S_0 &> 0, \\dV_t &= \kappa(\theta - V_t) dt + \eta \sqrt{V_t} dB_t, & V_0 &> 0.\end{aligned}$$

Example: Heston model

$$dS_t = rS_t dt + \sqrt{V_t} S_t dW_t, \quad S_0 > 0,$$

$$dV_t = \kappa(\theta - V_t)dt + \eta\sqrt{V_t}dB_t, \quad V_0 > 0.$$

$$\frac{\partial u}{\partial t} = -rS \frac{\partial u}{\partial S} - \kappa(\theta - V) \frac{\partial u}{\partial V} - \frac{1}{2} S^2 V \frac{\partial^2 u}{\partial S^2} - \frac{1}{2} \eta^2 V \frac{\partial^2 u}{\partial V^2} - \rho \eta S V \frac{\partial^2 u}{\partial S \partial V} + ru$$

Example: Heston model

$$\frac{\partial u}{\partial t} = -rS \frac{\partial u}{\partial S} - \kappa(\theta - V) \frac{\partial u}{\partial V} - \frac{1}{2} S^2 V \frac{\partial^2 u}{\partial S^2} - \frac{1}{2} \eta^2 V \frac{\partial^2 u}{\partial V^2} - \rho \eta S V \frac{\partial^2 u}{\partial S \partial V} + ru$$

Example: Heston model

$$\begin{aligned}\frac{\partial u}{\partial t} &= -rS \frac{\partial u}{\partial S} - \kappa(\theta - V) \frac{\partial u}{\partial V} - \frac{1}{2} S^2 V \frac{\partial^2 u}{\partial S^2} - \frac{1}{2} \eta^2 V \frac{\partial^2 u}{\partial V^2} - \rho \eta S V \frac{\partial^2 u}{\partial S \partial V} + ru \\ &= -rS \frac{\partial u}{\partial S} - \kappa(\theta - V) \frac{\partial u}{\partial V} - \frac{\partial}{\partial S} \left(\frac{1}{2} S^2 V \frac{\partial u}{\partial S} \right) + S V \frac{\partial u}{\partial S} \\ &\quad - \frac{\partial}{\partial V} \left(\frac{1}{2} \eta^2 V \frac{\partial u}{\partial V} \right) + \frac{1}{2} \eta^2 \frac{\partial u}{\partial V} - \frac{\partial}{\partial S} \left(\frac{1}{2} \rho \eta S V \frac{\partial u}{\partial V} \right) + \frac{1}{2} \rho \eta V \frac{\partial u}{\partial V} \\ &\quad - \frac{\partial}{\partial V} \left(\frac{1}{2} \rho \eta S V \frac{\partial u}{\partial S} \right) + \frac{1}{2} \rho \eta S \frac{\partial u}{\partial S} + ru\end{aligned}$$

Example: Heston model

$$\begin{aligned}
 \frac{\partial u}{\partial t} &= -rS \frac{\partial u}{\partial S} - \kappa(\theta - V) \frac{\partial u}{\partial V} - \frac{1}{2} S^2 V \frac{\partial^2 u}{\partial S^2} - \frac{1}{2} \eta^2 V \frac{\partial^2 u}{\partial V^2} - \rho \eta S V \frac{\partial^2 u}{\partial S \partial V} + ru \\
 &= -rS \frac{\partial u}{\partial S} - \kappa(\theta - V) \frac{\partial u}{\partial V} - \frac{\partial}{\partial S} \left(\frac{1}{2} S^2 V \frac{\partial u}{\partial S} \right) + S V \frac{\partial u}{\partial S} \\
 &\quad - \frac{\partial}{\partial V} \left(\frac{1}{2} \eta^2 V \frac{\partial u}{\partial V} \right) + \frac{1}{2} \eta^2 \frac{\partial u}{\partial V} - \frac{\partial}{\partial S} \left(\frac{1}{2} \rho \eta S V \frac{\partial u}{\partial V} \right) + \frac{1}{2} \rho \eta V \frac{\partial u}{\partial V} \\
 &\quad - \frac{\partial}{\partial V} \left(\frac{1}{2} \rho \eta S V \frac{\partial u}{\partial S} \right) + \frac{1}{2} \rho \eta S \frac{\partial u}{\partial S} + ru \\
 &= -\nabla \cdot \left(\frac{V}{2} \begin{bmatrix} S^2 & \eta \rho S \\ \eta \rho S & \eta^2 \end{bmatrix} \nabla u \right) + \begin{bmatrix} (V - r + \frac{1}{2} \rho \eta) S \\ \kappa(V - \theta) + \frac{1}{2} \eta \rho V + \frac{\eta^2}{2} \end{bmatrix} \cdot \nabla u + ru
 \end{aligned}$$

Time Deep Nitsche Method

$$\begin{cases} u_\tau - \nabla \cdot (A \nabla u) + ru + F(u) = 0, & (\tau, \mathbf{x}) \in [0, T] \times \Omega, \\ u(0, \mathbf{x}) = \Phi(\mathbf{x}), & \mathbf{x} \in \Omega. \end{cases}$$

Time Deep Nitsche Method

$$\begin{cases} u_\tau - \nabla \cdot (A \nabla u) + ru + F(u) = 0, & (\tau, \mathbf{x}) \in [0, T] \times \Omega, \\ u(0, \mathbf{x}) = \Phi(\mathbf{x}), & \mathbf{x} \in \Omega. \end{cases}$$

- Divide $[0, T]$ in intervals $(\tau_{k-1}, \tau_k]$ with $h = \tau_k - \tau_{k-1}$

$$\frac{U^k - U^{k-1}}{h} - \nabla \cdot (A \nabla U^k) + rU^k + F(U^{k-1}) = 0$$

Time Deep **Nitsche** Method

$$\frac{U^k - U^{k-1}}{h} - \nabla \cdot (A \nabla U^k) + rU^k + F(U^{k-1}) = 0$$

Time Deep **Nitsche** Method

$$\frac{U^k - U^{k-1}}{h} - \nabla \cdot (A \nabla U^k) + rU^k + F(U^{k-1}) = 0$$

$$0 = \int_{\Omega} \left((U^k - U^{k-1}) + h \left(-\nabla \cdot (A \nabla U^k) + rU^k + F(U^{k-1}) \right) \right) v d\mathbf{x}$$

Time Deep Nitsche Method

$$\frac{U^k - U^{k-1}}{h} - \nabla \cdot (A \nabla U^k) + rU^k + F(U^{k-1}) = 0$$

$$\begin{aligned} 0 &= \int_{\Omega} \left((U^k - U^{k-1}) + h \left(-\nabla \cdot (A \nabla U^k) + rU^k + F(U^{k-1}) \right) \right) v d\mathbf{x} \\ &= i'(0) \end{aligned}$$

$$i(\tau) = I^k(U^k + \tau v)$$

Time Deep **Nitsche** Method

$$\frac{U^k - U^{k-1}}{h} - \nabla \cdot (A \nabla U^k) + rU^k + F(U^{k-1}) = 0$$

$$\begin{aligned} 0 &= \int_{\Omega} \left((U^k - U^{k-1}) + h \left(-\nabla \cdot (A \nabla U^k) + rU^k + F(U^{k-1}) \right) \right) v dx \\ &= i'(0) \end{aligned}$$

$$i(\tau) = I^k(U^k + \tau v)$$

$$I^k(u) = \frac{1}{2} \|u - U^{k-1}\|^2 + h \int_{\Omega} \frac{1}{2} \left((\nabla u)^T A \nabla u + ru^2 \right) + F(U^{k-1}) u dx$$

$$U^k = \arg \min_{u \in H^1(\Omega)} I^k(u)$$

Time **Deep** Nitsche Method

$$I^k(u) = \frac{1}{2} \|u - U^{k-1}\|^2 + h \int_{\Omega} \frac{1}{2} \left((\nabla u)^T A \nabla u + ru^2 \right) + F(U^{k-1}) u dx$$

$$U^k = \arg \min_{u \in H^1(\Omega)} I^k(u)$$

Time **Deep** Nitsche Method

$$I^k(u) = \frac{1}{2} \|u - U^{k-1}\|^2 + h \int_{\Omega} \frac{1}{2} \left((\nabla u)^T A \nabla u + ru^2 \right) + F(U^{k-1}) u dx$$


$$U^k = \arg \min_{u \in H^1(\Omega)} I^k(u)$$

$$f^k(\theta) = \arg \min_{u \in \mathcal{C}(\theta)} I^k(u)$$

$\mathcal{C}(\theta)$ = space of neural networks with parameters θ

Architecture

No-arbitrage bound: $u(t, S) \geq S_t - Ke^{-rt}$

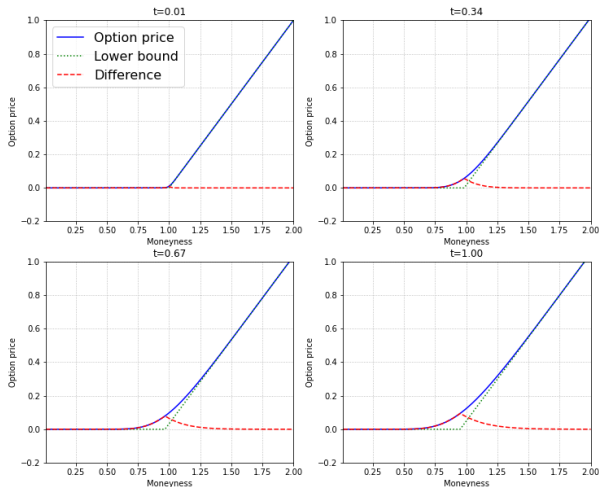

Algorithm

1: Initialize θ_0 .

Algorithm

- 1: Initialize θ_0 .
- 2: **for** each time step $k = 1, \dots, N_t$ **do**
- 3: Initialize $\theta_0^k = \theta^{k-1}$.

Algorithm


- 1: Initialize θ_0 .
- 2: **for** each time step $k = 1, \dots, N_t$ **do**
- 3: Initialize $\theta_0^k = \theta^{k-1}$.
- 4: **for** each sampling stage n **do**
- 5: Generate random points \mathbf{x}^i for training.

Algorithm

- 1: Initialize θ_0 .
- 2: **for** each time step $k = 1, \dots, N_t$ **do**
- 3: Initialize $\theta_0^k = \theta^{k-1}$.
- 4: **for** each sampling stage n **do**
- 5: Generate random points \mathbf{x}^i for training.
- 6: Calculate the cost functional $I^k(f(\theta_n^k; \mathbf{x}^i))$.

Algorithm

- 1: Initialize θ_0 .
- 2: **for** each time step $k = 1, \dots, N_t$ **do**
- 3: Initialize $\theta_0^k = \theta^{k-1}$.
- 4: **for** each sampling stage n **do**
- 5: Generate random points \mathbf{x}^i for training.
- 6: Calculate the cost functional $I^k(f(\theta_n^k; \mathbf{x}^i))$.
- 7: Take a descent step $\theta_{n+1}^k = \theta_n^k - \alpha_n \nabla_{\theta} I^k(f(\theta_n^k; \mathbf{x}^i))$.
- 8: **end for**
- 9: **end for**

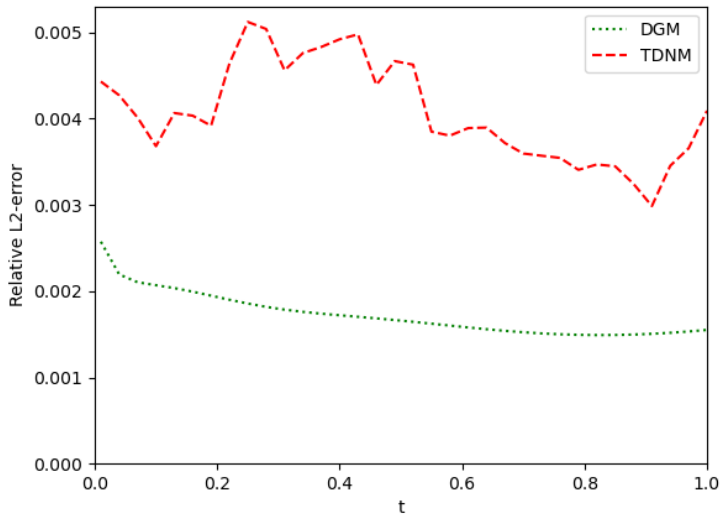

Lifted Heston

- Rough Heston: more accurate, but not Markovian

Lifted Heston

- Rough Heston: more accurate, but not Markovian
- Lifted Heston: Markovian, but multiple dimensions

$$dS_t = rS_t dt + \sqrt{V_t^n} S_t dW_t, \quad S_0 > 0,$$


$$V_t^n = g^n(t) + \sum_{i=1}^n c_i^n V_t^{n,i},$$

$$dV_t^{n,i} = -\left(\gamma_i^n V_t^{n,i} + \lambda V_t^n\right) dt + \eta \sqrt{V_t^n} dB_t, \quad V_0^{n,i} = 0,$$

$$g^n(t) = V_0 + \lambda \theta \sum_{i=1}^n c_i^n \int_0^t e^{-\gamma_i^n(t-s)} ds,$$


Lifted Heston, $n = 1$

Lifted Heston, $n = 1$

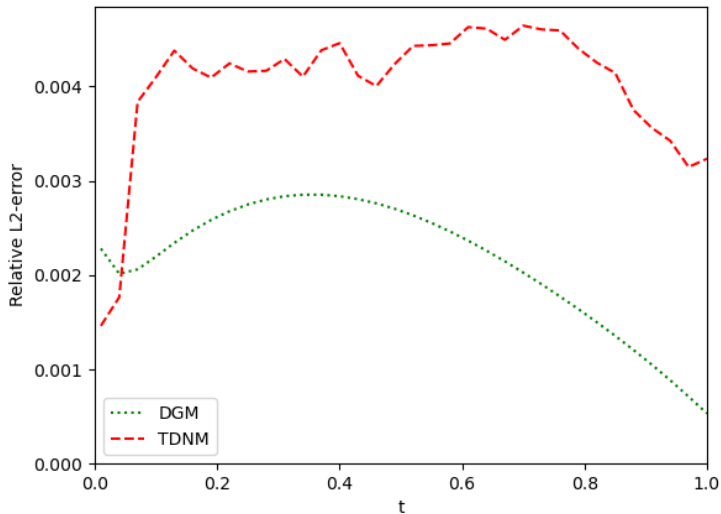

Lifted Heston, $n = 20$

Lifted Heston, $n = 20$

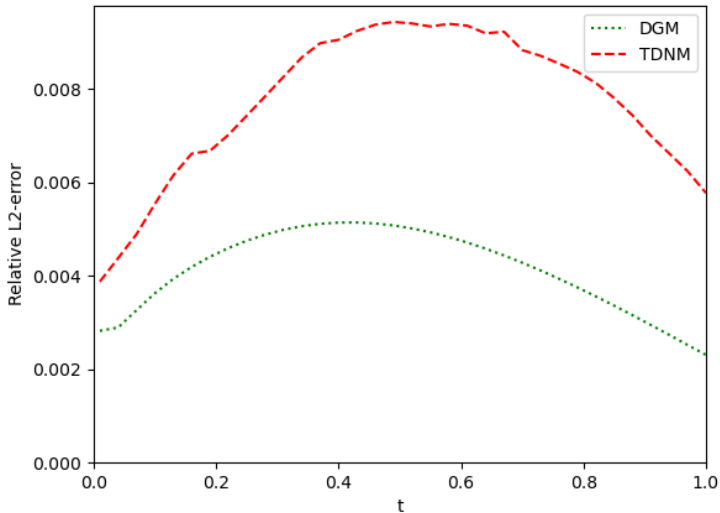

Running times

Method	Heston	LH, $n=1$	LH, $n=20$
DGM	1.3	1.3	6.0
TDNM	0.77	0.66	1.0

Table: Training time (10^4 seconds)

Running times

Method	Heston	LH, $n=1$	LH, $n=20$
DGM	1.3	1.3	6.0
TDNM	0.77	0.66	1.0

Table: Training time (10^4 seconds)

Method	Heston	LH, $n=1$	LH, $n=20$
COS	10^{-2}	8.9	10.4
DGM	10^{-2}	10^{-2}	10^{-2}
TDNM	10^{-2}	10^{-2}	10^{-2}

Table: Computing time (seconds)

Conclusion

	Accurate	Fast
Heston	×	✓
Lifted Heston	✓	×

Conclusion

	Accurate	Fast
Heston	×	✓
Lifted Heston	✓	×
Lifted Heston with neural networks	✓	✓

Deep Gradient Flow Methods for Option Pricing in Diffusion Models

Finance Research Day

Jasper Rou

December 15, 2023

j.g.rou@tudelft.nl

www.jasperrou.nl