

In-Class Exercise/Demo



In-Class Demo

- Let's practice the OAuth and work with APIs.
- First, create a new Github repository **m5-w3-d1-exercise** and the clone into your WESTCLIFF folder.
- Next, head over to GAP and download **m5-w3-d1-demo.zip** folder, unzip and drop the contents in the clone folder.
- Launch VS Code and navigate to the clone folder.
- Open Terminal and `cd example/client`
- Let's run `npm install`
- Next let's review `AuthorizationCodeExample.js` and `ImplicitGrantExample.js` under `example/client/src`



In-Class Demo

```
export default function AuthorizationCodeExample() {
  const [accessToken, setAccessToken] = useState(null);
  const [error, setError] = useState(null);

  // You can test this with a GitHub OAuth2 app (provided t
  const onSuccess = ({ code }) =>
    fetch(`${serverUrl}/github/token?code=${code}`)
      .then(res => res.json())
      .then(data => setAccessToken(data.access_token));

  return (
    <div className="column">
      {
        error && <ErrorAlert error={error} />
      }
      <OAuth2Login
        authorizationUrl={authorizationUrl}
        clientId={clientId}
        redirectUri={redirectUri}
        responseType="code"
        buttonText="Auth code login"
        onSuccess={onSuccess}
        onFailure={setError}
      />
      {
        accessToken && <p>Access token: {accessToken}</p>
      }
    </div>
  );
};
```

Autho code

```
export default function ImplicitGrantExample() {
  const [accessToken, setAccessToken] = useState(null);
  const [error, setError] = useState(null);

  const onSuccess = ({ access_token: token }) => setAccessToken(token);
  return (
    <div className="column">
      {
        error && <ErrorAlert error={error} />
      }
      <OAuth2Login
        authorizationUrl={authorizationUrl}
        clientId={clientId}
        redirectUri={redirectUri}
        responseType="token"
        buttonText="Implicit grant login"
        onSuccess={onSuccess}
        onFailure={setError}
      />
      {
        accessToken && <p>Access token: {accessToken}</p>
      }
    </div>
  );
};
```

Implicit code



In-Class Demo

- Next let's Run `npm start` and go to <http://localhost:1234/>
- You will see a pop with an error that it is missing authorization key.
- Next let's setup authorization key.
- For this example we are setting up a Git hub API
- Go to [URL](#)
- This is Github documentation
- Click on [Registered](#) next to client_id
- Make sure you are [logged in](#) to your Github account



In-Class Demo

- Let's enter this information
- Once you click submit
- It will give you [Client ID](#).
- Enter the Clientid on file [settings.sample.js](#) line 11

(Next Slide)

Application name *

m5-w3-d1-demo

Something users will recognize and trust.

Homepage URL *

http://localhost:1234/

The full URL to your application homepage.

Application description

Application description is optional

This is displayed to all users of your application.

Authorization callback URL *

http://localhost:1234/

Your application's callback URL. Read our [OAuth documentation](#) for more information.



In-Class Demo

For authorization URL: enter

<https://github.com/login/oauth/authorize>

This URL is provided in the documentation
on this page: (OAuth Documentation)

<https://docs.github.com/en/developers/apps/authorizing-oauth-apps>

```
// Authorization screen base URL
// e.g. https://developer.github.com/apps/building-oauth-apps/authorizing-oa
export const authorizationUrl = '';

// To get a client ID, create an app, e.g.
// GitHub (authorization code grant only): https://github.com/settings/devel
// Spotify (implicit grant & auth code): https://developer.spotify.com/dashb
export const clientId = '';

// You get to configure this in your OAuth settings
// If you use React Router, the relative path (empty here) can match
// that of a route which displays nothing
export const redirectUri = 'http://localhost:1234/';

// Authorization code flow only: base URL for your server
// The one provided below is that of the sample Express server provided
export const serverUrl = 'http://localhost:5000';
```



In-Class Demo


- Now let's rename the .JS file to point to correct code.
- Make a copy of `setting.sample.js` file and save it as “`settings-code.js`” and “`setting-implicit.js`”
- Next review your page in browser and click on any button. The pop up will ask you to authorize the login.



In-Class Demo

Implicit grant login

Auth code login

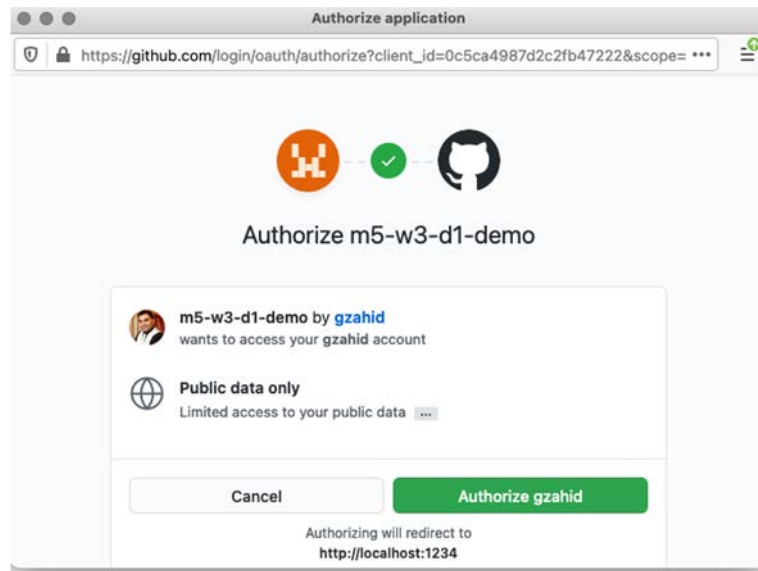



In-Class Exercise Demo

Due:

Today 10.30PM PT

Submission:

Post Github link on GAP Week 3 Day 1 Exercise