Device Tags for Classification

API Guide for Integration Partners

Introduction

The Netskope Device Classification API enables partners and administrators to programmatically manage device tags within their Netskope environment. Device tags provide a flexible classification mechanism to organize and apply policies to devices based on custom risk assessment, device type, department, or any other business classification criteria.

This guide demonstrates how to view existing device tags, create new tags, apply them to devices, and manage tag lifecycle through RESTful API endpoints.

We will use both Device Tags and Device Classification. Here is a short description of both.

Device Classifications vs Device Tags

Device Classifications

- Purpose: Automatic, rule-based classification system
- How they work: You create rules that automatically apply classifications to devices based on conditions (OS type, presence of other tags, etc.)
- API Endpoints:
    - Create: POST /api/v2/deviceclassification/tags
    - Create rules: POST /api/v2/deviceclassification/rules
    - List: GET /api/v2/deviceclassification/tags
- Examples: ID 18006 ("low risk"), 16341 ("medium risk"), 7841 ("Risky Device")
- Applied by: Rules engine (automatic)
- Use case: Static classification based on device characteristics

Device Tags

- Purpose: Manual, explicit tagging system for direct device assignment
- How they work: You directly assign tags to specific devices via API calls
- API Endpoints:
    - Apply: POST /api/v2/devices/device/tags/bulkreplace
    - Retrieve: POST /api/v2/devices/device/tags/gettags
    - Remove: DELETE /api/v2/devices/device/tags/{id}
- Examples: ID 1137 ("low risk"), 912 ("Medium Risk")
- Applied by: Direct API calls (manual)
- Use case: Dynamic tagging based on real-time risk assessment from third-party tools

2025 © Netskope Public. All rights reserved.


Device Tags for Classification

Prerequisites

Before using the Device Classification API, ensure the following:

- API Access: The Device Classification APIs are currently in beta. Contact your Netskope account team to request access.
- API Token: Generate an API token with appropriate functional area permissions from your Netskope tenant.
    a. Functional Areas: In your Netskope tenant, enable the following functional areas:

    Access Control > NS Client
    - Set both Device Classification and Devices to Manage
    - CASB > CCI to view

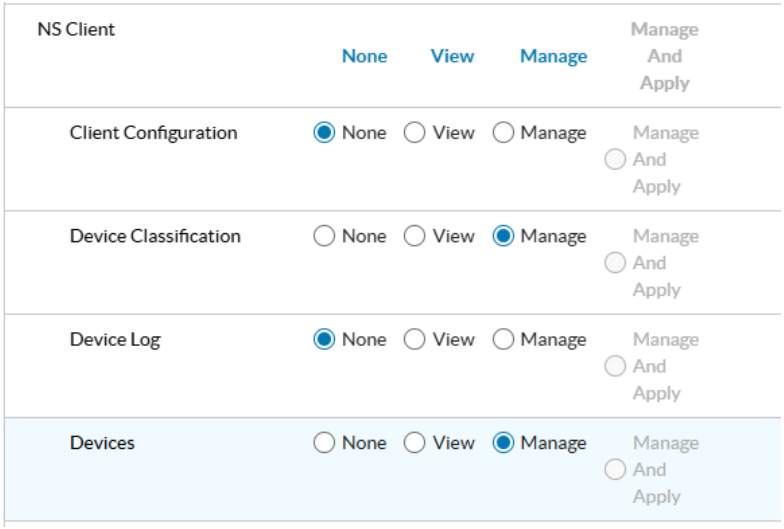

- User-Agent String: Include a user-agent string in the format <Vendor-product-version> in all API requests.

Things to note

1. Batch Processing & Performance Optimization

- Devices are processed in batches of **100** (`TAG_DEVICE_BATCH_SIZE`)
- Large device sets are split into multiple sequential batches
- Each batch triggers a separate Netskope API call

2025 © Netskope Public. All rights reserved.

Device Tags for Classification



---

2. Tag Validation & Constraints

- **Maximum tag length:** 80 characters
- **Maximum tags per device:** 5 (Netskope platform limit)
    - For Replace action, only the first 5 sorted tags are applied
- **Tag name format:**
    - Allows only alphanumeric characters, hyphens, and spaces

---

3. Comma-Separated Value Handling

- **Tags:** Split and processed as individual tags
- **User Key:** Split and processed individually
- **Device UID:** Comma-separated values are rejected
- Empty values after splitting are detected and rejected with validation errors

Available Endpoints

The following endpoints are available for managing device classification tags:

Tag Management Endpoints

Method	Endpoint	Description
GET	/api/v2/deviceclassification/tags	List all device tags
POST	/api/v2/deviceclassification/tags	Create a new device tag
GET	/api/v2/deviceclassification/tags/{id}	Retrieve specific tag by ID
PUT	/api/v2/deviceclassification/tags/{id}	Update entire tag
PATCH	/api/v2/deviceclassification/tags/{id}	Partially update tag
DELETE	/api/v2/deviceclassification/tags/{id}	Delete a device tag
GET	/api/v2/deviceclassification/options	Get available classification options

Device Tag Application Endpoints

Method	Endpoint	Description
POST	/api/v2/devices/device/tags	Apply tags to a device

2025 © Netskope Public. All rights reserved.

Device Tags for Classification

POST	/api/v2/devices/device/tags/gettags	Get tags for a specific device
DELETE	/api/v2/devices/device/tags/{id}	Remove tag from a device
PATCH	/api/v2/devices/device/tags/{id}	Update device tag assignment
GET	/api/v2/deviceclassification/rules	List classification rules

API Examples

Viewing Device Tags

To retrieve all device tags in your Netskope environment, make a GET request to the tags endpoint:


```
GET /api/v2/deviceclassification/tags
```

Response Example:


```
[  {
    "id": 8505,
    "priority": 7,
    "name": "Low Risk",
    "description": "the risk of this device is low",
    "modifiedBy": "test@test.com",
    "modifiedTime": "2025-07-28T08:48:14.000Z",
    "policyNames": ["Low-Risk device"]
  }
]
```


2025 © Netskope Public. All rights reserved.

Device Tags for Classification

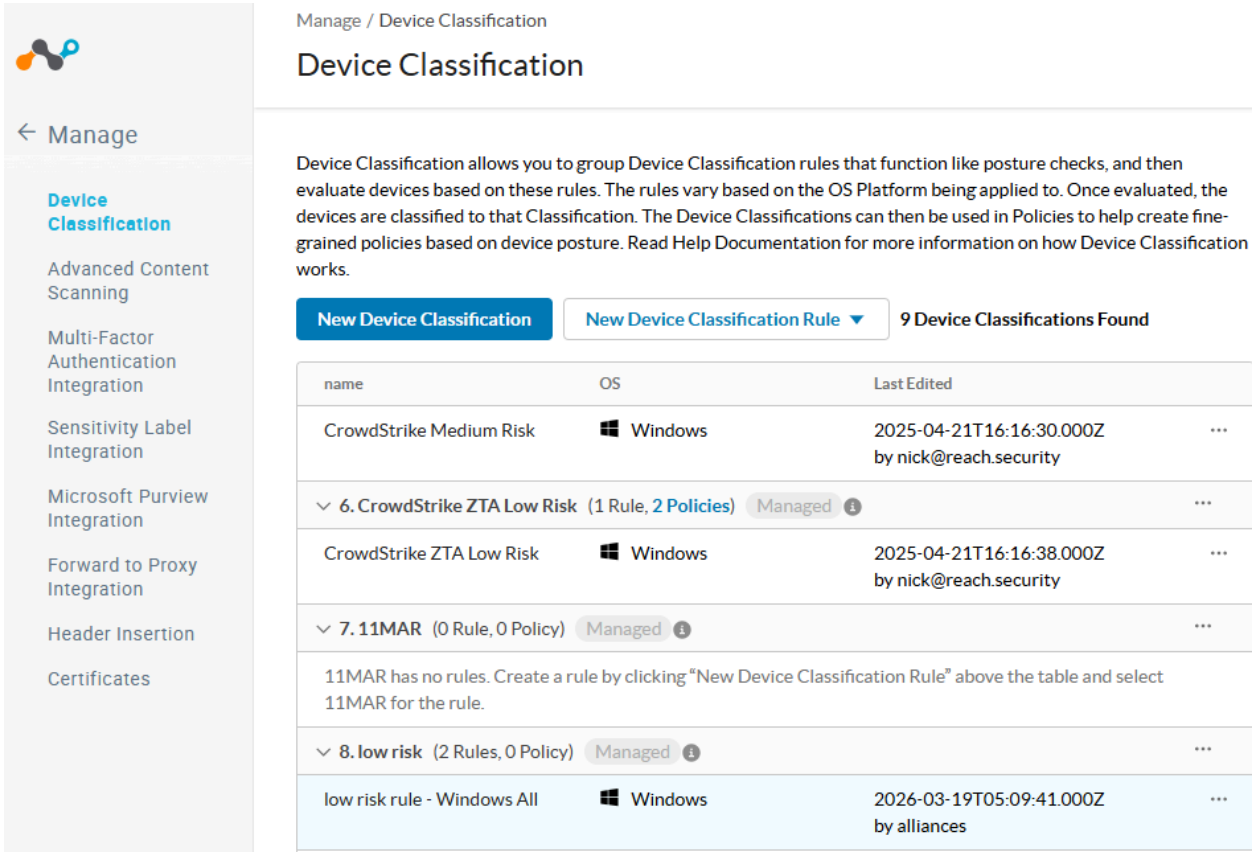

Creating a New Device Classification Tag

To create a new device classification tag (label), make a POST request with the tag details. The request body must be an **array of tag objects**:

POST /api/v2/deviceclassification/tags

Request Body:

```
[
  {
    "name": "low risk",
    "description": "Devices with low risk classification"
  }
]
```


Response Example:

```
{
  "status": true,
  "data": [18006]
}
```

2025 © Netskope Public. All rights reserved.

Device Tags for Classification

Notice that when you create it, it is missing a Rule / OS.

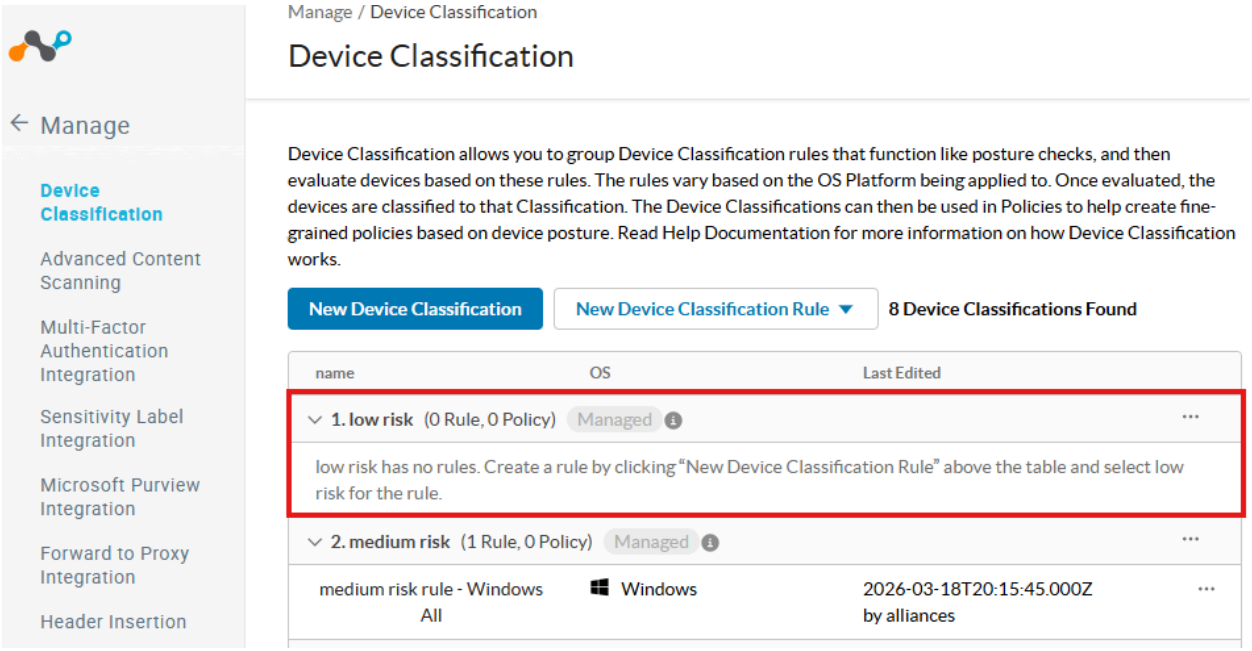

Creating a Device Classification Rule

Device Classification Rules define how devices are automatically tagged based on specific criteria. Create rules using the POST endpoint. The request body must be an **array of rule objects**:

POST /api/v2/deviceclassification/rules

Request Body Example - Operating System Criteria:

```
[
 {
  "name": "low risk rule - Windows All",
  "label": "low risk",
  "os": "windows",
  "conditions": {
   "$and": [
    {
     "$and": [
      {
       "$or": [
        {
         "min_os_version_check": {
```

2025 © Netskope Public. All rights reserved.

Device Tags for Classification


```
            "min_os_version": "0",
            "edition": "Windows All"
          }
        }
      ]
    }
  ]
 }
]
```


Second POST - You must do both. Request Body Example - Device Tag Criteria:

```
[
 {
  "name": "low risk tag rule",
  "label": "low risk",
  "os": "windows",
  "conditions": {
   "$and": [
    {
     "$and": [
      {
       "$and": [
        {"device_tag_check": {"tag_id": 1137}}
       ]
      }
     ]
    }
   ]
  }
 }
]
```

Note: the tag_id in this second POST is the device_tag. Use /api/v2/devices/device/tags/gettags to find the id. I will show you how below.

2025 © Netskope Public. All rights reserved.

Device Tags for Classification

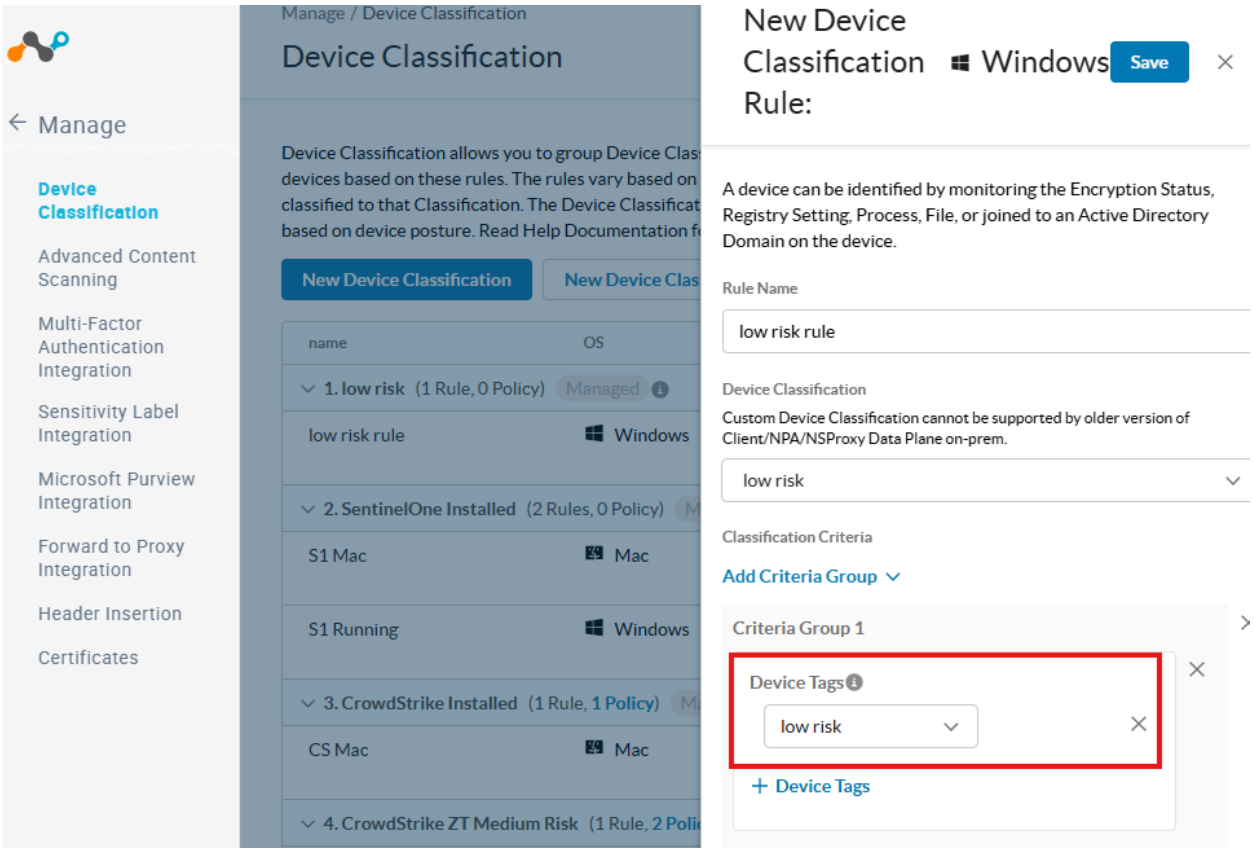

Important Notes:

- Request body must be an array of rule objects
- Use "label" field with the tag name (not tag_id)
- Use "os" field to specify the operating system (windows, mac, linux, android, ios)
- Conditions support multiple criteria types: min_os_version_check, device_tag_check, av_check, domain_check, file_check, etc.
- For OS edition criteria, use min_os_version_check with edition values like "Windows All", "Windows 10", "Windows 11"
- Status 201 indicates successful rule creation

Finding Devices by Status Query

Before applying tags to devices, you need to find the **nsdeviceuid**. Use the device status endpoint to query devices by time range:

```
GET /api/v2/events/datasearch/clientstatus
```

Request Body:

2025 © Netskope Public. All rights reserved.

Device Tags for Classification

- starttime - Unix timestamp for query start time
- endtime - Unix timestamp for query end time
- fields - Comma-separated list of fields to return

Example URL:


> GET /api/v2/events/datasearch/clientstatus?starttime=1773101400&endtime=1773187800&fields=nsdeviceuid,hostname,os,client_version

Response Example:


```
{
 "result": [
  {
   "_id": "019888fb-f0eb-4d4f-806e-ac0f066201eb",
   "client_version": "135.1.10.2611",
   "nsdeviceuid": "416012FE-E4CD-860D-0DAE-A6432CB21A76",
   "hostname": "nskp-w11-joe-3",
   "os": "Windows"
  },
  {
   "_id": "fc18ce47-e4f7-429c-9345-7853fe29ffbe",
   "client_version": "135.1.10.2611",
   "nsdeviceuid": "AB2E7066-747D-8728-71F9-6163532C2BD0",
   "hostname": "Jenga-Surface",
   "os": "Windows"
  }
 ],
 "status": {
  "count": 10,
  "execution": "SUCCESS",
  "message": "Executed Successfully",
  "status_code": 200
 }
}
```


2025 © Netskope Public. All rights reserved.

Device Tags for Classification

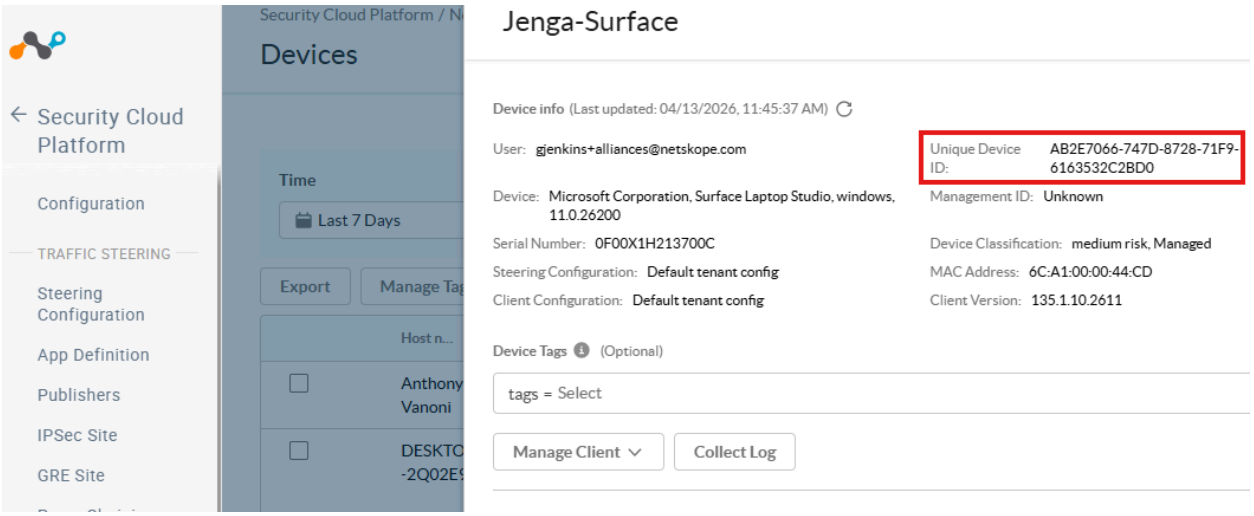

Creating Device Tags

Before we can apply a device tag to a system, we need to know the tag id. Query any device and it returns all available tags in the system with their IDs and names:

POST /api/v2/devices/device/tags

Request Body:

```
{
  "name": "low risk",
  "description": "Devices with low risk classification"
}
```

Response Example:

```
{
  "success": true,
  "data": {
    "id": 1137,
    "name": "low risk",
    "description": "Devices with low risk classification"
  }
}
```

2025 © Netskope Public. All rights reserved.

Device Tags for Classification

Finding Device Tags

If the tags are already created, before we can apply a device tag to a system, we need to know the tag id. Query any device and it returns all available tags in the system with their IDs and names:

POST /api/v2/devices/device/tags/gettags

```
None
curl -X POST "https://<tenant>.goskope.com/api/v2/devices/device/tags/gettags" \
  -H "Authorization: Bearer YOUR_API_TOKEN" \
  -H "Content-Type: application/json" \
  -H "User-Agent: Partner-RiskAssessment-1.0" \
  -d '{"device_id": "AB2E7066-747D-8728-71F9-6163532C2BD0"}'
```

Response Example:

```
{
  "data": [
    {"id": 1137, "name": "low risk"},
    {"id": 912, "name": "Medium Risk"},
    {"id": 7841, "name": "Risky Device"}
  ]
}
```

Applying Tags to Devices

To apply one or more tags to one or more devices, use the bulkreplace endpoint. This endpoint replaces all tags on the specified devices with the tags provided:

POST /api/v2/devices/device/tags/bulkreplace

Request Body:

```
{
  "tags": [1137],
  "devices": [
    {
      "nsdeviceuid": "AB2E7066-747D-8728-71F9-6163532C2BD0",
      "userkey": "AB2E7066-747D-8728-71F9-6163532C2BD0",
      "hostname": "Jenga-Surface"
    }
  ],
```

2025 © Netskope Public. All rights reserved.

Device Tags for Classification




```
    "device_classifications": []
  }
```

Request Parameters:

- tags - Array of tag IDs to apply to the devices
- devices - Array of device objects with nsdeviceuid and userkey
- device_classifications - Array of device classification IDs (use empty array for device tags)

Response Example:

```
{
  "success": true,
  "data": {
    "affected_device_tags": 1,
    "affected_device_classification_tags": 0,
    "message": "Tags replaced successfully"
  }
}
```

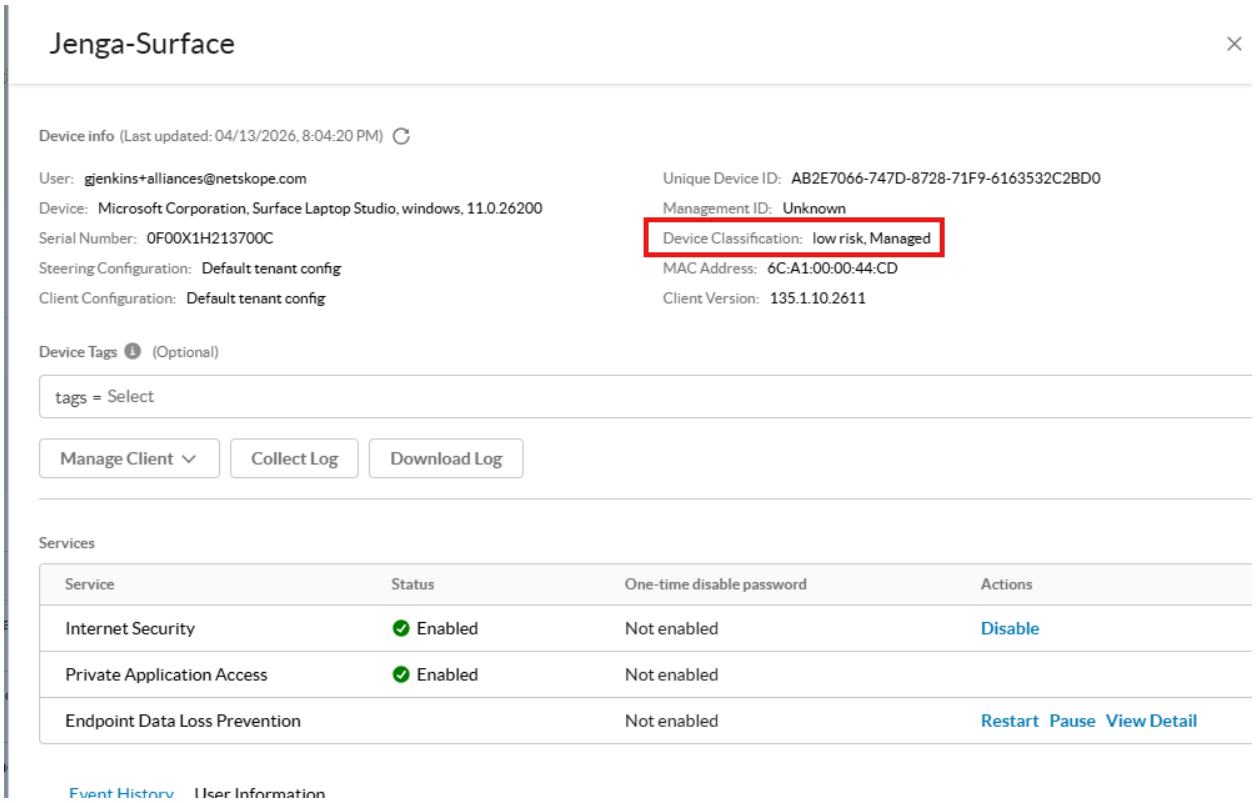

2025 © Netskope Public. All rights reserved.

Device Tags for Classification

Test Functionality

Test Overview

This section demonstrates a complete end-to-end workflow for creating a device classification tag and identifying a target device. The test uses a real Windows 11 device and creates a "medium risk" tag that can be applied to devices. Follow these steps to verify the device classification functionality in your environment.

Step 1: Create Device Classification Tag

Create a new device classification tag named "medium risk"

Action: POST /api/v2/deviceclassification/tags

- Tag Details:

1. Name: medium risk
2. Description: devices that are at medium risk

Result: HTTP 201 Created

- Tag ID: 16224
- Status: Successfully created (or already exists)

Step 2: Find Target Device

Query for the device used by alliances@netskope.com

Action: GET /api/v2/events/datasearch/clientstatus

- Query Parameters:

3. starttime: 1773106446 (last 24 hours)
4. endtime: 1773192846
5. fields: device_id,hostname,user,os,client_version

Result: HTTP 200 OK

- Device Found: Surface

2025 © Netskope Public. All rights reserved.

Device Tags for Classification



- Device ID: m0iIawJYwjxM1Zb9YLIW_AB2E7066-747D-8728-71F9-6163532C2BD0
- User: alliances@netskope.com
- OS: Windows 11
- Client Version: 135.0.0.2631 (64-bit)

Step 3: Create Device Classification Rule

Create a device classification rule that applies the "medium risk" tag to Windows devices

Action: POST /api/v2/deviceclassification/rules

- Rule Configuration:

6. Name: medium risk rule - Windows
7. Label: medium risk
8. OS: windows
9. Conditions: device_tag_check with tag_id 16224 (nested in $and operators)

Result: HTTP 201 Created


- Rule Status: Active and visible in Netskope admin console
- Console Display: medium risk (1 Rule, 0 Policies)

Step 4: Verify in Netskope Client


Once the device classification rule is created and applied, the tag will appear in the Netskope client. The user should see the "medium risk" classification displayed in their Netskope client settings.

2025 © Netskope Public. All rights reserved.

Device Tags for Classification

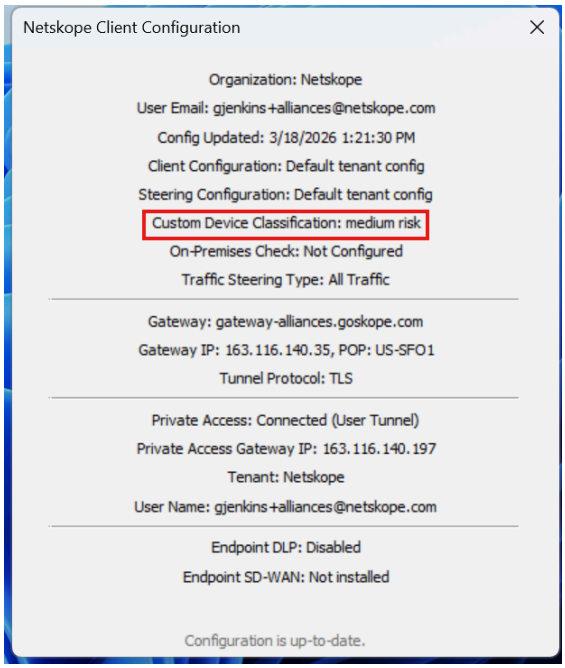


Before Policy would be applied for this traffic, you will need to add a Realtime Policy to match

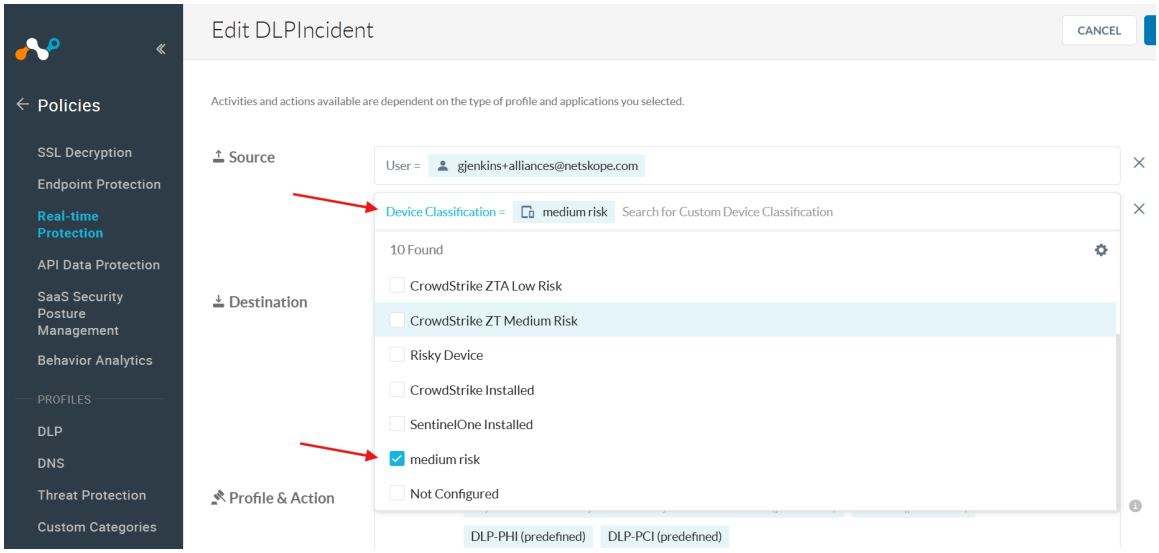

I did a basic Alert action on this policy for testing.

2025 © Netskope Public. All rights reserved.

Device Tags for Classification

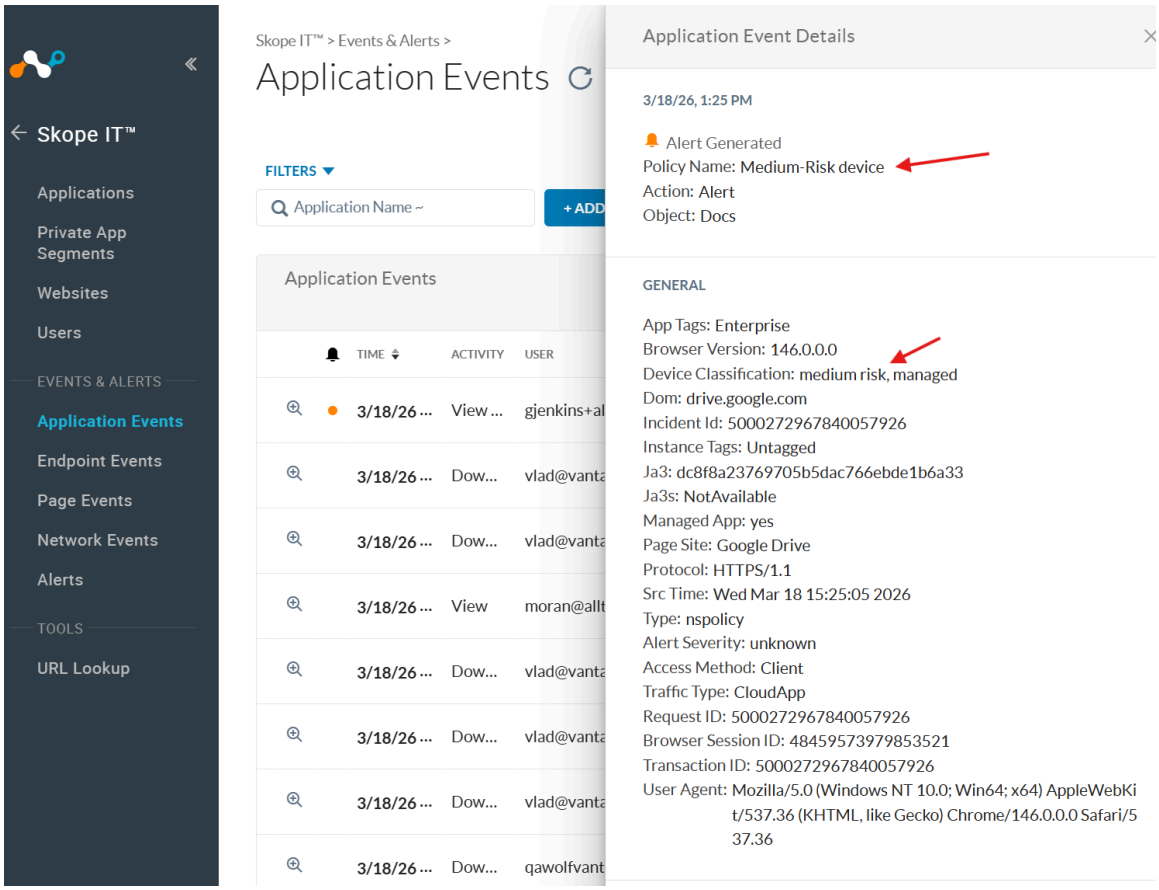

Test Results Summary

Component	Value
Tag Name	medium risk
Tag ID	16224
Rule Name	medium risk rule - Windows
Rule OS Target	Windows
Device	Surface (m0ilawJYwjxM1Zb9YLIW_AB2E7066-747D-8728-71F9-6163532C2BD0)

Best Practices

- Use meaningful names and descriptions for tags to ensure clarity across your organization.

2025 © Netskope Public. All rights reserved.

Device Tags for Classification

- Establish a priority numbering scheme that aligns with your risk assessment framework (lower numbers = higher priority).
- Test tag creation and application in a non-production environment before deploying to production.
- Always include a User-Agent header in API requests for proper tracking and support.
- Implement error handling and retry logic for API calls to ensure robustness.
- Use PATCH requests for partial updates when you only need to modify specific fields.

Support and Additional Resources

For detailed API documentation, visit the Netskope Help Center at https://docs.netskope.com

For API support and troubleshooting, contact your Netskope account team.

2025 © Netskope Public. All rights reserved.