Backend · concept board

FastAPI

Type-hinted APIs, Pydantic, dependency injection, async, auth, testing

1. What FastAPI is

2. Request bodies and Pydantic models

3. Dependency injection and routers


4. async def vs def, auth and middleware

Draw on any slide, then Present (arrow keys) or export the board as a PDF.

1. What FastAPI is

Definition

FastAPI is a modern Python web framework for building APIs. It uses type hints for validation and automatically generates OpenAPI docs at /docs. It runs on ASGI (Starlette + Pydantic) and supports async.

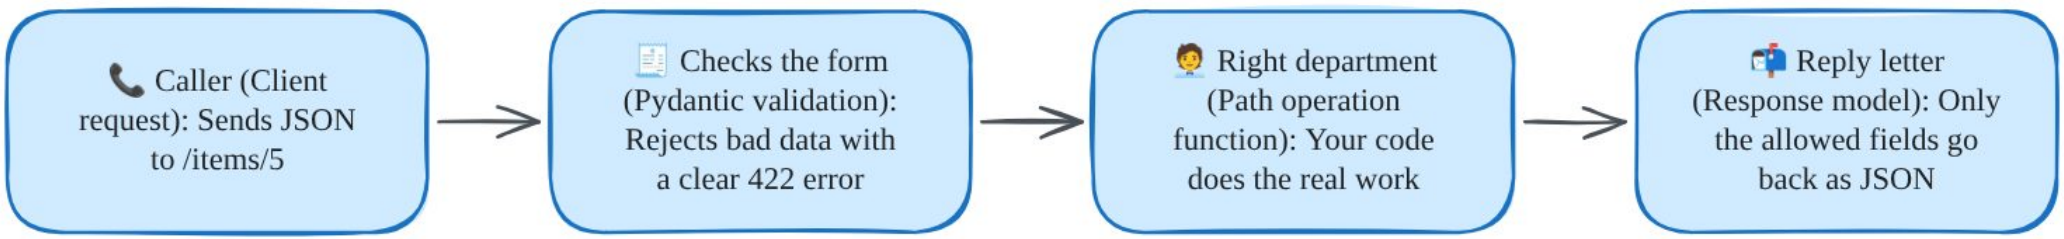

Think of FastAPI like a smart receptionist

The smallest API (run: uvicorn main:app --reload)

```
from fastapi import FastAPI


app = FastAPI(title="Shop API")

@app.get("/")
def root():
    return {"status": "ok"}

@app.get("/items/{item_id}")
def read_item(item_id: int, q: str | None = None):   # path + query params come from the signature
    return {"item_id": item_id, "q": q}
```

- Interactive docs: Swagger UI at /docs, ReDoc at /redoc, raw schema at /openapi.json.
- item_id: int converts and validates the path parameter; non-numbers return 422 automatically.
- Run with uvicorn (dev: --reload; production: several workers or gunicorn with uvicorn workers).

2. Request bodies and Pydantic models

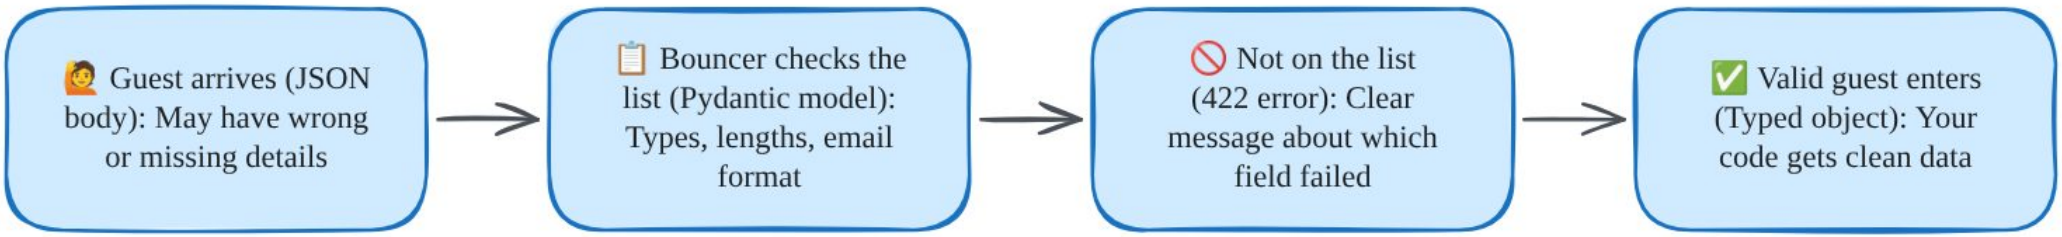

Think of Pydantic like a bouncer with a guest list

Validate input, shape output

```
from fastapi import FastAPI, HTTPException, status
from pydantic import BaseModel, EmailStr, Field


class UserIn(BaseModel):
    name: str = Field(min_length=1, max_length=80)
    email: EmailStr
    password: str = Field(min_length=8)

class UserOut(BaseModel):        # never includes the password
    id: int
    name: str
    email: EmailStr

app = FastAPI()
DB: dict[int, dict] = {}
# … 8 more lines in the notes
```

- A Pydantic model parameter is read from the JSON body; scalar parameters come from the path/query. Use Query(), Path(), Body() and Header() to add rules.
- response_model filters and documents the output (hide passwords and internal fields).
- Raise HTTPException(status_code, detail) for expected errors; add exception_handlers for custom ones.
- Pydantic v2 uses model_dump() / model_validate(); from_attributes=True lets it read ORM objects.

3. Dependency injection and routers

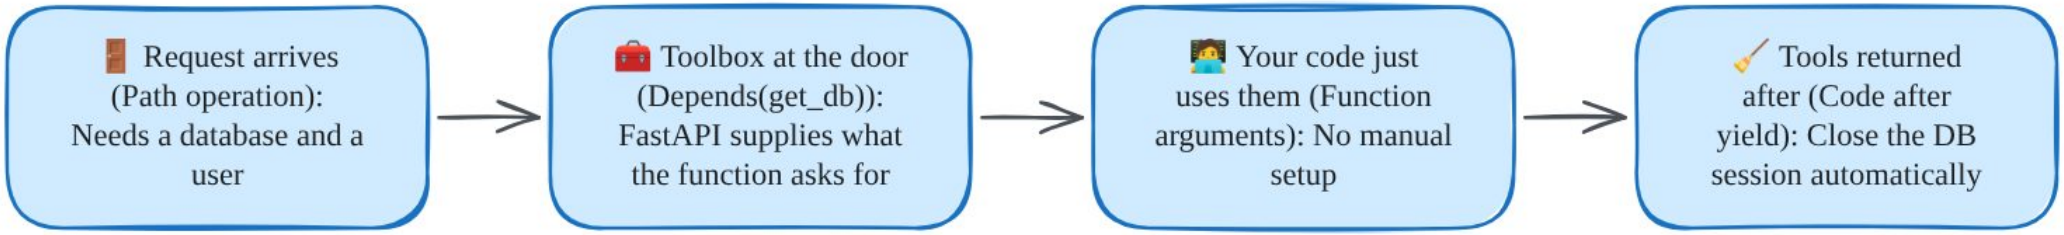

Think of Depends like tools handed out at the door

Depends: shared logic, DB sessions, auth


```
from typing import Annotated
from fastapi import APIRouter, Depends, HTTPException
from sqlalchemy.orm import Session

def get_db():
    db = SessionLocal()
    try:
        yield db            # code after yield runs when the request ends
    finally:
        db.close()

def get_current_user(token: Annotated[str, Depends(oauth2_scheme)], db: Session = Depends(get_db)):
    user = decode_and_load(token, db)
    if not user:
        raise HTTPException(status_code=401, detail="Invalid token")
# … 9 more lines in the notes
```

- Depends() is FastAPI's dependency injection: reusable pieces (DB session, current user, pagination) are resolved per request and are easy to override in tests.
- APIRouter splits the app by feature (/users, /items) with their own prefixes, tags and shared dependencies.
- Settings: use pydantic-settings (BaseSettings) to read configuration from environment variables.
- Background tasks (BackgroundTasks) are for small post-response work; use Celery/RQ/arq for heavy jobs.

4. async def vs def, auth and middleware

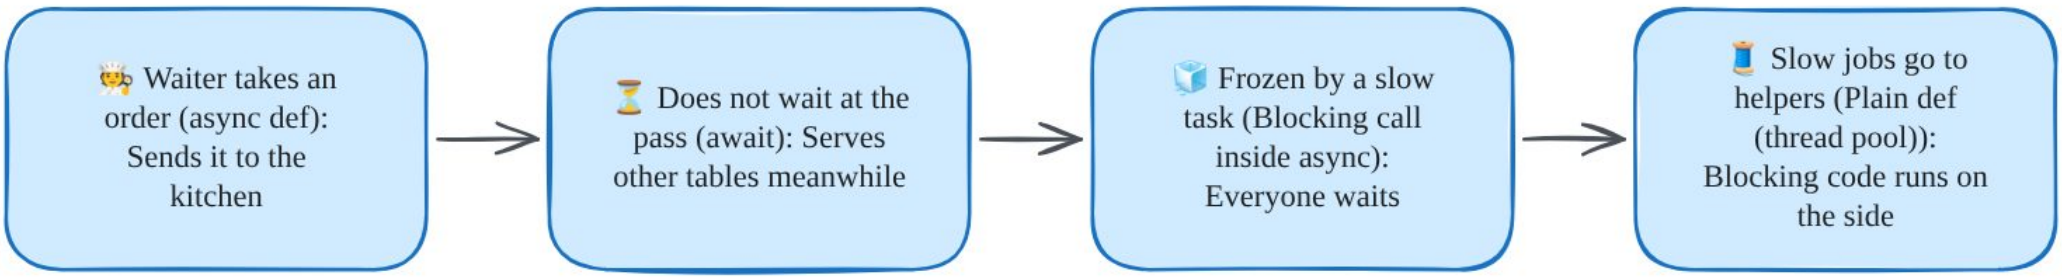

Think of async def like a waiter who never stands still

You write	FastAPI runs it	Use when
async def	on the event loop	you await async libraries (httpx, asyncpg, async SQLAlchemy)
plain def	in a thread pool	you call blocking code (requests, sync DB drivers)

Common mistake

Blocking calls (time.sleep, requests.get, a sync DB query) inside async def freeze every request. Either make the function plain def or use an async library.

- Auth: OAuth2 password flow with JWT access tokens (OAuth2PasswordBearer), hash passwords with bcrypt/argon2 (never store them plain).
- CORS: app.add_middleware(CORSMiddleware, allow_origins=[...]) with an explicit origin list.
- WebSockets (@app.websocket) and Server-Sent Events support real-time features.
- Lifespan handlers open and close shared resources (DB pools) at startup and shutdown.
- Testing: TestClient(app) (or httpx.AsyncClient) plus app.dependency_overrides to swap the DB or the user.

Testing with TestClient

```
from fastapi.testclient import TestClient

client = TestClient(app)

def test_create_user():
    r = client.post("/users", json={"name": "Asha", "email": "a@b.com", "password": "secret123"})
    assert r.status_code == 201
    assert "password" not in r.json()
```

Revise

Type hints → validation + docs, Pydantic in/out models, response_model hides fields, Depends for DB/auth, async def only with async libraries, APIRouter per feature, JWT + hashed passwords, explicit CORS, TestClient + dependency_overrides, uvicorn workers in production.

Rapid-fire Q&A (1/2)

Why is FastAPI fast?

It is built on ASGI (Starlette) with async support and Pydantic validation, so one process serves many concurrent I/O-bound requests efficiently.

How does FastAPI validate data?

Through Python type hints and Pydantic models. Invalid input returns a 422 response listing which fields failed.

What are the automatic docs?

FastAPI generates an OpenAPI schema from your code and serves Swagger UI at /docs and ReDoc at /redoc.

async def vs def endpoints?

async def runs on the event loop and must only await async code; plain def runs in a thread pool so blocking code does not stall the server.

What is dependency injection in FastAPI?

Depends() declares reusable functions (DB session, current user, pagination) that FastAPI resolves per request, making code shorter and easily testable via dependency_overrides.

What is response_model for?

It validates and filters the returned data to a Pydantic model, so fields like passwords never leak, and documents the output.

Rapid-fire Q&A (2/2)

FastAPI vs Django vs Flask?

FastAPI: modern async APIs with validation and docs. Django: full-stack with ORM, admin and auth built in. Flask: minimal, bring your own pieces.

How do you handle authentication?

OAuth2 password flow with JWT tokens via OAuth2PasswordBearer and a get_current_user dependency; passwords are hashed with bcrypt/argon2.

How do you run FastAPI in production?

uvicorn (or gunicorn with uvicorn workers) behind a reverse proxy like Nginx, in Docker, with settings from environment variables.

How do you test a FastAPI app?

Use TestClient (or httpx.AsyncClient) with pytest, and override dependencies to use a test database or fake user.

What is Pydantic?

A data validation library that parses and validates data into typed models; v2 uses model_validate and model_dump.

Path vs query vs body parameters?

Path params are in the URL template ({id}), query params are other simple arguments (?q=), and the body is a Pydantic model sent as JSON.